TEST REPORT

CTK Co., Ltd.
5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
Tel: 1551-9871
Fax: +82-31-624-9501

REPORT No.: CTK-2026-01986

1.	**Applicant**	
	◦ Name :	Hanwha Vision Co., Ltd
	◦ Address :	6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA
	◦ Date of Receipt :	Jun. 16, 2026
2.	**Manufacturer**	
	◦ Name :	Hanwha Vision Co., Ltd
3.	**Use of Report :**	For submission to customer
4.	**Test sample / Model :**	NETWORK CAMERA / XNV-A6085R
5.	**Date(s) of test :**	Jun. 22, 2026 ~ Jul. 03, 2026
6.	**Test Standard (Method) used :**	EN 60068-2-1, EN 60068-2-2, EN 60068-2-14, EN 60068-2-6, EN 60068-2-27, EN 60068-2-78, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-6, IEC 60068-2-27, IEC 60068-2-78
7.	**Testing Environment :**	Temperature: (25 ± 10) ℃, Humidity: (50 ± 25) % R.H. Pressure: (96 ± 10) kPa
8.	**Test Results :**	Refer to the test results
9.	**Location of Test :**	☒ Permanent Testing Lab ☐ On Site Testing (5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Name: HongBeom Jeon (Signature)	Name: HoHyun Lee (Signature)

Remark. This report is not related to ISO/IEC 17025, KOLAS accreditation and relevant regulation.

Jul. 22, 2026

CTK Co., Ltd.

Verify the authenticity of this document using Blockchain
Click the QR code or visit
www.blockchain-verified.com

Table of Contents

1. Testing laboratory ____ 4
1.1 Testing laboratory information ... 4
1.2 Testing laboratory accreditation status ... 4

2. Sample description and equipment information ____ 5
2.1 Sample description ... 5
2.2 Equipment information ... 5
2.3 Pre-test sample images ... 6
2.4 Testing equipment images ... 7
2.5 Sample appearance ... 8

3. Cold test (EN 60068-2-1, IEC 60068-2-1) ____ 9
3.1 Test date and environmental conditions ... 9
3.2 Test conditions and methods ... 9
3.3 Test Setup and During test sample images ... 10
3.4 Test result ... 11
3.5 Test Data ... 12
3.6 Post-test operation and function ... 13

4. Dry heat test (EN 60068-2-2, IEC 60068-2-2) ____ 14
4.1 Test date and environmental conditions ... 14
4.2 Test conditions and methods ... 14
4.3 Test Setup and During test sample images ... 15
4.4 Test result ... 16
4.5 Test Data ... 17
4.6 Post-test operation and function ... 18

5. Change of temperature test (EN 60068-2-14, IEC 60068-2-14) 19
5.1 Test date and environmental condition 19
5.2 Test conditions and methods 19
5.3 Test Setup and During test sample images 20
5.4 Test result 21
5.5 Test Data 22
5.6 Post-test operation and function 23

6. Vibration Test (EN 60068-2-6, IEC 60068-2-6) 24
6.1 Test date and environmental conditions 24
6.2 Test conditions and methods 24
6.3 Test Setup and During test sample images 25
6.4 Test result 26
6.5 Test Data 27
6.6 Post-test operation and function 29

7. Shock Test (EN 60068-2-27, IEC 60068-2-27) 30
7.1 Test date and environmental conditions 30
7.2 Test conditions and methods 30
7.3 Test Setup and During test sample images 31
7.4 Test result 32
7.5 Test Data 33
7.6 Post-test operation and function 36

8. Damp heat Test (EN 60068-2-78, IEC 60068-2-78) 37
8.1 Test date and environmental conditions 37
8.2 Test conditions and methods 37
8.3 Test Setup and During test sample images 38
8.4 Test result 39
8.5 Test Data 40
8.6 Post-test operation and function 41
8.7 Post-test sample images 42

1. Testing laboratory

1.1 Testing laboratory information

Lab. Name	CTK Co., Ltd.
Representative	Young Joseph Seungwon
Address	5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
Tel.	1551-9871
Fax.	+82-31-624-9501
E-Mail	all.youngin@element.com
Website	www.elementkorea.kr

1.2 Testing laboratory accreditation status

Country	Classification	Accreditation Number	Logo
International	KOLAS	TESTING NO. KT119	

※ CTK Co., Ltd. is an independent third-party testing laboratory and is not affiliated with the manufacturer (Hanwha Vision Co., Ltd.) or any of its parent or subsidiary companies.

2. Sample description and equipment information

2.1 Sample description

Sample Name	Model Name	S/N	Date of Manufacture	Quantity	Comment
Network Camera	XNV-A6085R	ZY2470GL6000KD	Jun. 2026	1 EA	-

2.2 Equipment information

Testing equipment	Model Name	Manufacturer	Manufacturing Number	Next Cal. Date
Temperature & Humidity Chamber	ARS-0390-AE	ESPEC	4120200057	Aug. 21, 2026
ESS	C-1000	Weisstechnik	54260029610010	Aug. 21, 2026
Temperature & Humidity Chamber	C4-340	Weisstechnik	54260023190010	Feb. 06, 2027
Vibration Testing System	LT1010	FAMTECH	D2012335	-
Vibration Testing System	GT1000M	FAMTECH	D1803072-1	-
Acceleration sensor	8703A250M5	KISTLER	5722241	Jun. 22, 2027

※ All test equipment used for this testing was calibrated in accordance with the manufacturer's requirements, and the calibration ranges cover the measurement values recorded in this report.

2.3 Pre-test sample images

2.3.1 Test sample




Top



Bottom



Front

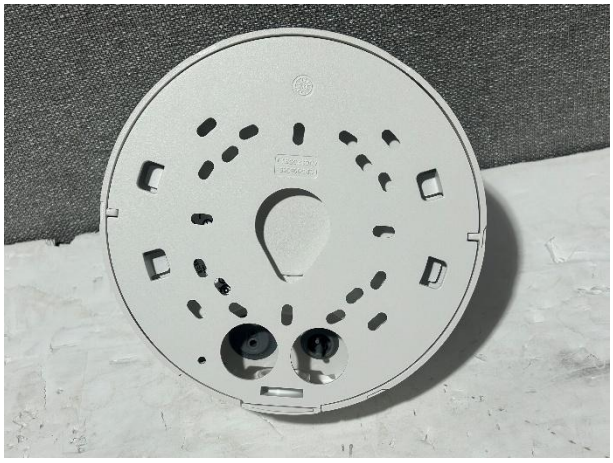

Rear



Left side



Right side

2.4 Testing equipment images

2.4.1 Test equipment



Temperature & Humidity Chamber



ESS



Temperature & Humidity Chamber



Vibration Testing System




Vibration Testing System



8703A250M5

2.5 Sample appearance

Enclosure dimensions [unit: mm]

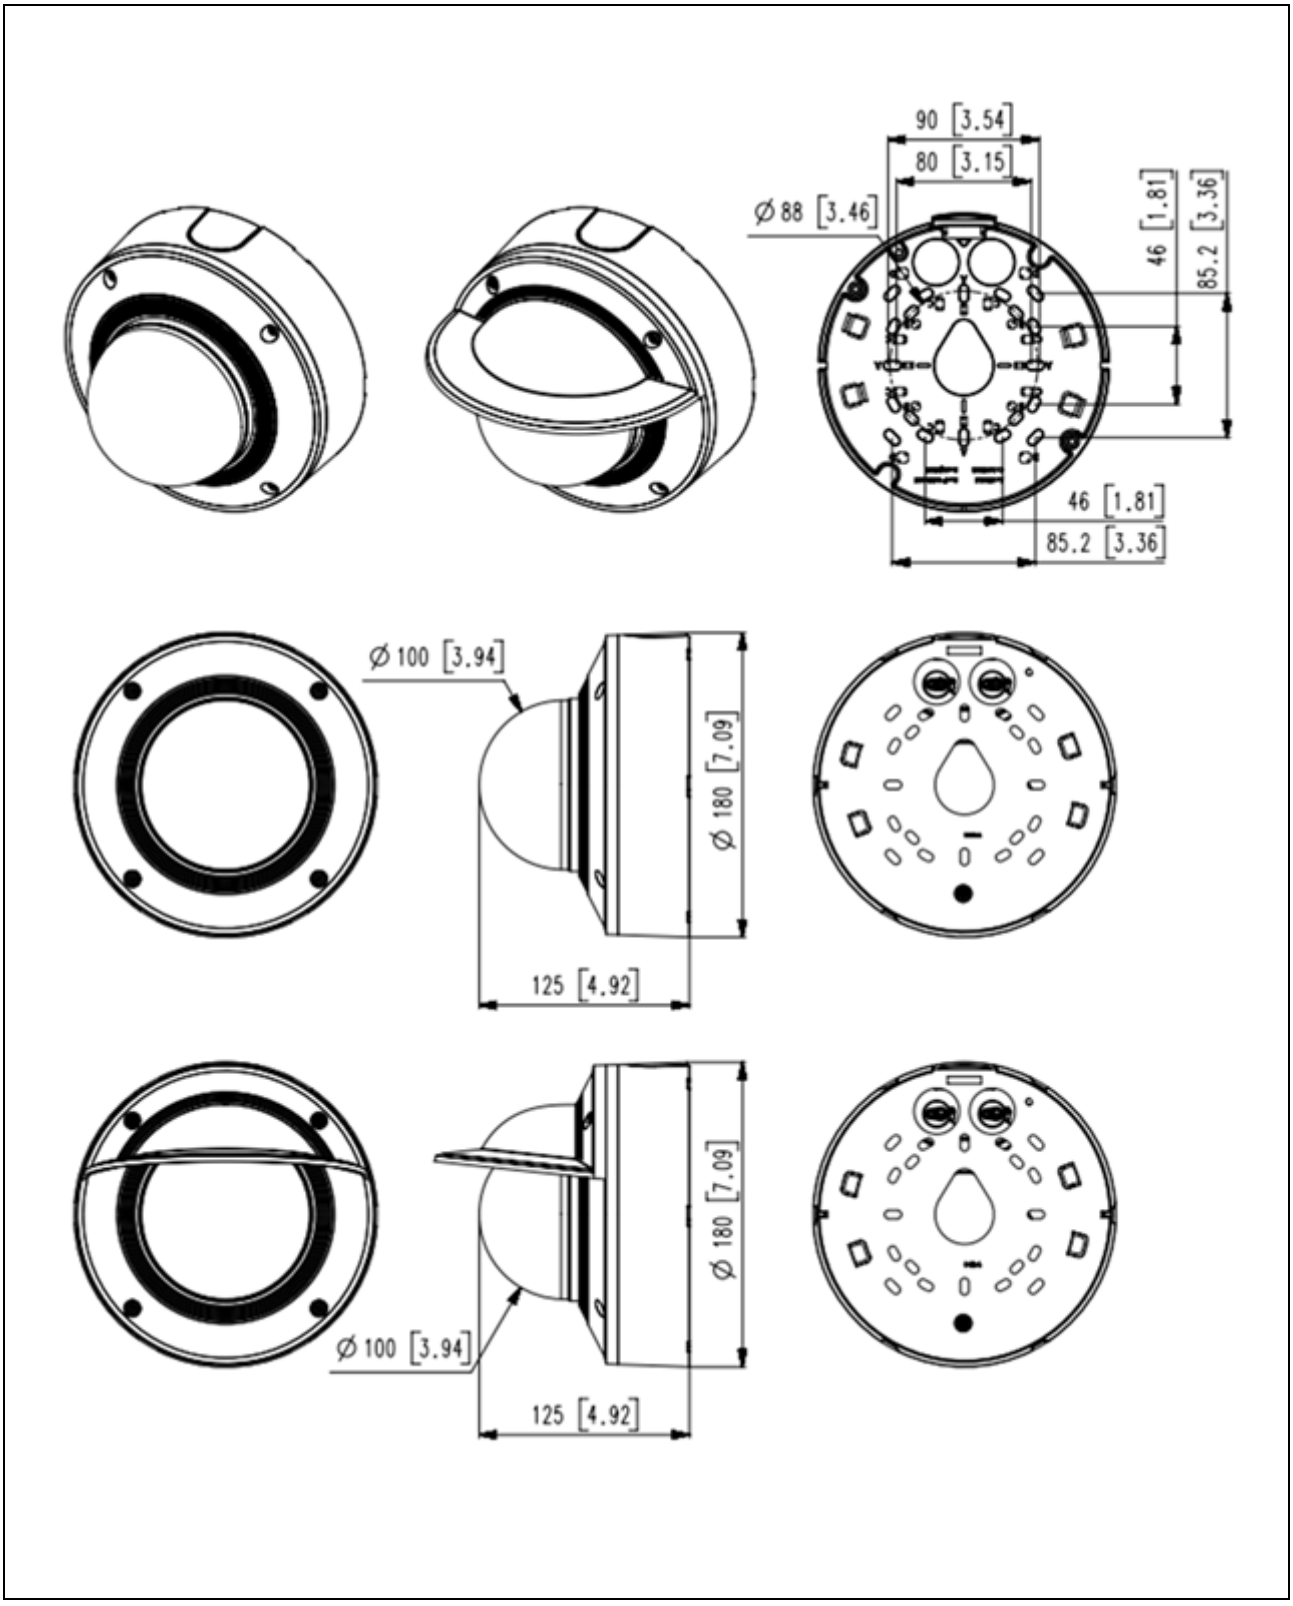

3. Cold test (EN 60068-2-1, IEC 60068-2-1)

3.1 Test date and environmental conditions

3.1.1 Test date: Jun. 30, 2026 ~ Jul. 01, 2026

3.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.5	54.6	97.5

3.2 Test conditions and methods

3.2.1 Preconditioning temperature: 25 °C

3.2.2 Sample status: Operation

3.2.3 Test temperature: -50 °C

3.2.4 Test time: 16 h

3.2.5 Recovery Temperature: 25 °C


3.2.6 Evaluation items

1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

3.3 Test Setup and During test sample images

3.3.1 Evidence of test setting



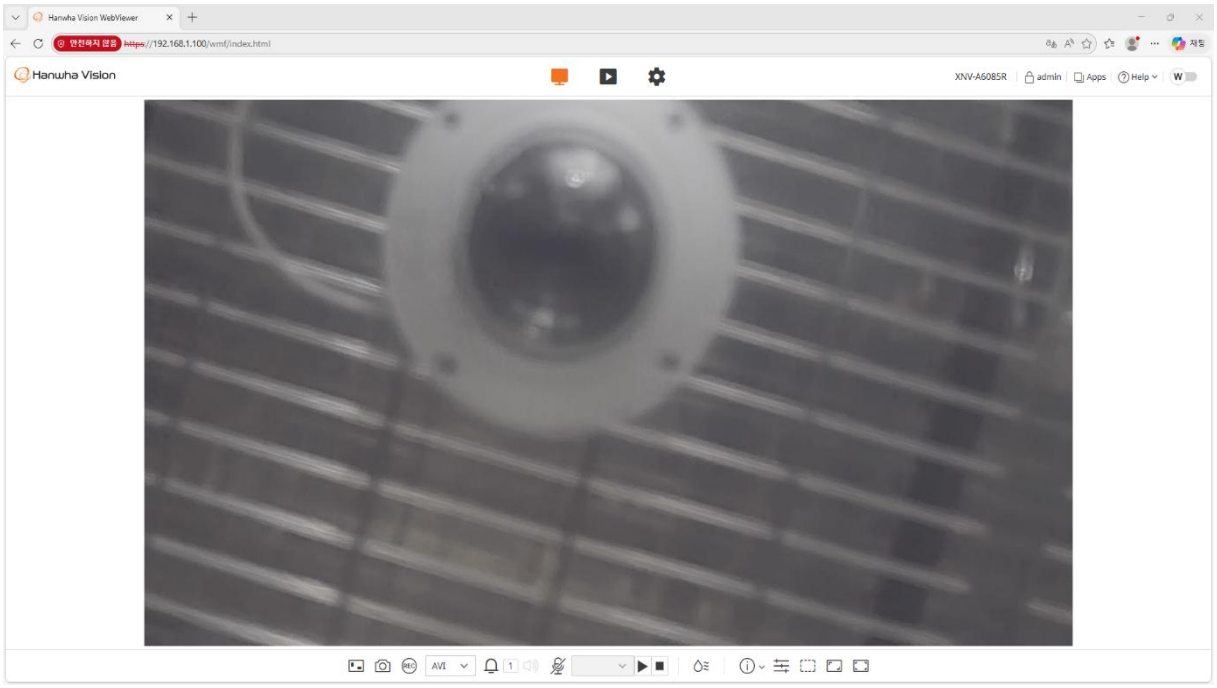

3.4 Test result


3.4.1 Test result table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 3.6.

3.5 Test Data


3.5.1 Test data and graph

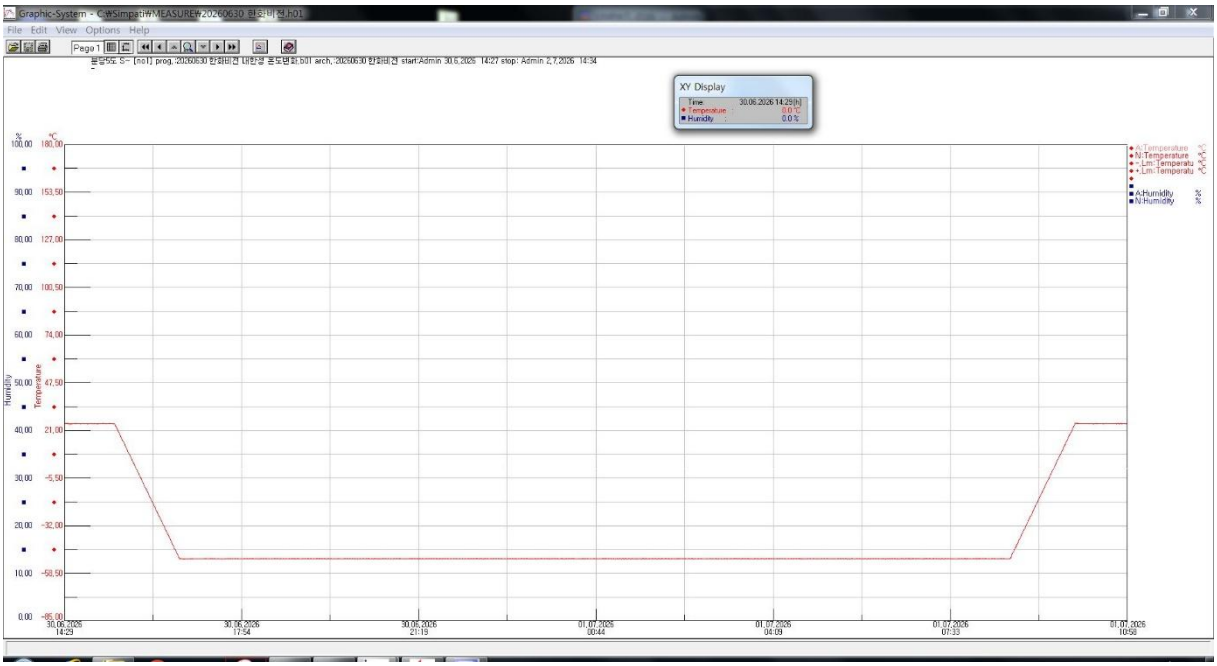

Temperature Data

3.6 Post-test operation and function

3.6.1 Test sample operation and function

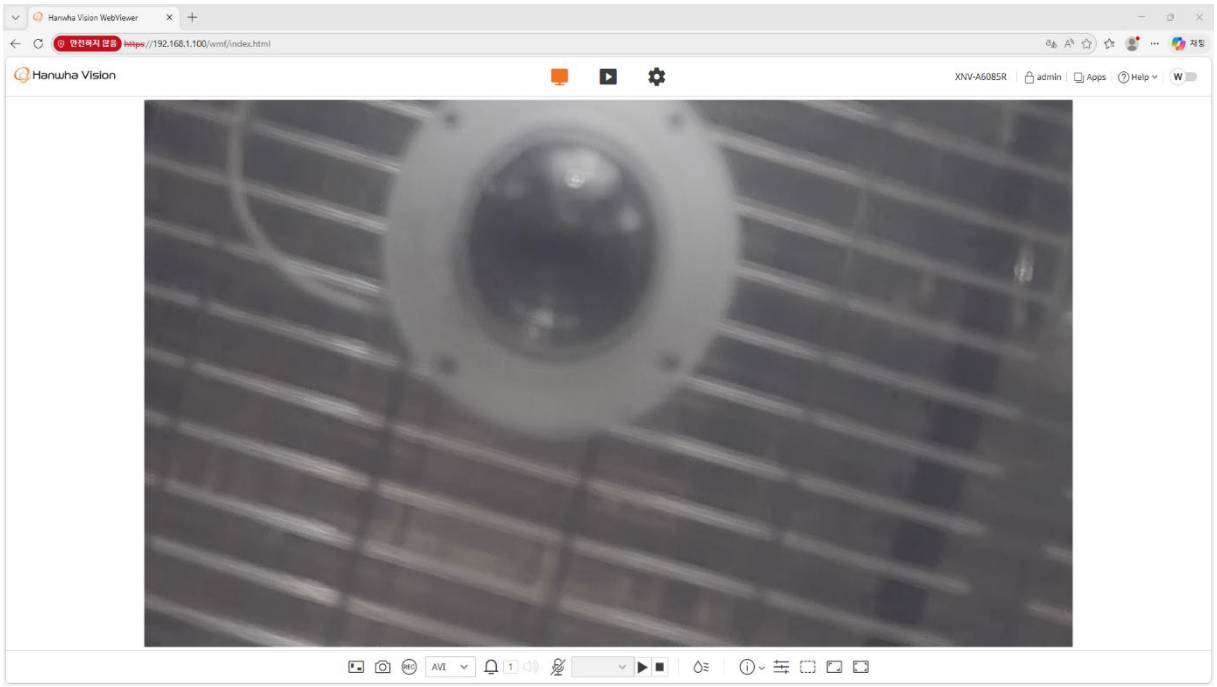

4. Dry heat test (EN 60068-2-2, IEC 60068-2-2)

4.1 Test date and environmental conditions

4.1.1 Test date: Jun. 25, 2026 ~ Jun. 29, 2026

4.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	25.6	52.3	101.3

4.2 Test conditions and methods

4.2.1 Preconditioning temperature: 25 °C

4.2.2 Sample status: Operation

4.2.3 Test temperature: 60 °C

4.2.4 Test time: 96 h


4.2.5 Recovery Temperature: 25 °C


4.2.6 Evaluation items

1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

4.3 Test Setup and During test sample images

4.3.1 Evidence of test setting

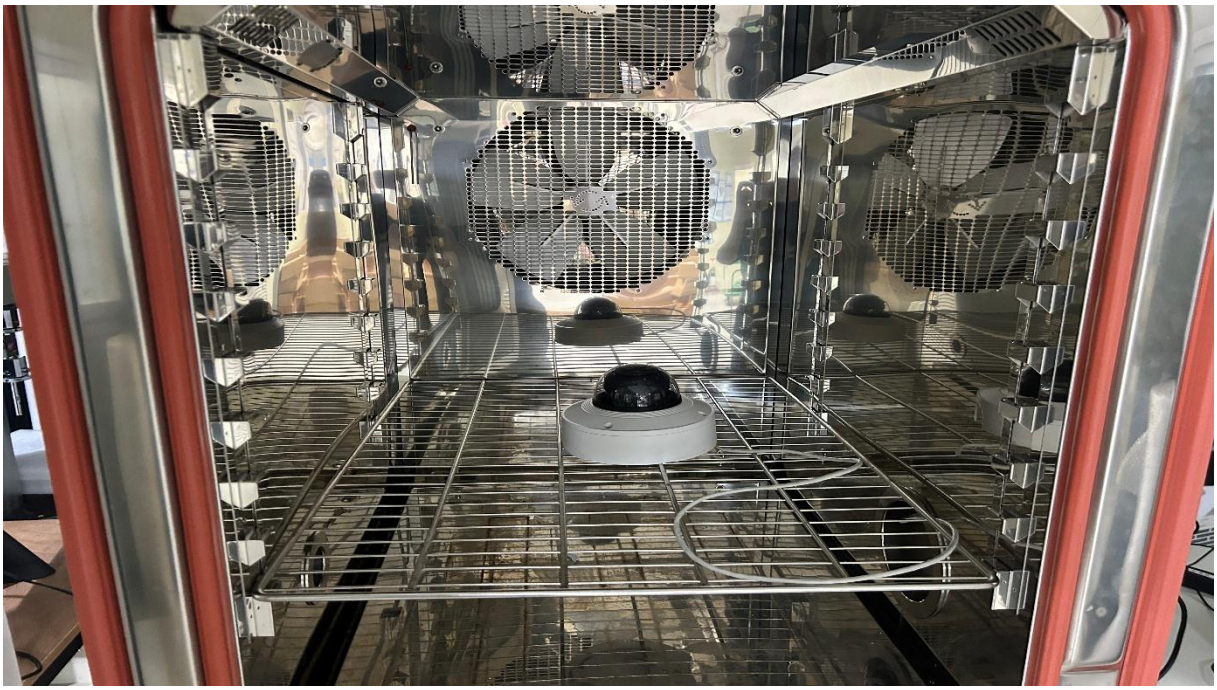

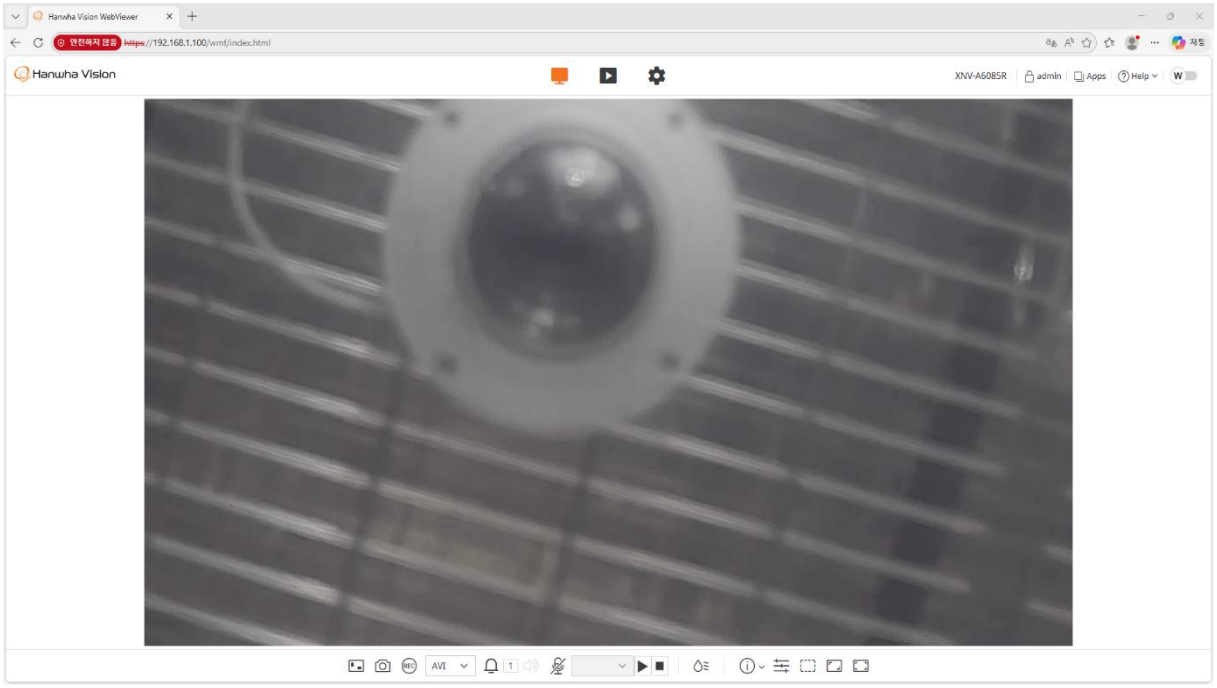

4.4 Test result

4.4.1 Test result table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 4.6.

4.5 Test Data


4.5.1 Test data and graph



Temperature Data

4.6 Post-test operation and function

4.6.1 Test sample operation and function

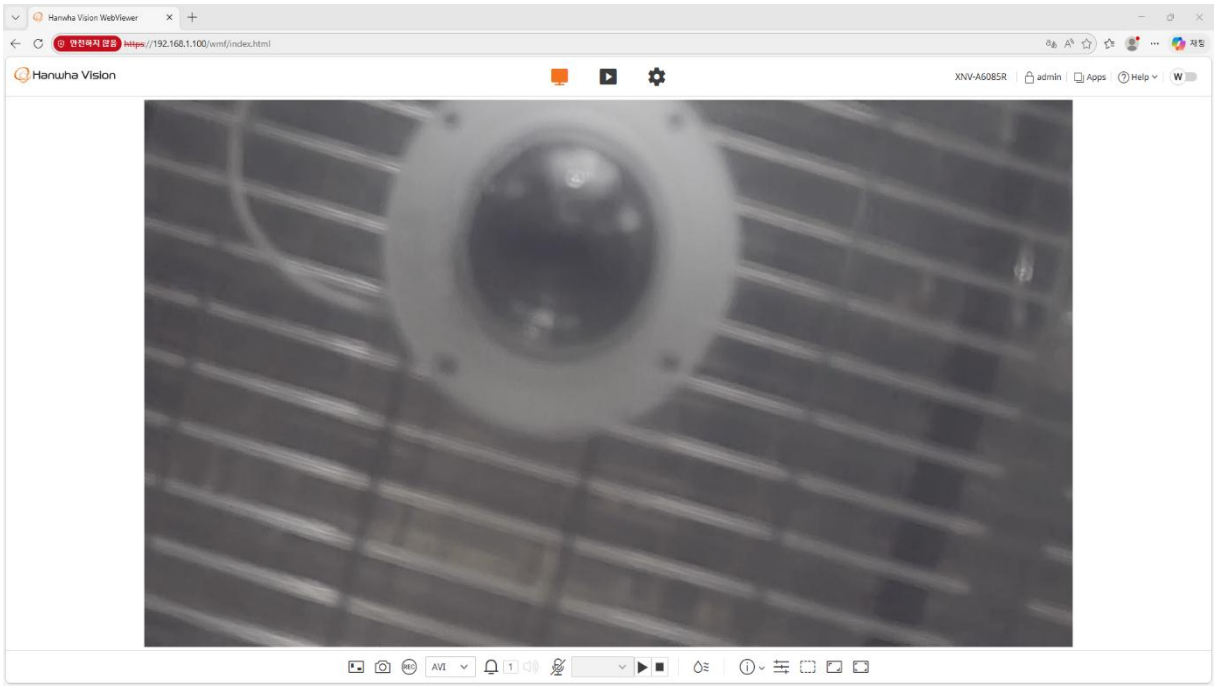

5. Change of temperature test (EN 60068-2-14, IEC 60068-2-14)

5.1 Test date and environmental condition

5.1.1 Test date: Jul. 01, 2026 ~ Jul. 02, 2026

5.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	25.1	58.3	99.1

5.2 Test conditions and methods

5.2.1 Sample status: operation

5.2.2 Test temperature: -50 °C, 60 °C

5.2.3 Evaluation items

1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation


5.2.4 Test method

Temp	Temperature change rate(℃/min)	t_1(idle time)	Cycles
High	5 ℃/min	3 h	3
Low	1 ℃/min	3 h	3

5.3 Test Setup and During test sample images

5.3.1 Evidence of test setting



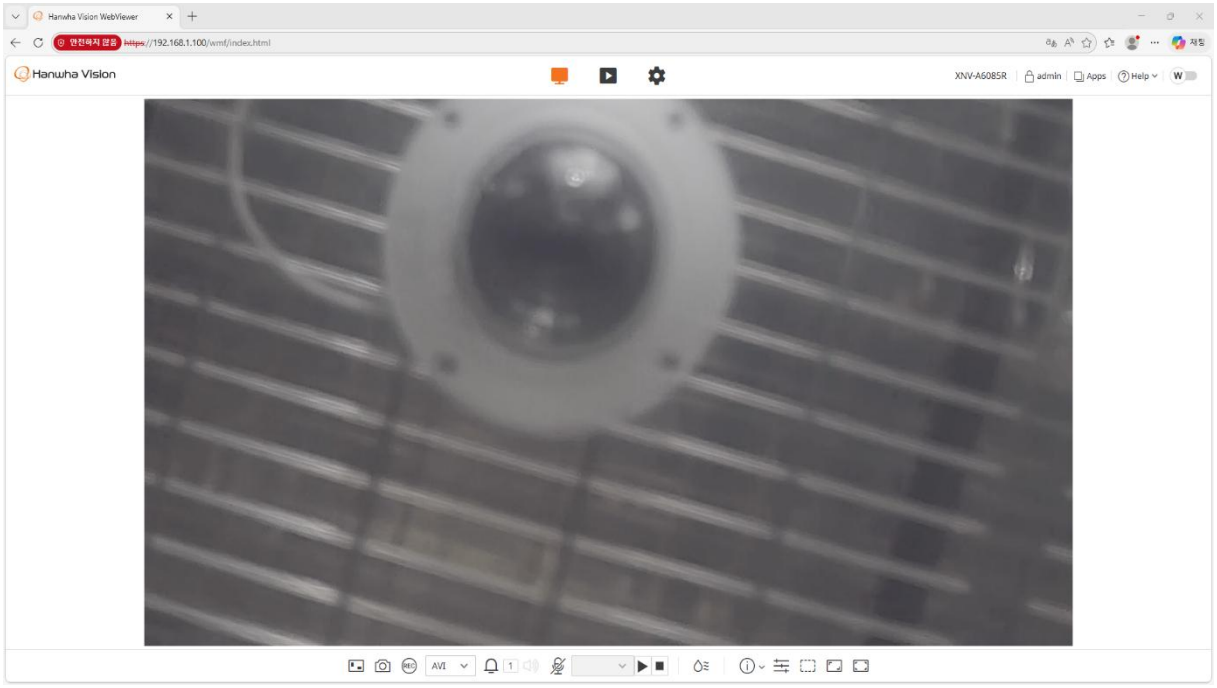

5.4 Test result


5.4.1 Test results table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 5.6.

5.5 Test Data


5.5.1 Test data and graph

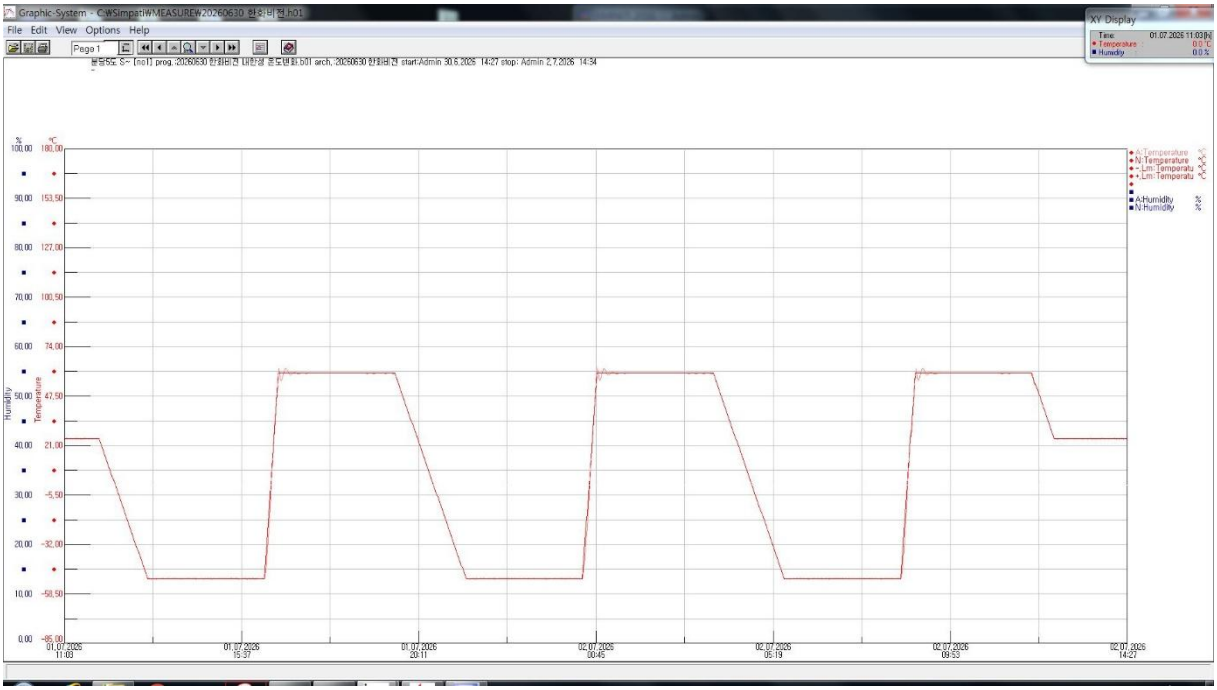

Temperature Data

5.6 Post-test operation and function

5.6.1 Test sample operation and function

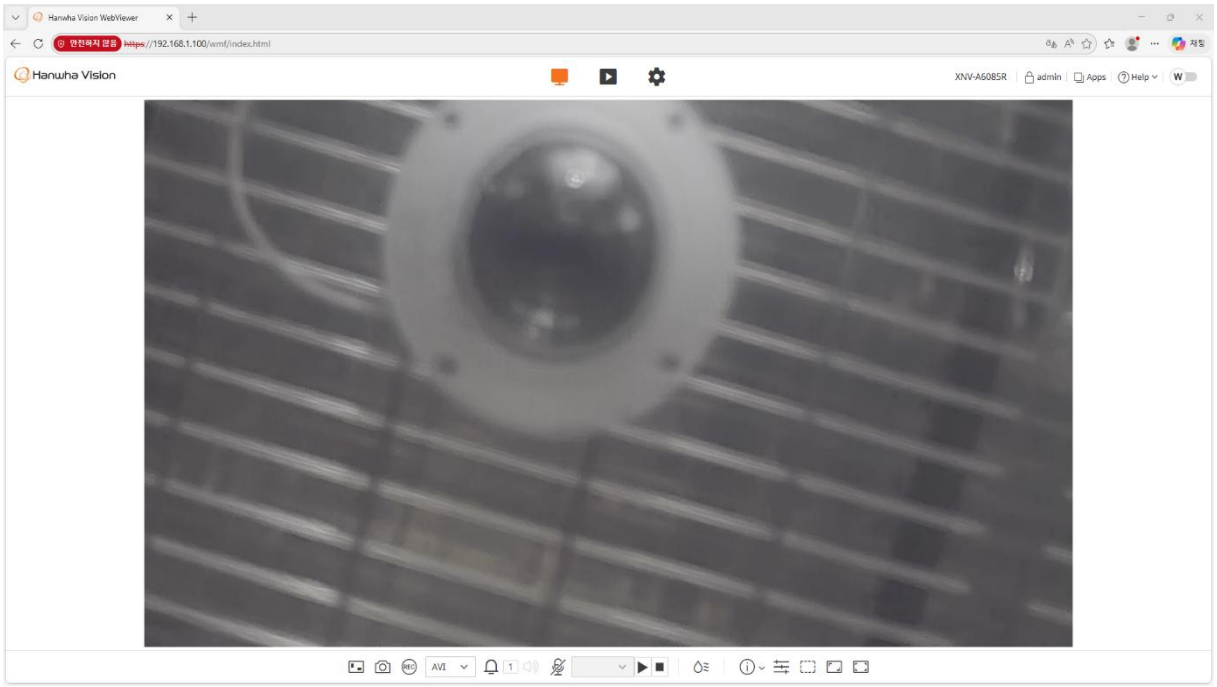

6. Vibration Test (EN 60068-2-6, IEC 60068-2-6)

6.1 Test date and environmental conditions

6.1.1 Test date: Jun. 26, 2026

6.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.8	45.1	97.6

6.2 Test conditions and methods

6.2.1 Sample status: Operation

6.2.2 Applied waveform: Sine

6.2.3 Frequency (Hz): (5 ~ 200) Hz

6.2.4 Acceleration(G): 1 G

6.2.5 Sweep rate: 1 oct/min

6.2.6 Applicable axis: X, Y, Z


6.2.7 Test time: Total 30 minutes (10 min. per each axis)

6.2.8 Evaluation items


1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

6.3 Test Setup and During test sample images


6.3.1 Evidence of test setting

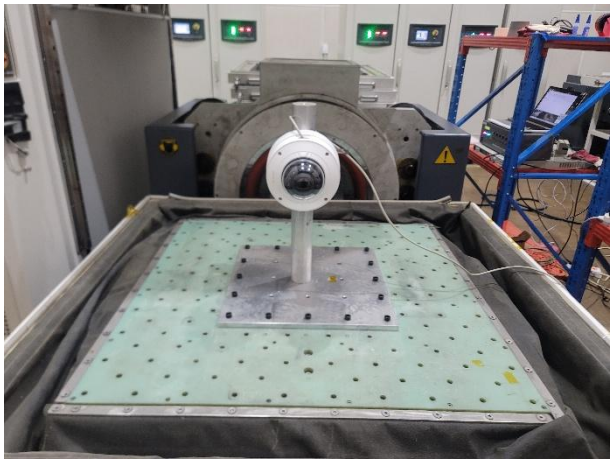

X axis

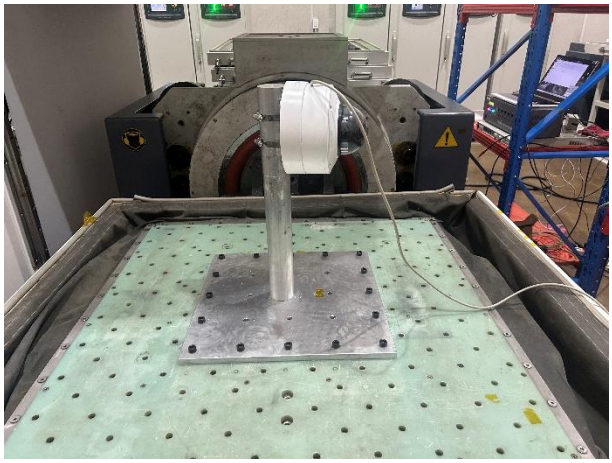

Y axis

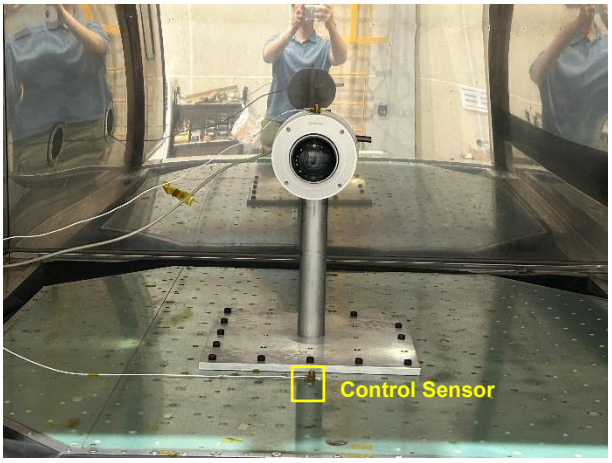

Z axis

※ The control sensors for the X and Y axes are mounted on the vibration plate.

6.4 Test result


6.4.1 Test results table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 6.6.

6.5 Test Data

6.5.1 Test Data (X, Y Axes)

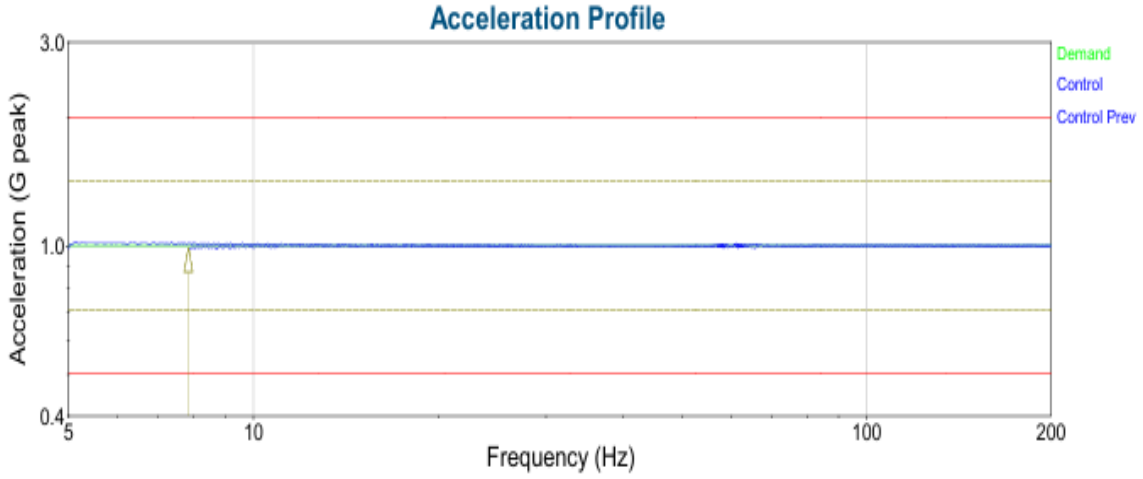


6 26, 2026 17:54:49
Demand: 1 G
Control: 0.9883 G

Level 1) 100 %
Level Time: 0:10:00
Total Time: 0:10:13

Output: 0.2686 Volts peak
Frequency: 7.846 Hz
End of Timed Test

한화비전 60068-2-6

Vibration Test (X Axis)

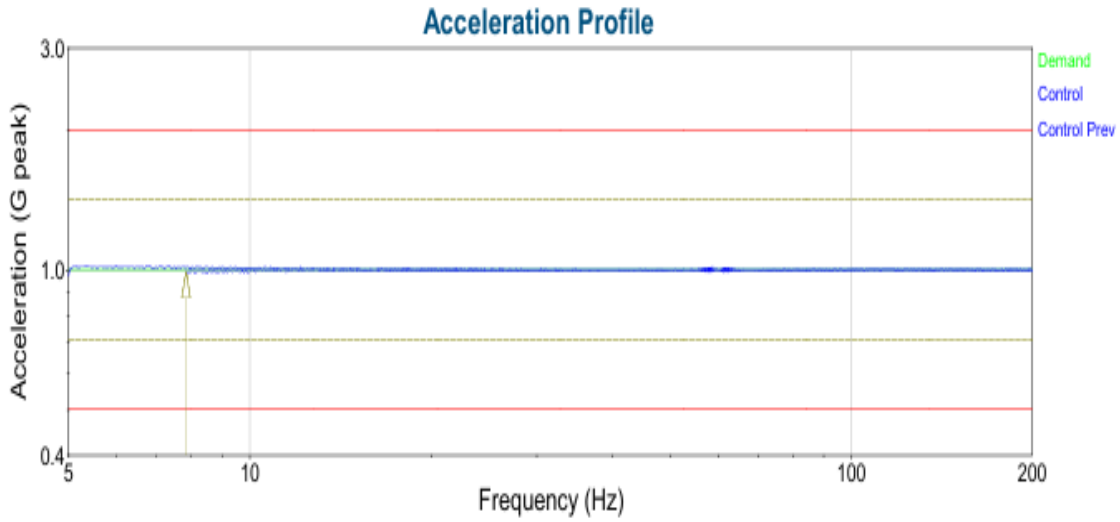

6 26, 2026 17:36:16
Demand: 1 G
Control: 0.99 G


Level 1) 100 %
Level Time: 0:10:00
Total Time: 0:10:13

Output: 0.2687 Volts peak
Frequency: 7.841 Hz
End of Timed Test

한화비전 60068-2-6

Vibration Test (Y Axis)

6.5.2 Test data (Z Axis)

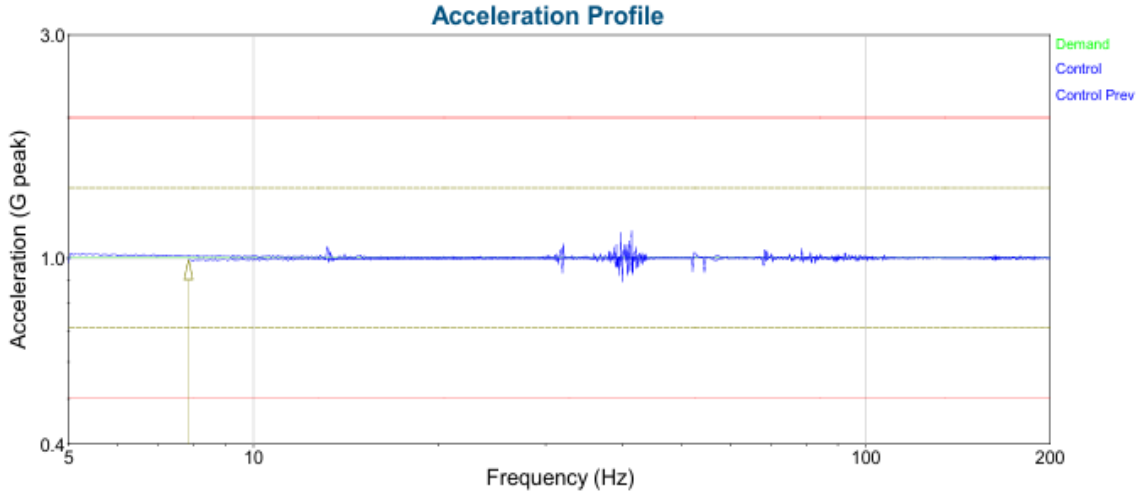


6 26, 2026 10:43:23	Level 1) 100 %	Output: 0.4136 Volts peak	한화비전 60068-2-6
Demand: 1 G	Level Time: 0:10:00	Frequency: 7.841 Hz	
Control: 0.9907 G	Total Time: 0:10:12	End of Timed Test	


Vibration Test (Z Axis)

6.6 Post-test operation and function


6.6.1 Test sample operation and function

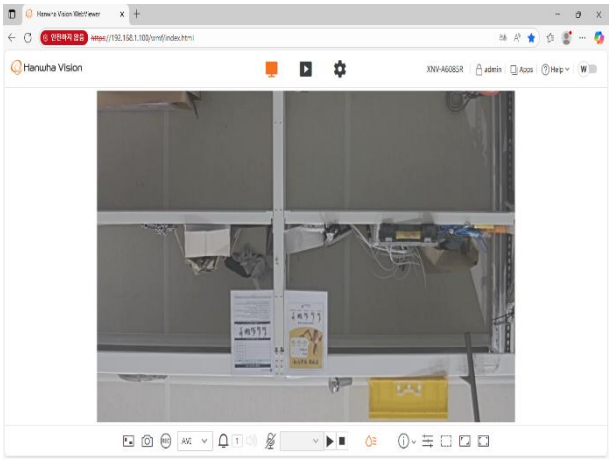

X axis

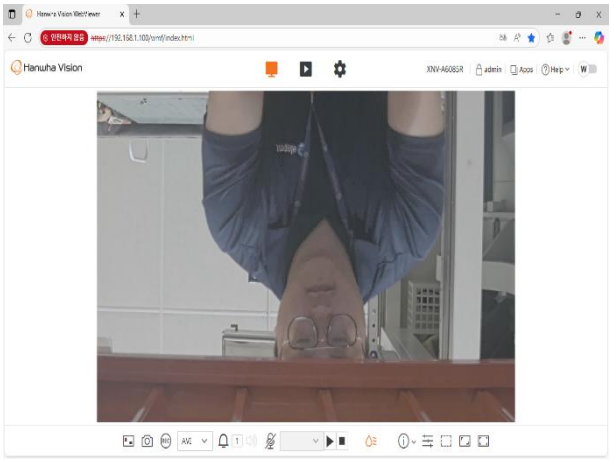

Y axis

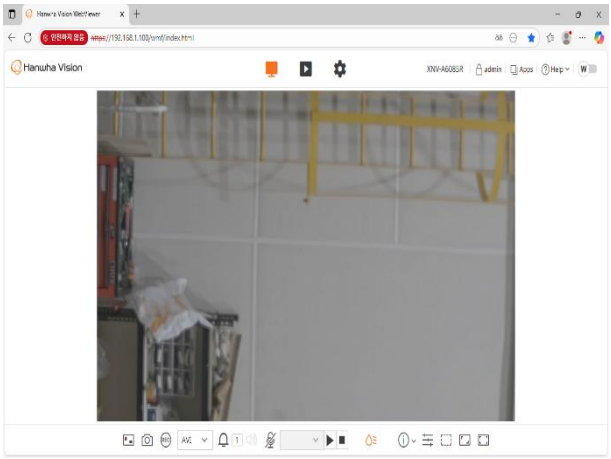

Z axis

7. Shock Test (EN 60068-2-27, IEC 60068-2-27)

7.1 Test date and environmental conditions

7.1.1 Test date: Jun. 26, 2026

7.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.8	58.6	89.9

7.2 Test conditions and methods

7.2.1 Sample status: Operation

7.2.2 Acceleration(m/s^2): 100 m/s^2


7.2.3 Applicable axis: X, Y, Z

7.2.4 Number of impacts: 10 per direction (total 60)

7.2.5 Evaluation items


1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

7.2.6 Profile

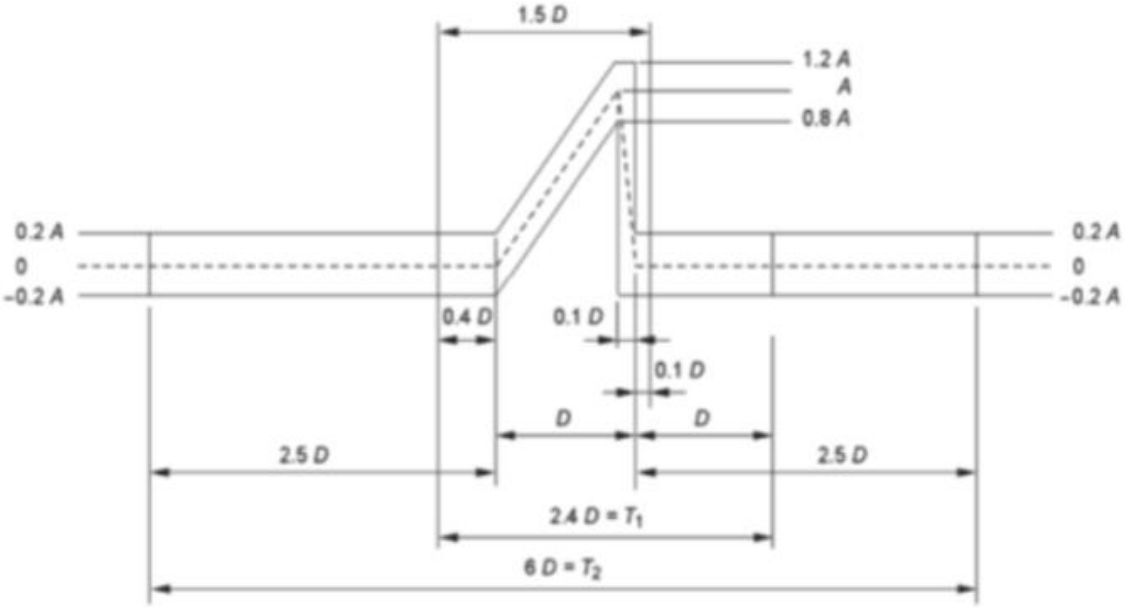


7.3 Test Setup and During test sample images


7.3.1 Evidence of test setting

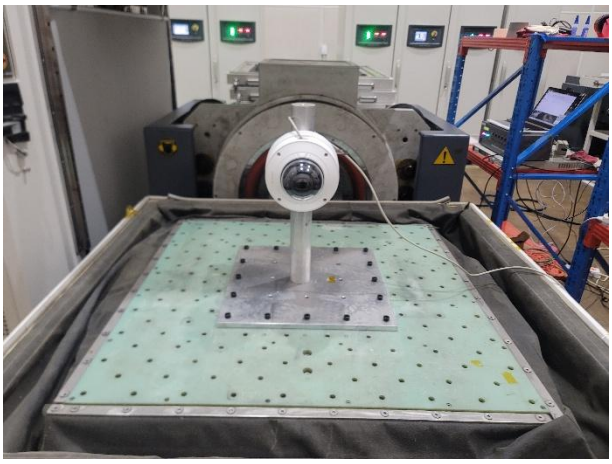

X axis

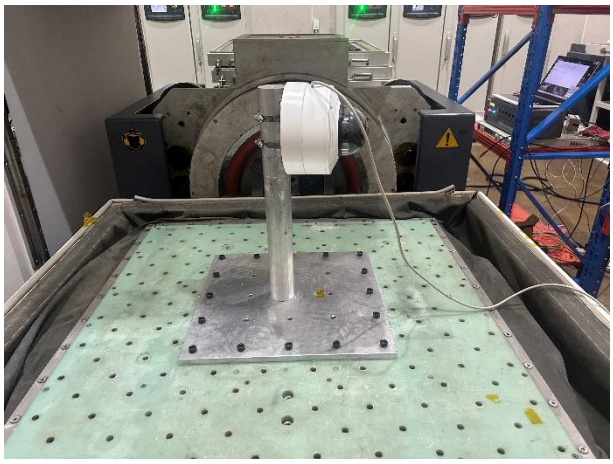

Y axis

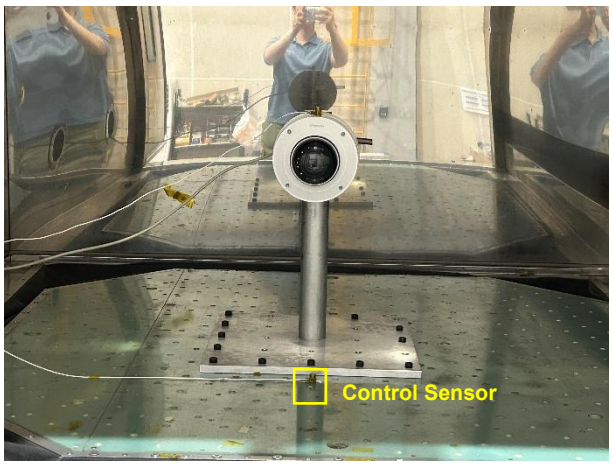

Z axis

※ The control sensors for the X and Y axes are mounted on the vibration plate.

7.4 Test result


7.4.1 Test results table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 7.6.


7.5 Test Data

7.5.1 Mechanical shock data (±X Axis)

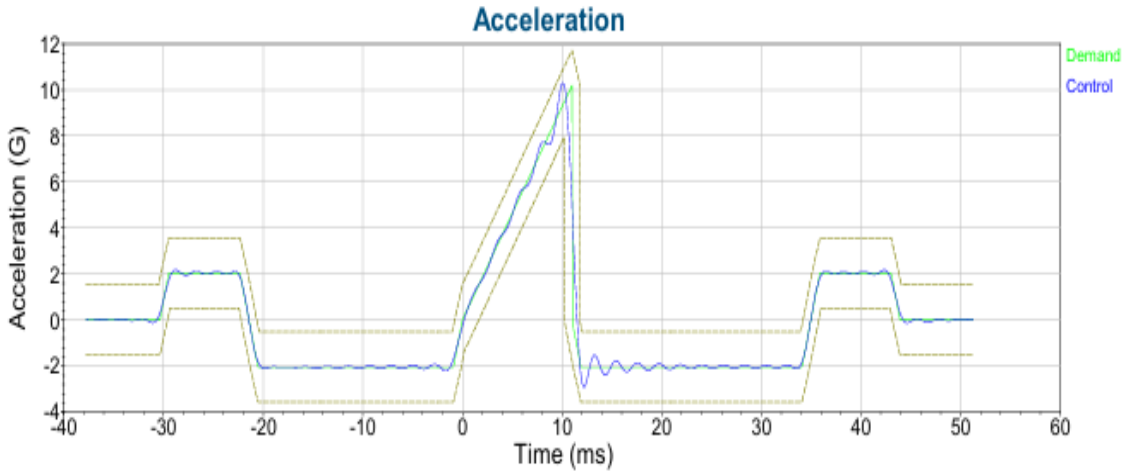

6 26, 2026 17:43:59 Level 1) 100 % Output: 0.545 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.3 G Pulse: 10 of 10 Running


Mechanical Shock data +X Axis

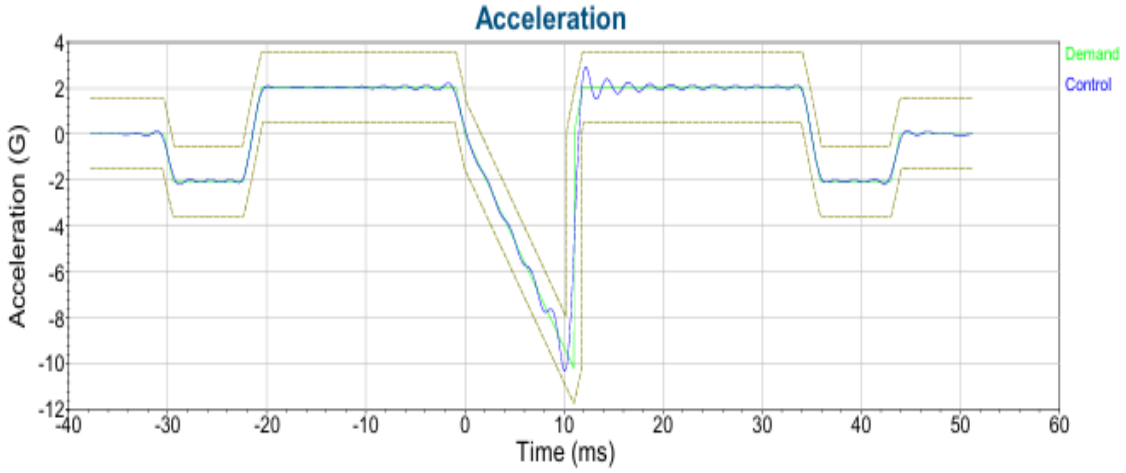

6 26, 2026 17:44:09 Level 2) 100 % Output: 0.5481 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.3 G Pulse: 10 of 10 End of Test


Mechanical Shock data -X Axis

7.5.2 Mechanical shock data (±Y Axis)

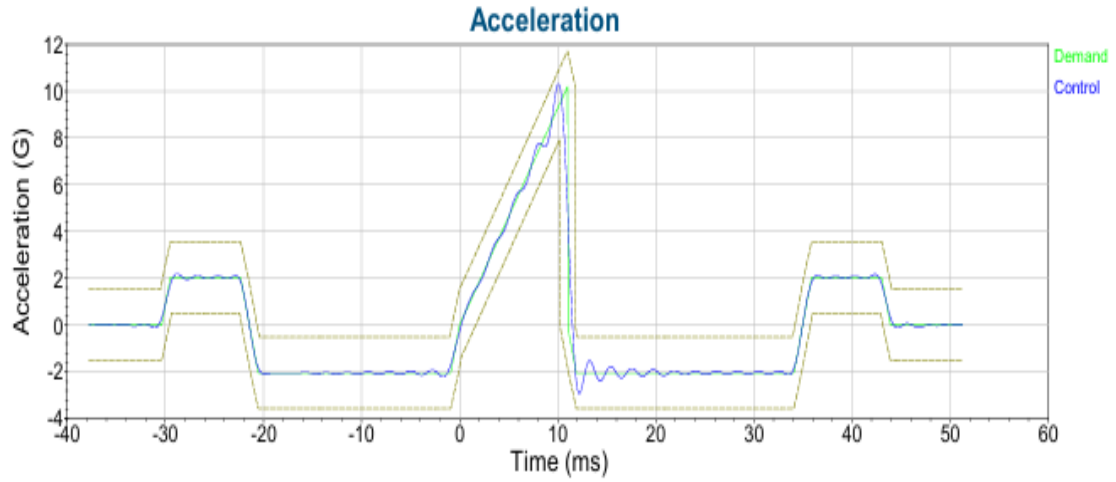

6 26, 2026 17:25:46 Level 1) 100 % Output: 0.5468 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.3 G Pulse: 10 of 10 Running


Mechanical Shock data +Y Axis

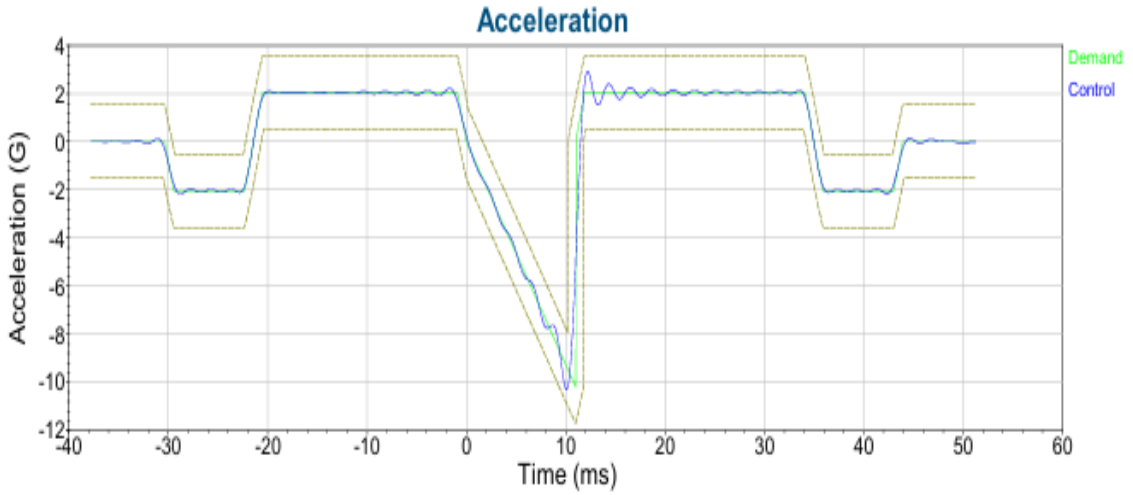

6 26, 2026 17:25:56 Level 2) 100 % Output: 0.5463 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.29 G Pulse: 10 of 10 End of Test


Mechanical Shock data -Y Axis

7.5.3 Mechanical shock data (±Z Axis)

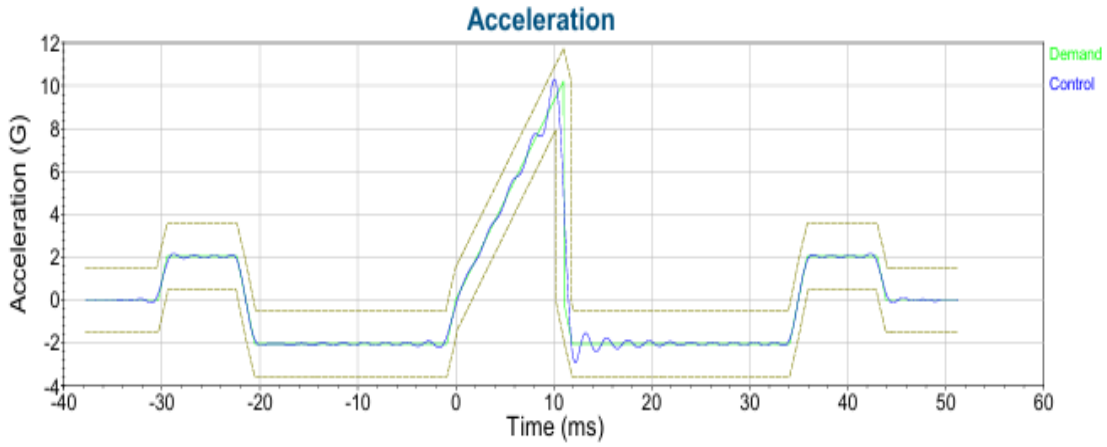

6 26, 2026 15:08:47 Level 1) 100 % Output: 0.5364 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.3 G Pulse: 10 of 10 Running

Mechanical Shock data +Z Axis

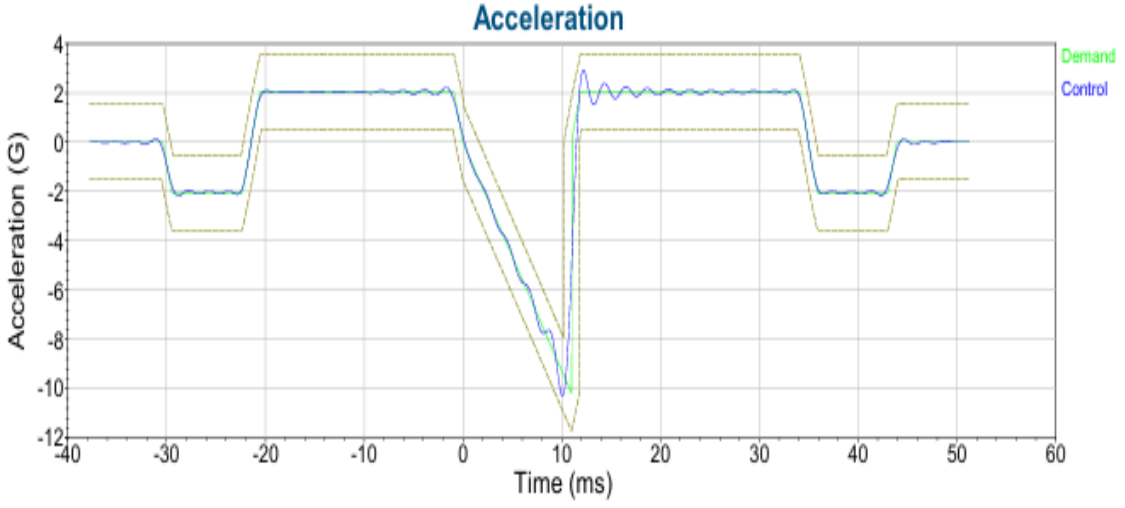


6 26, 2026 15:08:57 Level 2) 100 % Output: 0.5372 Volts peak 한화비전 60068-2-27
Demand: 10.2 G
Control: 10.29 G Pulse: 10 of 10 End of Test


Mechanical Shock data -Z Axis

7.6 Post-test operation and function


7.6.1 Test sample operation and function

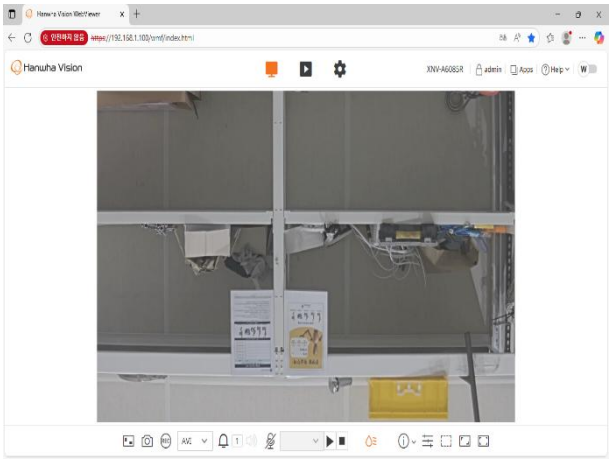

X axis

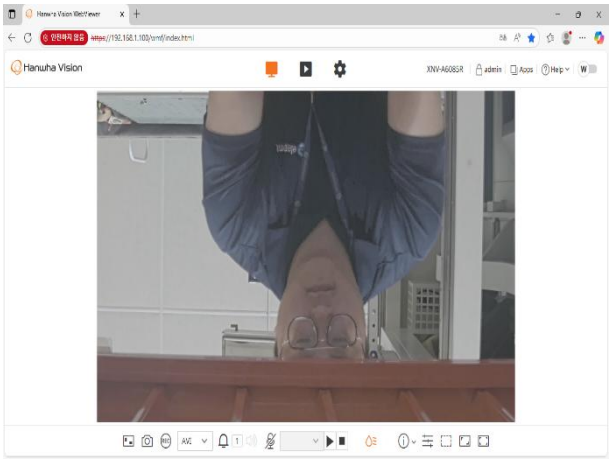

Y axis

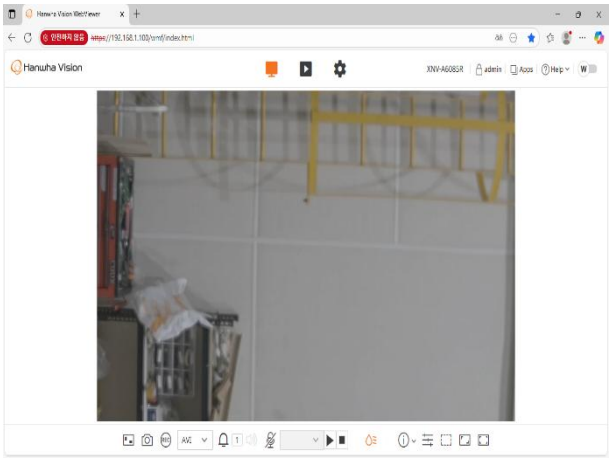

Z axis

8. Damp heat Test (EN 60068-2-78, IEC 60068-2-78)

8.1 Test date and environmental conditions

8.1.1 Test date: Jun. 22, 2026 ~ Jul. 02, 2026

8.1.2 Measured Environmental Conditions

Item	Temperature (℃)	Humidity (% R.H.)	Pressure (kPa)
Measurement	24.5	61.2	95.9

8.2 Test conditions and methods

8.2.1 Preconditioning temperature: 25 °C

8.2.2 Sample status: Operation

8.2.3 Test temperature: 40 °C

8.2.4 Test humidity: 93 % R.H.

8.2.5 Test time: 240 h

8.2.6 Recovery Temperature: 25 °C


8.2.7 Evaluation items

1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

8.3 Test Setup and During test sample images

8.3.1 Evidence of test setting



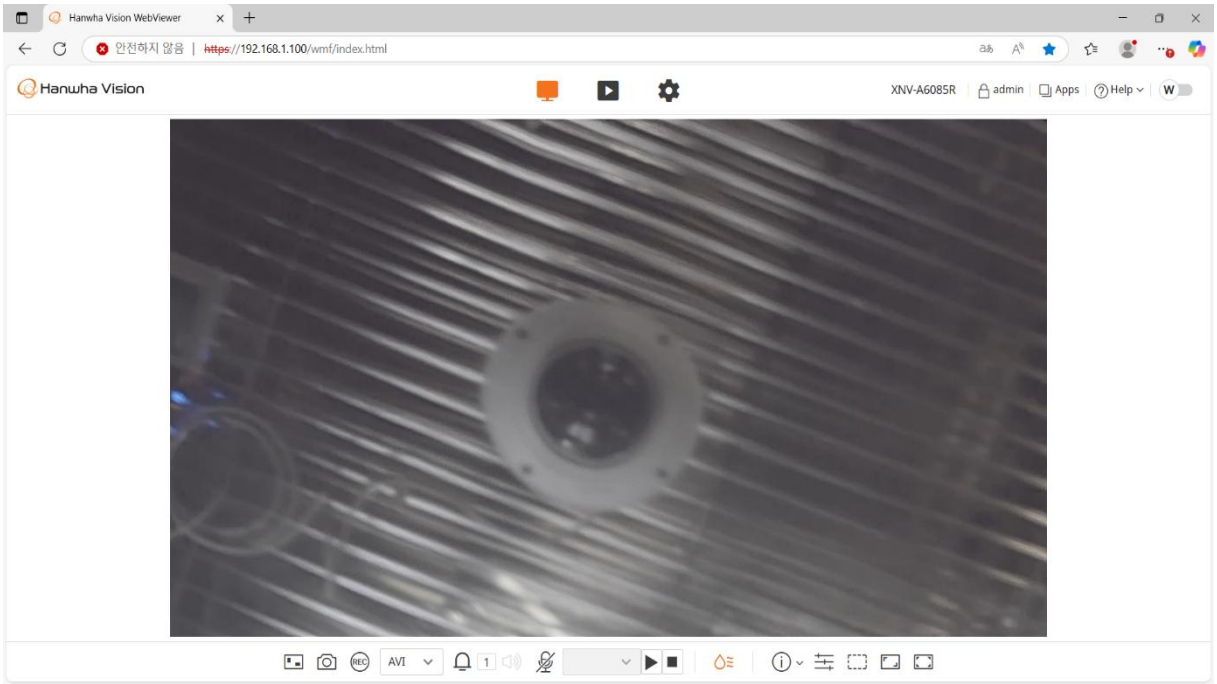

8.4 Test result


8.4.1 Test results table

Evaluation Criteria	Test Results	Comment
Functional operation	**Pass**	-
Mechanical inspection	**Pass**	-

※ Refer to the sample operation after the completion of testing in section 8.6.

8.5 Test Data


8.5.1 Test data and graph

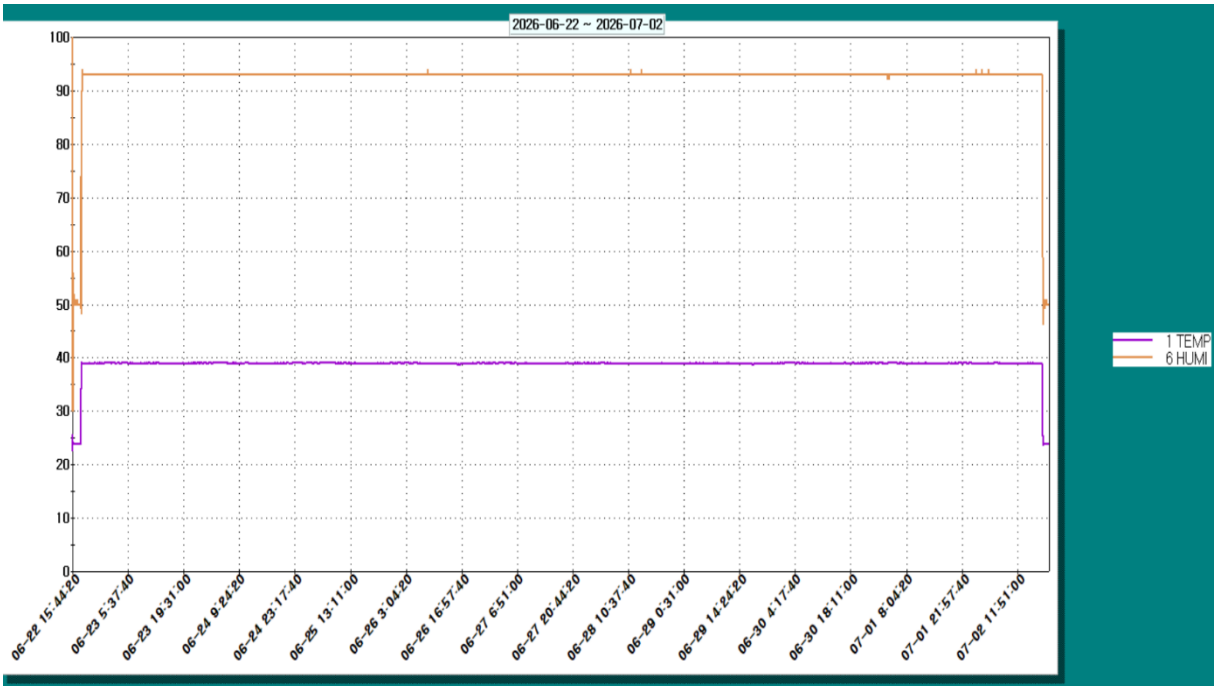

Temperature Data

8.6 Post-test operation and function

8.6.1 Test sample operation and function

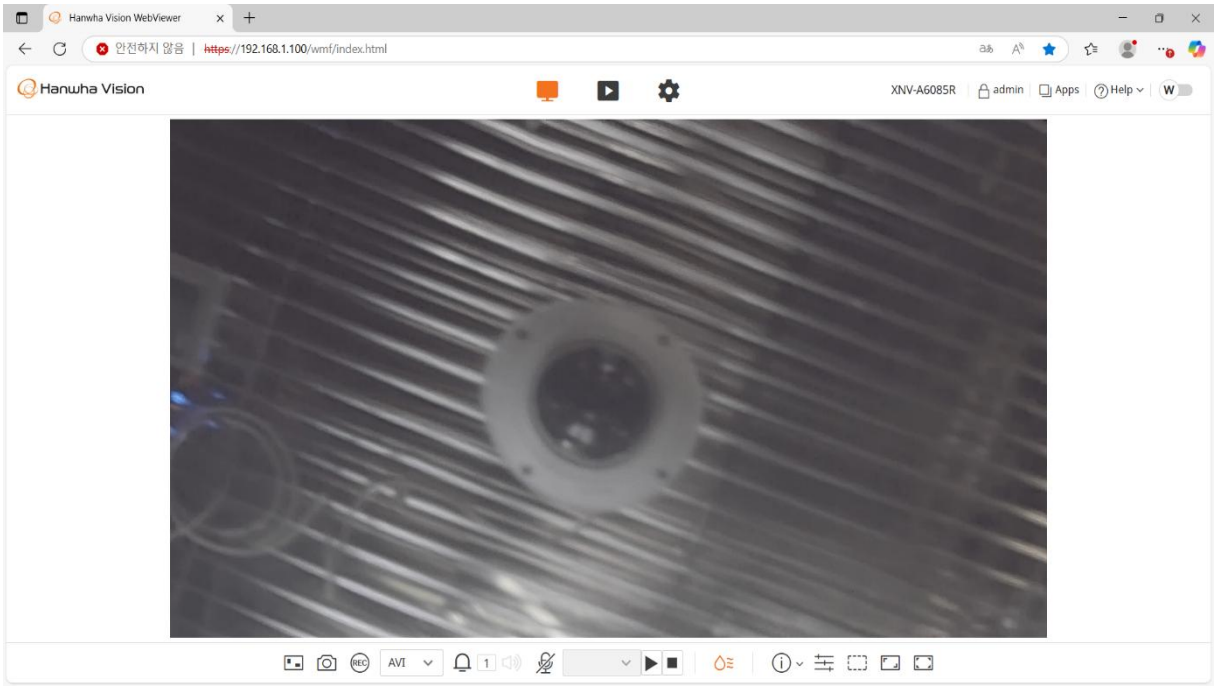

8.7 Post-test sample images

8.7.1 Test sample



Top



Bottom



Front



Rear



Left side



Right side

- End -