


SCD-2010F Series Quick Install Guide

PREFACE

SCD-2010F Series is designed for installing on a ceiling.


PRE-INSTALLING THE CAMERA BEFORE MOUNTING A CEILING

- To facilitate the installation work, arrange the BNC-POWER cable through the wiring hole.

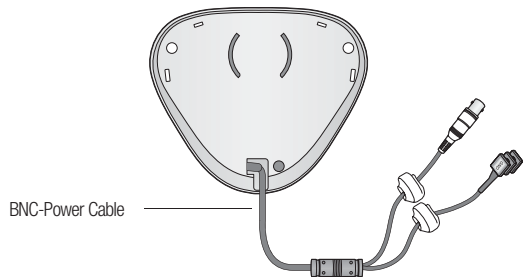

INSTALLING THE CAMERA

1. Remove the shield case from the body.
2. Install the camera in a desired position and use the screwdriver to tighten up the screws.
3. When done, insert the shield case back into the body.

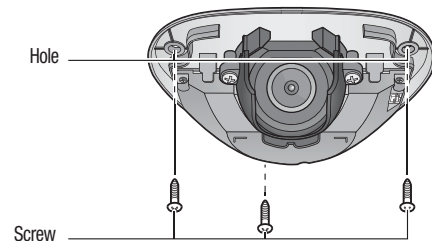


Notes

- The recommended screws are 4mm Tapping screws.
- The screws should not be larger than 4mm.
- When fastening the two screws, be careful not to damage the dome components.
- Arrange the cables properly lest that they be stuck between or peeled off. Otherwise, it may cause damage to the camera or a fire.


CLOSING THE SHIELD CASE

Determine a desired monitoring area and close the shield case.
Then, tighten up the screw as shown to fix the case.

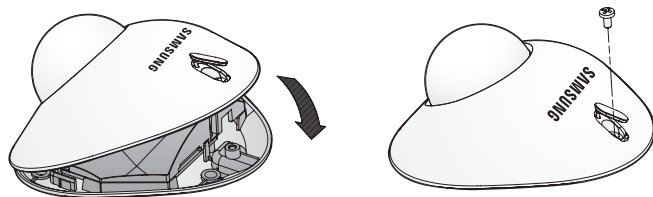

PANNING & TILTING CONTROL

You can adjust the Panning and Tilting angle freely. (Panning angle: $\pm 10^\circ$, Tilting angle: $0^\circ \sim 90^\circ$)

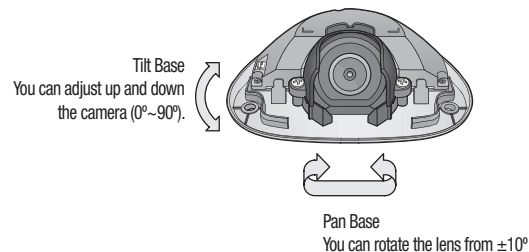

1. Adjustment Panning angle: After attaching the dome camera to a ceiling, adjust the panning angle for better monitoring area by rotating the Pan Base. The panning angle can be adjusted $\pm 10^\circ$ freely.
2. Adjustment Tilting angle: After attaching the dome camera to a ceiling, adjust the tilting angle for better monitoring area by rotating the Tilt Base. The tilting angle can be adjusted to 0° from 90° freely. (based the ceiling surface)