

ANV-L7082R



Network

Dome

# ANV-L7082R

## 4MP IR Outdoor Vandal Dome Camera



### Key Features

- 4MP resolution, Up to 30fps
- Color : 0.1Lux (F1.6, 1/30sec), B/W : 0Lux (IR LED On)
- 3.3 ~ 10.3mm motorized varifocal with Simple Focus
- IR viewable length: 30m (98.42ft)
- Day & Night (ICR), WDR (120dB)
- H.265, H.264, MJPEG, Multiple streaming supported
- Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering
- Hallway view (90°/270°), LDC support, WiseStream II
- Micro SD/SDHC/SDXC memory 1 slot (Max. 128GB)
- IP66, IK10

# ANV-L7082R

4MP IR Outdoor Vandal Dome Camera



## Specifications

### Video

|                         |                       |                                                                                                         |
|-------------------------|-----------------------|---------------------------------------------------------------------------------------------------------|
| Imaging Device          | Size                  | 1/2.8"                                                                                                  |
|                         | Type                  | CMOS                                                                                                    |
| Resolution              |                       | 2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 |
| Max. Framerate          | H.265/H.264           | 30fps/25fps(60Hz/50Hz)                                                                                  |
|                         | MJPEG                 | 15fps                                                                                                   |
| Min. Illumination (Lux) | Color(1/30sec, 30IRE) | 0.1                                                                                                     |
|                         | BW(1/30sec, 30IRE)    | 0.01                                                                                                    |

### Lens

|                               |            |                      |
|-------------------------------|------------|----------------------|
| Focal Length (mm)             |            | 3.3~10.3             |
| Max Aperture Ratio (F number) | Wide       | 1.6                  |
|                               | Tele       | 3.3                  |
| Angular Field of View         | Horizontal | 95°~28°              |
|                               | Vertical   | 51°~15°              |
|                               | Diagonal   | 113°~32°             |
| Min. Object Distance          |            | 0.5m(1.64ft)         |
| Focus Control                 |            | Simple focus, Manual |
| Lens Type                     |            | DC auto iris         |

### Pan / Tilt / Rotate

|                           |        |         |
|---------------------------|--------|---------|
| Pan / Tilt / Rotate Range | Pan    | 0°~350° |
|                           | Tilt   | 0°~67°  |
|                           | Rotate | 0°~355° |

### Operational

|                         |               |
|-------------------------|---------------|
| Day & Night             | Auto(ICR)     |
| Backlight Compensation  | BLC, WDR, SDR |
| Wide Dynamic Range (dB) | 120           |
| Digital Noise Reduction | SSNR          |

## Operational

|                                          |             |                                                                                                                                                 |
|------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Motion Detection                         | Quantity    | 4ea                                                                                                                                             |
|                                          | Shape       | 8point Polygonal zones                                                                                                                          |
| Privacy Masking                          | Quantity    | 6ea                                                                                                                                             |
|                                          | Shape       | Rectangular zones                                                                                                                               |
| Gain Control                             |             | Low, Middle, High                                                                                                                               |
| White Balance                            |             | ATW, AWC, Manual, Indoor, Outdoor                                                                                                               |
| LDC                                      |             | Support                                                                                                                                         |
| Electronic Shutter                       | Mode        | Minimum, Maximum, Anti flicker                                                                                                                  |
|                                          | Speed Range | 1/5~1/12,000sec                                                                                                                                 |
| Video Rotation                           |             | Flip, Mirror, Hallway view(90°/270°)                                                                                                            |
| Alarm Triggers                           |             | Analytics, Network disconnect                                                                                                                   |
| Alarm Events When Alarm Trigger Occurred |             | File upload(image): e-mail/FTP,<br>Notification: e-mail,<br>Recording: SD/SDHC/SDXC or NAS recording at event triggers,<br>Handover: PTZ preset |
| Light Type                               |             | IR LED                                                                                                                                          |
| Light Viewable Length                    | IR          | 30m(98.42ft)                                                                                                                                    |
| IR Wavelength                            |             | 850nm                                                                                                                                           |

## Analytics

|                  |        |                                                                                                                       |
|------------------|--------|-----------------------------------------------------------------------------------------------------------------------|
| Analytics Events | Normal | Defocus detection, Motion detection, Tampering, Virtual area(Intrusion/Enter/Exit), Virtual line(Crossing, Direction) |
|------------------|--------|-----------------------------------------------------------------------------------------------------------------------|

## Network

|                                   |                    |                                                                                                                                                                                                                           |
|-----------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ethernet                          |                    | RJ-45(10/100BASE-T)                                                                                                                                                                                                       |
| Video Compression                 |                    | H.265/H.264: Main/High, MJPEG                                                                                                                                                                                             |
| Smart Codec                       |                    | Manual, WiseStream II                                                                                                                                                                                                     |
| Bitrate Control                   |                    | H.265/H.264: CBR or VBR,<br>MJPEG: VBR                                                                                                                                                                                    |
| Streaming                         | Unicast            | Up to 6 users                                                                                                                                                                                                             |
|                                   | Multicast          | Support                                                                                                                                                                                                                   |
|                                   | Multiple Streaming | Up to 3 profiles                                                                                                                                                                                                          |
| Protocol                          |                    | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), PPPoE, PIM-SM |
| Application Programming Interface | ONVIF              | S, G, T                                                                                                                                                                                                                   |
|                                   | Others             | SUNAPI(HTTP API)                                                                                                                                                                                                          |
| Direct Cloud Connection           |                    | Optional (needs gateway)                                                                                                                                                                                                  |

## Security

|                       |  |                    |
|-----------------------|--|--------------------|
| OS / Firmware Protect |  | Encrypted firmware |
|-----------------------|--|--------------------|

## Security

|                        |                                                                         |
|------------------------|-------------------------------------------------------------------------|
| User authentication    | Digest authentication, Prevent brute-force attack                       |
| Network authentication | IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)                      |
| Secure Communication   | HTTPS, WSS(WebSocket Secure), SRTP                                      |
| Access Control         | IP-based access control                                                 |
| Data Protect           | Encryption credentials, Encrypt compress for live recording file export |
| Audit                  | Access / System / Event Log management                                  |
| Device ID              | Device certificate(Hanwha Vision Root CA)                               |
| Secure Storage         | SDcard partition encrypt(AES-256)                                       |

## General

|              |                    |                    |
|--------------|--------------------|--------------------|
| Memory       | RAM                | 512MB              |
|              | Flash              | 256MB              |
| Edge Storage | Micro SD/SDHC/SDXC | Max. 128GB x 1slot |

## Environmental & Electrical

|                     |             |                                        |
|---------------------|-------------|----------------------------------------|
| Operating Condition | Temperature | -30°C~+55°C(-22°F~+131°F)              |
|                     | Humidity    | 0~95% RH(non-condensing)               |
|                     | Others      | Start up should be done at above -20°C |
| Storage Condition   | Temperature | -30°C~+55°C(-22°F~+131°F)              |
|                     | Humidity    | 0~95% RH(non-condensing)               |
| Input Voltage       |             | PoE(IEEE802.3af, Class3)               |
| Power Consumption   | PoE         | Max. 8.0W, typical 6.0W                |

## Mechanical

|                     |                            |
|---------------------|----------------------------|
| Color               | White                      |
| Material            | Aluminum, Plastic          |
| RAL Code            | RAL9003                    |
| Product Dimensions  | ø137.8x107.1mm(5.43x4.22") |
| Product Weight      | 550g(1.21lb)               |
| Compatible Gang Box | Single, Double, 4" Octagon |

## Certifications & Standards

|             |                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC         | FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, RCM AS-NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835 |
| Safety      | UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471                                                                                                                                  |
| Environment | IEC/EN 63000, IEC 60529 IP66, IEC 62262 IK10                                                                                                                                      |

**DORI (EN62676-4 standard)**

|                                  |      |                  |
|----------------------------------|------|------------------|
| <b>Detect (25PPM/ 8PPF)</b>      | Wide | 46.9m(153.92ft)  |
|                                  | Tele | 205.4m(673.73ft) |
| <b>Observe (63PPM/ 19PPF)</b>    | Wide | 18.8m(61.57ft)   |
|                                  | Tele | 82.1m(269.49ft)  |
| <b>Recognize (125PPM/ 38PPF)</b> | Wide | 9.4m(30.78ft)    |
|                                  | Tele | 41.1m(134.75ft)  |
| <b>Identify (250PPM/ 76PPF)</b>  | Wide | 4.7m(15.39ft)    |
|                                  | Tele | 20.5m(67.37ft)   |


# ANV-L7082R

4MP IR Outdoor Vandal Dome Camera



CAD

Unit: mm [inch]

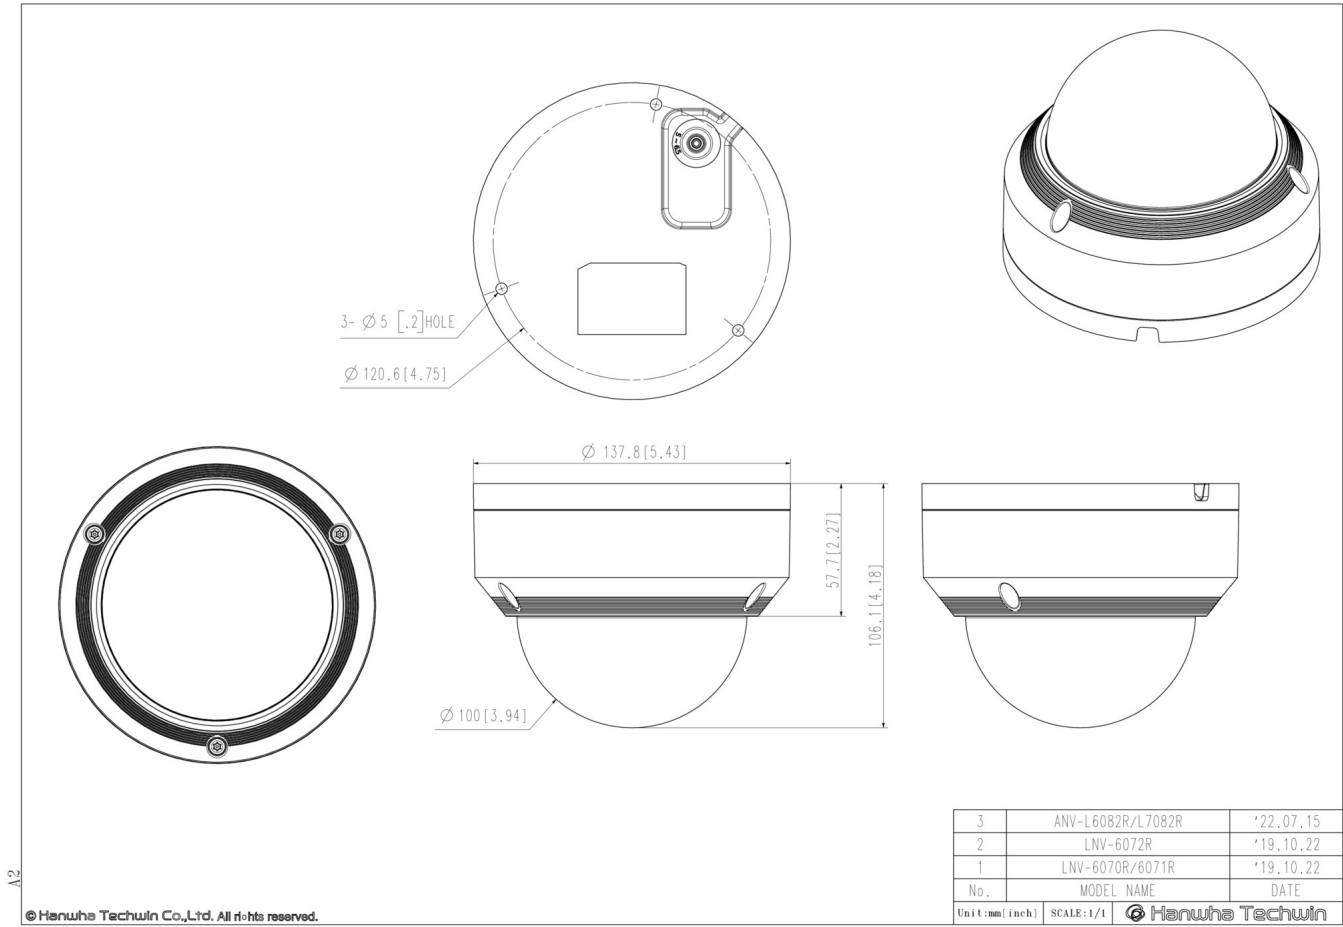

A2

© Hanwha Techwin Co., Ltd. All rights reserved.