

EMC TEST REPORT

Test Report No. : KES-EM-22T0880
Date of Issue : Nov. 03, 2022
Product Name : DVR
Model/Type No. : ARD-810
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Oct. 13, 2022
Test date : Oct. 25, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Seong Min, Jang
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 03, 2022	KES-EM-22T0880	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	16
2.3	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		20
Conducted Emissions at Mains Power Ports.....		20
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		24
Test Setup Photos and Configuration		25
Conducted Emissions at Mains Power Ports.....		25
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz)		27
EUT External Photographs		28
EUT Internal Photographs		29

1.0 General Product Description

Main Specifications of EUT are:

			ARD-810
Display	Display		
Analog camera	Analog camera	Inputs	
		Signal Type	
Network camera	Network camera	Inputs	Additional 2Ch (Max. 8Ch) TSD
		Resolution	SMP - CF
		Protocols	SCHAPI(WiFi), ONVIF
Decoding	Decoding	Local Display	None
		Multi Screen Display	None
		Resolution	None
Use	Use	Local Display	1x HDMI, 1x VGA (Single Mode) - HDMI 1080i x 2160, 2560x1600, 1920x1080, 1280x1024, 1280x720 (Dual Mode) Clone - HDMI 1920x1080, 1280x1024, 1280x720 - VGA 1920x1080, 1280x1024, 1280x720
		Multi Screen Display	[Local monitor] - Dynamic layout, Virtual channel view - up to 7 division [Web] 1 / 4 / 16
		Resolution	[Analog Camera(NTSC/PAL)] SMP(5M Half 20fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) [Network Camera] - Typ. 2MP(120fps)
Performance	Performance		
Operating System	Operating System	Embedded	Linux
Record	Record	Compression	H.265, H.264, MPEG
		Record Rate(Analog)	[Analog Camera(NTSC/PAL)] (Main Stream) SMP(5M Half 20fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) (Sub Stream) 720p or higher : 640x360 full fps/Ch SD signal : upto CF 30/25fps/Ch * The maximum recording frame rate depends on the frame rate of the input camera.
		Recording Bandwidth	Max. 60Mbps
		Resolution	SMP - CF
		Mode	Manual, Schedule (Continuous/Event), Event(Pri/Post), Dual Track
		Event Trigger	Alarm input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Posing, Virtual-line, (Dio)Appear, Face Detection, Audio detection), Defocus camera event, Dynamic camera event
		Event Action	E-mail, PTZ preset, Alarm-out, Buzzer, Monitor out
Search & Play	Search & Play	Playback Bandwidth	Max. 32Mbps
		User	Max. 4 users (See 1, Remote 3)
		Simultaneous playback	8Ch(Local Monitor, CMS, Wireless Mobile) 1Ch(Web)
		Storage Overwriting	WEB / CMS
		Mode	Date & Time (Calendar) / Event log list / Text search (POS), Back up, Motion, Smart search (Virtual line way) direction, Enter / Exit * All Search included Preview Function ASR search
		Resolution	SMP - CF
		Playback Control	FastForward/Backward (x2,x4,x8,x16,x32,x64,x128,x256) Slow Forward/Backward(x1/2,x1/4,x1/8) JMove one step up/down
Storage	Storage	Supported HDD	Up to 6TB
		HDD Slot	SATA (See/Max 6TB)
		External	None
		RAD	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0880
Page (5) of (34)

Backup	Backup	File backup	B/L, EXE(include Player), AV(Webviewer only)	B/L, EXE(include Player), AV(Webviewer only)
		Function	Max. 10 Ch play, Date-time/title display	Max. 16 Ch play, Date-time/title display
Network	Network			
Protocol	Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SU/NAP(Server, Client)	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SU/NAP(Server, Client)
DDNS	DDNS		Wanet DDNS	Wanet DDNS
Transmission speed	Transmission speed		[Analog Camera(NTSC/PAL)] (Main Stream) 5MP(5M Half 30fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) (Sub Stream) 720p or higher : 640x360 full fps/Ch SD signal : upto CF 30/25fps/Ch * The maximum recording frame rate depends on the frame rate of the input camera.	[Analog Camera(NTSC/PAL)] (Main Stream) 5MP(5M Half 30fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) (Sub Stream) 720p or higher : 640x360 full fps/Ch SD signal : upto CF 30/25fps/Ch * The maximum recording frame rate depends on the frame rate of the input camera.
Transmission Bandwidth	Transmission Bandwidth		Max. 40Mbps	Max. 100Mbps
Transmission Bandwidth	Transmission Bandwidth		None	None
Wireless	Wireless	WIFI	None	None
		3G/LTE	None	None
Audio	Audio	Input/Output	1 Line In / 1 Line out	1 Line In / 1 Line out
		Compression	G.711 (NW Cam G.711, 720)	G.711 (NW Cam G.711, 720)
		Audio Communication	2-Way	2-Way
Max Remote User			None	None
		Security	IP address filtering, User access log, 602 Is Authentication, Encryption (D/PW), Recording Transmission, Backup) Device Certificate(Hanwha Techno Root CA)	IP address filtering, User access log, 602 Is Authentication, Encryption (D/PW), Recording Transmission, Backup) Device Certificate(Hanwha Techno Root CA)
Web viewer	Web viewer	Supported OS	Windows 10, Mac OS 11 Big Sur and later	Windows 10, Mac OS 11 Big Sur and later
		Supported browser	Chrome v89 or above, Edge v89 or above, Safari v14.0.3 or above	Chrome v89 or above, Edge v89 or above, Safari v14.0.3 or above
Viewer Software	Viewer Software		SSM, Webviewer, Wanet Viewer, Wanet mobile Support SDK/CG(SU/NAP) for integration to 3rd party VMS	SSM, Webviewer, Wanet Viewer, Wanet mobile Support SDK/CG(SU/NAP) for integration to 3rd party VMS
Functions	Functions			
Camera Setup	Camera Setup	Register	Auto, Manual	Auto, Manual
		Reset	None	None
PTZ	PTZ	Control	Via GUI/Webviewer, SSM, WanetViewer, WanetMobile Viewer, System Controller	Via GUI/Webviewer, SSM, WanetViewer, Wanet Mobile Viewer, System Controller
		Presets	100 presets	100 presets
Smart phone	Smart phone	Support Model	iOS, Android	iOS, Android
		Protocol Support	RTP, RTSP, HTTP, CG(SU/NAP)	RTP, RTSP, HTTP, CG(SU/NAP)
		Control	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 28MP) Eventpush	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 28MP) Eventpush
		Max. Remote User	Search(1), Use Unicast(10)	Search(1), Use Unicast(10)
Redundancy	Redundancy	Failover	None	None
		ARR	Support	Support
Easy configuration	Easy configuration		Setup Wizard (Language, Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)	Setup Wizard (Language, Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Casual Control	Casual Control		CVBS(Pelco-C)/AHD/CV/TVI	CVBS(Pelco-C)/AHD/CV/TVI
Interface	Interface			
Front	Front	Indicator	LED(Status Indicator) : Power(1), Record(1), Network(1)	LED(Status Indicator) : Power(1), Record(1), Network(1)
Storage	Storage		None	None
Reset	Reset		Switch(1EA)	Switch(1EA)
HDD Key Lock	HDD Key Lock		None	None
HDMI	HDMI		1EA	1EA
VGA	VGA		1EA	1EA
BNC	BNC		6Ch In / 1Ch Out(Spot Output)	16Ch In / 1Ch Out(Spot Output)
DP	DP		None	None
DVI	DVI		None	None
e-SATA	e-SATA		None	None
Audio	Audio		Out(1EA, RCA, Line)	Out(1EA, RCA, Line)
Ethernet	Ethernet		RJ-45(10/100 BASE-T)	RJ-45(10/100 BASE-T)
Alarm	Alarm		In 4EA, Out 1EA - Relay Out(1NO/NC/COM)	In 4EA, Out 1EA - Relay Out(1NO/NC/COM)
USB	USB		2EA(Front/Rear USB2.0)	2EA(Front/Rear USB2.0)
GPS	GPS		None	None
WIFI	WIFI		None	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Serial(Protocol)	Serial(Protocol)		RS-485 (Samsung-T/Pelco-D/Pelco-p) * for PTZ	RS-485 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power Inlet	Power Inlet		15A DC Input Jack	15A DC Input Jack
System	System			
Log	Log	Log Unit	Max. 100,000 (System Log, Event Log each)	Max. 100,000 (System Log, Event Log each)
System Control	System Control		Mouse, Webbrowser, System Controller(SPC-7000, SPC-6000, SPC-2000)	Mouse, Webbrowser, System Controller(SPC-7000, SPC-6000, SPC-2000)
Power Management	Power Management	Shutdown Delay	None	None
		Startup Delay	None	None
Language	Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech , Czech, Portuguese, Danish, Romanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Vietnamese, Korean, Chinese, Japanese, Thai	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech , Czech, Portuguese, Danish, Romanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Polish, Korean, Chinese, Japanese, Thai, Vietnamese
Environmental	Environmental			
Operating Temperature			0°C to +40°C(+32°F to +104°F)	0°C to +40°C(+32°F to +104°F)
Operating Humidity			20% ~ 85% RH	20% ~ 85% RH
Certification	Certification		UL, CE, FCC, KC	UL, CE, FCC, KC
Electrical	Electrical			
Power Input			DC12V	DC12V
Power Consumption			TBD	TBD
PoE Budget	PoE Budget		None	None
Mechanical	Mechanical			
Color / Material	Color / Material		Black / Metal	Black / Metal
Dimension (WxHxD)	Dimension (WxHxD)		100 x 47 x 206.7mm (11.85" x 1.89" x 8.22")	270.0x 46.0 x 220mm(10.63" x 1.81" x 8.66")
Weight	Weight		TBD	TBD
Control Box	Control Box			
Interface	Interface	Indicator		
		Emergency Button		
		Audio/Power Switch		
		Main i/O		
Mechanical	Mechanical	Color / Material		
		Dimension (WxHxD)		
		Weight		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	ARD-810	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
Adapter	KPL-048F-VI	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
Mouse	MOKJUO	21H07051	Primax Electronics Ltd.	-
HDD	ST2000VX012	-	SEAGATE	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Laptop	LG15N54	503NZWY038929	LG	-
Laptop Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
Monitor 1	SMT-2232	C95V67VF90003 8B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	SMT-2233	ZC6U67VH50019 4D	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 3	-	-	DELL. INC	-
Speaker	-	-	Britz	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Controller Adapter	AP-12005A	-	A Power	-
Alarm	PRO-SL	-	SENSOR PRO	-
ButtonAlarm	-	-	-	-
Camera	SCD-6083RN	-	TB-eye Ltd.	-
Camera Adapter	KP-1220	-	Korea Power	-
USB Memory	-	-	SanDisk	-
NETWORK VIDEO ENCODER	SPE-410	-	HANWHA TECHWIN CO.,LTD.	-
NETWORK VIDEO ENCODER Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	DC Jack	Adapter (EUT)	DC Jack	1.4	U
	USB A-type	Mouse (EUT)	USB A-type	1.5	U
	BNC(SPOT)	Monitor #1	BNC	3.5	S
	VGA	Monitor #2	VGA	1.5	U
	HDMI	Monitor #3	HDMI	1.4	S
	AUDIO OUT	Speaker	AUDIO OUT	2.0	U
	RS-485	Controller	RS-485	3.2	U
	Alarm OUT	Alarm	Alarm IN	3.1	U
	Alarm IN	ButtonAlarm	Alarm OUT	3.2	U
	VIDEO IN	NETWORK VIDEO ENCODER	BNC	3.5	S
	RJ-45	Laptop	RJ-45	3.0	U
	AUDIO IN	Laptop	AUDIO IN	1.5	U
	USB	USB Memory	USB	-	-
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
	BNC (VIDEO IN)	NETWORK VIDEO ENCODER	BNC	10.0	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.4	S
Controller	DC Jack	Controller Adapter	DC Jack	1.4	S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0880

Page (10) of (34)

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Camera	DC Jack	Camera Adapter	DC Jack	1.4	S
NETWORK VIDEO ENCODER	2 Pin	NETWORK VIDEO ENCODER Adapter	2 Pin	2.0	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operating Mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.8 Configuration

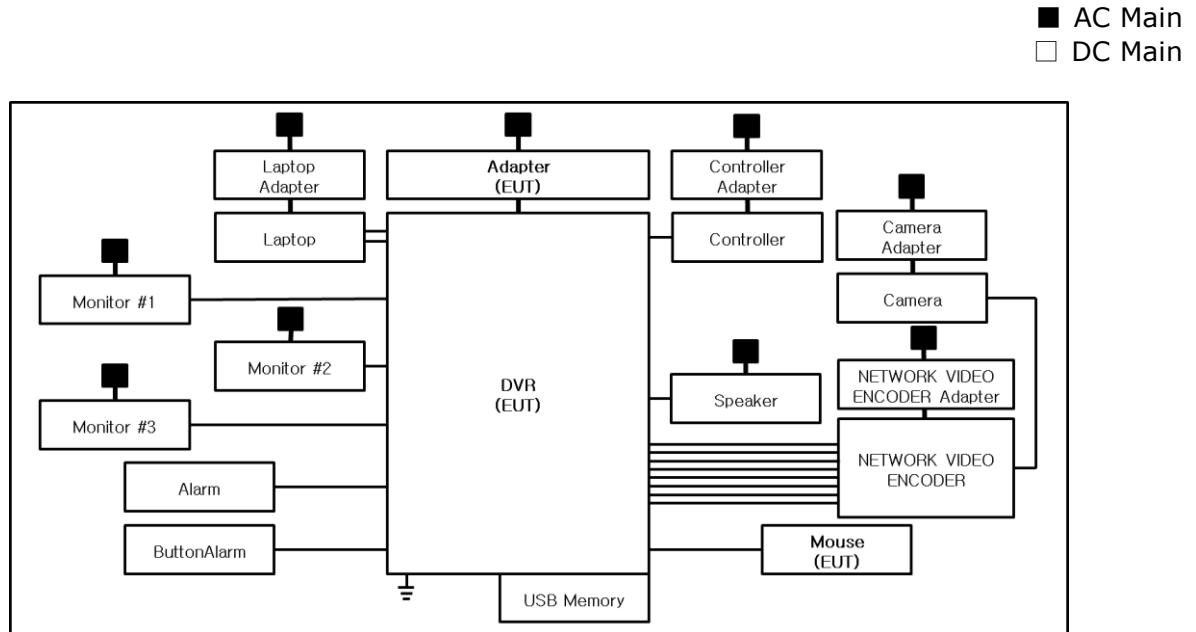

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

2.1 Conducted Emissions at Mains Power Ports

Test Date

Oct. 25, 2022


Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Diagram of test setup

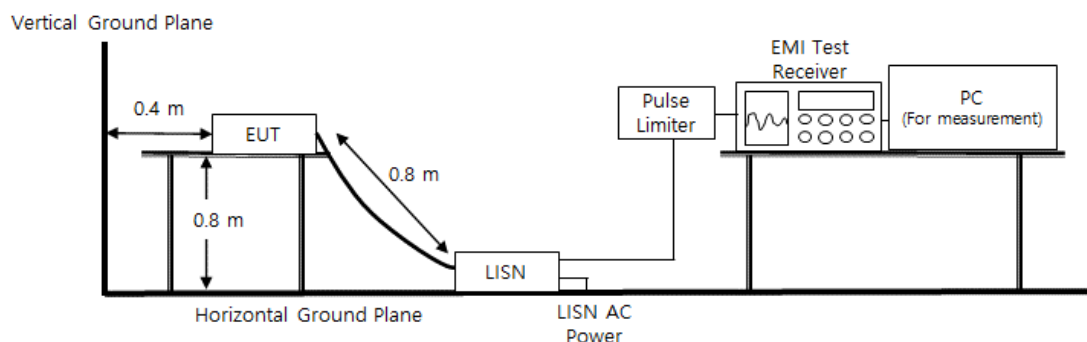

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0880

Page (15) of (34)

Test Conditions

Temperature: (23,0 ± 0,2) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Oct. 25, 2022


Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Diagram of test setup

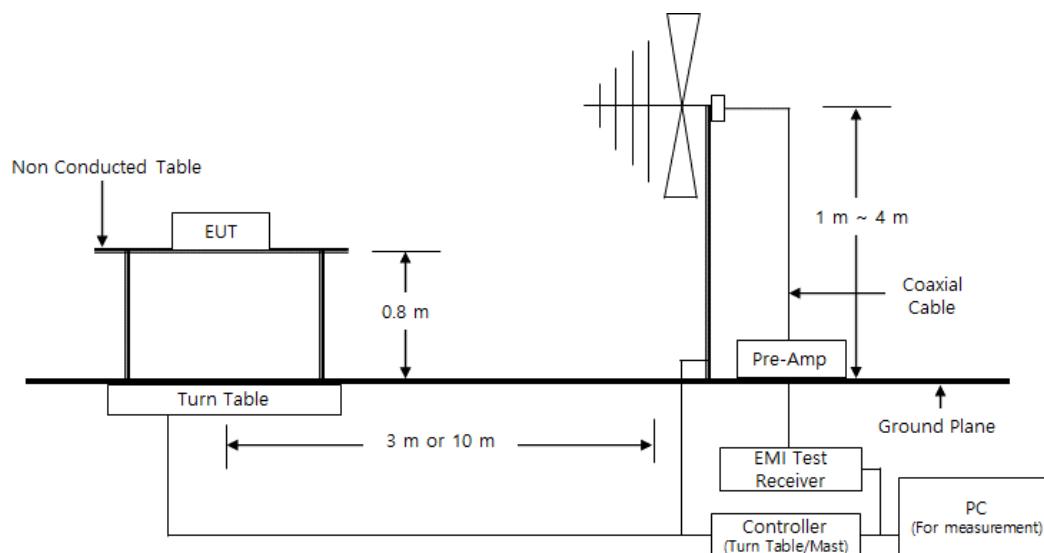

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0880
Page (17) of (34)

Test Conditions

Temperature: $(22,5 \pm 0,1) ^\circ\text{C}$
Relative Humidity: $(47,0 \pm 0,1) \% \text{ R.H.}$

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Oct. 25, 2022


Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
☒	ATTENUATOR	8491B	HP	23094	04, 21, 2023

Diagram of test setup

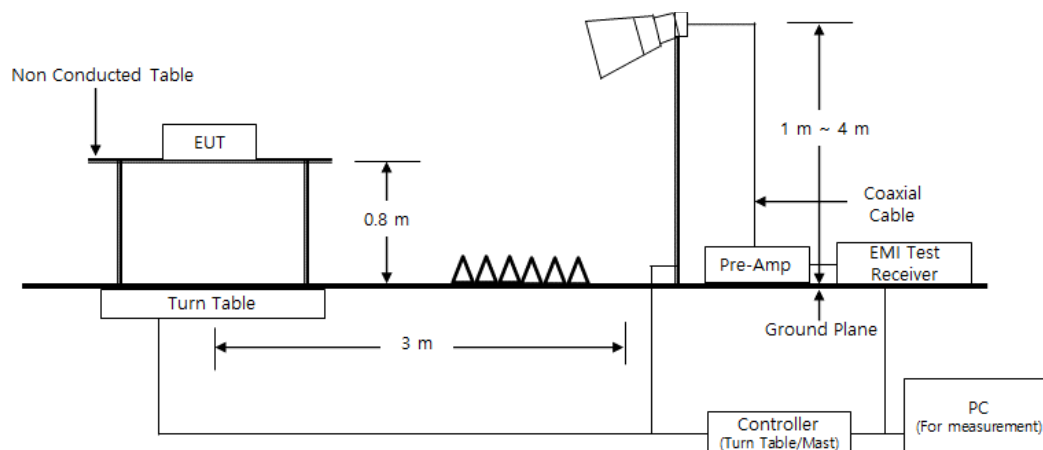



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0880
Page (19) of (34)

Test Conditions

Temperature: $(22,3 \pm 0,1) ^\circ\text{C}$
Relative Humidity: $(47,6 \pm 0,2) \% \text{ R.H.}$

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
 Model No.: ARD-810
 Phase:
 Mode: L1
 Operator Name: KES

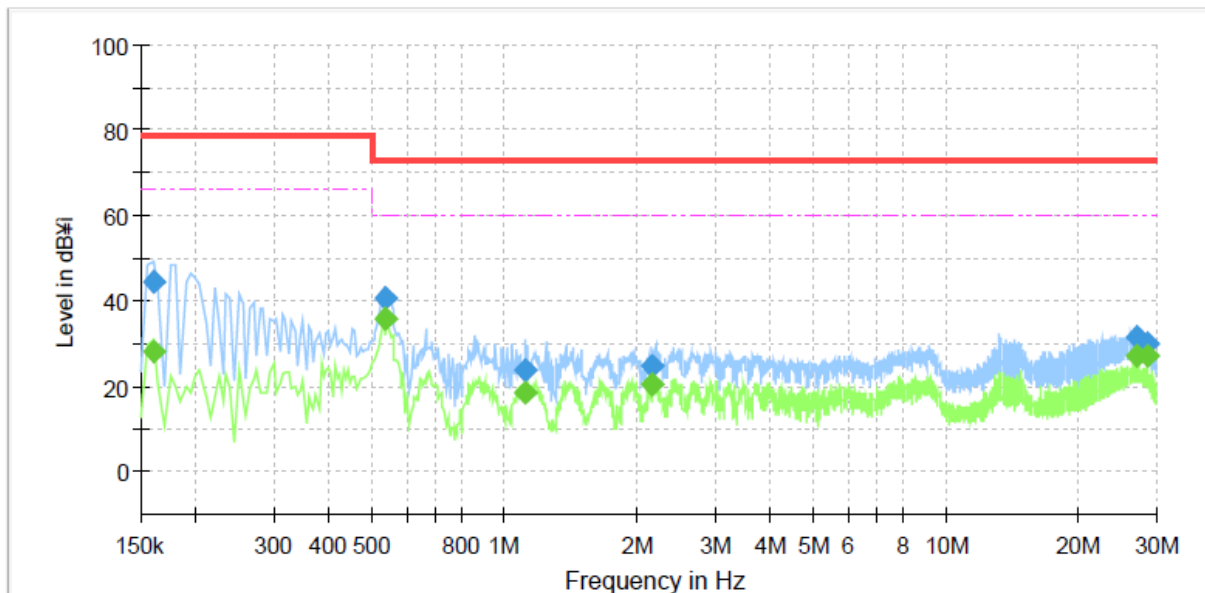

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	28.06	66.00	37.94	1000.0	9.000	L1	19.4
0.160000	44.31	---	79.00	34.69	1000.0	9.000	L1	19.4
0.535000	---	35.80	60.00	24.20	1000.0	9.000	L1	19.8
0.535000	40.84	---	73.00	32.16	1000.0	9.000	L1	19.8
1.115000	---	18.65	60.00	41.35	1000.0	9.000	L1	20.1
1.115000	23.71	---	73.00	49.29	1000.0	9.000	L1	20.1
2.170000	---	20.19	60.00	39.81	1000.0	9.000	L1	20.3
2.170000	24.96	---	73.00	48.04	1000.0	9.000	L1	20.3
27.160000	---	27.24	60.00	32.76	1000.0	9.000	L1	20.2
27.160000	31.50	---	73.00	41.50	1000.0	9.000	L1	20.2
28.685000	---	27.01	60.00	32.99	1000.0	9.000	L1	20.3
28.685000	30.24	---	73.00	42.76	1000.0	9.000	L1	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: ARD-810
Phase:
Mode: N
Operator Name: KES

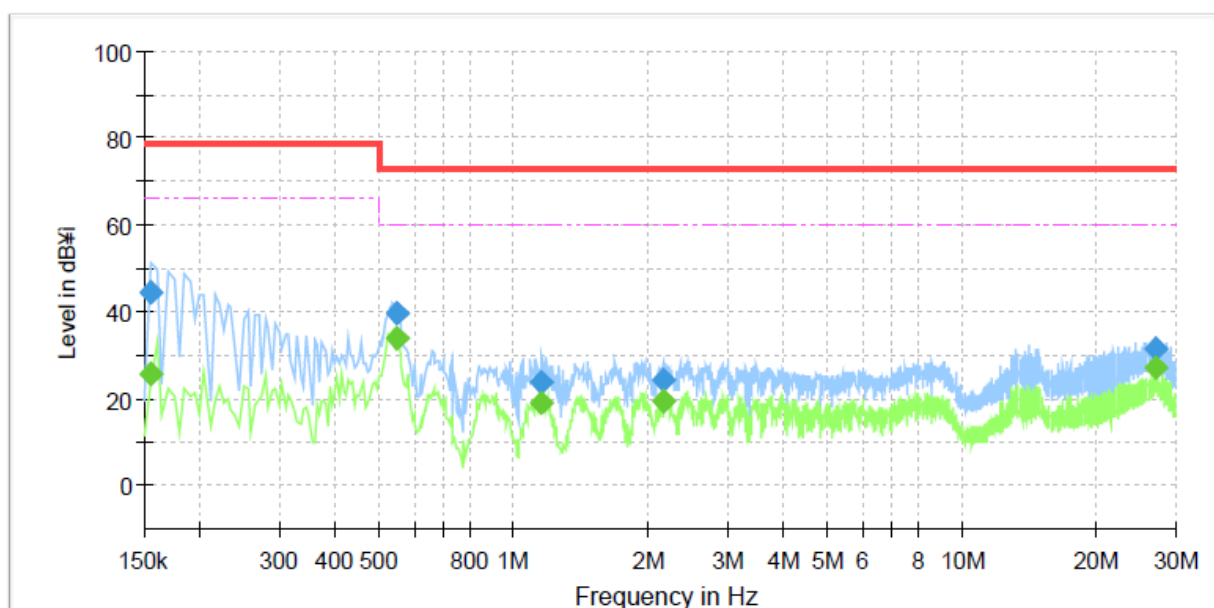

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	25.61	66.00	40.39	1000.0	9.000	N	19.4
0.155000	44.55	---	79.00	34.45	1000.0	9.000	N	19.4
0.550000	---	33.86	60.00	26.14	1000.0	9.000	N	19.8
0.550000	39.77	---	73.00	33.23	1000.0	9.000	N	19.8
1.155000	---	18.96	60.00	41.04	1000.0	9.000	N	20.1
1.155000	23.73	---	73.00	49.27	1000.0	9.000	N	20.1
2.150000	---	19.57	60.00	40.43	1000.0	9.000	N	20.3
2.150000	24.36	---	73.00	48.64	1000.0	9.000	N	20.3
27.160000	---	27.26	60.00	32.74	1000.0	9.000	N	20.3
27.160000	31.34	---	73.00	41.66	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

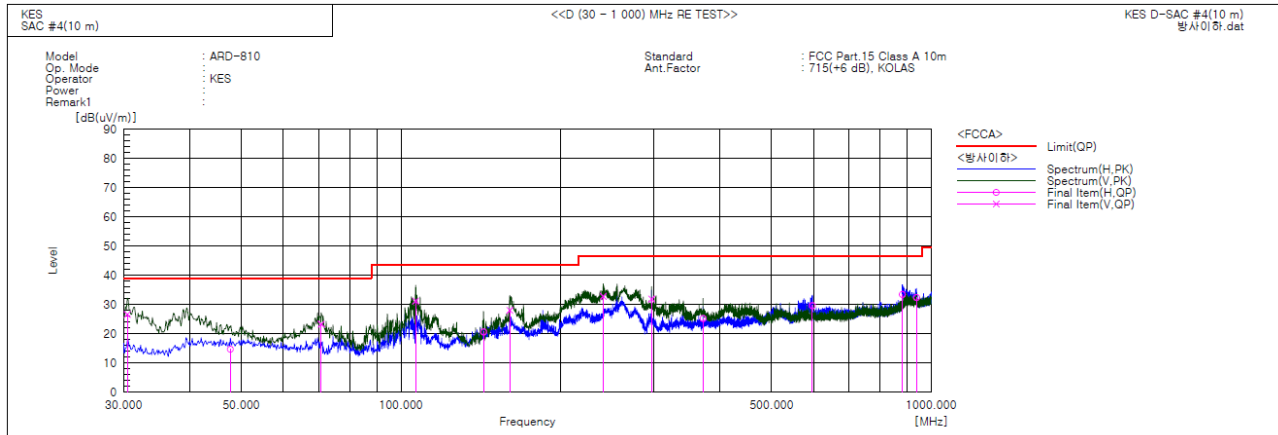

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.485	V	51.6	-25.0	26.6	39.0	12.4	120.0	125.0	
2	47.703	H	35.7	-21.0	14.7	39.0	24.3	386.0	199.0	
3	70.740	V	48.3	-25.0	23.3	39.0	15.7	110.0	102.0	
4	106.630	V	53.4	-22.2	31.2	43.5	12.3	108.0	173.0	
5	143.248	H	45.9	-25.3	20.6	43.5	22.9	387.0	192.0	
6	160.465	V	52.5	-24.5	28.0	43.5	15.5	114.0	12.0	
7	240.733	V	52.1	-19.3	32.8	46.5	13.7	117.0	187.0	
8	296.993	V	49.7	-17.8	31.9	46.5	14.6	133.0	159.0	
9	371.198	H	39.7	-14.5	25.2	46.5	21.3	376.0	185.0	
10	596.965	H	37.8	-8.2	29.6	46.5	16.9	388.0	21.0	
11	882.024	H	37.4	-4.0	33.4	46.5	13.1	395.0	333.0	
12	938.648	H	35.6	-3.2	32.4	46.5	14.1	377.0	4.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

- IC Regulation ICES-003 Issue 7

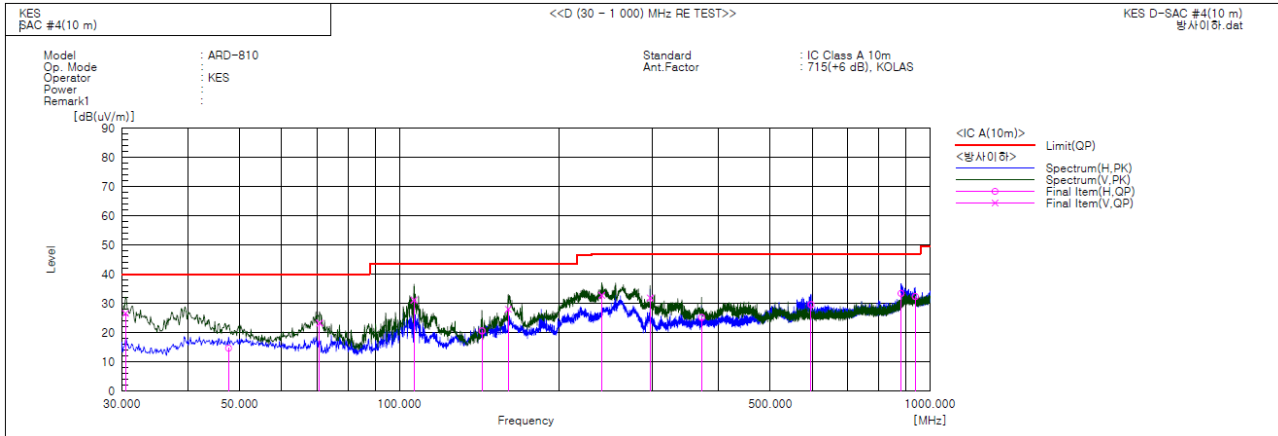

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.485	V	51.6	-25.0	26.6	40.0	13.4	120.0	125.0	
2	47.703	H	35.7	-21.0	14.7	40.0	25.3	386.0	199.0	
3	70.740	V	48.3	-25.0	23.3	40.0	16.7	110.0	102.0	
4	106.630	V	53.4	-22.2	31.2	43.5	12.3	108.0	173.0	
5	143.248	H	45.9	-25.3	20.6	43.5	22.9	387.0	192.0	
6	160.465	V	52.5	-24.5	28.0	43.5	15.5	114.0	12.0	
7	240.733	V	52.1	-19.3	32.8	47.0	14.2	117.0	187.0	
8	296.993	V	49.7	-17.8	31.9	47.0	15.1	133.0	159.0	
9	371.198	H	39.7	-14.5	25.2	47.0	21.8	376.0	185.0	
10	596.965	H	37.8	-8.2	29.6	47.0	17.4	388.0	21.0	
11	882.024	H	37.4	-4.0	33.4	47.0	13.6	395.0	333.0	
12	938.648	H	35.6	-3.2	32.4	47.0	14.6	377.0	4.0	

◆ Calculation - SAC #4(10 m)


Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Radiated Electric Field Emissions(Above 1 GHz)

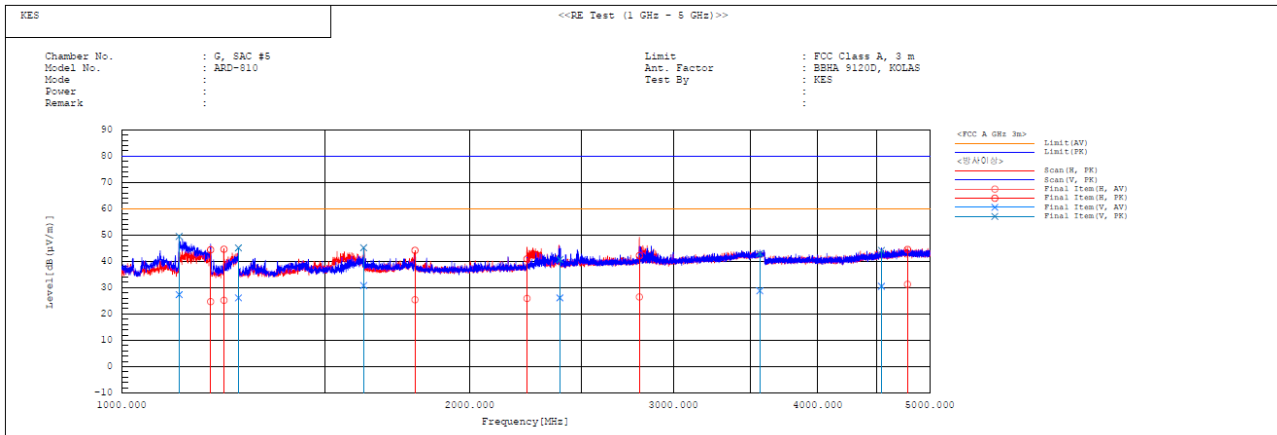

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1121.661	V	35.3	57.5	-8.0	27.3	49.5	60.0	80.0	32.7	30.5	146.0	18.8	
2	1194.132	H	32.4	52.1	-7.7	24.7	44.4	60.0	80.0	35.3	35.6	379.0	49.9	
3	1226.381	H	32.7	52.1	-7.5	25.2	44.6	60.0	80.0	34.8	35.4	388.0	325.1	
4	1262.065	V	33.4	52.4	-7.3	26.1	45.1	60.0	80.0	33.9	34.9	134.0	359.6	
5	1619.989	V	36.6	51.0	-5.8	30.8	45.2	60.0	80.0	29.2	34.8	108.0	0.0	
6	1793.816	H	30.5	49.3	-5.1	25.4	44.2	60.0	80.0	34.6	35.8	385.0	87.9	
7	2242.163	H	29.5	44.5	-3.6	25.9	40.9	60.0	80.0	34.1	39.1	388.0	63.2	
8	2393.921	V	29.1	43.7	-3.0	26.1	40.7	60.0	80.0	33.9	39.3	111.0	195.4	
9	2804.865	H	28.1	43.8	-1.6	26.5	42.2	60.0	80.0	33.5	37.8	379.0	75.4	
10	3564.459	V	29.2	43.4	-0.4	28.8	43.0	60.0	80.0	31.2	37.0	143.0	340.3	
11	4541.636	V	27.8	41.5	2.7	30.5	44.2	60.0	80.0	29.5	35.8	125.0	256.5	
12	4784.438	H	27.7	40.9	3.6	31.3	44.5	60.0	80.0	28.7	35.5	395.0	312.3	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]


Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

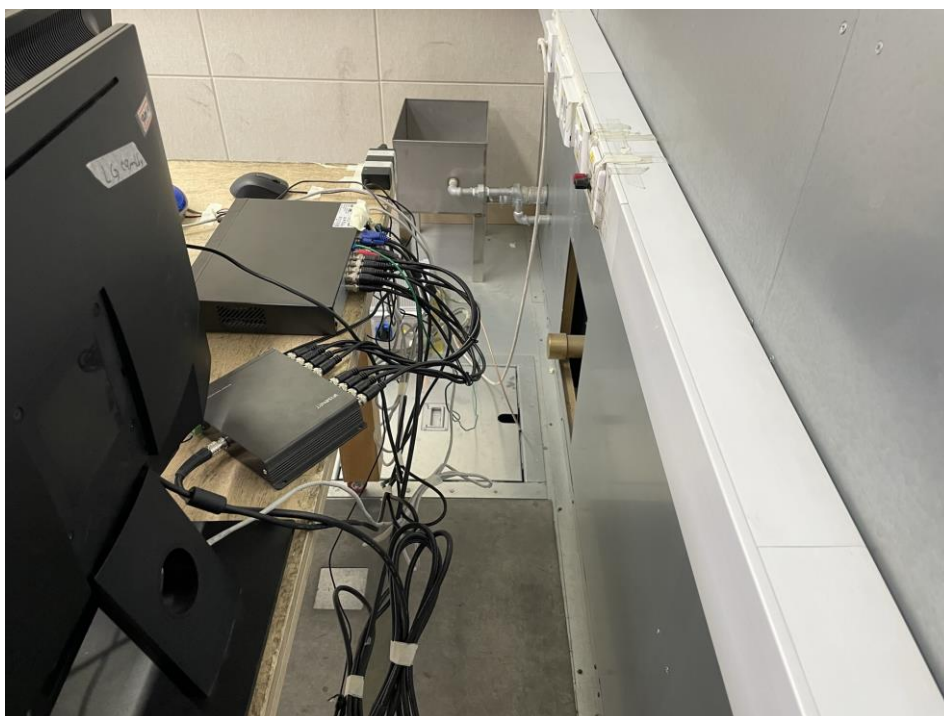



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

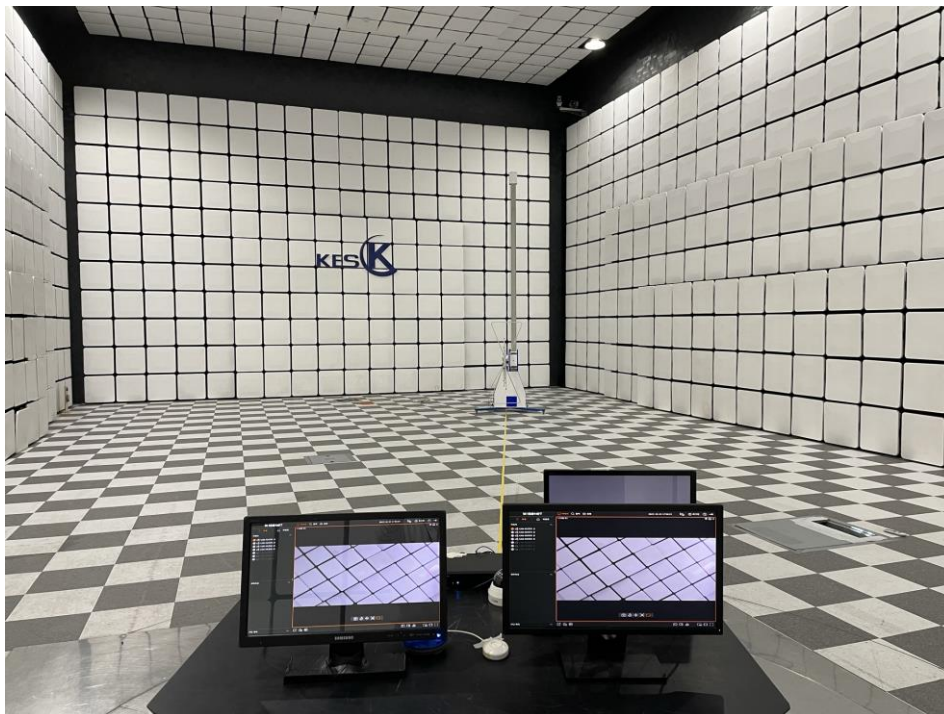

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

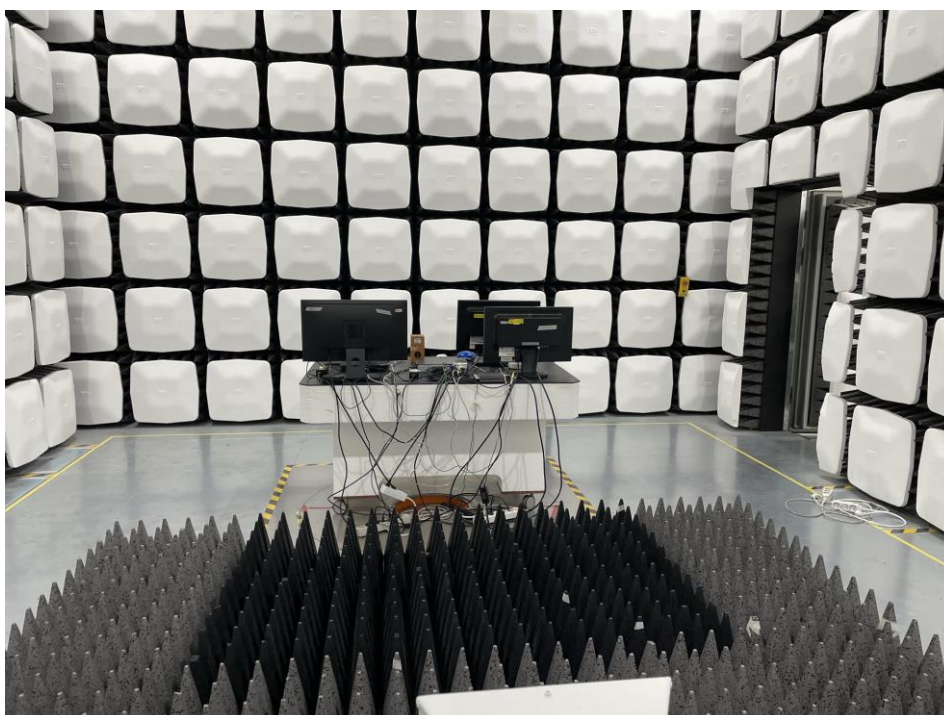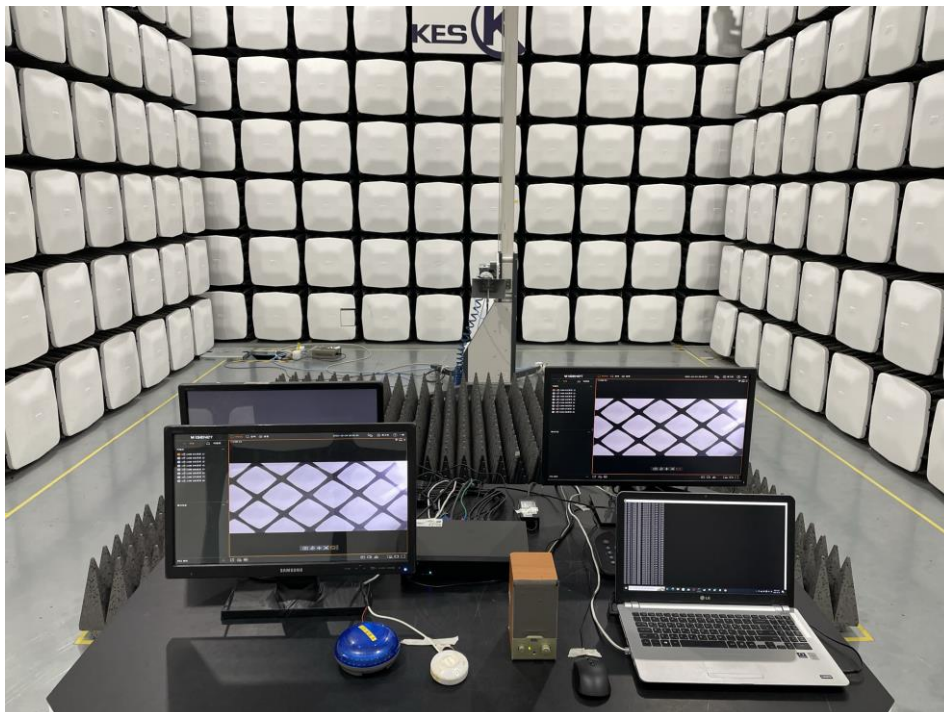

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)

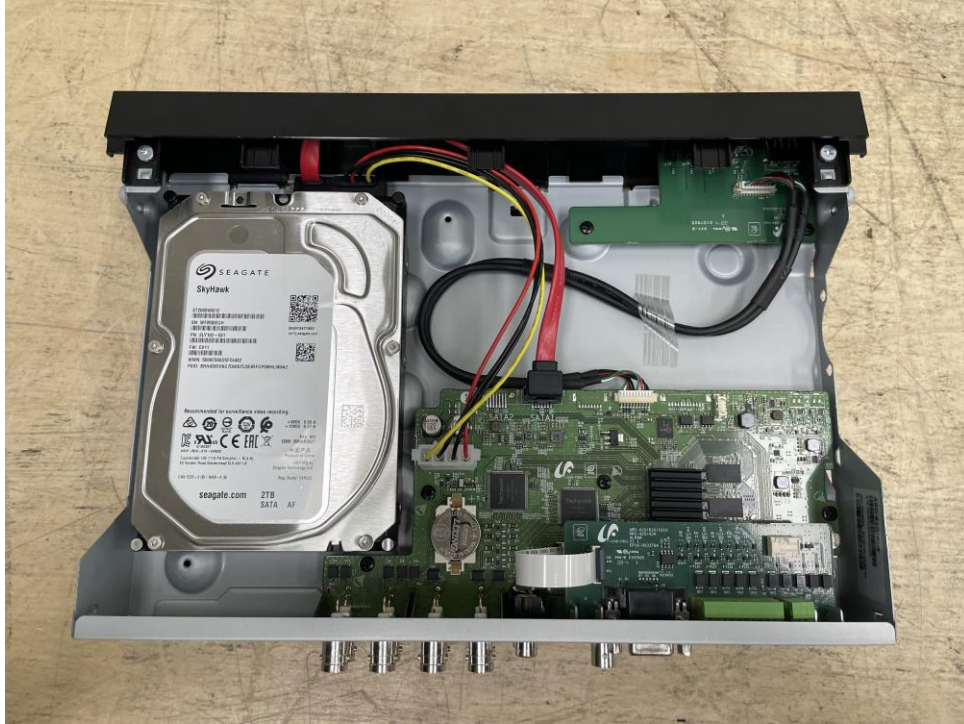


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)

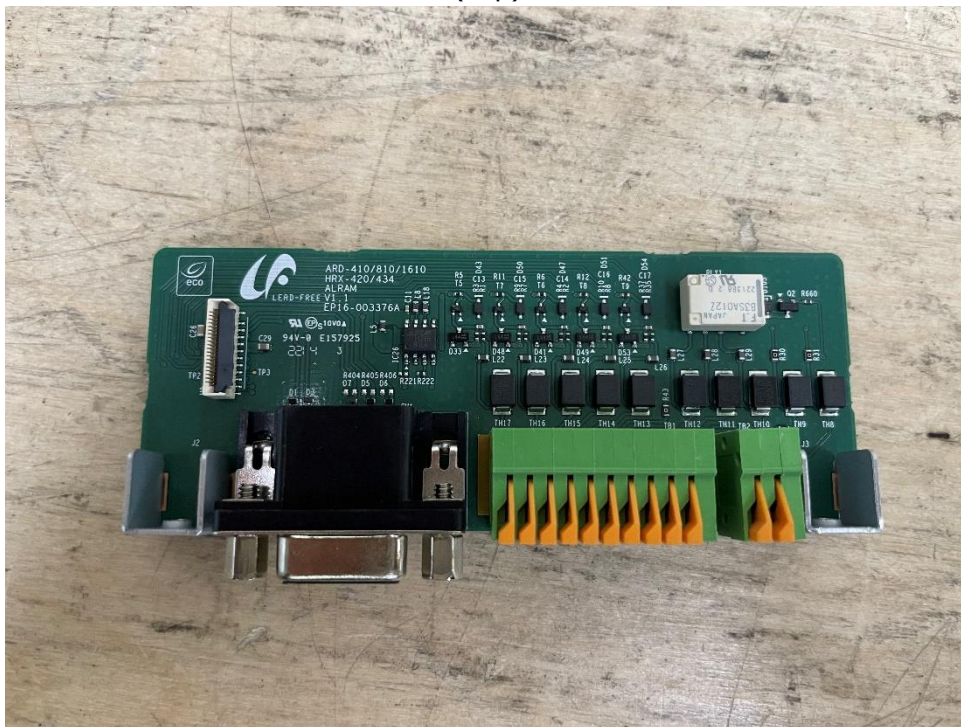

(Bottom)

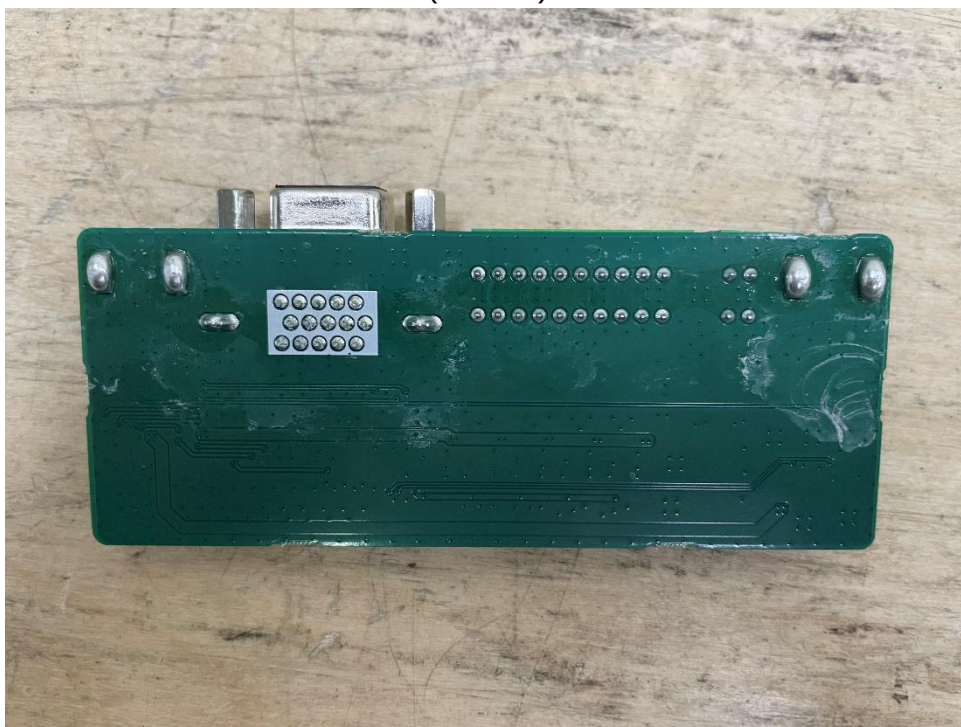


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)




(Bottom)

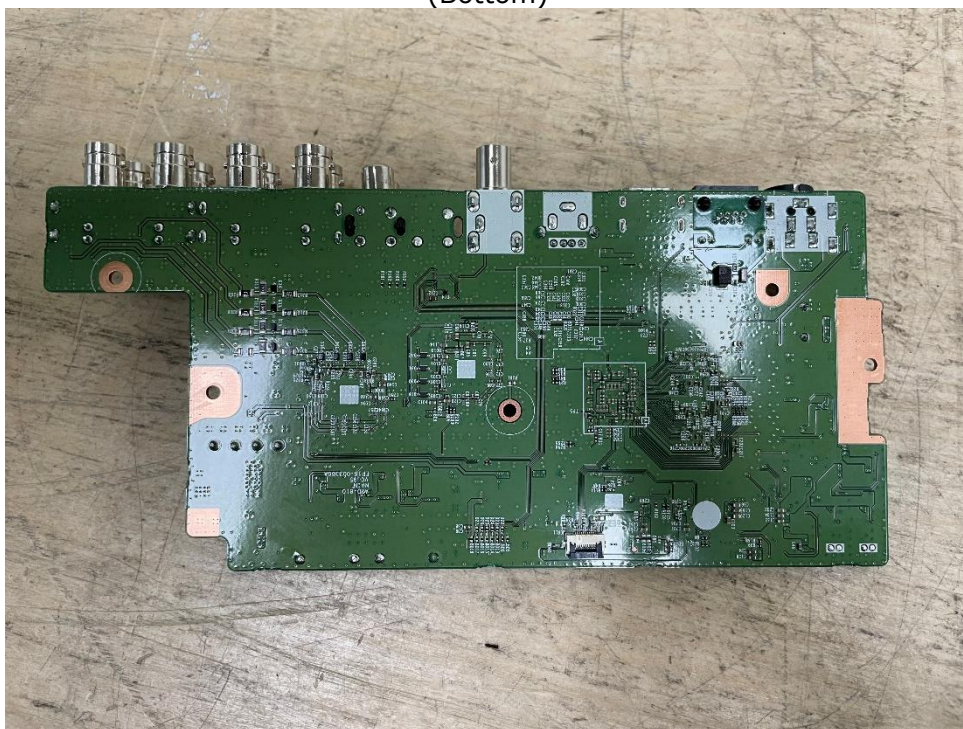


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)

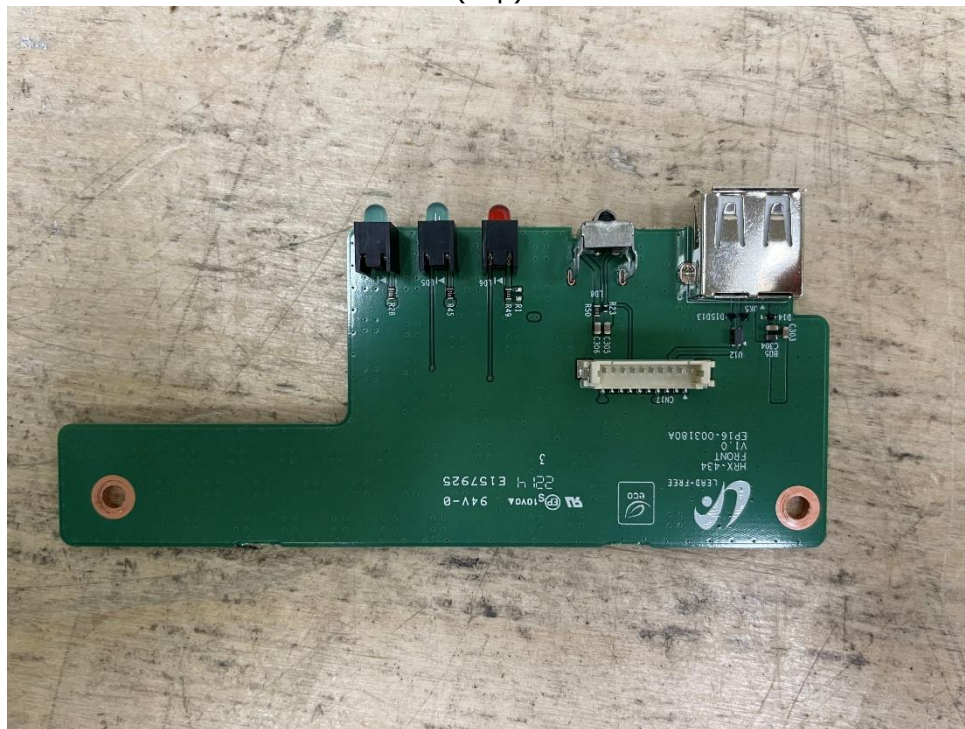

(Bottom)

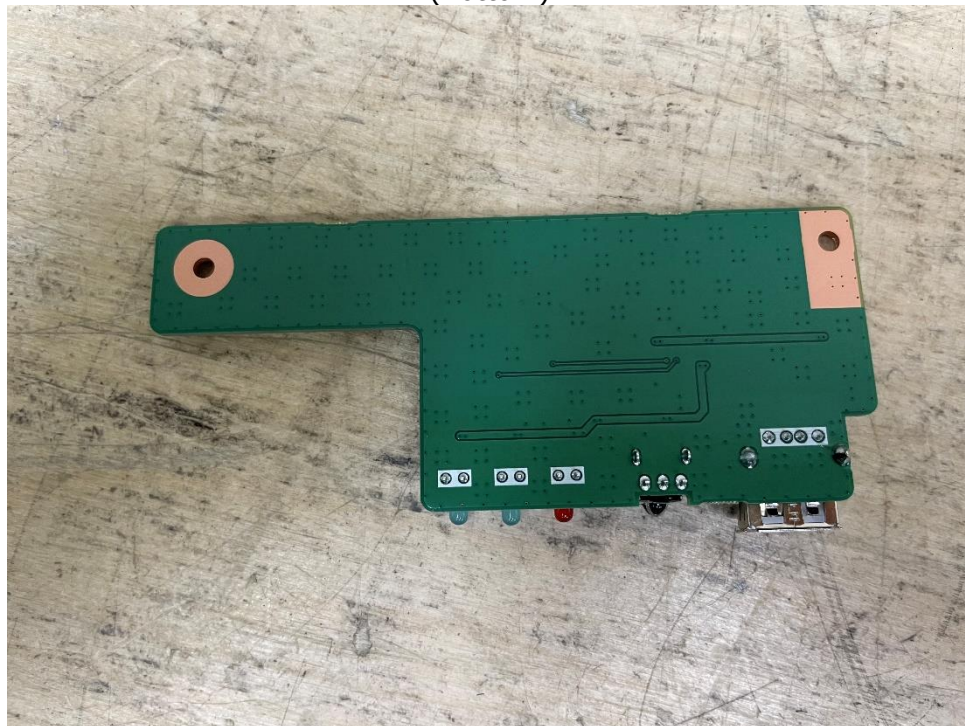

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – HDD

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs

FCC Label



Hanwha Techwin Co., Ltd.

ARD-810

IC Label

CAN ICES-003(A) / NMB-003(A)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.