

BRB-X1610SE

16-Kanal BLAZE Appliance

Key Features

- Vorinstallierte BLAZE Client-, Server- und 16-Kanal-Premiumlizenzen
- Aufnahmebandbreite bis zu 150 Mbps
- 2 HDD-Einschübe (3,5"), bis zu 32 TB
- RAID 1-Unterstützung
- Gehärtetes Betriebssystem
- 2 x RJ-45 (1 Gbps), 8 x PoE RJ-45 (10/100 Mbps), PoE-Kapazität 100 W
- FIPS 140-3 Level 3, NDAA-konform, UL-gelistet, FCC-zertifiziert

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

BRB-X1610SE

16-Kanal BLAZE Appliance



Specifications

System

Video Management Software		BLAZE VMS
Licenses		16 x BLAZE Premium License
Available Channels		Up to 16 channels
Recording Rate		Up to 150Mbps
OS Drive Bays		eMMC 32GB
Data Drive Bays		SATA 2ea
Data Storage		Up to 32TB
RAID Support		RAID 1
Network Interface		2 x RJ-45 (1Gbps), 8 x PoE RJ-45(10/100Mbps)
Memory		8GB DDR4
Operating System		Hardened OS
Decoding	Video Outputs	Duplicate: 1 x HDMI(4K),1 x DP(4K), Extend: 1 x HDMI(FHD),1 x DP(FHD)
	Resolution	Decoding Performance (H.264) - UHD Duplicate Mode: 6CH*8M@15fps,14CH*2M@15fps, 16CH*640x360@7fps - FHD/FHD Extend Mode: (2CH+2CH)*8M@15fps, (6CH+6CH)*2M@15fps,(8CH+8CH)*640x360@7fps
USB Ports		Front 2 x USB 2.0 Rear 2 x USB 3.0
Audio	Output	1x Audio output
	Audio Communication	2-Way (Audio In: USB Mic)
Keyboard & Mouse		Keyboard, Mouse

Mechanical

Form Factor	Box
Color / Material	Black / Metal
Dimensions (WxHxD)	14.57"(370mm) x 2.00"(50.7mm) x 12.60"(320mm)
Weight	6.13lbs (2.78Kg)

Electrical

Power Input	100 ~ 240 VAC ±10%, 50/60 Hz
Power Consumption	70W (238.84 BTU, without PoE)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Electrical

PoE Budget	100W

Environmental

Operating Temperature	32°F to 104°F(0°C to 40°C)
Operating Humidity	20% to 85% RH (non-condensing)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


BRB-X1610SE

16-Kanal BLAZE Appliance



CAD

Unit: mm [inch]

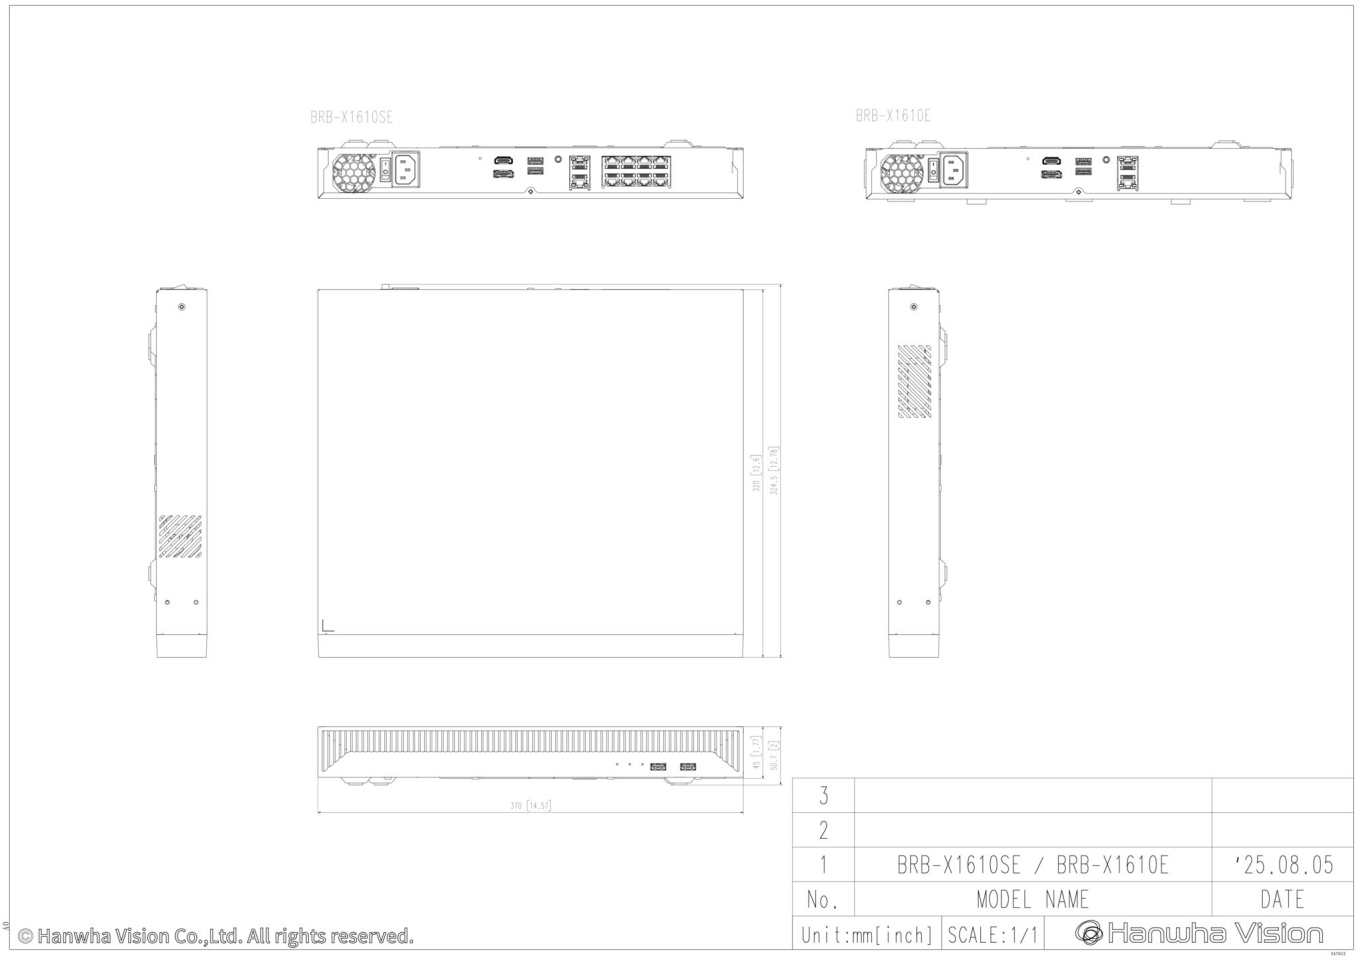

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.