

BRR-P6410A2E

Dispositivo BLAZE a 64 canali

Key Features

- Client BLAZE preinstallato, Server e licenze premium per 64 canali
- Larghezza di banda di registrazione fino a 520Mbps
- Supporto per la ricerca semantica (Intelligenza Artificial)
- 8 alloggiamenti HDD (3.5"), fino a 80TB
- Sistema operativo rinforzato
- Supporto RAID 1/5/6
- 3 x RJ-45 (1Gbps)
- Conforme a NDAA, elencato UL, certificato FCC

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

BRR-P6410A2E

Dispositivo BLAZE a 64 canali



Specifications

System

Video Management Software		BLAZE VMS
Licenses		64 x BLAZE Premium License
Available Channels		Up to 64 channels
Recording Rate		Up to 520Mbps
OS Drive Bays		SSD 128GB
Data Drive Bays		SATA 8ea
Data Storage		Up to 80TB
RAID Support		RAID 1, RAID 5, RAID 6
Network Interface		3 x RJ-45 (1Gbps)
Memory		16GB DDR4
AI Card		Yes
Operating System		Hardened OS
Decoding	Video Outputs	Duplicate: 2 x HDMI(4K), Extend: 1 x HDMI(4K),1 x HDMI(FHD)
	Resolution	Decoding Performance (H.264) - UHD Duplicate Mode: 26CH*8M@15fps,64CH*2M@15fps, 64CH*640x360@7fps - UHD/FHD Extend Mode: (14CH+14CH)*8M@15fps, (32CH+32CH)*2M@15fps,(32CH+32CH)*640x360@7fps
USB Ports		Front 2 x USB 2.0 Rear 2 x USB 3.0
Audio	Output	1x Audio output
	Audio Communication	2-Way (Audio In: USB Mic)
Keyboard & Mouse		Keyboard, Mouse

Mechanical

Form Factor	2U rack
Color / Material	Black / Metal
Dimensions (WxHxD)	17.24"(438mm) x 3.39"(86mm) x 17.12"(434.9mm)
Weight	20.06lbs (9.10Kg)

Electrical

Power Input	100 ~ 240 VAC ±10%, 50/60 Hz

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Electrical

Power Consumption	238W (812.1BTU, Max)

Environmental

Operating Temperature	32°F to 104°F(0°C to 40°C)
Operating Humidity	20% to 85% RH (non-condensing)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


BRR-P6410A2E

Dispositivo BLAZE a 64 canali



CAD

Unit: mm [inch]

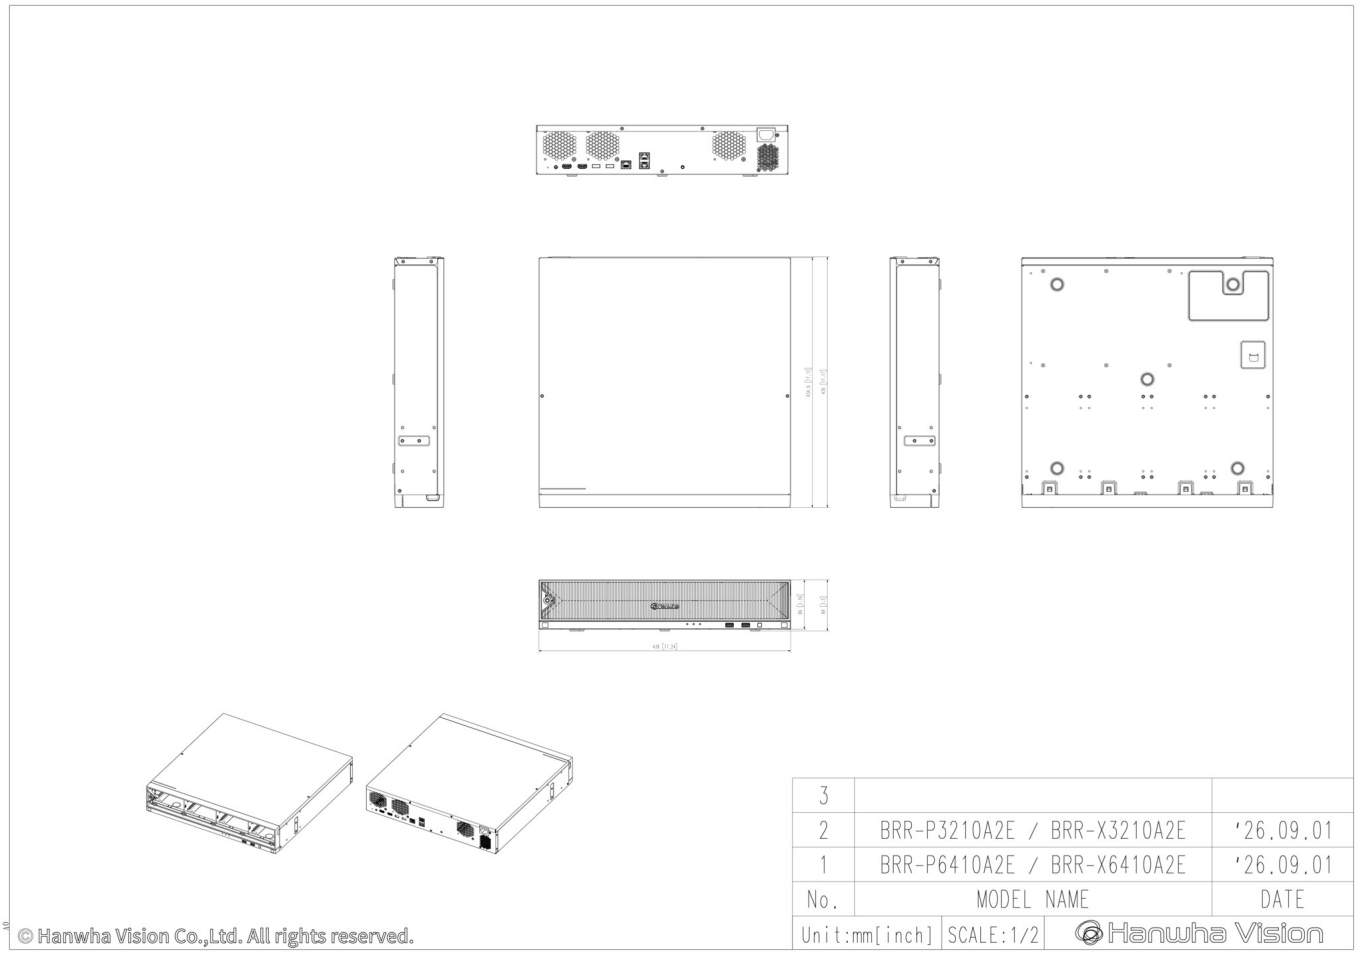

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.