



BRR-P6410A4E

64CH BLAZE Appliance



Key Features

- BLAZE Client、Server、64chプレミアムライセンスがプリインストール
- 最大520Mbpsの録画帯域幅
- (AI) セマンティック検索サポート
- 16台のHDDベイ (3.5インチ)、最大160TB
- 強化されたOS
- RAID 1/5/6サポート
- 3 x RJ-45 (1Gbps)
- FIPS 140-3 レベル3、NDAA準拠、ULリスト、FCC認証

BRR-P6410A4E

64CH BLAZE Appliance



Specifications

System		
Video Management Software		BLAZE VMS
Licenses		64 x BLAZE Premium License
Available Channels		Up to 64 channels
Recording Rate		Up to 520Mbps
OS Drive Bays		SSD 128GB
Data Drive Bays		SATA 16ea
Data Storage		Up to 160TB
RAID Support		RAID 1, RAID 5, RAID 6
Network Interface		3 x RJ-45 (1Gbps)
Memory		16GB DDR4
AI Card		Yes
Operating System		Hardened OS
Decoding	Video Outputs	Duplicate: 2 x HDMI(4K), Extend: 1 x HDMI(4K),1 x HDMI(FHD)
	Resolution	Decoding Performance (H.264) - UHD Duplicate Mode: 26CH*8M@15fps,64CH*2M@15fps, 64CH*640x360@7fps - UHD/FHD Extend Mode: (14CH+14CH)*8M@15fps, (32CH+32CH)*2M@15fps,(32CH+32CH)*640x360@7fps
USB Ports		Front 2 x USB 2.0 Rear 2 x USB 3.0
Audio	Output	1x Audio output
	Audio Communication	2-Way (Audio In: USB Mic)
Keyboard & Mouse		Keyboard, Mouse
Mechanical		
Form Factor		3U rack
Color / Material		Black / Metal
Dimensions (WxHxD)		17.32"(440mm) x 5.20"(132mm) x 22.48"(571.1mm)
Weight		31.3 lbs (14.2kg)
Electrical		
Power Input		100 ~ 240 VAC ±10%, 50/60 Hz

Electrical

Power Consumption	283W (965.6 BTU)
-------------------	------------------

Environmental

Operating Temperature	32°F to 104°F(0°C to 40°C)
Operating Humidity	20% to 85% RH (non-condensing)


BRR-P6410A4E

64CH BLAZE Appliance



CAD

Unit: mm [inch]

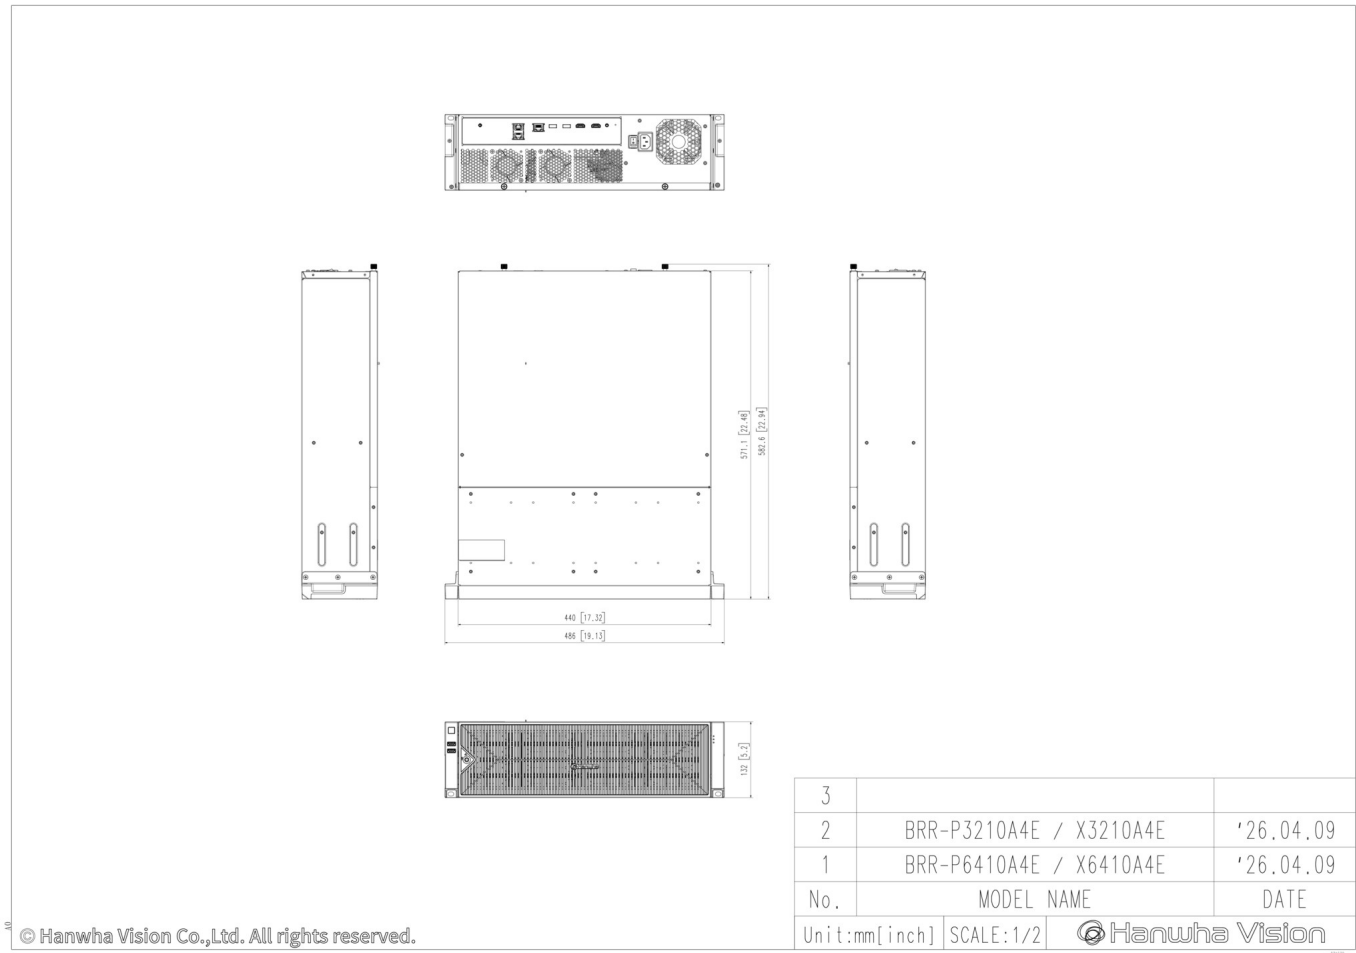

© Hanwha Vision Co.,Ltd. All rights reserved.