

SAMSUNG TECHWIN

网络摄像机 用户手册

SNB-7002/SND-7082/
SND-7082F/SNV-7082



SAMSUNG



网络摄像机

用户手册

版权

©2012 Samsung Techwin Co., Ltd. 版权所有。

商标

 SAMSUNG TECHWIN 是 Samsung Techwin Co., Ltd. 的注册徽标。

本产品的名称是 Samsung Techwin Co., Ltd. 的注册商标。

本手册中提及的其他商标属其相应公司的注册商标。

限制

Samsung Techwin Co., Ltd. 保留本文档的版权。

在任何情况下, 未经 Samsung Techwin 正式批准, 不得复制、发行或更改本文档的一部分或全部。

免责声明

Samsung Techwin 尽力验证本文档中内容的完整性和正确性, 但不能提供正式保证。

使用本文档及所产生的结果完全由用户自行负责。

Samsung Techwin 保留更改本文档的内容而不提前通知的权利。

- ❖ 设计和规格可能会随时更改, 恕不提前通知。
- ❖ 默认密码可能会向黑客线程公开, 因此建议您在安装产品之后更改该密码。
请注意, 未更改密码导致的安全和其他相关问题, 用户自己承担责任。

概述

重要的安全说明

1. 请阅读这些说明。
2. 请您妥善保存这些说明。
3. 请您遵守所有的操作说明。
4. 请您注意所有的警告说明。
5. 请您不要在水源附近运行本机器。
6. 请您用干布清洁本机器。
7. 请您不要堵塞通风口，在装入机器时，请您注意制造商的说明。
8. 请您不要将此机器放置在热源附近，如散热器，炉子或其它发热设备。
9. 请您绝对不要移去双线插头或有接地插头的安全装置，双线插头有两个不同宽度的插塞接点，接地插头有两个插塞接点和第三个接地接点。较宽的插塞接点或附加的接地接点是用来确保您的安全的，如果随同供货的插头规格不适合您的插座，请您委托电工更换适当的插座。
10. 请您正确铺设电源线，使其不会被踩踏和尖角损坏。请您尤其注意插头处，加长电缆和电线延伸到机器处必须具备充分的保护。
11. 请您使用制造商推荐的附加设备或配件。
12. 仅可使用厂商指定或随设备出售的运载车、支脚、三脚架、支架或工作台。使用运载车时，请小心避免在移动运载车/设备组合时翻覆。
13. 在雷雨天气或长时间不用的情况下，请拔下本设备的插头。
14. 请您委托具备资格的售后服务人员进行保养工作。出现以下情况时，有必要进行保养，例如当机器被损坏时（如电线或插头损坏），有物体或液体进入到机器内部时机器受到雨淋或潮湿后，机器运行不正常或摔落在地上时。



概述


警告

为防止火灾或电击等引起的破坏，不要把产品暴露于水中或潮湿处。请勿穿过设备上的通风栅格或其他开口插入任何金属物体。

请勿将设备放置于滴水或溅水的地方，且勿将装有水的物体（如花瓶）放在设备上面。

为了避免造成人身伤害，必须按照安装说明牢固地把本设备固定在墙壁/天花板上。

注意

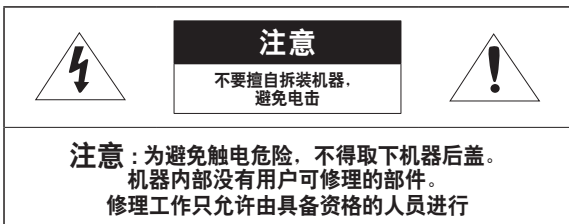

图形符号说明



等边三角形内带箭头的闪电符号用于警告用户：产品机壳内存在“危险电压”，其电压量足以对人员构成电击危险。



等边三角形内的感叹号用于警告用户：产品附带的文字中包含重要的操作和维护（维修）说明。

Class I 构造

具有 CLASS I 构造的设备应连接到具有保护接地连接的电源插座。

电池

电池（安装的电池组或电池）不得暴露在过多的热量下（如阳光、火焰或类似物体）。

换用不恰当的电池可能会导致爆炸的风险。

只换用相同或相等类型的电池。

断开设备

如果设备出现故障，请拔下其电源插头。并请致电当地的维修人员。

当在美国以外使用时，可以利用所用的 HAR 代码和许可代理机构的接待处。

注意

这些维修说明仅供合格的维修人员使用。

为减少电击的危险，除了操作说明中所描述的之外，请勿执行其他任何维修工作，除非您合格这么做。

产品的 BNC 输出端子是为了方便安装而提供的，建议不要将它用于监视。如果保持连接 BNC 电缆，则闪光的风险可能会导致损坏产品或使产品功能异常。

请将输入电源仅用于一部摄像机，并且不能连接其他设备。

产品内有害物质信息

部件名称	有毒有害物质元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 Cr (VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印制电路板组件	×	○	○	○	○	○
金属部品	×	○	○	○	○	○
电缆	×	○	○	○	○	○
塑料部品	○	○	○	○	○	○

○：部品中有毒有害物质含量在〈含量标准〉的标准值内。

×：部品中有毒有害物质含量超出〈含量标准〉的标准值。

本表格表明机器内部含有有害物质，数据是根据部件类型，由部件制作商提供并在三星内部验证后做成的。

某些部品包含的有害物质，按照现在的技术基准不能替代，三星一直在为改善此项而努力。

概述

请仔细阅读以下建议的安全预防措施。

- 请勿将本设备放置于不平的表面上。
- 请勿安装在暴露在直射阳光下、靠近供暖设备或非常寒冷区域的表面上。
- 请勿将本设备放置在传导物体附近。
- 请勿自行维修本设备。
- 请勿将一杯水放在产品上。
- 请勿安装在任何磁源附近。
- 请勿堵塞任何通风口。
- 请勿在产品上放置任何重物。

用户手册是如何使用产品的指导书。

书中所用符号的含义如下。

- 参考：用于提供产品用法的帮助信息
 - 注意：如果不遵照说明是否有可能对物品和人员造成任何损害
- ※ 在使用物品之前请阅读本手册以保证安全，并将它保存在安全的地方。

概述

3

- 3 重要的安全说明
- 9 产品特色
- 10 推荐 PC 技术规格
- 10 建议的 SD/SDHC 存储卡规格
- 11 随机提供的物品
- 14 简图 (SNB-7002)
- 18 简图 (SND-7082)
- 22 简图 (SND-7082F)
- 25 简图 (SNV-7082)

安装与连接

28

- 28 安装镜头 (SNB-7002)
- 30 安装 (SND-7082)
- 32 安装 (SND-7082F)
- 34 安装 (SNV-7082)
- 39 插入/取出 SD 存储卡
- 43 存储卡信息 (不含)
- 44 与其他设备连接

网络连接和设置

50

- 50 将摄像头与局域网直接连接
- 51 将摄像机直接连接至基于 DHCP 的 xDSL/有线电视网调制解调器
- 52 直接将摄像机连接到 PPPoE 调制解调器
- 53 将摄像头与使用 PPPoE/Cable 调制解调器的宽带路由器连接
- 54 在 IP Installer 中使用的按钮
- 55 静态 IP 设置
- 59 动态 IP 设置
- 60 路由器端口设置
- 62 从共享的本地 PC 连接到摄像机
- 62 从远程 PC 通过互联网连接到摄像机

概述

WEB 查看器

63

- 63 连接到摄像机
- 64 登录
- 65 安装 Silverlight Runtime
- 69 安装 STW WebViewer 插件
- 70 使用现场屏幕
- 72 按事件搜索并播放
- 73 按时间搜索并播放

设置屏幕

75

- 75 设置
- 75 视频与音频设置
- 91 网络设置
- 100 事件设置
- 116 系统设置

附录

123

- 123 规格
- 129 产品视图
- 133 故障排除
- 135 Open Source Announcement

产品特点

- **全高清视频质量**

本网络摄像机可以同时使用不同的 CODEC、采用不同的分辨率和质量来显示视频。

- **基于 Web 浏览器的监视**

使用互联网 Web 浏览器在本地网络环境中显示图像

- **警报**

如果发生事件，则会将与事件相关的视频传送到用户指定的 FTP/电子邮件或保存到 SD 存储卡，或者将事件信号发送至 警报输出端口。

- **防拆检测**

在视频监视上检测拆离尝试。

- **移动探测**

从摄像机的视频输入检测移动。

- **智能视频分析**

分析视频以从摄像机的视频输入检测指定条件的逻辑事件。

- **面部探测**

从摄像机的视频输入探测面部。

- **智能编码**

自适应应用摄像机视野一部分的编码以改善用户指定区域的质量。

- **音频探测**

检测高于用户指定的特定音量的声音。

- **自动检测断开的网络**

检测网络断开连接，检测到便触发事件。

- **符合 ONVIF**

本产品支持 ONVIF。

有关详细信息，请参阅 www.onvif.org。



Driving network video through global standardization

概述

推荐 PC 技术规格

- CPU：Intel Core 2 Duo 2.4GHz 或更高
 - 操作系统：Windows XP/7、VISTA、Mac OS
 - 分辨率：1280X1024 像素或更高（32 位颜色）
 - RAM：2GB 或更大
 - 网络浏览器：Internet Explorer 7 或更高版本、Firefox 9 或更高版本、Chrome 15 或更高版本、Safari 5.1 或更高版本
 - 既不支持测试版，也不支持开发者版，仅支持在公司官方网站发布的正式版本。
 - 若需要使用IPv6功能，建议使用 Windows 7操作系统。
 - 显存：256MB 或更大
- 
 - 如果显卡的驱动程序未正确安装或不是最新版本，则视频可能无法正确播放。
 - 对于至少涉及 2 个监视器的多监视系统，播放性能可能会下降，具体视系统而定。

建议的 SD/SDHC 存储卡规格

- 4GB ~ 32GB
- 建议您使用至少为类别 6 速度的存储卡。

随机提供的物品

请检查产品包装内是否已包括摄像机和所有附件。

外观	项目名称	数量	说明	型号名称
	摄像机	1		SNB-7002 或者 SND-7082 或者 SND-7082F 或者 SNV-7082
		1		
		1		
		1		
	说明手册, Installer 软件 CD, CMS 软件 DVD	2		SNB-7002/ SND-7082/ SND-7082F/ SNV-7082
	用户手册	1		
	用于测试显示器的电缆	1	用于测试摄像机至便携式显示设备的连接	

概述


外观	项目名称	数量	说明	型号名称
	镜头适配, 自动光圈镜头连接器	1	用于安装 C 安装摄像机镜头	SNB-7002
	摄像机支架 (底座)	1	用于安装摄像机座	
	(底座) 螺钉	2	用于安装底座	
	6 位置接线端子	1	用于警报输入/输出端子	
	5 位置接线端子	1	用于警报输入/输出端子	SND-7082/ SND-7082F/ SNV-7082
	铁螺钉	3	用于固定至铁板	SND-7082/ SND-7082F
	模板	1	产品安装指南	SND-7082F/ SNV-7082
	插孔模块化	1	LAN 电缆公母	
	防尘板	1	防止灰尘进入接线 连接部位。	SND-7082

外观	项目名称	数量	说明	型号名称
	自攻螺钉	1	用于固定安全支架	SND-7082F
	支架固定	1	安全支架	
	自攻支架螺钉	4	用于墙壁或天花板上的安装	SNV-7082
	L 型扳手	1	用于卸下/ 固定圆顶盖	
	塑料固定器	4	用于固定螺钉， 已插入孔中 (增强固定力量)	
	机器螺钉	4	在将产品安装在管道、 墙上安装支架等上时， 用于装配圆顶盒； 或者用于堵塞孔。	
镜头选项(未包括)				
	CS/C 镜头		将插入摄像机的可选镜头	SNB-7002

概述

简图 (SNB-7002)

前面

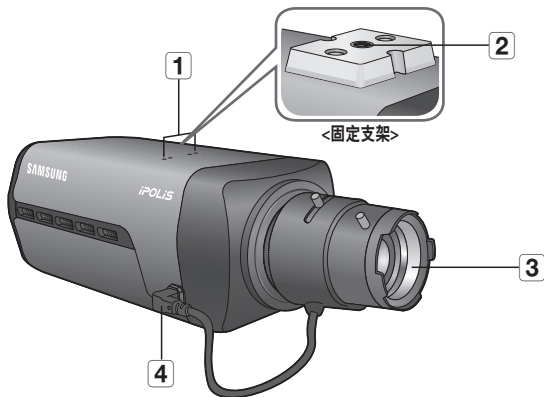

项目	说明
1 摄像机座(安装)孔	通过使用支架固定摄像机座（安装）适配器将摄像机安装到支架上时使用。
2 安装支架螺钉孔	用于将摄像机固定在支架或安装支架上。 ■ 螺钉尺寸：使用此螺钉来固定安装支架。 1/4 英寸 -20UNC(20THREAD) 长度：4.5±0.2 毫米（ISO 标准）或 0.197 英寸（ASA 标准） 


项目	说明
3 自动光圈镜头 (可选)	安装在镜头适配器上。
4 自动光圈镜头连接器	用于电源和输出信号控制镜头光圈。



- 用擦镜布或蘸有乙醇的布块轻轻擦拭透镜去除表面脏污。
- 未随附安装支架。
有关使用安装支架的更多信息，请参阅产品的文档。

概述

背面

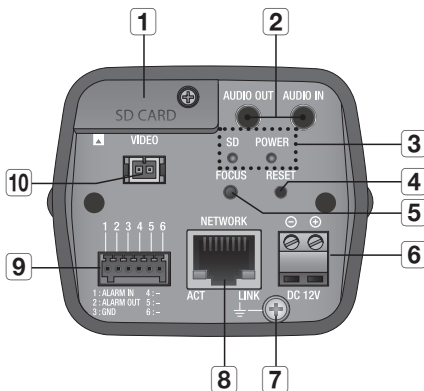


项目	说明	
1 SD 存储卡槽	用于安装SD存储卡。	
2 音频输出端子	AUDIO OUT	用于连接到扬声器。
	AUDIO IN	用于连接到麦克风。
3 SD、电源指示灯	SD	开：插入了存储卡并且能正常使用。 闪烁：无法录制，空间不足或插入异常。 关：摄像机关闭、摄像机正在重新启动、没有插入存储卡或录制已关闭。
	POWER	开：电源已打开 关：电源已关闭

项目	说明	
4 重置按钮	该按钮会将所有摄像机设置恢复为出厂默认值。 按住约 5 秒钟可重启系统。 ! 如果复位摄像机，则会调整网络设置，以便可以启用 DHCP。如果网络中没有 DHCP 服务器，则必须运行 IP Installer 程序更改基本的网络设置，如 IP 地址、子网掩码、网关等，然后才能连接到网络。	
5 焦点调整按钮	该按钮会自动调节图像的焦点。	
6 电源端口	用于插入电源线。	
7 照明保护性接地端口	用来在外部安全地断开照明电路以保护摄像机。	
8 网络端口	用于连接 PoE 或网络连接的以太网电缆。	
9 警报 I/O 端口	ALARM IN	用于连接警报输入信号。
	ALARM OUT	用于连接警报输出信号。
	GND	用于连接地线。
10 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。	

概述

简图 (SND-7082)

外观

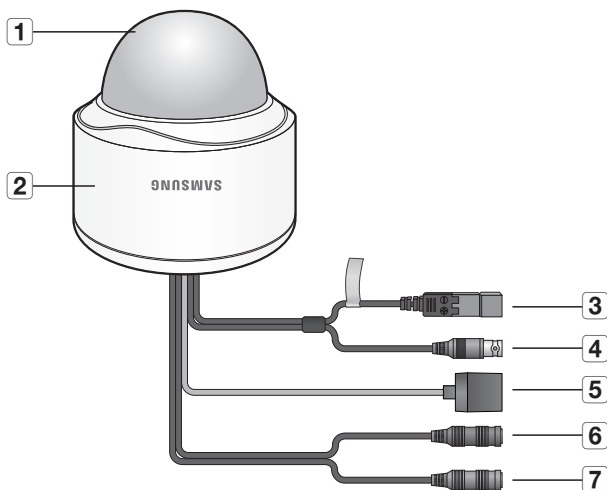


项目	说明
1 顶部护盖	用于保护镜头和主装置的外壳护盖。
2 摄像机外壳	盖住摄像机机身的外壳部分。

项目	说明
3 电源端口	用于插入电源线。
4 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。
5 网络端口	用于连接 PoE 或网络连接的以太网电缆。
6 音频输入插孔	用于连接到麦克风。
7 音频输出插孔	用于连接到扬声器。

概述

组件

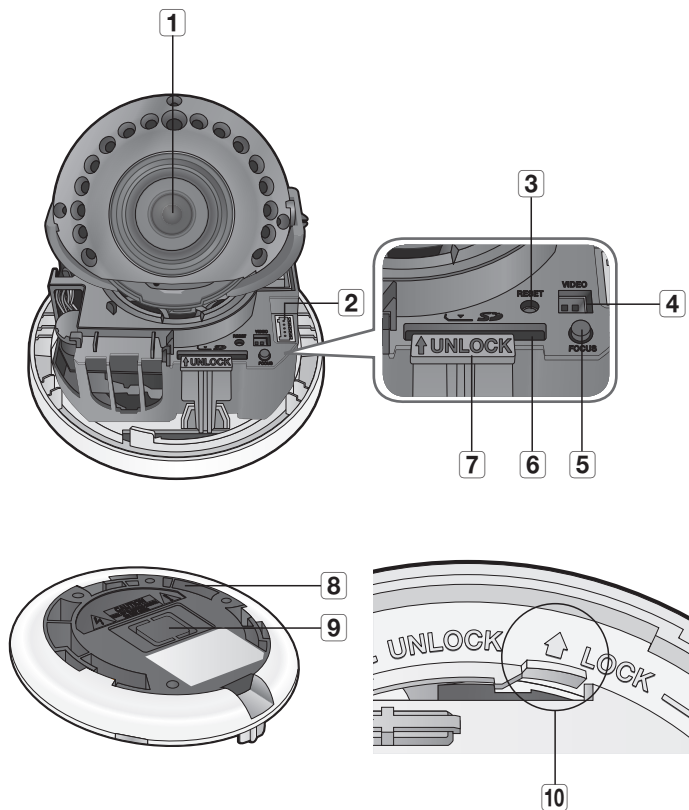


项目	说明	
1 镜头	摄像机的镜头。	
2 警报 I/O 端口	ALARM IN	用于连接警报输入信号。
	ALARM OUT	用于连接警报输出信号。
	GND	用于连接地线。
3 重置按钮	该按钮会将所有摄像机设置恢复为出厂默认值。按住约 5 秒钟可重启系统。 ■ 如果复位摄像机，则会调整网络设置，以便可以启用 DHCP。如果网络中没有 DHCP 服务器，则必须运行 IP Installer 程序更改基本的网络设置，如 IP 地址、子网掩码、网关等，然后才能连接到网络。	
4 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。	
5 焦点调整按钮	该按钮会自动调节图像的焦点。	
6 SD 内存卡盒	用于 SD 内存卡的盒子。	
7 解锁杆	按两端的 <UNLOCK> 杆以分离摄像机模块与机身。	
8 上层盖	如果您准备将摄像机安装在天花板上，为了穿入电线，可将此盖取出。	
9 配线盖	如果在配线盖上钻孔以配线，请移除盖子并连接提供的防尘板，然后通过板排放电缆。	
10 释放锁	如果您想从主设备取下支架，或者从支架上取下摄像机，要推一下该按钮，然后向 <UNLOCK> 方向转动主设备。	

概述


简图 (SND-7082F)

外观

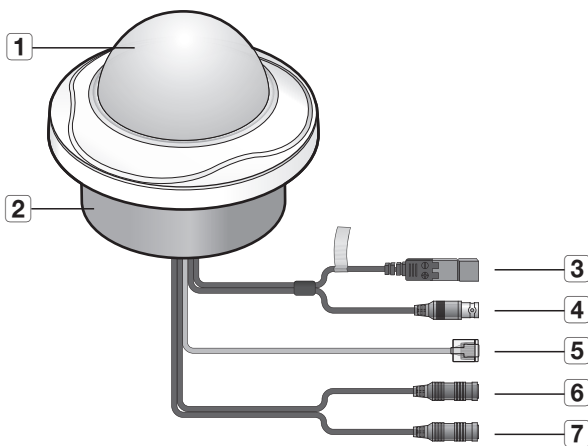


项目	说明
1 顶部护盖	用于保护镜头和主装置的外壳护盖。
2 摄像机外壳	盖住摄像机机身的外壳部分。
3 电源端口	用于插入电源线。
4 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。
5 网络端口	用于连接 PoE 或网络连接的以太网电缆。
6 音频输入插孔	用于连接到麦克风。
7 音频输出插孔	用于连接到扬声器。

组件



项目	说明	
1 网络端口	用于连接 PoE 或网络连接的以太网电缆。	
2 警报 I/O 端口	ALARM IN	用于连接警报输入信号。
	ALARM OUT	用于连接警报输出信号。
	GND	用于连接地线。
3 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。	
4 重置按钮	该按钮会将所有摄像机设置恢复为出厂默认值。 按住约 5 秒钟可重启系统。	
	❗ 如果复位摄像机，则会调整网络设置，以便可以启用 DHCP。如果网络中没有 DHCP 服务器，则必须运行 IP Installer 程序更改基本的网络设置，如 IP 地址、子网掩码、网关等，然后才能连接到网络。	


概述



项目	说明
5 解锁杆	按两端的 <UNLOCK> 杆以分离摄像机模块与机身。
6 镜头	摄像机的镜头。
7 焦点调整按钮	该按钮会自动调节图像的焦点。
8 SD 内存卡盒	用于 SD 内存卡的盒子。

简图 (SNV-7082)


外观

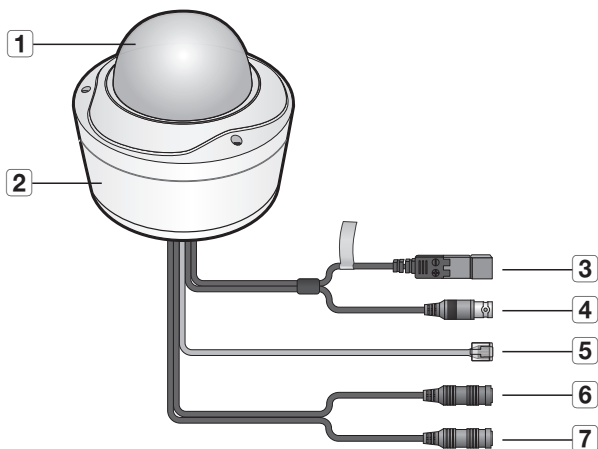


项目	说明
1 顶部护盖	用于保护镜头和主装置的外壳护盖。
2 摄像机外壳	盖住摄像机机身的外壳部分。
3 电源端口	用于插入电源线。
4 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。
5 网络端口	用于连接 PoE 或网络连接的以太网电缆。
6 音频输入插孔	用于连接到麦克风。
7 音频输出插孔	用于连接到扬声器。

概述

组件



项目	说明	
1 网络端口	用于连接 PoE 或网络连接的以太网电缆	
2 警报 I/O 端口	ALARM IN	用于连接警报输入信号。
	ALARM OUT	用于连接警报输出信号。
	GND	用于连接地线。
3 测试显示器输出	用于测试监视视频输出的输出端口。使用测试监视器电缆来连接至移动显示器并检查测试视频。	
4 重置按钮	该按钮会将所有摄像机设置恢复为出厂默认值。 按住约 5 秒钟可重启系统。 ■ 如果复位摄像机，则会调整网络设置，以便可以启用 DHCP。如果网络中没有 DHCP 服务器，则必须运行 IP Installer 程序更改基本的网络设置，如 IP 地址、子网掩码、网关等，然后才能连接到网络。	

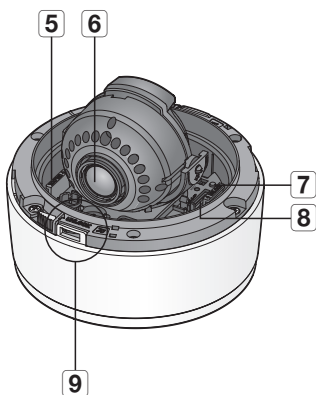

项目	说明
5 解锁杆	按两端的 <UNLOCK> 杆以分离摄像机模块与机身。
6 镜头	摄像机的镜头。
7 焦点调整按钮	该按钮会自动调节图像的焦点。
8 SD 内存卡盒	用于 SD 内存卡的盒子。
9 释放锁	如果您想从主设备取下支架，或者从支架上取下摄像机，要推一下该按钮，然后向 <UNLOCK> 方向转动主设备。

安装与连接

安装镜头 (SNB-7002)


在安装前要断开电源。



- 产品包装内未包括 C 镜头和 CS 镜头。
本产品只能与百万像素镜头一起使用。

在摄像机上安装 CS 镜头


顺时针旋转可选的 CS 镜头将其插入。



CS 镜头

在摄像机上安装 C 镜头


顺时针旋转角落底座适配器将其插入，然后对 C 镜头进行相同的操作。



C 镜头

连接自动光圈镜头连接器

将镜头连接器插入摄像机的相应孔中。

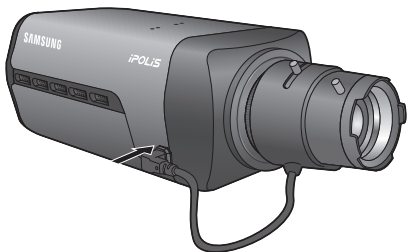

对焦

左右旋转镜头调节棒可以控制缩放和镜头对焦，这样可以观看清晰的对象。



安装与连接

安装前注意事项


安装之前，请确保阅读下列说明：

- 安装在天花板或墙壁上时，所需安装点至少必须能够承受 5 倍于的摄像机重量的重力。
- 破损或脱皮电缆可能会损坏产品或引起火灾。
- 为安全起见，让其他人远离安装地点。将个人所有物放在安装点一侧，以防万一。


安装 (SND-7082)

拆解

1. 用一只手拿稳摄像机机身，用另一只手拿住顶部护盖。然后，逆时针旋转护盖以将其取下来。




2. 按两端的 <UNLOCK> 杆以分离摄像机模块与机身。





- 向图中所示的外面方向按下锁定杆，然后向 <UNLOCK> 方向（逆时针）转动摄像机机身，以从机身取下支架。

- 如果该操作失败，请用支架底部的孔，向 <LOCK> 方向（顺时针）转动支架以将其取下。



安装

- 使用提供的螺钉将支架固定到天花板或墙壁上的所需位置。
 - 确保支架上的 <CAMERA FRONT> 标签朝着摄像机监视的方向。
- 整齐排放通过支架到天花板或墙壁的电缆。
 - 如果在天花板上钻孔以配线，请用力按以移除盖子并连接防尘板，然后通过板排放电缆。如果要钻孔就排放电缆，请使用与 <CAMERA FRONT> 标签侧的相对的空白区域来进行配线。
- 将摄像机机身安装在支架上。使摄像机机身的标志孔与支架的 <CAMERA FRONT> 标签对准，然后向 <LOCK> 方向转动机身。
- 将摄像机模块装配到机身。
- 请参阅“调整摄像机的监视方向”来调整镜头，使其面向所需的方向。（第 38 页）
- 盖上顶部护盖。
 - 将顶部护盖套入摄像机机身的固定导柱，然后顺时候转动护盖。




安装与连接

安装 (SND-7082F)


拆解

1. 用一只手拿稳摄像机机身，用另一只手拿住顶部护盖。然后，逆时针旋转护盖以将其取下来。

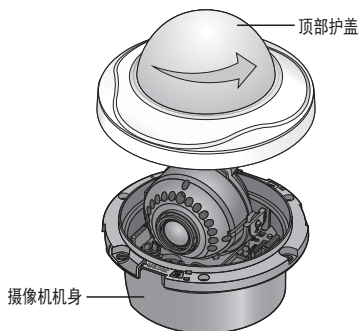


安装

1. 使用随附的模板为摄像机钻一个孔，然后为螺钉钻一个孔（直径 5 毫米，至少 35 毫米深），并将塑料固定器（HUR 5）插入螺钉孔直到底部。
2. 连接和排放必要的电缆，以免在安装摄像机时损坏或缠绕它们。
3. 将摄像机机身插入孔中以便它与摄像机孔相配，并使用支架自攻螺钉（TH, M4xL30）固定机身。（x3）
4. 请参阅“**调整摄像机的监视方向**”来调整镜头，使其面向所需的方向。（第 38 页）
5. 盖上顶部护盖。
 - 将顶部护盖套入摄像机机身的固定导柱，然后顺时候转动护盖。



添加警报电缆(未包含)

1. 为此，应首先从机壳上卸下顶盖。
2. 拉出所示的突出橡胶杆。
3. 这将露出橡胶杆所在的孔，穿过它插入电缆，并将它连接至 PCB 上的警报端子。
4. 连接和排放必要的电缆（电源、视频等等），以免在安装摄像机时损坏或卡住它们。然后，按拆卸的相反顺序安装摄像机总成。
5. 请参阅“调整摄像机的监视方向”来调整镜头，使其面向所需的方向。(第 38 页)
6. 盖上顶部护盖。




安装与连接


安装 (SNV-7082)

拆解

1. 使用随附的 L 形板手，逆时针旋转顶部护盖上的 3 个螺栓，以取下护盖。

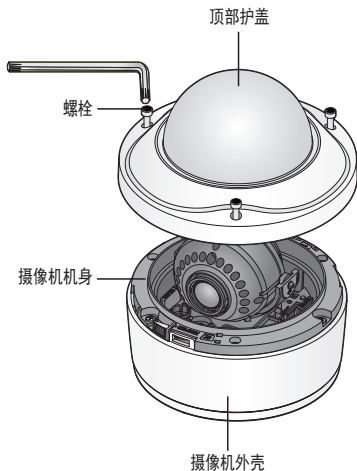


2. 逆时针旋转摄像机机身上的 3 个螺钉，按下左/右“锁头”杆（按箭头方向）以松开锁。然后，从外壳中取出摄像机。




直接安装在天花板上

1. 从外壳中取出顶部护盖，方法参见“拆解”一节。（第 34 页）
2. 在外壳底部所需位置钻一个孔（直径：5mm，深度：至少 35mm），然后将随附的塑料固定器（HUD 5）插入到底。
3. 将底孔套入固定器也，然后插入并固定支架固定螺钉（TH M4xL30）。
 - 在将摄像机盒子安装到连接盒时，请选择盒子底部的相应螺钉孔进行安装。
4. 连接和排放必要的电缆，以免在安装摄像机时损坏或缠绕它们。
5. 以“拆解”的相反顺序安装摄像机机身。（第 34 页）
6. 以所需方向调整镜头，方法请参阅“调整摄像机的监视方向”一节。（第 38 页）
7. 盖上顶部护盖。
 - 为了确保防水，请使用 L 型板手拧紧固定螺栓。



天花板安装

1. 从外壳中取出顶部护盖，方法参见“拆解”一节。（第 34 页）
2. 使用随附的模板为摄像机钻一个孔，然后为螺钉钻一个孔（直径 5 毫米，至少 35 毫米深），并将塑料固定器（HUR 5）插入螺钉孔直到底部。
3. 连接和排放必要的电缆，以免在安装摄像机时损坏或缠绕它们。




安装与连接

4. 松开并取下摄像机装置上的外壳固定螺钉。(x3)
5. 将摄像机装置插入孔中以便它与摄像机孔相配，并使用支架自攻螺钉（TH, M4xL30）固定装置。(x3)
6. 以所需方向调整镜头，方法请参阅“**调整摄像机的监视方向**”一节。(第 38 页)
7. 盖上顶部护盖。
 - 为了确保防水，请使用 L 型板手拧紧固定螺栓。

连接至非捆绑销售的适配器

选择并购买下列其中一个必要的选件（非捆绑销售），它应该适合您的安装位置或为您提供方便。


1. 从外壳中取出顶部护盖，方法参见“**拆解**”一节。（第 34 页）
2. 使用随附的机器螺钉将摄像机外壳固定到非捆绑销售的适配器上。
3. 连接和排放必要的电缆，以免在安装摄像机时损坏或缠绕它们。
4. 以“**拆解**”的相反顺序安装摄像机机身。（第 34 页）
5. 以所需方向调整镜头，方法请参阅“**调整摄像机的监视方向**”一节。（第 38 页）
6. 盖上顶部护盖。
 - 为了确保防水，请使用 L 型板手拧紧固定螺栓。




可选的安装附件

为了方便安装，您可以购买可选的附件。


1. 墙上安装适配器（SBP-300WM 或 SBP-300WM1）/ 悬挂安装适配器（SBP-300HM3）
将圆顶摄像机安装到墙上时使用该适配器。




2. 天花板安装适配器 (SBP-300CM) / 悬挂安装适配器 (SBP-300HM3)
将圆顶摄像机安装到混凝土天花板上时使用该适配器。



3. 柱式安装适配器 (SBP-300PM)
这是在直径大于 80 毫米的柱子上安装墙上安装适配器 (SBP-300WM 或 SBP-300WM1) 时使用的适配器。




4. 角落安装适配器 (SBP-300KM)
这是在墙角安装墙上安装适配器 (SBP-300WM 或 SBP-300WM1) 时使用的适配器。



安装与连接

调整摄像机的监视方向 (SND-7082/SND-7082F/SNV-7082)



调整监视方向

仅当摄像机固定到天花板上时才能调整摄像机方向。

调整时，左右旋转摄像机装置称为“平移”，调整倾斜度称为“倾斜”，沿镜头轴转动镜头称为“旋转”。

- 平移的有效范围是共 355 度。
- 旋转的有效范围是共 355 度。
- 倾斜的有效范围是共 90 度。



- 在某些角度，顶部护盖可能会导致剪掉一部分监视的对象。
- 取下前面护盖后，切勿用力旋转聚焦/缩放镜头。否则可能会导致因马达故障而不能正确聚焦。

调整方法


1. 安装摄像机之后，根据监视方向调整平移角度。
倾斜摄像机时，应该向要显示图像的相反方向轻微调整水平角度。
2. 调整旋转角度以更正图像显示位置（上/下/左/右）。
 - 旋转意味着在后镜头单元的基础上旋转。
3. 调整倾斜角度，以便摄像机面朝监视的对象。

插入/取出 SD 存储卡

- ❗ 请先从摄像机拔下电源线，再插入 SD 存储卡。


插入 SD 存储卡

松开螺钉并打开 SD 存储卡的盖子。按箭头插入 SD 卡，如图中所示。

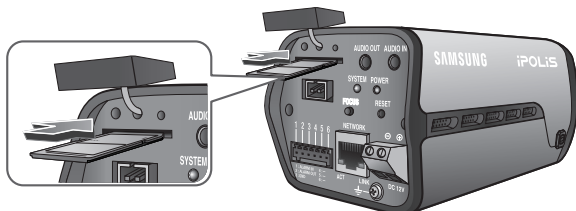


<SNB-7002>

请按图中所示箭头方向推 SD 存储卡。

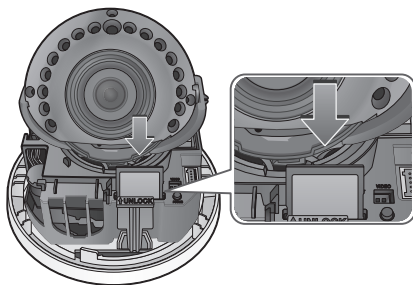


<SND-7082>

安装与连接

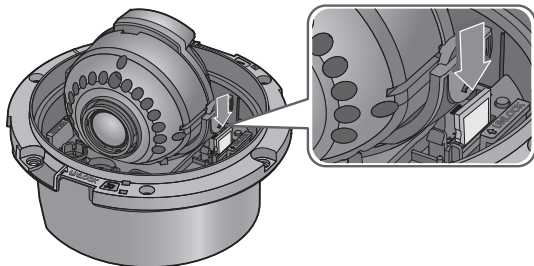

<SND-7082F>

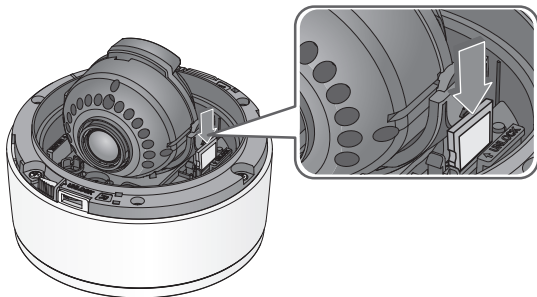


<SNV-7082>




- 请勿在 SD 存储卡倒放时用力插入。可能会损坏SD存储卡槽。

取出 SD 存储卡

轻轻地按压存储卡露在外面的一端，依图示的方式从拆槽中弹出存储卡。

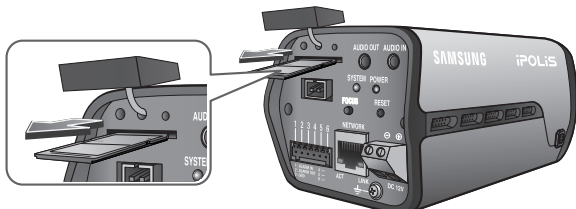


<SNB-7002>

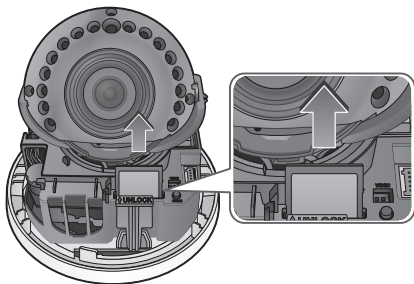


<SND-7082>

安装与连接

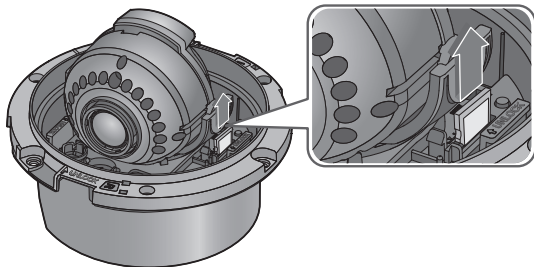

<SND-7082F>

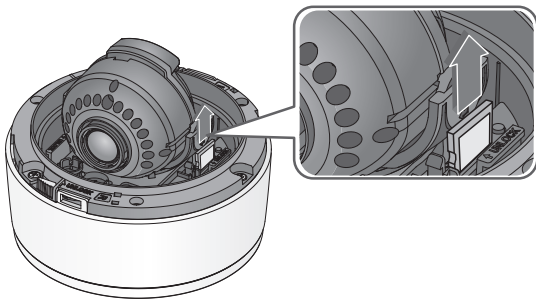

<SNV-7082>



- 太用力按 SD 存储卡可能会导致存储卡从卡槽中松脱后猛然弹出。
- 要取出 SD 存储卡，请在 <存储器> 菜单中将卡设置为 <关>，然后按 [应用 (应用)] 按钮。
(第 102 页)
- 当正在将 SD 存储卡用于保存时将其取出可能会损坏卡中存储的数据。

存储卡信息（未包含）

什么是存储卡？

存储卡是一种外部数据储存设备，它的开发为使用数字设备进行录制和共享音频、视频和文本数据提供了崭新的方式。

选择一款适合您的存储卡

本摄像机支持 SD/SDHC 存储卡。

根据存储卡的型号和制作材料不同，您可能会遇到兼容性的问题。

对您的摄像头，我们建议您使用以下厂商制造的存储卡：

SD/SDHC 存储卡：Sandisk, Transcend

建立将 4GB ~ 32GB 的存储卡与本摄像机配合使用。

回放性能可能受存储卡速度的影响，因此，请使用高速存储卡。


建议您使用至少为类别 6 速度的存储卡。

记忆卡的使用

SD 和 SDHC 记忆卡有一个能够禁止写入的开关。



将开关拨到锁定位置能够保证记忆卡中的数据不会因意外删除，但同时，您也无法向其中写入数据。

记忆卡组件



安装与连接

与其他设备连接

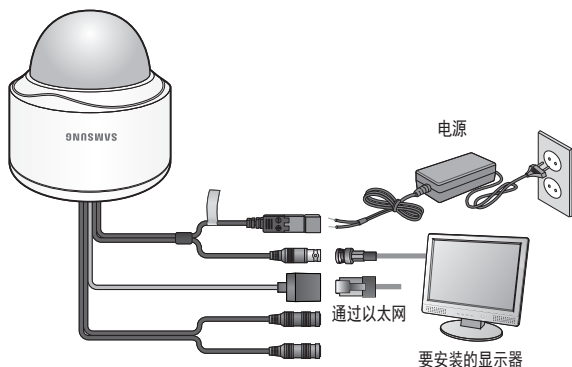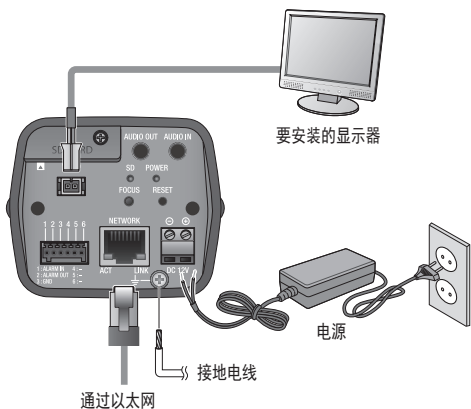

- 产品的 BNC 输出端子是为了方便安装而提供的，建议不要将它用于监视。如果保持连接 BNC 电缆，则闪光的风险可能会导致损坏产品或使产品功能异常。

以太网连接

将以太网电缆连接到本地网络或互联网。

电源

使用螺丝刀将每股电源线 (+, -) 连接至摄像机的相应电源端口。

-  如果同时供应 PoE (以太网供电) 和直流 12V 电源, 产品将采用第一个供电的电源工作。
 - 您也可以使用具有 PoE 功能的路由器为摄像机供电。
 - 使用符合 IEEE802.3af 协议的 PoE。
 - 仅可使用 PoE 和 DC12V 的电源之一。
- 加热器只能采用 PoE 电源才能正常工作。(SNV-7082)
 - 如果使用直流 12V 电源, 加热器将根本不起作用。
 - 在低于 -10°C 的低温地方, 请使用 PoE。
- 在连接电源线时, 切勿弄反极性。
- 如果要连接外部设备, 则必须先关闭外部设备再继续进行。

[20°C (68°F)] 时铜线的电阻

铜线电容量 (AWG)	#24(0.22mm ²)	#22(0.33mm ²)	#20(0.52mm ²)	#18(0.83mm ²)
电阻 (Ω/m)	0.078	0.050	0.030	0.018
电压降 (V/m)	0.028	0.018	0.011	0.006
建议距离 (m)	少于 20	少于 30	少于 30	少于 30

- 如上表中所示, 您可能会遇到电压下降, 具体视电线长度而定。
如果您使用极长的线来连接摄像机, 则摄像机可能无法正常工作。
 - 摄像机工作电压: 直流 12V±10%
 - 上图中的电压降测量值可能会因铜线的类型和制造商而异。

安装与连接

使产品接地 (SNB-7002)

使用螺丝刀将接地线连接至电源接头端子下方的接地端子。




- 接地可让产品免遭电涌或闪电破坏。
- 接地时，请确保关闭产品的电源。

建议的接地电线

- 长度：不超过 3M
- 容量规格：18 AWG 或更大
示例）UL1007 AWG 18/16、UL1015 AWG18/16/14/12 或 UL2468 AWG18/16/14

连接音频输入/输出

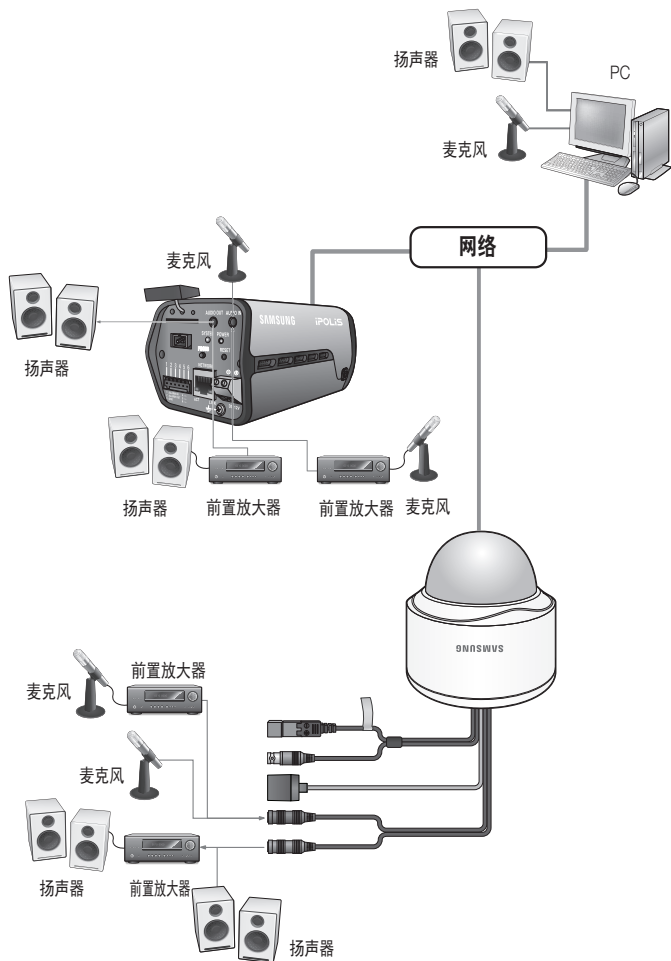

安装与连接

1. 将摄像机的音频输入端口连接至麦克风或麦克风连接至的扩音器的线性输出端口。
2. 将摄像机的音频输出端口连接至扬声器或扬声器连接至的扩音器的线性输入端口。
3. 检查音频输入的规格。

- **音频编解码器**

G.711 PCM, μ -law 64kbps 8kHz / G.726 (16Kbps, 24Kbps, 32Kbps, 40Kbps) 取样

- **全双工音频**

- **音频输入**

使用单声道信号线路输入（最大2.4 Vpp）

- **音频输出**


使用单声道信号线路输出（最大2.4 Vpp）

- **线路输出阻抗**

600 Ω

连接到 I/O 端口 (SNB-7002)


将警报 I/O 信号连接到后面端口盒的相应端口。

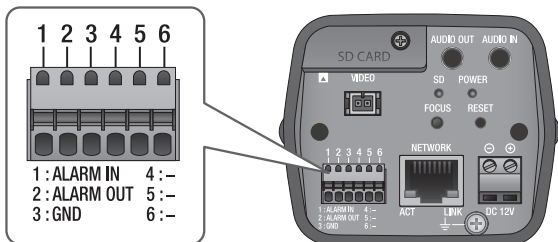

- **ALARM IN** : 用于连接警报输入信号。
- **ALARM OUT** : 用于连接警报输出信号。
- **GND** : 用于连接地线。

连接到 I/O 端口 (SND-7082/SND-7082F/SNV-7082)

将警报 I/O 电缆连接到内部端口盒的相应端口。

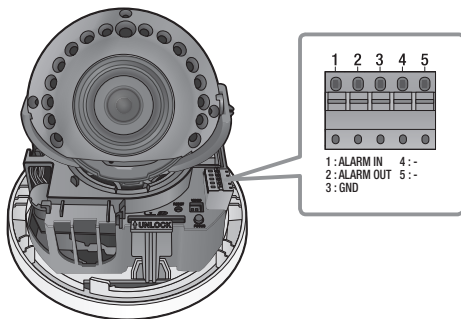


- ALARM IN : 用于连接警报输入信号。
- ALARM OUT : 用于连接警报输出信号。
- GND : 用于连接地线。

连接外接传感器

将传感器每根信号线（2 线）的一股线连接至 [ALARM IN] 端口，并将另一股线连接至 [GND] 端口。

警报 I/O 接线图




网络连接和设置

可根据您的网络配置来设置网络的设定。

将摄像头与局域网直接连接


连接局域网内的本地 PC 和摄像头

1. 启动本地 PC 上的网络浏览器。
2. 在浏览器的地址栏中输入 IP 地址。

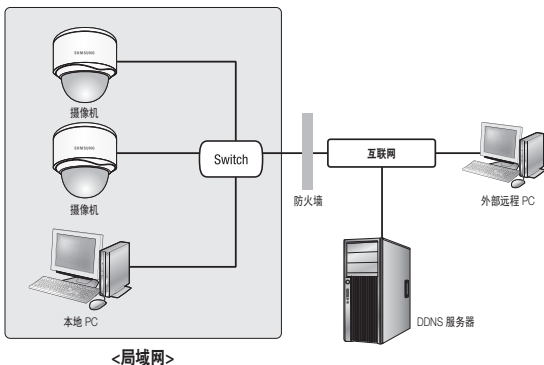

- 在正确设置防火墙或端口转发前，局域网外部的远程互联网 PC 可能无法连接安装于内部网的摄像头。
在此情况下，联系网络管理员解决问题。
- 根据出厂默认值，会自动从 DHCP 服务器分配 IP 地址。如果没有可用的 DHCP 服务器，则会将 IP 地址设置为 192.168.1.100。
要更改 IP 地址，请使用 IP Installer。
有关 IP Installer 使用的详细信息，请参阅“静态 IP 设置”。(第 55 页)

将摄像机直接连接至基于 DHCP 的 xDSL/有线电视网调制解调器

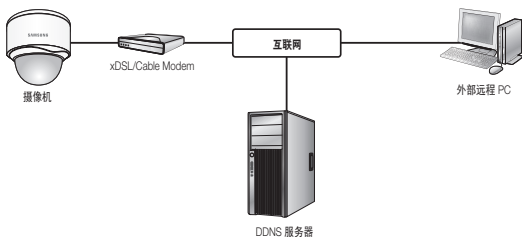


1. 使用交叉 LAN 电缆将网络电缆直接连接至您的 PC。
2. 运行 IP Installer 并更改摄像机的 IP 地址，以便可以使用桌面上的 Web 浏览器连接至互联网。
3. 使用互联网浏览器连接至 Web Viewer。
4. 移至 [Setup] 页面。
5. 移至 [Network] – [DDNS] 并配置 DDNS 设置。
6. 移至 [Network] – [接口]，并将网络类型设置为 [DHCP]。
7. 将摄像机（已从您的 PC 上拔下）直接连接至调制解调器。
8. 重新启动摄像机。



- 有关注册 DDNS 设置，请参阅“注册 DDNS”。（第 94 页）
- 有关配置 DDNS 设置，请参阅“DDNS”。（第 93 页）
- 有关设置网络类型，请参阅“接口”。（第 91 页）

网络连接和设置

直接将摄像机连接到 PPPoE 调制解调器

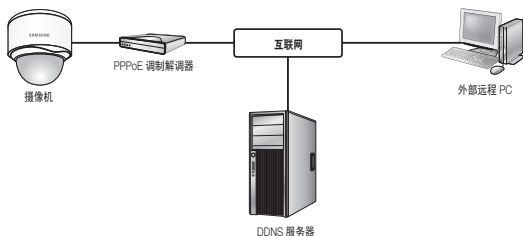


1. 使用交叉 LAN 电缆将网络电缆直接连接至您的 PC。
2. 运行 IP Installer 并更改摄像机的 IP 地址，以便可以使用桌面上的 Web 浏览器连接至互联网。
3. 使用互联网浏览器连接至 Web Viewer。
4. 移至 [Setup] 页面。
5. 移至 [Network] – [DDNS] 并配置 DDNS 设置。
6. 移至 [Network] – [接口]，并将网络类型设置为 [PPPoE]。
7. 将摄像机（已从您的 PC 上拔下）直接连接至调制解调器。
8. 重新启动摄像机。



- 有关注册 DDNS 设置，请参阅“注册 DDNS”。（第 94 页）
- 有关配置 DDNS 设置，请参阅“DDNS”。（第 93 页）
- 有关设置网络类型，请参阅“接口”。（第 91 页）

将摄像头与使用 PPPoE/Cable 调制解调器的宽带路由器连接

适用于小型网络环境，如家庭、SOHO 以及普通的商店。

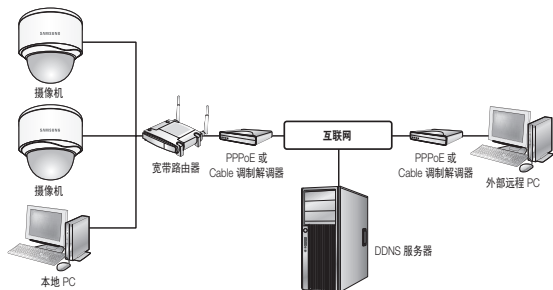

配置连接到宽带路由器

在配置连接到宽带路由器的本地 PC 的网络设置时，遵循以下说明。

- 选择：<网上邻居> → <属性> → <本地连接> → <属性> → <常规> → <Internet 协议 (TCP/IP)> → <属性> → <自动获得 IP 地址> 或 <使用下面的 IP 地址>。
- 若您选择的是 <使用下面的 IP 地址>，遵照以下说明操作：

例1) 若宽带路由器的地址 (LAN IP) 为 192.168.1.1

IP 地址：192.168.1.100
子网掩码：255.255.255.0
默认网关：192.168.1.1

例2) 若宽带路由器的地址 (LAN IP) 为 192.168.0.1

IP 地址：192.168.0.100
子网掩码：255.255.255.0
默认网关：192.168.0.1

例3) 若宽带路由器的地址 (LAN IP) 为 192.168.xxx.1


IP 地址：192.168.xxx.100
子网掩码：255.255.255.0
默认网关：192.168.xxx.1



- 关于宽带路由器的地址，请参见产品文档。
- 如需宽带路由器的正向端口的更多信息，请参阅“路由器端口设置”。(第 60 页)

网络连接和设置

在 IP Installer 中使用的按钮

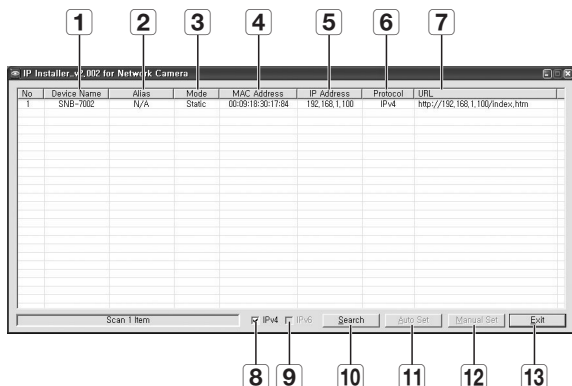

项目	说明
1 Device Name	已连接摄像机的型号名称。 单击此列可以按型号名称对列表进行排序。 但是，如果在搜索时单击将会停止搜索。
2 Alias	此功能当前不可用。
3 Mode	对当前网络连接状态显示 <Static>，<Dynamic> 和 <PPPoE>。
4 MAC(Ethernet) Address	已连接摄像机的以太网地址。 单击此列可以按以太网对列表进行排序。 但是，如果在搜索时单击将会停止搜索。
5 IP Address	IP 地址。 单击此列可以按 IP 地址对列表进行排序。 但是，如果在搜索时单击将会停止搜索。
6 Protocol	摄像机的网络设置。 出厂默认设置为 “IPv4”。 使用 IPv6 设置的摄像机将显示 “IPv6”。

项目	说明
7 URL	DDNS URL 地址可以从外部互联网访问。 但是, 如果 DDNS 注册失败, 此按钮将被摄像机的 <IP Address> 代替。
8 IPv4	扫描使用 IPv4 设置的摄像机。
9 IPv6	扫描使用 IPv6 设置的摄像机。 只能在符合 IPv6 的环境中激活。
10 Search	扫描当前连接到网络的摄像机。 但是, 如果没有选取 IPv4 也没有选取 IPv6, 该按钮将呈灰色。
11 Auto Set	IP Installer 自动配置网络设置。
12 Manual Set	手动配置网络设置。
13 Exit	退出 IP Installer 程序。



- 对于 IP Installer, 请仅使用在安装 CD 中提供的版本, 或者最新版本 (如果可以获得)。可以从 Samsung 网站 (www.samsungcctv.com) 下载最新版本。

静态 IP 设置


手动网络设置

运行 <IP Installer_v2.XX.exe> 以显示摄像机搜索列表。
在初始启动时, [Auto Set] 和 [Manual Set] 将呈灰色。



- 对于以 IPv6 设置为基础的摄像机, 这些按钮将呈灰色, 因为摄像机不支持此功能。

- 从搜索列表中选一个摄像机。
在摄像机的标签上检查摄像机的 MAC 地址。
将激活 [Auto Set] 和 [Manual Set] 按钮。
- 单击 [Manual Set]。
Manual Setting 对话框将会出现。
将显示摄像机的 <IP Address>、<Subnet Mask>、<Gateway>、<HTTP Port> 和 <VNP Port> 默认值。




网络连接和设置

3. 在 <Address> 窗格中，提供必需的信息。

- MAC (Ethernet) Address：印在摄像机标签上的 MAC 地址会自动显示，不需要用户设置。



- 只有在未选中 DHCP 复选框的情况下，才能配置静态 IP 设置。



如果不使用宽带路由器


若要设置 <IP Address>、<子网掩码> 和 <Gateway>，请联系网络管理员。

4. 在 <Port> 窗格中，提供必需的信息。

- HTTP Port：用于使用互联网浏览器访问摄像机，默认值为 80。
- VNP Port：用于控制视频信号传输，默认值为 4520。

5. 输入密码。

输入用来访问摄像机的“admin”帐户的密码。
默认密码为“4321”。



- 默认密码可能会向黑客线程公开，因此建议您在安装产品之后更改密码。请注意，不更改密码导致的安全和其他相关问题，用户自己承担责任。
- 如果您要更改密码，请参考用户设置的“管理员密码更改”。（第 118 页）

6. 单击 [OK]。

将完成手动网络设置。

如果使用宽带路由器

- IP Address：输入宽带路由器提供的 IP 范围内的地址。
例) 192.168.1.2~254,
192.168.0.2~254,
192.168.XXX.2~254
- Subnet Mask：宽带路由器的 <子网掩码> 将是摄像机的 <子网掩码>。
- Gateway：宽带路由器的 <本地 IP 地址> 将是摄像机的 <Gateway>。



- 设置可能因连接的宽带路由器型号而异。
有关详细信息，请参阅适用路由器的用户手册。
- 如需宽带路由器的正向端口的更多信息，请参阅“路由器端口设置”。(第 60 页)

如果宽带路由器连接了多个摄像机

彼此清楚地配置 IP 相关设置和端口相关设置。

例)

类别		摄像机 1	摄像机 2
IP 相关设置	IP Address	192.168.1.100	192.168.1.101
	Subnet Mask	255.255.255.0	255.255.255.0
	Gateway	192.168.1.1	192.168.1.1
端口相关设置	HTTP Port	8080	8081
	VNP Port	4520	4521



- 如果 <HTTP Port> 设置为除 80 以外的值，您必须在互联网浏览器的地址栏中提供 <Port> 号，才能访问摄像机。
例) http://IP address: HTTP Port
http://192.168.1.100:8080

网络连接和设置

自动网络设置



运行 <IP Installer_v2.XX.exe> 以显示摄像机搜索列表。
在初始启动时, [Auto Set] 和 [Manual Set] 将呈灰色。

■ 对于以 IPv6 设置为基础的摄像机, 这些按钮将呈灰色, 因为摄像机不支持此功能。

1. 从搜索列表选择一个摄像机。
在摄像机的标签上检查摄像机的 MAC 地址。
将激活 [Auto Set] 和 [Manual Set] 按钮。
2. 单击 [Auto Set]。
Auto Setting 对话框将会出现。
将自动设置 <IP Address>、<Subnet Mask> 和 <Gateway>。
3. 输入密码。
输入用来访问摄像机的“admin”帐户的密码。
默认密码为“4321”。

- ! ■ 默认密码可能会向黑客线程公开, 因此建议您在安装产品之后更改密码。
请注意, 不更改密码导致的安全和其他相关问题, 用户自己承担责任。
- 如果您要更改密码, 请参考用户设置的“管理员密码更改”。(第 118 页)

4. 单击 [OK]。
将完成自动网络设置。





动态 IP 设置

动态 IP 环境设置

- 动态 IP 环境示例
 - 如果连接了摄像机的宽带路由器由 DHCP 服务器分配了 IP 地址
 - 如果使用 DHCP 协议将摄像机直接连接至调制解调器
 - 如果 IP 由内部 DHCP 服务器通过 LAN 分配

检查动态 IP

1. 在用户的本地计算机上运行 IP Installer。
分配了 <Dynamic IP> 地址的摄像机将会显示在列表中。
2. 从搜索结果中选择摄像机。
3. 单击 [Manual Set] 按钮，然后检查摄像机的 <Dynamic IP> 地址。
如果取消选择 <DHCP>，您即可将 IP 更改为 <Static>。




网络连接和设置

路由器端口设置

如果您安装了连接摄像机的宽带路由器，就必须设置在宽带路由器上开放的端口范围，以便远程 PC 可以其中的摄像机。

手动端口设置

1. 从宽带路由器的 Setup 菜单中，选择 <Applications & Gaming> - <Port Range Forward>。
对于第三方宽带路由器端口范围前移设置，请参阅该宽带路由器的用户手册。
2. 对连接到宽带路由器的每个摄像机选择 <TCP> 和 <UDP Port>。
宽带路由器的每个端口号都应该与在摄像机的 Web Viewer 菜单的 <Setup> - <Network> - <端口> 中指定的端口号相符。
3. 完成后，单击 [Save Settings]。
将保存设置。



- 以上样本说明基于 CISCO 的宽带路由器。
- 设置可能因连接的宽带路由器型号而异。
有关详细信息，请参阅适用路由器的用户手册。


设置多个网络摄像机的端口范围前移

当多个网络摄像机连接到一个宽带路由器设备时，您应将路由器的 TCP 943 端口前移到所连接摄像机的 TCP 943 端口。

! 如果您没有正确设置路由器的 TCP 943 端口，则无法从摄像机的网页上获得任何视频流。

- TCP 943 端口是摄像机的 Silverlight 策略服务器端口。
- 您可通过配置网页在宽带路由器设备上设置 正向端口的规则。
- 您无法更改摄像机的 Silverlight 策略服务器端口。
- 您可通过其配置网页更改摄像机的端口，但不可更改策略服务器端口。

当摄像机 1 和摄像机 2 连接至同一路由器时：

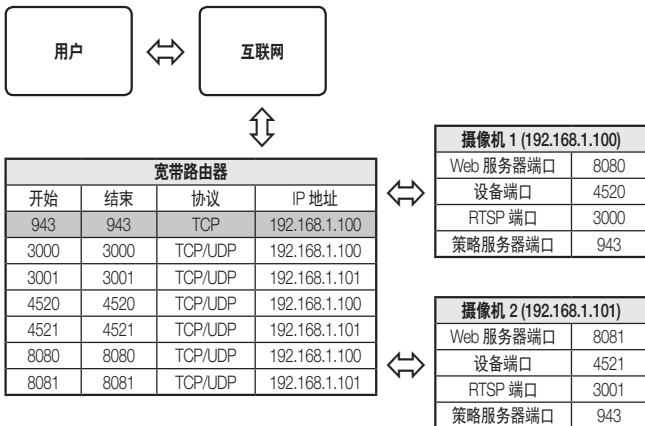


网络连接和设置

从共享的本地 PC 连接到摄像机

1. 运行 IP Installer。
它将扫描连接的摄像机，并显示摄像机列表。
2. 双击要访问的摄像机。
互联网浏览器将启动，并连接到摄像机。



- 您也可以在互联网浏览器的地址栏中键入所发现摄像机的 IP 地址的方式访问摄像机。



从远程 PC 通过互联网连接到摄像机

由于不允许在不属于宽带路由器网络群集的远程计算机上使用 IP Installer，所以用户需通过摄像机的 DDNS URL 在宽带路由器网络内访问摄像机。

1. 您应该设置宽带路由器端口范围前移，然后才能访问宽带路由器网络中的摄像机。
2. 从远程 PC 启动互联网浏览器，并在地址栏中键入摄像机的 DDNS URL 地址，或宽带路由器的 IP 地址。
例) [http://www.samsungipolis.com/\[产品 ID\]](http://www.samsungipolis.com/[产品 ID])




- 有关注册 DDNS 设置，请参阅“注册 DDNS”。(第 94 页)

web 查看器

连接到摄像机

通常，您应该：

1. 启动互联网浏览器。
2. 在地址栏中键入摄像机的 IP 地址。
例) • IP 地址 (IPv4) : 192.168.1.100
→ http://192.168.1.100
- 将会出现登录对话框。
• IP 地址 (IPv6) : 2001:230:abcd:ffff:0000:0000:ffff:1111
→ http://[2001:230:abcd:ffff:0000:0000:ffff:1111] - 将会出现登录对话框。



如果 HTTP 端口为除 80 以外的值

1. 启动互联网浏览器。
2. 在地址栏中键入摄像机的 IP 地址和 HTTP 端口号。
例) IP 地址 : 192.168.1.100:HTTP 端口号(8080)
→ http://192.168.1.100:8080 - 将会出现登录对话框。

使用 URL

1. 启动互联网浏览器。
2. 在地址栏中键入摄像机的 DDNS URL。
例) URL 地址 : http://www.samsungipolis.com/[产品 ID]
- 将会出现登录对话框。

web 查看器

检查 DDNS 地址

如果摄像机直接连接到 DHCP 有线电视网调制解调器、xDSL 调制解调器或 PPPoE 调制解调器，每当您尝试连接到 ISP（互联网服务提供商）服务器时，您的网络 IP 地址都会更改。

在这种情况下，将不会通知您 IP 地址已被 DDNS 更改。

一旦您向 DDNS 服务器注册了基于动态 IP 的设备，当尝试访问该设备时，就可以轻松检查更改的 IP。

要向 <DDNS> 服务器注册您的设备，请访问 www.samsungipolis.com 并先注册您的设备，然后将 Web Viewer 的 <Network> - <DDNS> 设置为 <Samsung DDNS>，同时提供用于 DDNS 注册的 <产品 ID>。

登录

每当访问摄像机时，登录窗口都会出现。

输入用户 ID 和密码以访问摄像机。


1. 在 <用户名(U)> 输入框中输入“admin”。
管理员 ID，即“admin”是固定的，无法更改。
2. 在 <密码(P)> 输入框中输入“4321”。
如果更改了密码，请输入更改的密码。
3. 单击 [确定]。
如果已成功登录，您将会看到 Live Viewer 屏幕。



- 默认的用户 ID 为“admin”，默认密码为“4321”。
- 为安全起见，请确保在 <System> - <用户> 中更改了密码。
- 默认密码可能会向黑客线程公开，因此建议您在安装产品之后更改密码。
请注意，不更改密码导致的安全和其他相关问题，用户自己承担责任。
- 如果您在完成输入之后选中“记住我的密码(R)”选项，则从下次起将自动登录，而不会提示输入登录信息。



- 如果屏幕大小是 100%，则您可以体验最佳视频质量。降低该比率可能会切掉边框上的图像。




安装 Silverlight Runtime


如果您的计算机未安装 Silverlight Runtime 或只安装了 Runtime 旧版本，当访问 Web 查看器时，会自动将打开 Silverlight Runtime 安装页面。

在 Windows 操作系统上安装

1. 单击 <Click Here>。



2. 当文件下载对话框弹出时，请单击 <Run>。



3. 完成下载后，请单击 <Run>。




4. 将显示 Silverlight Runtime 安装页面。单击 <Install now> 以进行安装。



web 查看器

5. 完成后，请单击 <Close>。



在 MAC 操作系统上安装


1. 运行以 “.dmg” 结尾的文件。




2. 运行自动创建的以 “.pkg” 结尾的安装包文件。



3. 单击 <Continue>。




4. 在选择语言屏幕上选择语言，然后单击 <Continue>。



5. 单击 <Agree>。



6. 单击 <Install>。



web 查看器

7. 输入当前登录的帐户的密码，然后单击 <Install Software> 并继续。



8. 完成后，单击 <Close>。




安装 STW WebViewer 插件

如果首次连接到摄像机，您将会看到安装消息。然后，安装所需的 WebViewer 插件以访问摄像机并在摄像机内实时控制视频。




- 应该先在计算机上安装 Microsoft Visual C++ 2010 Redistribute Package，然后才能安装 Web Viewer 插件。如果尚未安装 Visual Studio 2010，您将会看到以下错误消息：“There is no VC++ 2010 runtime installed. Please install the runtime library.” 运行 vcredist_x86.exe 文件，该文件可在 Samsung 网站 www.samsungcctv.com 或随附的安装 CD 中找到。vcredist_x86.exe 文件是适用于 32 位操作系统的 Microsoft Visual Studio 2010 Redistributable Package。

- 访问监视页面的开始屏幕时，请单击该页面顶部的黄色警告消息。




- 单击 <Run Add-on>。



- 安全性警告弹出窗口将会出现，单击 [Run]。



- 正确安装 Web Viewer 插件之后，将看到实时画面显示出来。



web 查看器

使用现场屏幕



项目	说明
1 正在监视	移至监视屏幕。
2 播放	切换到播放 SD 存储卡中录制的数据的监视屏幕。
3 设置	移至设置屏幕。
4 查看器屏幕	显示屏幕上的现场视频。 在 Viewer 屏幕中，可以使用鼠标滚轮来激活数码缩放。
5 配置文件类型	可以在 <视频> 设置菜单下的 <Video & Audio> 中选择配置文件类型。 连接 Web Viewer 后，将会显示当前使用的配置文件的信息。
6 屏幕优化	来自摄像机的视频尺寸将放大为与 Web 浏览器尺寸一样大。
7 固定分辨率	不管在摄像机中配置的分辨率设置如何，系统都会将分辨率设置为 640x480。再按一次它会切换回默认分辨率。


项目	说明
8 全屏	将当前视频切换至显示器的最大大小。
9 捕捉	以 .bmp 或 .jpg 格式将快照另存为图像文件。
10 音频/麦克风控制	启用/禁用音频和麦克风，并控制音量。
11 警报输出	激活警报输出端口。
12 隐藏上下文菜单	左上角的上下文菜单将会消失，只留下菜单图标。

捕捉快照

- 在场景上单击 **[捕捉 (📷)]** 进行捕捉。捕捉对话框将会出现。
- 确认保存路径，然后单击 **[保存(S)]** 按钮。
屏幕截图会保存在指定的路径中。



- 如果您在 Windows 7 计算机上使用 IE8 时发生视频中断，请从“工具 - Internet 选项 - 安全”中取消选择“启用保护模式”。



适合全屏

- 单击 **[全屏 (🖥️)]** 按钮。
- 这将使查看器适合全屏。
- 要退出全屏模式，请按键盘上的 **[Esc]**。



- 对于 Internet Explorer 和 Google Chrome 浏览器，您可以切换至全屏。

web 查看器

控制音频声音

1. 单击 [音频 (🔊)] 图标以激活音频通信。
2. 使用 [🔊] 滑块控制音量。

控制麦克风

1. 单击 [麦克风 (🎤)] 图标以激活麦克风。

按事件搜索并播放



1. 单击 [Playback (🎞️)] 按钮。
2. 指定搜索的开始和结束时间。
3. 选择指定时间段内搜索的事件类型。
4. 单击 [事件搜索] 按钮。
搜索结果将显示在列表中。



- 如果在搜索时间段内录制了超过 500 个事件，则搜索将限制为录制第 500 个事件的日期。


例如，如果搜索时间段在一个月内的第 10 天和第 15 天之间，并且在第 10 天到第 11 天录制了超过 500 个事件，则搜索将限制为最多第 11 天（共 500 个事件），将找不到之后（从第 12 天开始）的事件。

5. 在搜索列表中选择要播放的数据项目。
6. 单击 [播放 (▶)] 按钮。
7. 要停止播放视频，请单击 [停止 (■)]。
8. 要返回到搜索屏幕，请单击 [退出 (↶)]。



按时间搜索并播放

1. 单击 [Time Search (🔍)].
2. 在日历中单击所需日期。
将会播放指定日期上的视频。
3. 如果视频播放已停止，请选择时间，
然后单击 [播放 (▶)]。
将会播放所选日期上的视频。
4. 播放视频时，将会显示当前视频的录制时间。
5. 向前或向后搜索视频，并控制播放速度。
 - 控制播放速度
如果选择 ►►，按钮将切换为 x1, x2, x4, x8，并且播放速度相应提高。
如果选择 ◀◀，按钮将切换为 x8, x4, x2, x1，并且播放速度相应降低。
 - 控制播放方向
如果您看到显示 ►► 按钮和播放速度，将会向前播放视频；而如果您看到显示 ◀◀ 按钮和播放速度，将会向后播放视频。
6. 先将 [时间滑块 (📏)] 移至视频的所需时间点再播放。
包含标准录制文件的时间将以蓝色突出显示；包含事件录制内容的时间将以红色突出显示。




web 查看器

检查播放视频的时间信息

1. 单击 [关于 (ⓘ)] 按钮。
2. 日期和时间信息将会出现在屏幕上。

备份搜索到的视频

1. 在播放期间，在场景上单击 [📷] 进行备份。
备份开始和结束时间的计划窗口将会出现。
2. 单击 [🎞] 按钮。
另存为窗口将会出现。
3. 确认保存路径，然后单击 [保存(S)] 按钮。
屏幕截图将备份到指定的路径中。



播放备份视频

备份视频以 .avi 格式保存。可以在计算机上使用支持该格式的任何媒体播放器播放备份视频。

设置屏幕

设置

可以配置网络中的摄像机的视频与音频、网络、事件和系统设置。

1. 在现场屏幕中，单击 [Setup ()]。
2. 设置屏幕将会出现。



- 需要在计算机上安装 Microsoft Silverlight 4.0 才能设置提供预览视频的页面。如果尚未安装该软件，则会自动移至 Silverlight 安装程序。

视频与音频设置

视频配置文件

1. 从设置菜单，选择 <Video & Audio ()> 选项卡。
2. 单击 <视频配置文件>。
3. 设置 <像素模式>。
更改模式选择会显示有关重设视频配置的确切消息。
单击 [确定] 以确认更改视频设置。
4. 设置 <视频配置文件连接策略>。
 - 在更改配置文件设置时保持连接：
更改现有连接使用的配置文件属性不影响此类连接并且保留旧配置文件的设置。
如果未选中，则更改现有连接使用的配置文件会重设此类连接。
5. 选择每个配置文件属性。



设置屏幕

6. 单击每个项目的输入框，并输入/选择所需的值。

- 上下文菜单可能因所选的编解码器类型而异。

- 默认配置文件：如果在使用 Web Viewer 时未选择配置文件，则会应用默认视频配置文件。
- 电子邮件/FTP配置文件：将传送至指定的电子邮件或 FTP 站点的视频配置文件。
 - 只能将 MJPEG 编解码器设置为电子邮件/FTP 配置文件。
- 录制配置文件：这是应用于视频录制的配置文件。
- 音频输入：设置是否使用音频进行视频录制。

7. 根据您的情况，设置 ATC（自动传输控制）模式。

- ATC 模式：它可以根据网络带宽的变化调整视频属性，以控制比特率。
根据 ATC 模式调整比特率。



- 控制帧速率：如果网络带宽下降，则降低帧速率。
- 控制压缩：如果网络带宽下降，则控制压缩率。
压缩调整可能会导致图像质量下降。

- 如果 <比特率控制> 设置为 <CBR>，则根据 ATC 模式，按如下所示固定编码优先级：

比特率控制/ATC 模式	控制帧速率	控制压缩
CBR	帧速率	压缩

- ATC 灵敏度：根据网络带宽的变化影响传输速率。
如果带宽为<非常高>，传输速率将调整为最高，如果带宽为<非常低>，则调整为最慢。
- ATC 限制：如果调整帧速率的质量，此属性将更改为针对上一设置值 (100%) 的应用值 (%)。
请注意，如果您将此属性值降低太多，屏幕上可能会闪烁。因此，建议在阈值范围内调整该值。



- 建议您仅对支持 ATC 的摄像机应用 ATC 控制。
- 在网络带宽变化较大的网络环境中，将 ATC 灵敏度设置为<非常低>。
- 如果网络连接不稳定，屏幕可能会闪烁。

8. 完成后，请单击 [应用 ()]。

添加视频配置文件

可以根据需要添加许多编解码器，以便可以根据录制条件应用各种配置文件。

1. 选择 <视频配置文件> 选项之一。
2. 提供名称并选择编解码器。
3. 指定将应用编解码器的条件。
4. 指定所选编解码器的详细信息，包括分辨率和帧率。

单击 <高级> 以显示上下文。

- 分辨率：设置 H.264 和 MJPEG 文件的视频大小。
- 帧率：指定帧率。
- 压缩：指定视频的压缩率。
- 最大比特率：指定视频的最大比特率。



- 由于比特率可以根据清晰度、帧频和屏幕复杂性进行有限的调整，所以实际比特率可能比最大比特率要大。所以在设定值时必须考虑使用环境。

- 比特率控制：您可从恒定比特率和可变比特率中选择一种方式进行压缩。
CBR（恒定比特率）可改变视频质量并且固定网络传输比特率，而可变比特率则通过改变网络传输比特率来强调质量。
- 编码优先权：可以将视频传输方法设置为帧率或质量。
- 视频组长度：在 1 至 15 之间选择 视频组长度。
- 配置文件：可以选择 H.264 靠模方法。
- 熵编码：减少可能因编码引起的压缩损失。
- 智能编码：指定使用智能编解码器。



- 仅当编解码器为 H.264 并且压缩系统是 CBR 时，“智能编码”才会活动。

- 多播(SVNP)：指定使用 SVNP 协议。
 - IP 地址：输入可用于连接至 IPv4 网络的 IPv4 地址。
 - 端口：指定视频通信端口。
 - TTL：为 SVNP 数据包设置 TTL。
- 多播(RTP)：指定 RTP 协议的使用。
 - IP 地址：输入可用于连接至 IPv4 网络的 IPv4 地址。
 - 端口：指定视频通信端口。
 - TTL：可为 RTP 数据包设置 TTL。

设置屏幕

什么是视频组长度？


视频组（视频对象平面组）是用于 H.264 压缩的视频帧，表示从初始图像帧（关键帧）到下一个图像帧的帧集合。视频组由 2 类帧组成：I 帧和 P 帧。

I 帧是压缩的基本帧，也称为关键帧，包含一幅完整图像的数据。P 帧仅包含与先前的 I 帧相比发生了变化的数据。

可为 H.264 CODEC 指定 1 与 15 之间的值。

视频设置

1. 从设置菜单，选择 <Video & Audio ()> 选项卡。
2. 单击 <视频设置>。
3. 选择 <视频源> 模式。
 - 翻转模式：使摄像机捕捉的图像上下翻转。
 - 镜像模式：使摄像机捕捉的图像水平翻转。
4. 选择视频类型。
5. 指定隐私区域。
6. 完成后，请单击 [应用 ()]。



设置加密区域

可以指定为了您的隐私将保护摄像机视频的某些区域。


1. 将其设置为 <启用>。
2. 完成后，请单击 [应用 ()]。
3. 选择所需加密区域的遮挡类型和颜色。
 - 矩形：将光标放在视频的一个点上，然后将它拖到所需的任何部分。
可以重叠加密区域设置的矩形。
 - 四边形：在视频上选择 4 个顶点（形成四边形）。
4. 单击视频屏幕并拖动以设置所需区域。
5. 提供名称，然后按 [确定]。
6. 如果您要删除列表中的某个区域，请选择区域，然后单击 [删除 ()]。



音频设置

可以配置摄像机的音频源的 I/O 设置。

1. 从设置菜单，选择 <Video & Audio ()> 选项卡。
2. 单击 <音频设置>。
3. 设置音频输入值。
 - 来源：设置音频输入。
 - 线：线性输入音频输入。
 - 外部麦克风：3.5mm 插孔类型，有源主动外部麦克风。
 - 内置麦克风：摄像机中内置的麦克风。（仅适用于 SNB-7002）
 - 为外部麦克风供电：如果连接的外部麦克风没有独立的电源，请选中此选项以将摄像机设置为向连接的外部麦克风供电。如果选择了 <外部麦克风>，则此选项可用。




设置屏幕

- 编解码器：选择要使用的编解码器。
 - G.711：一种音频编解码器标准，它使用 64 Kbps PCM（脉冲编码调制）编码。ITU 标准音频编解码器，对于在 PSTN 网络或通过 PBX 进行的数字语音传输而言已经足够。
 - G.726：ITU 标准音频编解码器，将可变比特率 40/32/24/16 Kbps 的 ADPCM（自适应差分脉冲编码调制）应用于 64 Kbps PCM 编码。
 - 比特率：如果使用 G.726 编解码器，则设置比特率以区分压缩比。
 - 增益：设置输入音频增益。
4. 设置音频输出级别。
- 启用：设置是否使用音频输出。
 - 增益：设置输出音频增益。
5. 完成后，请单击 [应用 ()]。

摄像机 设置

可以根据摄像机所在的环境更改摄像机设置。

1. 从设置菜单，选择 <Video & Audio ()> 选项卡。
2. 单击 <摄像机 设置>。
3. 根据需要配置以下各项的设置：
SSDR、白平衡、背光补偿、曝光、附加菜单、OSD、时间信息
4. 完成后，请单击 [应用 ()]。
 - 如果在更改设置之后经过一定的时间未按 [应用 ()] 按钮（超时：240 秒），则不会应用您的更改。



SSDR (Samsung Super Dynamic Range) 设置

在明暗差异非常大的场景中，您可以单独增加黑暗区域的亮度以调整总亮度。

1. 选择 <SSDR>。
2. 将 <模式> 设置为 <开>。
3. 配置必要的 <SSDR 级别> 和 <级别> 设置。
 - SSDR 级别：调整动态范围的级别。
 - 范围：选择动态范围的幅度区域。



白平衡设置

在任何照明条件下，可以基于白色校正图像颜色。

1. 选择 <白平衡>。
2. 选择 <白平衡模式>。
 - 自动追踪白平衡：自动校正摄像机视频的颜色。
 - 手动：可以手动调整摄像机视频的红色和蓝色增益。
 - 自动白平衡：根据当前照明条件和屏幕模式进行优化，校正摄像机视频的颜色。要获得当前照明的最佳条件，请将摄像机的焦点对准白纸，然后按 [自动白平衡设置] 按钮。
 - 室外：根据室外环境进行优化，自动校正摄像机的视频颜色。
 - 室内：根据室内环境进行优化，自动校正摄像机的视频颜色。



 在自动白平衡模式中，如果要保留当前图像的白平衡级别，请单击 [自动白平衡 设置] 按钮。


-  在下列情况下，白平衡可能无法正常工作：
在这种情况下，请切换到“自动白平衡”模式。
- 如果物体的周围环境条件超出测试校正范围
示例) 清澈的蓝天，日落
 - 如果物体的周围环境黑暗
 - 如果摄像机的焦点直接面对荧光灯照明，或者如果将摄像机安装在照明变化的位置，白平衡操作可能会不稳定。

设置屏幕

背光补偿设置

可以手动在视频上指定想要的区域和设置要更清晰显示的区域。

1. 选择 **<背光补偿>**。
2. 将 **<模式>** 设置为 **<背光补偿>**。
3. 设置 **<背光补偿级别>**。
可以更改等级以调整监视区域的亮度。
4. 设置 **<顶部>**、**<底部>**、**<左边>**、**<右边>** 等级以指定目标区域。



强光抑制设置

当摄像机面对强光（如路灯或汽车前灯）时，您可以遮盖暴露区域以免其饱和。

1. 选择 **<背光补偿>**。
 2. 将 **<模式>** 设置为 **<强光抑制>**。
 3. 设置 **<强光抑制级别>** 和 **<色调>**。
 - 强光抑制级别：调整亮度等级以便在特定条件下消除进入的高光。
 - 色调：调整高光区域的遮掩色调。
- 在晚上操作时，仅当在低照度环境中进入高光越过区域时，才会激活此功能。
- 在晚上工作时，强光抑制将不会在太亮或太暗场景中工作。




宽动态设置

将在同时存在明亮和阴暗区域的场景中显示尖锐的物件图像。

1. 选择 <背光补偿>。
2. 将 <模式> 设置为 <宽动态>。
3. 指定 <宽动态级别>。



- 如果应用宽动态，可能会在较亮和较暗区域之间的边界发现杂讯。



例)



<宽动态关>



<宽动态开>

曝光设置 (SNB-7002)

可以调整摄像机的曝光级别。

1. 选择 <曝光>。
2. 选择各项并进行正确设置。
 - 亮度：调整屏幕亮度。
 - 快门 模式：调整摄像机的电子快门。
 - 自动（电子快门控制）：根据环境亮度自动调整快门速度。
 - 如果 <镜头> 设置为 <手动>，则会激活此项。




设置屏幕

- 手动：手动调整摄像机的快门速度。
 - 在 2M 模式中，您可以选择 1/30 与 1/12000 秒之间的一个值，在 3M 模式中，您可以选择 1/20 与 1/12000 秒之间的一个值。
- 防闪烁：如果您遇到由于频率与环境照明不匹配导致屏幕闪烁的情况，请选择此功能。
- 快门速度：手动控制快门速度。
- SSNR3：指定使用降噪。
- SSNR3 级别：调整降噪级别。
- 感光度模式：自动感应夜间或低对比度场景的黑暗程度，相应地延长累积时间，以获得明亮清晰的图像。
 - 如果您将快门模式设置为手动/防闪烁，将取消激活感光度模式。
 - 感光度因数越大，屏幕就变得越明亮，但可能会导致重影或视频延迟。
- 感光度倍率：在低对比度场景中工作条件设置为自动模式。
- 镜头：选择此项以将摄像机的镜头模式设置为手动或自动。
 - DC(自动)：如果您使用 DC 镜头，请选择此项。仅自动调整光圈，但焦点无法自动控制。
 - 手动：如果您使用手动调整光圈和焦点的镜头，请选择此项。
- 自动增益模式：选择自动增益控制模式。
调整视频的增益值（即，具体地说，在低对比度场景中录制且亮度级别低于正常）以控制视频亮度。

曝光设置 (SND-7082/SND-7082F/SNV-7082)

可以调整摄像机的曝光级别。

1. 选择 <曝光>。
2. 选择各项并进行正确设置。
 - 亮度：调整屏幕亮度。
 - 快门模式：调整摄像机的电子快门。
 - 自动（电子快门控制）：根据环境亮度自动调整快门速度。
 - 如果 <光圈> 设置为 <手动>，则会激活此项。




- 手动：手动调整摄像机的快门速度。
 - 在 2M 模式中，您可以选择 1/30 与 1/12000 秒之间的一个值，在 3M 模式中，您可以选择 1/20 与 1/12000 秒之间的一个值。
- 防闪烁：如果您遇到由于频率与环境照明不匹配导致屏幕闪烁的情况，请选择此功能。
- 快门速度：手动控制快门速度。
- SSNR3：指定使用降噪。
- SSNR3 级别：调整降噪级别。
- 感光度模式：自动感应夜间或低对比度场景的黑暗程度，相应地延长累积时间，以获得明亮清晰的图像。
 - 如果您将快门模式设置为手动/防闪烁，将取消激活感光度模式。
 - 感光度因数越大，屏幕就变得越明亮，但可能会导致重影或视频延迟。
- 感光度倍率：在低对比度场景中将工作条件设置为自动模式。
- 光圈：您可以根据偏好设置为自动或手动。
 - 自动：自动设置光圈自适应环境照明和快门速度。
 - 手动：将光圈设置为其最大孔径。
- 自动增益模式：选择自动增益控制模式。
调整视频的增益值（即，具体地说，在低对比度场景中录制且亮度级别低于正常）以控制视频亮度。

附加菜单设置 (SNB-7002)

1. 选择 <附加菜单>。

2. 选择各项并进行正确设置。

- 日夜：可以切换该模式以调整黑白层次及颜色。
 - 彩色：始终以彩色显示视频。
 - 黑白：始终以黑白显示视频。
 - 自动：在正常的白天时间以彩色模式显示，并在夜晚低对比度场景中切换为黑白模式。



- 如果从 <曝光> 将自动增益模式设置为 <关>，则会相应地禁用自动白天/夜晚模式。
- 外部：通过警报输入端口与外部 IR 同步时，控制彩色和黑色图像模式。

设置屏幕

- 等待时间：这是为了能够在白天模式和夜晚模式之间切换，每个适用照明条件要保持的时间。
- 转换条件：指定触发顺序操作的照明的时间间隔。
- D/N 之后 简单对焦：切换白天/夜晚模式之后，自动执行焦点调节。
将红外线镜头与摄像机配合使用时，请将此项设置为 <关>。



- 设置 <D/N 之后 简单对焦> 选项可能会导致在特定条件下错误地进行焦点调节。有关更多详细信息，请参阅“**对焦 设置**”。(第 89 页)


- 锐利度 模式：调整图像的总清晰度。
如果选择了 <开>，您可以调整图像的清晰度。
- 锐利度 级别：级别越高，图像轮廓变得越清晰和越清楚。
- 伽玛：调整图像的对比度。
- 色调 级别：调整图像的颜色等级。
- 警报输入：根据报警传感器的开/闭状态，将图像设置为彩色或黑白。
 - 如果将日夜模式设置为外部，则会禁用事件-报警输入页面上的报警输入功能。

附加菜单设置 (SND-7082/SND-7082F/SNV-7082)

1. 选择 <附加菜单>。

2. 选择各项并进行正确设置。

- 日夜：可以切换该模式以调整黑白层次及颜色。
 - 彩色：始终以彩色显示视频。
 - 黑白：始终以黑白显示视频。
 - 自动：在正常的白天时间以彩色模式显示，并在夜晚低对比度场景中切换为黑白模式。
 - 如果从 <曝光> 将自动增益模式设置为 <关>，则会相应地禁用自动白天/夜晚模式。
- 外部：通过警报输入端口与外部 IR 同步时，控制彩色和黑色图像模式。



- 等待时间：这是为了能够在白天模式和夜晚模式之间切换，每个适用照明条件要保持的时间。
- 转换条件：指定触发顺序操作的照明的时间间隔。
- 锐利度 模式：调整图像的总清晰度。
如果选择了 <开>，您可以调整图像的清晰度。
- 锐利度 级别：级别越高，图像轮廓变得越清晰和越清楚。
- 伽玛：调整图像的对比度。
- 色调 级别：调整图像的颜色等级。
- 警报输入：根据报警传感器的开/闭状态，将图像设置为彩色或黑白。
■ 如果将日夜模式设置为外部，则会禁用事件-报警输入页面上的报警输入功能。

OSD 设置

1. 选择 <OSD>。

2. 选择各项并进行正确设置。

- 摄像机名称：指定是否在屏幕上显示摄像机标题。
■ 最多可输入 15 个字符作为标题。
- 摄像机名称 位置 X, Y：指定摄像机标题在屏幕上显示的坐标。



时间信息设置

1. 选择 <时间信息>。

2. 选择各项并进行正确设置。

- 时间显示：指定在屏幕上使用时间显示。
- 日期模式：指定将在视频屏幕上显示的日期格式。
- 位置 X, Y：指定在屏幕上显示时间的位置。
- 显示工作日：指定在屏幕上显示使用日期。




设置屏幕

智能编码 设置

设置来自摄像机的所需视频进入区域作为 ROI 区域，并指定该区域的探测灵敏度。

1. 从设置菜单，选择 <Video & Audio ()> 选项卡。
2. 单击 <智能编码 设置>。
3. 设置图像质量。
ROI区域将以指定的质量显示。
4. 使用鼠标指针选择所需区域，然后将它拖动到所需大小。
 - 最多可以指定 5 个独立的区域。
5. 要取消区域的所有设置，请单击 [清除()] 按钮。
6. 完成后，请单击 [应用 ()]。




- 如果在 <视频配置文件> 中将智能编解码器设置为 <关>，则它不活动。(第 75 页)

对焦 设置 (SNB-7002)

您可以调节视频图像的焦点。

1. 从设置菜单，选择 <Video & Audio (🔧)> 选项卡。
2. 单击 <对焦 设置>。
3. 设置焦点。（如何使用简单对焦）
 - 1) 焦点初始化：将焦点调节恢复为默认定位截距。
 - 2) 对焦（调节镜头）：手动调节镜头的焦点（远 <-> 近）并确保图像清晰。
 - 3) 简单对焦：单击 [] 按钮以自动适合焦点。




-  在下列情况下，简单对焦模式可能无法正确调适：
- 在简单对焦模式下突然切换至物体（突然移动、出现或消失）
 - 在简单对焦模式下亮度彻底改变
 - 图像对比度低
 - 摄像机前面或周围有强光源时
- 如果焦点不适当的离开上面提到的位置，请使用 [-100, -10, -1, +1, +10, +100] 按钮来手动调节焦点。
- 在难以应用简单对焦的情况下，请尝试使用手动对焦模式。

设置屏幕

对焦 设置 (SND-7082/SND-7082F/SNV-7082)

您可以调节视频图像的焦点和缩放比率。

1. 从设置菜单，选择 <Video & Audio (🔍)> 选项卡。
2. 单击 <对焦 设置>。
3. 设置焦点和缩放。
 - 对焦：手动调节镜头焦点（远 <-> 近）。
 - 缩放：手动调节缩放（广角 <-> 望远）。
 - 简单对焦：单击 [🔍] 按钮以自动适合焦点。




- 在下列情况下，简单对焦模式可能无法正确调适：
 - 在简单对焦模式下突然切换至物体（突然移动、出现或消失）
 - 在简单对焦模式下亮度彻底改变
 - 图像对比度低
 - 摄像机前面或周围有强光源时
- 如果焦点不适当的离开上面提到的位置，请使用 [-100, -10, -1, +1, +10, +100] 按钮来手动调节焦点。
- 在难以应用简单对焦的情况下，请尝试使用手动对焦模式。

网络设置

接口

1. 从设置菜单，选择 <Network ()> 选项卡。
 2. 单击 <接口>。
 3. 根据需要设置 <接口> 和 <IPv6 设置>。
 - IP 类型：选择 IP 连接类型。
 - 手动：指定 IP 地址、子网掩码、网关、DNS1 和 DNS2。
 - DHCP：指定 DNS1 和 DNS2。
 - PPPoE：指定 DNS1、DNS2、ID 和密码。
 - 如果将其设置为 <手动>，则应手动指定 IP、子网掩码、网关和 DNS 1 和 2。
 - MAC 地址：显示 MAC 地址。
 - IP 地址：显示当前 IP 地址。
 - 子网掩码：显示所设 IP 的 <子网掩码>。
 - 网关：显示所设 IP 的 <网关>。
 4. 配置 <IPv6 设置>。
 - 设置为 <使用> 以使用 IPv6 地址。
 - DNS1/DNS2：显示 DNS（域名服务）服务器地址。
 - 默认：使用默认 IPv6 地址。
 - DHCP：显示并使用从 DHCP 服务器获取的 IPv6 地址。
 - 手动：手动输入 IP 地址和网关并使用它。
 5. 完成后，请单击 [应用 ()]。
- ! ■ IP 寻址系统将默认为 DHCP。如果未找到 DHCP 服务器，将自动恢复之前的设置。
- 完成编辑之后，单击 [应用 ()] 以应用更改，并且浏览器将会退出。一小会之后，使用更改后的 IP 再次连接。



设置屏幕

端口

1. 从设置菜单，选择 <Network ()> 选项卡。
2. 单击 <端口>。
3. 在端口菜单的每个项目中键入所需信息。

- 0 至 1023 之间的端口范围和端口 3702 都不可用。

- HTTP 端口：用于通过 Web 浏览器访问摄像机的 HTTP 端口。
默认值是 80(TCP)。

- 安全策略不允许将 Safari 和 Google Chrome 浏览器的 HTTP 端口设置为 65535。

- 设备端口：设置用于根据 Samsung 协议传输视频信号的端口。
- RTSP 端口：用于以 RTSP 模式传输视频，默认值为 554。
- Web 流端口：用于将视频传输到 Web 查看器，默认值为 4520。
- Silverlight 政策端口：Silverlight 用于允许获得网络连接；默认为 943。




- 如果更改了 HTTP 端口，则浏览器会退出。

此后，地址应该在 IP 后面包含新分配的 HTTP 端口。

例) IP 地址：192.168.1.100，HTTP 端口：分配了 8080 → http://192.168.1.100:8080
(如果将 HTTP 端口设置为 80，则不需要指定端口号)

- 网络流的端口范围是介于 4502 和 4534 之间。如果设备端口在此有效范围内，则指定的网络流端口应与设备端口相同。
- 无法更改摄像机的网络流/Silverlight 策略服务器端口。

4. 完成后，请单击 [应用 ()]。



DDNS

DDNS 是动态域名服务的缩写，该服务将摄像机的 IP 地址转换成一般主机名，以便用户可以轻松记住它。

1. 从设置菜单，选择 <Network ()> 选项卡。

2. 单击 <DDNS>。


3. 选择 <DDNS> 连接类型。

4. 根据所选类型键入 DDNS 项目。

- Samsung DDNS：如果使用 Samsung Techwin 提供的 DDNS 服务器，请选择此项。
 - 产品 ID：输入向 Samsung DDNS 服务注册的产品 ID。
 - Quick connect：当与支持 UPnP（通用即插即用）的路由器配合使用时，它会自动设置端口转发。
- 公共 DDNS：使用公共 DDNS 服务器时，可从所提供的公共 DDNS 服务器中选择一个。
 - 服务：选择所需的公共 DDNS 服务的服务器。
 - 主机名：输入向 DDNS 服务器注册的主机的名称。
 - 用户名：输入 DDNS 服务的用户名。
 - 密码：输入 DDNS 服务的密码。

5. 完成后，请单击 [应用 ()]。

 选择选择了 <Quick connect>，请确保选择 Samsung DDNS 服务。




设置屏幕

注册 DDNS

向 Samsung DDNS 注册您的产品

1. 访问 iPOLiS 网站 (www.samsungipolis.com) 并用已注册的帐户登录。




2. 从顶部的菜单栏，选择 <DDNS SERVICE> - <MY DDNS>。



3. 单击 [PRODUCT REGISTRATION]。
4. 输入产品 ID。
 - 必须重复检查您输入的 ID。




5. 选择 <CLASSIFICATION> 并指定 <MODEL NUMBER>。
6. 指定产品位置及说明（如有必要）。
7. 单击 [REGISTRATION]。
产品将添加至产品列表，您可以对其进行检查。



在摄像机设置中连接至 Samsung DDNS

1. 从 DDNS 设置页面，将 <DDNS> 设置为 <Samsung DDNS>。
2. 提供向 DDNS 网站注册产品 ID 时指定的 <产品 ID>。
3. 单击 [应用 (应用)]。
成功进行连接后，屏幕上将显示消息 <(成功)>。



在摄像机设置中配置公共 DDNS

1. 打开 DDNS 设置页面并为 <DDNS> 选择 <公共 DDNS>。
2. 输入相应站点的主机名、用户名和密码。
3. 单击 [应用 (应用)] 按钮。
如果正确建立连接，<(成功)> 将会出现。
4. 完成后，请单击 [应用 (应用)]。



- 要正确使用 DDNS 服务，需要 DDNS 设置和路由器的端口转发设置。
对于端口转发设置，请参阅“路由器端口设置”（第 60 页）

设置屏幕

IP 过滤

可以创建想要授予或拒绝访问权限的 IP 列表。

1. 从设置菜单，选择 **<Network (网络)>** 选项卡。

2. 单击 **<IP 过滤>**。

3. 选择 **<过滤类型>**。

- 拒绝：如果选择此项，将限制从添加至过滤列表的那些 IP 进行的访问。
- 允许：如果选择此项，将只接受从添加至过滤列表的那些 IP 进行的访问。

4. 单击 **[添加 (添加)]** 按钮。

将会创建 IP 列表。

5. 提供想要授予或拒绝访问权限的 IP。

输入 IP 地址和前缀时，可用的 IP 地址列表将出现在右侧过滤范围列中。




- 如果为 IP 过滤 选择了 **<允许>** 并且 **<接口>** 的 **<IPv6 设置>** 设为 **<使用>**，则应该分配当前计算机配置的 IPv4 和 IPv6 地址。
- 不能将用于当前设置的计算机的 IP 地址添加至 **<拒绝>**，应该将它添加至 **<允许>**。
- 只有设置为 **<使用>** 的 IP 地址才会显示在过滤器列中。

6. 从列表中选择要删除的 IP。

单击 **[删除 (删除)]** 按钮。

7. 完成后，请单击 **[应用 (应用)]**。



SSL

可以选择安全连接系统或安装公共证书用于此目的。

1. 从设置菜单，选择 <Network ()> 选项卡。


2. 单击 <SSL>。

3. 选择安全连接系统。

- 若要将使用 HTTPS 模式访问摄像机，您必须以 `https://<Camera_IP>` 形式键入摄像机的 IP 地址。

如果未在 Internet Explorer 中以 HTTPS 模式配置 Web Viewer 设置，请按如下所示编辑 Internet 选项：

<菜单 → 工具 → Internet 选项 → 高级 → 安全 → 取消选择 TLS 1.0 并选择 TLS 1.1、TLS 1.2>



4. 搜索要安装在摄像机上的公共证书。

要将证书安装在摄像机上，需要提供证书名称（可由用户随意分配）、认证机构颁发的证书文件以及密钥文件。

- 仅当安装了公共证书，<HTTPS (使用公共证书的安全连接模式)> 项目才会活动。

5. 完成后，请单击 [应用 ()]。

安装证书

1. 输入证书名称。
2. 选择要安装的证书文件及证书密钥，然后单击 [安装 ()] 按钮。

删除证书


1. 单击 [删除 ()] 按钮。
2. 要删除公共证书，应该在 <HTTP (不使用安全连接)> 或 <HTTPS (使用唯一证书的安全连接模式)> 模式下访问网络视频解码器。

设置屏幕

802.1X

连接网络时，您可以选择是否使用 802.1x 协议，然后安装证书。

1. 从设置菜单，选择 <Network ()> 选项卡。
2. 单击 <802.1x>。
3. 设置 <IEEE 802.1x 设置 (使用 EAP-TLS 的 EAPOL)>。
 - 启用 IEEE 802.1x：指定使用 802.1x 协议。
 - EAPOL 版本：选择版本 1 或 2。
 - 识别号：输入客户机证书 ID。
 - 密码：输入客户机专用密钥密码。
如果密钥文件未加密，则不需要输入密码。



❗ 如果连接的网络设备不支持 802.1x 协议，那么即使您设置了该协议，它也不会正常执行。

4. 安装/移除证书。
 - CA 证书：选择包含公共密钥的公共证书。
 - 客户端证书：选择包含客户端证书密钥的公共证书。
 - 客户端私钥：选择包含客户端私钥的公共证书。
5. 完成后，请单击 [应用 ()]。


安装/删除与 802.1x 相关的证书

1. 按每个项目的 [浏览 ()] 按钮并选择要安装的证书。
2. 如果未安装任何证书，则会看到“不可用”出现在所选项目旁边。
3. 按 [安装 ()] 按钮以开始安装，并在项目旁边显示消息“已安装”。
4. 按 [删除 ()] 按钮以删除证书。

QoS

您可以指定优先级以确保特定 IP 的传输率稳定。

1. 从设置菜单，选择 <Network ()> 选项卡。
2. 单击 <QoS>。
3. 单击 [添加 ()] 按钮。
将会创建 IP 列表。
4. 输入将应用 QoS 的 IP 地址。




- 
 - 默认前缀对于 IPv4 是 32；
对于 DSCP，默认值设置为 63。
 - 只能为设置为 <使用> 的 IP 地址设置优先级。
5. 从列表中选择要删除的 IP。
单击 [删除 ()] 按钮。
 6. 完成后，请单击 [应用 ()]。

SNMP

通过 SNMP 协议，系统或网络管理员可以监视远程站点上的网络设备，以及配置环境设置。

1. 从设置菜单，选择 <Network ()> 选项卡。
2. 单击 <SNMP>。
3. 指定 <SNMP>。
 - 启用 SNMP v1：SNMP V1 将处于活动状态。
 - 启用 SNMP v2c：SNMP V2 将处于活动状态。



- 读取社区：提供读取社区的名称，可在其中访问 SNMP 信息。
默认名称为 <public>。
- 写入社区：提供写入社区的名称，可在其中访问 SNMP 信息。默认名称为 <write>。

设置屏幕

- 启用 SNMP v3：SNMP V3 将处于活动状态。
 - 密码：指定 SNMP V3 的默认密码。默认密码是 <admin4321>。
 - 默认密码可能会向黑客线程公开，因此建议您在安装产品之后更改该密码。请注意，未更改密码导致的安全和其他相关问题，用户自己承担责任。
 - 密码长度应该为 8–16 个字符。

4. 完成后，请单击 [应用 ()]。



- 仅当安全连接模式是 HTTPS 时，才能设置 SNMP v3。请参阅“SSL”。(第 97 页)

事件设置

FTP / 电子邮件

可以配置 FTP/电子邮件服务器设置，以便在事件发生时可以将使用摄像机拍摄的图像传输到您的计算机。

1. 从设置菜单，选择 <Event ()> 选项卡。
2. 单击 <FTP / 电子邮件>。
3. 选择 <FTP 配置> 或 <电子邮件配置> 并输入/选择所需的值。
 - FTP 配置
 - 服务器地址：输入您将警报或事件图像传输到的 FTP 服务器的 IP 地址。
 - ID：输入用于登录 FTP 服务器的用户 ID。
 - 密码：输入用于登录 FTP 服务器的用户帐户密码。
 - 上传目录：指定警报或事件图像将传输到的 FTP 路径。



- 端口：FTP 服务器的默认端口为 21；但是，可以根据 FTP 服务器设置使用不同的端口号。
 - 被动方式：如果由于防火墙或 FTP 服务器设置需要以被动模式连接，请选择 <开>。
 - 电子邮件 配置
 - 服务器地址：输入您将警报或事件图像传输到的电子邮件服务器的 IP 地址。
 - 使用身份验证：选择是否使用身份验证。
 - SSL 使用：指定使用 SSL。
 - ID：输入用于登录电子邮件服务器的用户 ID。
 - 密码：输入用于登录电子邮件服务器的用户帐户密码。
 - 端口：电子邮件服务器的默认端口为 25；但是，可以根据电子邮件服务器设置使用不同的端口号。
 - 收件人：输入电子邮件收件人的地址。
 - 发件人：输入电子邮件发件人的地址。如果发件人地址不正确，来自发件人的电子邮件可能会被电子邮件服务器分类为垃圾邮件，这样可能不发送。
 - 主题：输入电子邮件的主题。
 - 正文：为邮件提供文本。将警报或事件图像附加至准备的电子邮件。
4. 完成后，请单击 [应用 ()]。

设置屏幕


存储器

可以为 SD 存储卡设置录制条件或使用、检查存储的数据的大小或格式化 SD 存储卡本身。

1. 从设置菜单，选择 <Event ()> 选项卡。
2. 单击 <存储器>。

在 SD 存储卡上进行录制

1. 检查存储卡的 <可用> 大小和 <总计> 大小。
2. 如果可用空间足够，请将设备设置为 <使用>。
否则，请检查已存储的数据，如果发现它们不重要，则单击 <格式化> 以格式化 SD 存储卡。
 - 如果您的 SD 内存卡写入缓慢，则每秒将只存储一帧。
 - 对于大容量的 SD 存储卡，格式化将相应变慢。
 - 设置为分辨率、比特率和帧速度的较高选项会提高产生的数据量。
当数据大小增大时，传输的视频只能以 1 fps 存储，即使您将录制质量设置为完全帧也是如此。
3. 指定存储操作。
 - 录制配置文件：显示录制配置文件的编解码器类型。
 - 覆盖：如果 SD 存储卡已满，这将删除旧数据并存储新数据代替。
 - 预先录制时间：指定警报发出之前的时间点；从该时间点开始，将传输图像。最多可以指定警报发出之前 5 秒。
 - 延迟录制时间：指定警报发出之后的时间点；将传输图像到指定的时间点为止。最多可以指定警报发出之后 120 秒。
 - 普通：以特定帧速率进行录制。
 - 事件：设置发生的特定事件的录制类型。
4. 指定 <标准录制设置>。
 - 始终：始终将录制的视频保存在 SD 存储卡中。
 - 如果设置为始终，则激活时间无法更改。
 - 仅预约时间：仅在指定星期几的指定时间录制。
 - [清除()]：重置全部设置。
5. 完成后，请单击 [应用 ()]。



警报输入

可以设置警报输入类型、激活时间和工作模式。

1. 从设置菜单，选择 <Event (🔔)> 选项卡。

2. 单击 <事件设置>。

3. 从 <事件操作设置> 中选择 <警报输入>。

4. 设置是否 <启用>。

5. 指定警报输入设置。

- 类型

- 常开：它通常是打开的，但是如果关闭，将触发警报。
- 常闭：它通常是关闭的，但是如果打开，将触发警报。

6. 指定 <激活时间>。

- 始终：当警报发出时，将始终检查。
当警报发出时，它将在运行的模式下激活。

- 如果设置为 <始终>，激活时间将无法更改。


- 仅预约时间：警报发出时，在一周指定的一天检查指定的时间长度。当警报发出时，它将在运行的模式下激活。

- [清除(🗑️)]: 重置全部设置。

7. 指定警报发出时将执行的操作。

- FTP：在警报输入设置中指定使用 FTP 传输。
- 电子邮件：在警报输入设置中指定电子邮件传输的使用。
- 录制：在警报输入设置中指定录制的使用。
- 警报输出：选择如果警报进入是否设置警报输出，并指定警报输出时间。

8. 完成后，请单击 [应用 (📌)]。




设置屏幕

时间计划

可以设置为根据计划以特定间隔保存视频数据，而不考虑事件的实际情况。


1. 从设置菜单，选择 <Event (🔔)> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <时间计划>。
4. 设置是否 <启用>。
5. 指定 <传输时间间隔>。
6. 指定 <激活时间>。
 - 始终：始终在设置的时间间隔内以运行的模式激活。
 - 仅预约时间：在指定的时间和日期定期以运行的模式激活。
7. 指定激活条件。
 - FTP：指定事件发生时 FTP 传输的使用。
8. 完成后，请单击 [应用 (🔧)]。



防拆检测

您可以设置为检测拆离尝试并触发事件，例如摄像机取景框方向突然发生变化、镜头被蒙住以及视频的其他整个场景变化。

1. 从设置菜单，选择 <Event (🔒)> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <防拆检测>。
4. 设置是否 <启用>。
5. 设置防拆检测灵敏度。
灵敏度越高，越能检测最小的拆离尝试。
6. 指定激活时间和激活条件。
 - 有关 <激活时间> 和 <动作> 的详细信息，请参阅“警报输入”。(第 103 页)
7. 完成后，请单击 [应用 (🔒)]。




- ❗ 在下列情况下，默认防拆检测功能可能无法正常工作：
- 在简单背景或低照度以及今晚情况下，可能会降低检测灵敏度。
 - 摄像机摇晃严重或照明激烈变化会导致错误地视为拆离。
 - 防拆检测可能会在拆离发生之后的一定时间（最多 5 秒）进行。
 - 一旦检测到拆离，摄像机将继续在特定稳定性时间（大约 5 秒）之后继续标准操作，在此稳定性期间不会执行任何检测。

设置屏幕

移动探测 / 视频分析

可将动作探测和视频分析的事件设置为触发事件信号输出。

1. 从设置菜单，选择 <Event (🔔)> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <移动探测 / 视频分析>。
4. 设置是否 <启用>。
5. 根据您的用途，从移动探测和智能视频分析中选择。
6. 设置 <灵敏度>、<大小> 和 <地区>。
选择 智能视频分析时，还需要设置 <分析>。
7. 设置是否使用 <探测规则重叠>。
检测到移动时，会在屏幕上以矩形标出其大小和位置。
 - 绿色：所有目标都检测为移动。
 - 红色：所有目标都检测为通过、进入或退出。
(彩色标记保持 1 ~ 2 秒钟。)
 - 蓝色：所有目标都检测为出现/消失事件。
(彩色标记保持 3 ~ 5 秒钟。)
8. 指定激活时间和激活条件。
 - 有关 <激活时间> 和 <动作> 的详细信息，请参阅“警报输入”。(第 103 页)
9. 完成后，请单击 [应用 (🔧)]。

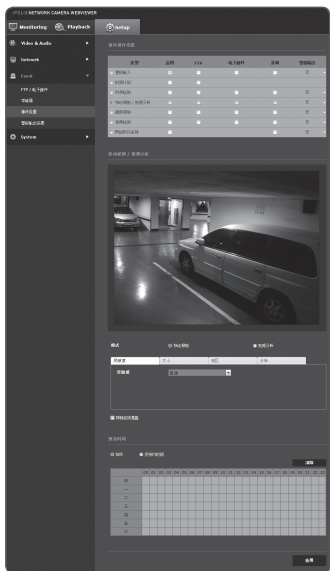



- 移动探测和视频分析不能同时使用。
- 在使用之前，设置最小和最大移动大小以适合要探测的所需迁移移动范围。
- 设置适合要探测物体的最大和最小探测大小。
- 物体的探测到大小与实际大小可能会有差异，视其形状而定。
- 从屏幕顶部开始，最多可以显示 16 个物体。
- 如果摄像机拍摄到较近的对象，视频分析功能可能会变弱。
- 在以下情况下，移动探测和智能视频分析功能可能会下降或导致不正确的探测结果。
 - 拍摄对象的颜色或亮度与背景类似。
 - 摄像机视野边界区域周围的小活动。
 - 由于场景变化、照明快速变化或其他原因，多次移动随机连续发生。
 - 固定的对象在一个位置连续不断地移动。
 - 位置变化不大的移动，例如逐渐靠近摄像机或从摄像机中慢慢消失。
 - 移动的对象离摄像机太近
 - 对象隐藏在其他对象后面。
 - 2 个或更多对象重叠，或者 1 个对象被分成多个对象。
 - 对象速度太快（若要探测，一个对象应该在邻近的帧之间重叠）。
 - 由于太阳直射、照明或头灯等强光而出现反射 / 视线模糊 / 阴影。
 - 在大雪、大雨、大风或黎明 / 黄昏环境中。

设置屏幕

使用移动探测

它会探测满足灵敏度、大小和区域指定的所有条件的移动。

1. 选择移动探测模式。

2. 选择 <灵敏度> 选项卡以设置灵敏度级别。可以设置传感器的灵敏度以检测监视视频中脱离背景的移动。

- 在可以清楚区分物体与背景的情况下，将此项设置为低灵敏度级别。在难以区分物体的相反情况下，如低照度环境中，请将此项设置为高级别。


3. 选择 <大小> 选项卡。

您可以限制要探测的移动的最小/最大大小。

- 最小大小：要设置被探测移动的最小大小，请选择 <最小大小>，然后使用鼠标指向屏幕上的位置并拖动至所需大小。
- 最大大小：要设置被探测移动的最大大小，请选择 <最大大小>，然后使用鼠标指向屏幕上的位置并拖动至所需大小。

- 无法探测小于指定最小大小或大于最大大小的移动。为了避免大小杂讯导致的意外探测，请根据环境相应地设置最小/最大大小。

请注意，相同位置处的相同移动在其检测大小方面可能会检测到不同；建议您在设置最小/最大探测大小时，考虑并包括允差。

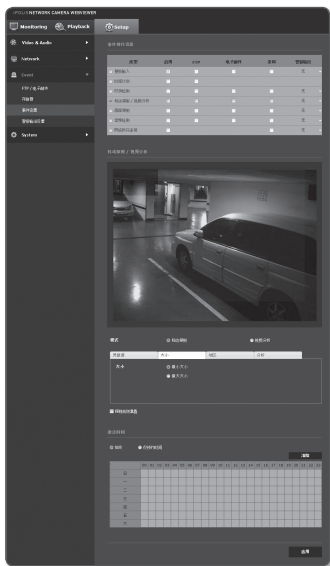

4. 选择 <地区> 选项卡。

您可以指定屏幕上要包括到探测中或从探测中排除的区域。


您最多可以指定 4 个区域。

- **检测区域：**将整个屏幕设置为从探测中排除，并将指定的区域添加为移动探测区域。使用鼠标来拖动以指定首选区域作为移动探测区域。
- **非测试区域：**将整个屏幕设置为移动探测区域，并排除指定的区域作为不探测的区域。使用鼠标来拖动以指定首选区域作为非测试区域。

5. 要删除区域，请右键单击屏幕以打开弹出窗口上下文菜单，然后选择删除和 [确定] 按钮。

 将会删除所有已定义的区域。

6. 完成后，请单击 [应用 ()]。

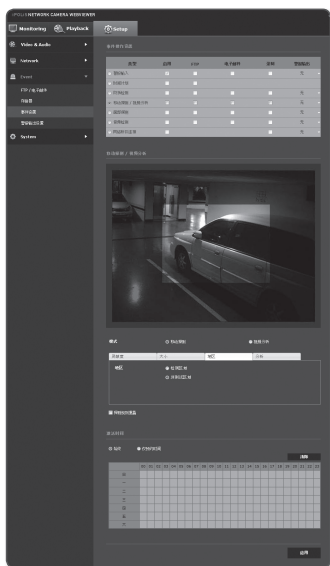


设置屏幕

使用智能视频分析

它会检测满足灵敏度、大小和区域以及事件条件规则指定的所有条件的事件。


1. 选择视频分析模式。
2. 设置 <灵敏度>、<大小> 和 <地区>。
有关设置的详细信息，请参阅“使用移动探测”。（第 108 ~ 109 页）
3. 选择 <分析> 选项卡。
4. 选择视频分析类型。
 - 通过、进入/退出：检测通过、进入或退出用户指定的虚拟线的移动。
 - 出现（消失）：检测从用户定义区域或整个屏幕区域上出现或消失的移动。
5. 设置视频分析规则。
有关设置的详细信息，请参阅“设置视频分析规则”。（第 111 ~ 112 页）
6. 设置是否使用 <探测规则重叠>。
虚拟线和区域的指定规则会显示在监视页面上。
7. 完成后，请单击 [应用 ()]。

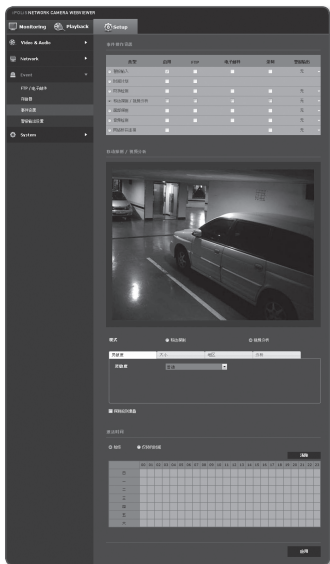

设置视频分析规则

通过

1. 将类型设置为 **<通过、进入/退出>**。
2. 将事件规则设置为 **<基于虚拟线的规则>**。
3. 在屏幕上，单击虚拟线的首选起点和终点，然后一个弹出菜单将会出现。
4. 选择所需规则：
 - 右：检测在虚拟线上从左到右运动的移动。
 - 左：检测在虚拟线上从右到左运动的移动。
5. 单击 **[确定]**。
6. 要除去已定义的规则，请右键单击显示的虚拟线以打开弹出上下文菜单，然后选择 **[删除]** 按钮。



进入/退出

1. 将类型设置为 **<通过、进入/退出>**。
2. 将事件规则设置为 **<基于已定义区域的规则>**。
3. 在屏幕上，单击四个顶点以定义检测区域，一个弹出窗口将会出现。
4. 选择所需规则：
 - 进入：检测中心点从区域外部进入已定义区域的移动物体的移动。
 - 出去：检测中心点从已定义区域内部移动到外部的移动物体的移动。
5. 单击 **[确定]**。
6. 要除去已定义的规则，请右键单击区域的显示的虚内部线以打开弹出上下文菜单，然后选择 **[删除]** 按钮。




设置屏幕

出现（消失）

1. 将分析类型设置为 **<出现 (消失)>**。
2. 选择所需事件规则：
 - 基于已定义区域的规则：它会检测出现在区域中并且在未通过区域边界时保留一定时间段的出现物体，以及相反情况下存在于区域中的物体消失。在屏幕上，单击四个顶点以定义检测区域。
 - 从弹出菜单中选择 **[出现(消失)]**。
 - 基于整个区域的规则：它会检测出现在整个屏幕中并保留一定时间的出现物体的事件，以及相反情况下存在于屏幕中的物体消失。

右键单击屏幕以打开弹出上下文菜单，然后选择 **[出现(消失)]**。

3. 单击 **[确定]**。
4. 要除去已定义的规则，请右键单击区域的显示的虚内部线或屏幕以打开弹出上下文菜单，然后选择 **[删除]** 按钮。




面部探测

可以设置为探测已识别的面部并相应地触发事件。

1. 从设置菜单，选择 <Event ()> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <面部探测>。
4. 设置是否 <启用>。
5. 选择 <灵敏度> 选项卡以设置灵敏度级别。
 - 当灵敏度提高时，面部探测变得更靠近并且细腻。
6. 选择 <地区> 选项卡并在屏幕上拖动以定义所需的检测区域。您最多可以指定 4 个检测区域。



- 面部探测的条件如下所示：
- 面部探测只能应用于具有 QVGA (320x240) 分辨率的视频。
- 要能够探测，面部区域至少应该大于 20~40 像素。
- 在一帧图像中最多可以探测到 35 个面部，不能探测更多。

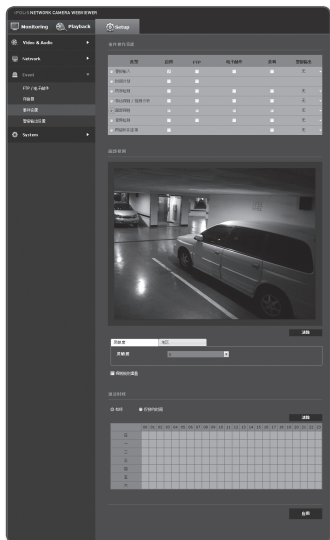

7. 要删除已定义的区域，请在选中 地区 选项卡时单击 [重设] 按钮。
8. 设置是否使用 <探测规则重叠>。
探测到面部时，会在屏幕上以矩形标记其位置和大小。
9. 指定激活时间和激活条件。
 - 有关 <激活时间> 和 <动作> 的详细信息，请参阅“警报输入”。(第 103 页)
10. 完成后，请单击 [应用 ()]。

设置屏幕


音频检测

可以设置为探测超过指定音量的声音并相应地触发事件。

1. 从设置菜单，选择 <Event (🔔)> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <音频检测>。
4. 设置是否 <启用>。
5. 选择音频探测的音量。
音量越低，可探测到的声音变化越小。
6. 指定激活时间和激活条件。
 - 有关 <激活时间> 和 <动作> 的详细信息，请参阅“警报输入”。(第 103 页)
7. 完成后，请单击 [应用 (🔧)]。




- 如果探测到的音量太低，请在 <音频设置> 中将音频输入增益设置为较高级别。



网络断开连接

您可以接收并保存物理上断开连接的网路的事件。

1. 从设置菜单，选择 <Event (🔔)> 选项卡。
2. 单击 <事件设置>。
3. 从 <事件操作设置> 中选择 <网络断开连接>。
4. 设置是否 <启用>。
5. 指定激活时间和激活条件。
 - 有关 <激活时间> 和 <动作> 的详细信息，请参阅“警报输入”。(第 103 页)
6. 完成后，请单击 [应用 (🔧)]。



警报输出设置

1. 从设置菜单，选择 <Event (🔔)> 选项卡。

2. 单击 <警报输出设置>。

3. 设置摄像机的警报输出类型。

- 如果您更改警报输出类型，监视页面上的警报输出按钮和事件设置页面上显示的警报输出类型会相应地更改。

- 类型

- 常开：将传感器或警报输入设备“开路”状态视为正常，如果变成“闭路”状态则触发警报事件。
- 常闭：将传感器或警报输入设备“闭路”状态视为正常，如果变成“开路”状态则触发警报事件。

4. 设置警报输出按钮。


- 模式：设置警报输出方式。

- 以下是在禁用时单击警报输出按钮时操作之间的差异。

- 脉冲：在持续时间（切换间隔）指定的时间段内激活，然后自动变成不活动。
- 活动/不活动：它保持为已激活，直到用户再次单击按钮以使它不活动为止。

- 转换条件：如果模式设置为脉冲，则设置保持激活的警报持续时间：1 到 15 秒。

5. 完成后，请单击 [应用 (应用)]。



设置屏幕

系统设置

产品信息

1. 从设置菜单，选择 <System ()> 选项卡。
2. 单击 <产品信息>。
3. 检查摄像机信息，或根据网络环境提供详细信息。
 - 型号：产品的型号名称。
 - 序列号：产品序列号。
 - 设备名称：提供将在现场屏幕上显示的设备名称。
 - 位置：指定安装摄像机的位置。
 - 描述：提供有关摄像机位置的详细信息。
 - 备忘录：提供有关摄像机的说明以便更好地理解。
 - 语言：选择 Web 查看器 OSD 的首选语言。



- 默认语言设置为 <English>。

4. 完成后，请单击 [应用 ()]。




日期和时间

1. 从设置菜单，选择 <System ()> 选项卡。
2. 单击 <日期和时间>。
3. 指定将应用于摄像机的时间和日期。
 - 当前系统时间：显示系统的当前时间设置。
 - 时区：指定本地基于 GMT 的时区。
 - 使用夏令时：如果选中、将在指定的时间段内将时间设置成比当地时区早一小时。
仅在应用夏令时的地区显示此选项。
 - 系统时间设置：指定将应用于您的系统的时间和日期。
 - 手动：手动指定时间。
 - 与 NTP 服务器同步：与指定的服务器地址的时间同步。
 - 与 PC 查看器同步：设置为连接计算机的时间。
4. 完成后，请单击 [应用 ()]。



- 如果您选择 <与 PC 查看器同步>，则应该将标准时区设置为与计算机中的当前时区相同。



设置屏幕

用户

1. 从设置菜单，选择 <System ()> 选项卡。

2. 单击 <用户>。

3. 提供必要的用户信息。

- 管理员密码更改：更改管理员的密码。

- 默认密码可能会向黑客线程公开，因此建议您在安装产品之后更改密码。
请注意，不更改密码导致的安全和其他相关问题，用户自己承担责任。

- 访客设置：如果选择了 <允许访客访问>，则访客帐户可以访问 Web Viewer 屏幕，但是只能查看 Live Viewer 屏幕。

- 访客帐户的 ID/密码是 <guest/guest>，无法更改。

- 认证设置：如果您选择了 <启用不需要认证的 RTSP 连接>，则您不需要登录就可以访问 RTSP 并查看视频。

- 当前用户：如果您选择了 <使用>，则您可以设置或更改用户权限。

- 管理员可以设置音频输入、音频输出和警报输出许可权。

- 配置文件：如果您选择了 <默认>，则您只能查看默认配置文件视频；如果选择了 <全部>，则您可以查看全部配置文件视频。




- 可用于允许使用 ONVIF 功能的已注册用户的 ONVIF 功能限制为已授予许可权的那些用户。

- 视频传输和更改视频信息：将配置文件设置为 <全部>，并设置 音频输入 和 音频输出。


- 视频传输、更改视频信息、视频输出：将配置文件设置为 <全部>，并根据偏好选择其余内容。

4. 完成后，请单击 [应用 ()]。





升级 / 重启

1. 从设置菜单，选择 <System ()> 选项卡。
2. 单击 <升级 / 重启>。
3. 选择所需的项目并进行适当设置。
 - 升级：执行系统升级。
 - 出厂默认设置：将系统重置为出厂默认值。
 - 网络参数之外：重置除网络设置之外的所有设置。
 - 全部：重置包括摄像机设置在内的所有设置。(但是，将不重置日志信息)
 - 如果重置摄像机，IP 寻址系统将默认为 DHCP。如果未找到 DHCP 服务器，将自动恢复之前的设置。
 - 配置备份与恢复：在执行恢复流程之前，备份当前的系统设置。备份或恢复之后，系统会自动重新启动。
 - 重新启动：重新启动系统。



执行升级

1. 单击 [升级]。
2. 单击 [浏览] 并指定要升级的文件。
3. 单击 [发送]。
4. “升级”对话框出现，其底部将显示进度。
5. 完成升级之后，浏览器将会退出，并且摄像机将重新启动。




设置屏幕



- 升级过程大约需要 20 分钟。
如果强行终止升级流程，升级将无法正确完成。
- 在重新启动系统期间，不能使用 Web Viewer 进行访问。
- 可以从 Samsung 网站(www.samsungcctv.com) 下载最新版本。

备份当前设置

1. 单击 **[备份]**。
另存为对话框将出现。
2. 指定备份路径及正确的文件名，然后单击 **[保存(S)]**。
备份文件将以“.bin”格式保存到指定的路径。




恢复备份设置

1. 要恢复备份设置，请单击 **[恢复]**。
2. 选择备份文件，然后单击 **[打开(Q)]**。




- 如果执行备份或恢复，Web 浏览器将关闭，且摄像机将重新启动。



日志

可以检查系统日志或事件日志。

1. 从设置菜单，选择 <System ()> 选项卡。
2. 单击 <日志>。
3. 选择日志类型。
 - 系统：您可以检查系统日志，其中记录了所有系统更改，包括时间信息。
 - 事件：可以检查事件日志，包括时间信息。
4. 从右边的日志列表，选择要搜索的项目。
 - 如果在左上角的下拉列表中选择了 <All>，将显示适用日志类型的所有日志。
5. 如果一页无法显示所有可用的日志，请使用底部按钮以移至前一个、下一个或最后项目。



- 如果要查看日志的详细信息，请单击日志右列中的 [信息()]；日志信息将显示在底部窗格中。
- 每页显示 15 个日志，最新的日志显示在顶部。
- 事件/系统日志列表最多可包含 1000 个日志；之后，每当创建新日志时，将删除最旧的现有日志。

设置屏幕


配置文件访问

您可以检查配置文件信息。

1. 从设置菜单，选择 <System (⚙️)> 选项卡。

2. 单击 <配置文件访问>。

- 配置文件访问：显示新添加的配置文件的详细信息。
 - 配置文件：显示新添加的编解码器的信息。
 - 比特率(kbps)：显示实际比特率和设置的比特率。
 - 帧率(fps)：显示实际帧速率和设置的帧速率。
 - ATC(%)：显示 ATC 状态。
 - 并行用户计数：显示访问配置文件的并行用户数。
- 当前用户：显示有关用户访问 Web Viewer 的信息并显示监视视频。
 - 配置文件：显示用户访问的配置文件的名称。
 - IP 地址：显示当前用户的 IP 地址。
 - 比特率(kbps)：显示当前比特率。
 - 网络连接状态：您可以检查网络连接状态。



- 要检查有关当前使用的配置文件的信息，请再次单击 <配置文件访问> 以刷新它。

附录

规格

项目		说明		
		SNB-7002	SND-7082(F)	SNV-7082
视频	成像设备	1/3 英寸 3.1M PS CMOS		
	总像素数	2,064(水平) X 1,578(垂直)		
	有效像素数	2,052(水平) X 1,536(垂直)		
	扫描系统	逐行扫描		
	最低照度	彩色：0.7 勒克司 (F1.2, 50IRE)、0.011 勒克司 (感光度 60X) 黑白：0.07 勒克司 (F1.2, 50IRE)、0.001 勒克司 (感光度 60X)		
	S/N 比率	50dB		
	视频输出	CVBS: 1.0 Vp-p / 75Ω 复合 (DIP 连接器类型), 704x480(N), 704x576(P), 供安装使用	CVBS: 1.0 Vp-p / 75Ω 复合, 704x480(N), 704x576(P), 供安装使用	
镜头	焦距(变焦比率)	-	3~8.5 毫米 (2.8X) 电动变焦	
	最大孔径比	-	F1.2	
	视野角度	-	H: 87.3°(广角)~31.2°(望远), V: 64.5°(广角)~23.4°(望远)	
	最短物距	-	0.5 m	
	聚焦控制	手动, 简单对焦, 白天和夜晚		
	变焦移动速度	-		
	镜头类型	手动/直流自动光圈	直流自动光圈	
	安装类型	C/CS	内置板类型	

附录

项目		说明		
		SNB-7002	SND-7082(F)	SNV-7082
平移/倾斜/旋转	平移范围	-	0°~355°	
	平移速度	-		
	倾斜范围	-	0°~90°	
	倾斜速度	-		
	旋转范围	-	0°~355°	
	预设	-		
	预设准确度	-		
	自动跟踪	-		
操作	摄像机标题	关/开（最多显示 15 个字符）		
	日夜	自动（ICR）/彩色/黑白/外部		
	背光补偿	关/背光补偿/强光抑制		
	宽动态	关 / 开 (96dB) 3M 模式：20fps，2M 模式：30fps		
	对比度增强	SSDR（Samsung 超级动态范围）（关/开）		
	数字降噪	SSNRIII（2D+3D 噪音过滤）（关/开）		
	数字图像稳定器	-		
	移动探测	关/开（4 个矩形区域）		
	隐私遮挡	关/开（1 个 4 点多边形区域 + 16 个矩形区域）		

项目		说明		
		SNB-7002	SND-7082(F)	SNV-7082
操作	感光度(倍率)	关/自动 (2X ~ 60X)		
	AGC(自动增益控制)	关/低/中/高		
	白平衡	自动追踪白平衡/自动控制白平衡/手动/室内/室外		
	电子快门速度	自动/防闪烁/手动 (1/30 ~ 12,000秒)		
	数字变焦	-		
	翻转/镜像	关/开		
	智能视频分析	音频检测, 面部检测, 场景变化, 虚拟线, 进入/退出, 出现/消失		
	警报 I/O	数字输入 1个 / 数字输出 1个		
	遥控器接口	-		
	RS-485 协议	-		
	警报触发	移动探测, 视频分析, 传感器输入, 网络断开连接		
	报警事件	• 通过 FTP 上传文件, 电子邮件 • 通过电子邮件和 TCP 通知 • 在网络断开连接的情况下进行本地存储器 (SD/SDHC) 录制		
网络	以太网	RJ-45 (10/100BASE-T)		
	视频压缩格式	H.264, MJPEG		
	分辨率	<3M 模式> 2048x1536 / 1920x1080 / 1600x1200 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180 <2M 模式> 1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180		

附录

项目		说明	
		SNB-7002	SND-7082(F) SNV-7082
网络	最大帧速率	<3M 模式> * H.264：所有分辨率都是最高 20 fps * MJPEG：800x600 ~ 320x180 - 20 fps, 1024x768 ~ 1920x1080 - 15 fps, 2048x1536 - 10 fps <2M 模式> * H.264：所有分辨率都是最高 30fps * MJPEG：800x600 ~ 320x180 - 30 fps, 1024x768 ~ 1920x1080 : 15 fps	
	智能编码	是（基于所有区域的方法）	
	视频质量调整	H.264：压缩级别、目标比特率级别控制 MJPEG：质量级别控制	
	比特率控制方法	H.264：CBR 或 VBR MJPEG：VBR	
	流能力	多流（最多 6 个配置文件）	
	音频 I/O	外接麦克风/线性输入， 线性输出， 内置麦克风	外接麦克风/线性输入，线性输出
	音频压缩格式	G.711 μ -law, G.726 (16Kbps, 24Kbps, 32Kbps, 40Kbps)	
	音频通信	双向	
	IP	IPv4、IPv6	
	协议	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, RTCP	
安全	HTTPS(SSL) 登录验证 分类登录验证 IP 地址过滤 用户访问日志 802.1X 身份验证方法		

项目		说明		
		SNB-7002	SND-7082(F)	SNV-7082
网络	流方法	单播/多播		
	最大用户访问量	单播模式下 10 个用户		
	内存插槽	SD/SDHC 内存插槽		
	ONVIF 一致	是		
	语言	英语、法语、德语、西班牙语、意大利语、中文、韩文、俄语、日语、瑞典语、丹麦语、葡萄牙语、捷克语、波兰语、土耳其语、罗马尼亚语、塞尔维亚语、荷兰语、克罗地亚语、匈牙利语、希腊语、挪威、芬兰		
	Web 查看器	支持的操作系统：Windows XP / Vista / 7、Mac OS X 10.7 或更高版本 支持的浏览器：Internet Explorer 7.0 或更高版本、Firefox 9.0 或更高版本、Chrome 15.0 或更高版本、Safari 5.1 或更高版本		
	中央管理软件	NET-i viewer		
环境	工作温度/湿度	-10°C ~ +55°C (+14°F ~ +131°F) / 相对湿度 20% ~ 80%		PoE : -35°C ~ +55°C (-40°F ~ +131°F) / ~ 90% 相对湿度 直流 12V : -10°C ~ +55°C (+14°F ~ +131°F) / 相对湿度 20% ~ 80% * 采用 PoE 电源输入时，加热器才工作。 * 启动之后，通过 PoE 供电在 -40° 温度下工作
	进入保护	-		IP 66 级
	防破坏	-		IK10



附录

项目		说明		
		SNB-7002	SND-7082(F)	SNV-7082
电气	输入电压	直流 12V、PoE(IEEE802.3af)		
	功耗	最大 9.0W (直流 12V, PoE(class3))		最大 9.0W (直流 12V, PoE (class3) - 加热器关) 最大 12.95W(PoE (class3) - 加热器开)
机械	颜色/材料	机身：深灰色/铝	机身：象牙色/塑料	机身：象牙色/铝
	尺寸	宽 72.0 (2.83") x 高 60.0 (2.36") x 深 150.5 (5.93") 不包括突起	SND-7082： 直径133.0 x 高129.4 毫米 SND-7082F： 直径159.9 x 高 125.0 毫米 (天花板安装型)	直径160.0 x 高134.5 毫米
	重量	468g	SND-7082：635g SND-7082F：700g	1,420g

产品视图

SNB-7002


单位：毫米(英寸)

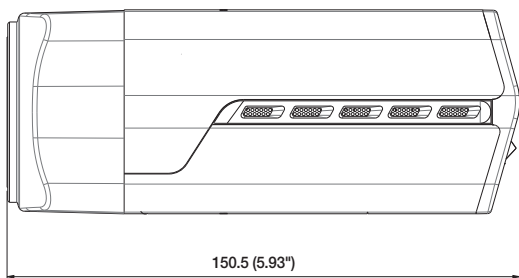

附录


SND-7082

单位 : 毫米(英寸)

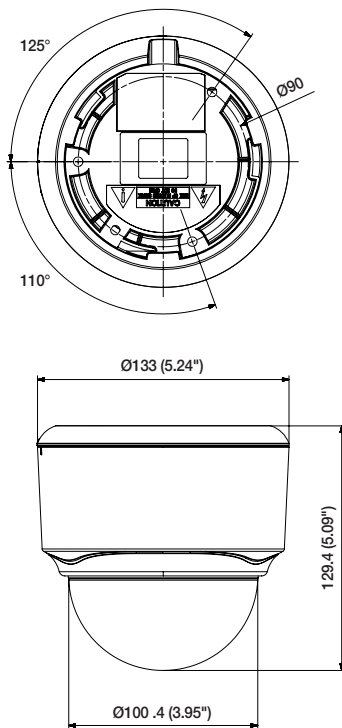

SND-7082F


单位: 毫米(英寸)

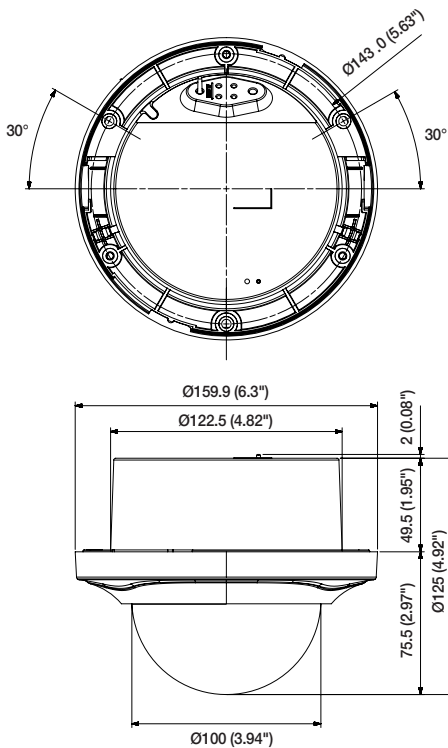

附录

SNV-7082

单位 : 毫米(英寸)

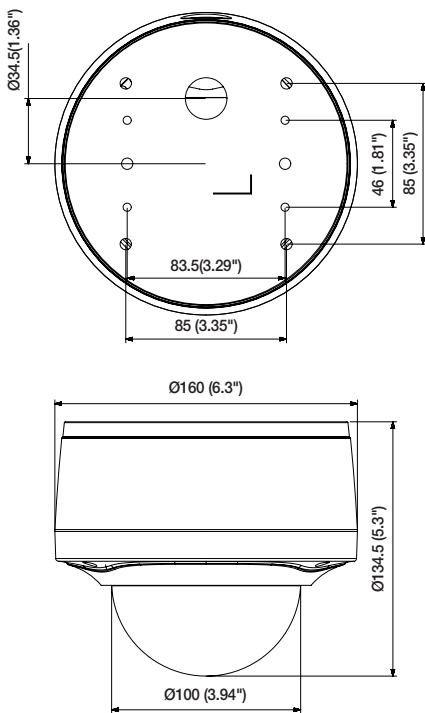

故障排除

故障	解决方法
无法使用网络浏览器访问摄像头。	• 检查摄像头的网络设置 是否正确。 • 检查网络缆线是否正确 连接。 • 若使用 DHCP 连接、检查摄像头是否能够 无故障地获得动态 IP 地址。 • 若摄像头与宽带路由器连接、确认是否 正确设置了端口转发。
查看器在监视期间断开。	• 已连接的查看器在摄像头或网络配置发生更改时会断开。 • 检查所有的网络连接。 • 若摄像头通过 PPPoE 网络进行连接，查看器在网络状况不佳的情况下可能会断开。
无法使用 IE 7.0 的选项卡浏览器连接系统。	• 在尝试使用选项卡浏览器连接系统时、使用的 cookie 信息相同、这导致了连接时出错。因此、打开新的浏览器窗口、而非使用选项卡浏览器来连接系统。
IP 安装程序未检测到连接至网络的摄像头。	• 关闭 PC 上的防火墙设置、再次搜索摄像头。
图像重叠。	• 检查是否将多个摄像头应当设置的不同地址设为了同一多播地址。多个摄像头共享同一地址可能会导致图像的重叠。
无图像出现。	• 如果传输方法设置为多播，请检查摄像头所连接的 LAN 中是否有路由器支持多播。

附录

故障	解决方法
<事件设置> 的 <移动探测/视频分析> 设置为 <开>, 但是我没有收到通知电子邮件。即使分析事件已发生也是如此。	- 按以下顺序验证设置： A. 检查 <日期和时间> 设置。 B. <移动探测 / 视频分析> 应设置为 <启用>。 C. 检查 <事件操作设置> 菜单的 <电子邮件> 选项是否选择为使用。
即使我未使用 <移动探测视频分析>, 是否也可以定义事件规则?	是, 可以。无论智能视频分析设置如何, 您均可设置事件规则。
即使在产生智能视频分析事件时, 在报警输出口也找不到信号。	检查警报输出口设置。
无法录制到 SD 内存卡。	- 检查内存卡是否有缺陷。 - 检查内存卡的写保护标签是否设置为“LOCK”。
插入了 SD 内存卡, 但摄像机操作不正常。	- 检查是否以正确的方向插入内存卡。不能保证本摄像机装置能正常使用由其他设备格式化的内存卡 - 在 <Setup> → <Event> → <存储器> 菜单中, 再次格式化内存卡。
无法格式化 SD 内存卡。	检查内存卡的写保护标签是否设置为“LOCK”。

Open Source Announcement

GPL/LGPL software license

The software included in this product contains copyrighted software that is licensed under the GPL/LGPL. You may obtain the complete Corresponding Source code from us for a period of three years after our last shipment of this product by sending email to help.cctv@samsung.com

If you want to obtain the complete Corresponding Source code in the physical medium such as CD-ROM, the cost of physically performing source distribution might be charged.

- GPL S/W
 - Base Kernel, Busybox, Sysvinit, dosfstools, DSP-SW-package
- LGPL S/W
 - glibc, Inetutils

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software-- to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too. When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have.

You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights. We protect your rights with two steps:

(1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software. Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all. The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

Version 2, June 1991 Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin St

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License.

The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following :

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange ; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange ; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.) The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License.

However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works.

These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all.

For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system ; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.
10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION. 12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found. one line to give the program's name and an idea of what it does.

Copyright (C)yyyy name of author

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail. If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author

Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type 'show w'. This is free software, and you are welcome to redistribute it under certain conditions; type 'show c' for details.

The hypothetical commands 'show w' and 'show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than 'show w' and 'show c'; they could even be mouse-clicks or menu items-- whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program 'Gnomovision' (which makes passes at compilers) written by James Hacker. signature of Ty Coon, 1 April 1989 Ty Coon, President of Vice This General Public License does not permit incorporating

your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is

Lwihcaetn ysoeu want to do, use the GNU Lesser General Public instead of this License.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works. The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users.

We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors.

You can apply it to your programs, too. When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights. Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it. For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions. Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special anger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free. We precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you".

"Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying. An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature

that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or generalpurpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source. The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you. Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program. You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so. A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d. A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work. A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made. If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying

occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network. Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions. When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission. Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors. All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but

permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying. If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms. Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11). However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation. Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice. Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License. An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts. You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version". A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License. Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party. If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid. If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it. A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license

- (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or
- (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007. Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation. If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program. Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR

A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301

USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed. [This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages—typically libraries—of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below. When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights. We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library. To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license. Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library.

The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom.

The Lesser General Public License permits more lax criteria for linking other code with the library. We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries.

However, the Lesser License provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, nonfree programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to

gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in nonfree programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and

the wherewithal to run that program using a modified version of the Library. The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".) "Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- The modified work must itself be a software library.
- You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful. (For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.) These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library. In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices. Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy. This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.) Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications. You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
 - b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
 - c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
 - d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
 - e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy. For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.
7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.
14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found. One line to give the library's name and an idea of what it does.

Copyright (C) year name of author

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA Also add information on how to contact you by electronic and paper mail. You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names: Yoyodyne, Inc., hereby disclaims all copyright interest in the library 'Frob' (a library for tweaking knobs) written by James Random Hacker. signature of Ty Coon, 1 April 1990 Ty Coon, President of Vice.

Open SSL LICENSE

Copyright (c) 1998-2006 The OpenSSL Project. All rights

reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"
4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.

6. Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. This product includes cryptographic software written by Eric Young (eyay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLEAY License

Copyright (C) 1995-1998 Eric Young (eyay@cryptsoft.com)

All rights reserved. This package is an SSL implementation written by Eric Young (eyay@cryptsoft.com). The implementation was written so as to conform with Netscapes SSL. This library is free for commercial and non-commercial use as long as the following conditions are aheared to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com). Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed. If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

"This product includes cryptographic software written by Eric Young (eyay@cryptsoft.com)" The word 'cryptographic' can be left out if the rouines from the library being used are not cryptographic related :-).

4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement: "This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG "AS IS AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The licence and distribution terms for any publically available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution licence [including the GNU Public Licence.

BSD License

Some software components of this product incorporate source code covered under the BSD license as follows.

Component Name	License	URL
net-snmp-5.4	BSD	http://www.net-snmp.org/about/license.html
lighttpd 1.4.25	BSD 2.0	http://www.opensource.org/licenses/bsd-license.html
Game-ws	BSD 2.0	
MiniUPnP Project Client	BSD 2.0	

lighttpd is a secure, fast, compliant, and very flexible webserver that has been optimized for high-performance environments. It has a very low memory footprint compared to other web servers and takes care of cpuload. Its advanced feature-set (FastCGI, CGI, Auth, Output-

Compression, URL-Rewriting and many more) make lighttpd the perfect webserver-software for every server that suffers load problems. Simple Network Management Protocol (SNMP) is an Internet standard protocol for managing devices on IP networks. It is used mostly in network management systems to monitor the devices attached to the network for conditions that need administrative attention. Net-SNMP is a suite of applications used to implement SNMP v1, SNMP v2c and SNMP v3 using both IPv4 and IPv6. For more additional information, send email to help.cctv@samsung.com.

Copyright (C) 2004, Kneschke, incremental

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met :

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the 'incremental' nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 1998-2001 University College London

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted provided that the following conditions are met :

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the Computer Science Department at University College London.
4. Neither the name of the University nor of the Department may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHORS AND CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 1991, 1993 The Regents of the University of California.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the Regents of the University of California nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2006, Creative Labs Inc

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the Creative Labs nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2005-2012, Thomas BERNARD

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Thomas BERNARD nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Various copyrights apply to this package, listed in various separate parts below. Please make sure that you read all the parts.

Part 1: CMU/UCD copyright notice: (BSD like)

Copyright 1989, 1991, 1992 by Carnegie Mellon University
Derivative Work - 1996, 1998-2000

Copyright 1996, 1998-2000 The Regents of the University of California

All Rights Reserved

Permission to use, copy, modify and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU and The Regents of the University of California not be used in advertising or publicity pertaining to distribution of the software without specific written permission.

CMU AND THE REGENTS OF THE UNIVERSITY OF CALIFORNIA DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL CMU OR THE REGENTS OF THE UNIVERSITY OF CALIFORNIA BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM THE LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Part 2: Networks Associates Technology, Inc copyright notice (BSD)

Copyright (c) 2001-2003, Networks Associates Technology, Inc

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following

disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy Neither the name of the Networks Associates Technology, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 3: Cambridge Broadband Ltd. copyrightnotice (BSD)

Portions of this code are copyright (c) 2001-2003, Cambridge Broadband Ltd.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy The name of Cambridge Broadband Ltd. may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 4: Sun Microsystems, Inc. copyright notice

(BSD)

Copyright (c) 2003 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A.

All rights reserved.

Use is subject to license terms below. This distribution may include materials developed by third parties. Sun, Sun Microsystems, the Sun logo and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy Neither the name of the Sun Microsystems, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 5: Sparta, Inc copyright notice (BSD)

Copyright (c) 2003-2009, Sparta, Inc

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy Neither the name of Sparta, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 6: Cisco/BUPTNIC copyright notice (BSD)

Copyright (c) 2004, Cisco, Inc and Information Network

Center of Beijing University of Posts and Telecommunications.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy Neither the name of Cisco, Inc, Beijing University of Posts and Telecommunications, nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 7: Fabasoft R&D Software GmbH & Co KG copyright notice (BSD)

Copyright (c) Fabasoft R&D Software GmbH & Co KG, 2003oss@fabasoft.com

Author: Bernhard Penz

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy The name of Fabasoft R&D Software GmbH & Co KG or any of its subsidiaries, brand or product names may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 8: Apple Inc. copyright notice (BSD)

Copyright (c) 2007 Apple Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. Neither the name of Apple Inc. ("Apple") nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY APPLE AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APPLE OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Part 9: ScienceLogic, LLC copyright notice(BSD)

Copyright (c) 2009, ScienceLogic, LLC

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: yy Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. yy Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. yy Neither the name of ScienceLogic, LLC nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The MIT License

Some software components of this product incorporate source code covered under the MIT license as follows

MIT License 2.0

- Acewidget, bettermeans, jquery-ui, libxml, libxml2, Mesa3D-MesaLib,mwEmbed,OpenGL Samples Pack, Wide Studio, xorg-server

Copyright (c) 2011, The Dojo Foundation

Copyright 2010, AUTHORS.txt (<http://jqueryui.com/about>)

Dual licensed under the MIT or GPL Version 2 licenses.

- <http://jquery.org/license>

- <http://docs.jquery.com/UI/Widget>

Copyright Daniel Veillard

Copyright Igor Zlatovic <igor@zlatkovic.com>

Copyright Aleksey Sanin

Copyright Gary Pennington <Gary.Pennington@uk.sun.com>

Copyright Alfred Mickautsch <alfred@mickautsch.de>

Copyright Bjorn Reese <bjorn.reese@systematic.dk>

Copyright Joel W. Reed

Copyright William Brack <wbrack@mmm.com.hk>

Copyright (c) 2007-2010 The Khronos Group Inc.

Copyright Atish Kumar Patra

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The Independent JPEG Group's JPEG Software

The software included in this product contains copyrighted software that is licensed under the JPEG license.

- JPEG license
- Code project - Generating Outline OpenGL, Libjpeg

This distribution contains the sixth public release of the Independent JPEG Group's free JPEG software. You are welcome to redistribute this software and to use it for any purpose, subject to the conditions under **LEGAL ISSUES**, below.

Serious users of this software (particularly those incorporating it into larger programs) should contact IJG at jpeg-info@uunet.uu.net to be added to our electronic mailing list. Mailing list members are notified of updates and have a chance to participate in technical discussions, etc.

This software is the work of Tom Lane, Philip Gladstone, Jim Boucher, Lee Crocker, Julian Minguijon, Luis Ortiz, George Phillips, Davide Rossi, Guido Vollbeding, Ge' Weijers, and other members of the Independent JPEG Group.

IJG is not affiliated with the official ISO JPEG standards committee.

LEGAL ISSUES

=====

In plain English:

1. We don't promise that this software works. (But if you find any bugs, please let us know!)
2. You can use this software for whatever you want. You don't have to pay us.
3. You may not pretend that you wrote this software. If you use it in a program, you must acknowledge somewhere in your documentation that you've used the IJG code.

In legalese:

The authors make NO WARRANTY or representation, either express or implied, with respect to this software, its quality, accuracy, merchantability, or fitness for a particular purpose. This software is provided "AS IS", and you, its user, assume the entire risk as to its quality and accuracy.

This software is copyright (C) 1991-1998, Thomas G. Lane. All Rights Reserved except as specified below.

Permission is hereby granted to use, copy, modify, and distribute this software (or portions thereof) for any purpose, without fee, subject to these conditions:

- (1) If any part of the source code for this software is distributed, then this README file must be included, with this copyright and no-warranty notice unaltered; and any additions, deletions, or changes to the original files must be clearly indicated in accompanying documentation.
- (2) If only executable code is distributed, then the accompanying documentation must state that "this software is based in part on the work of the Independent JPEG Group".
- (3) Permission for use of this software is granted only if the user accepts full responsibility for any undesirable consequences; the authors accept NO LIABILITY for damages of any kind.

These conditions apply to any software derived from or based on the IJG code, not just to the unmodified library. If you use our work, you ought to acknowledge us.

Permission is NOT granted for the use of any IJG author's name or company name in advertising or publicity relating to this software or products derived from it. This software may be referred to only as "the Independent JPEG Group's software".

We specifically permit and encourage the use of this software as the basis of commercial products, provided that all warranty or liability claims are assumed by the product vendor.

`ansi2knr.c` is included in this distribution by permission of L. Peter Deutsch, sole proprietor of its copyright holder, Aladdin Enterprises of Menlo Park, CA. `ansi2knr.c` is NOT covered by the above copyright and conditions, but instead by the usual distribution terms of the Free Software Foundation; principally, that you must include source code if you redistribute it. (See the file `ansi2knr.c` for full details.) However, since `ansi2knr.c` is not needed as part of any program generated from the IJG code, this does not limit you more than the foregoing paragraphs do.

The Unix configuration script "configure" was produced with GNU Autoconf. It is copyright by the Free Software Foundation but is freely distributable. The same holds for its supporting scripts (`config.guess`, `config.sub`, `ltconfig`, `ltmain.sh`). Another support script, `install-sh`, is copyright by M.I.T. but is also freely distributable.

It appears that the arithmetic coding option of the JPEG spec is covered by patents owned by IBM, AT&T, and Mitsubishi. Hence arithmetic coding cannot legally be used without obtaining one or more licenses. For this reason, support for arithmetic coding has been removed from the free JPEG software. (Since arithmetic coding provides only a marginal gain over the unpatented Huffman mode, it is unlikely that very many implementations will support it.) So far as we are aware, there are no patent restrictions on the remaining code.

The IJG distribution formerly included code to read and write GIF files. To avoid entanglement with the Unisys LZW patent, GIF reading support has been removed altogether, and the GIF writer has been simplified to produce "uncompressed GIFs". This technique does not use the LZW algorithm; the resulting GIF files are larger than usual, but are readable by all standard GIF decoders.

We are required to state that

"The Graphics Interchange Format(c) is the Copyright property of CompuServe Incorporated. GIF(sm) is a Service Mark property of CompuServe Incorporated."

Mozilla Public License

Since we, at Samsung Techwin, used the Mozilla Firefox component without modifying the source code according to the MOZILLA Public license 1.1, we are not obliged to provide the source code of the corresponding component.

- Version 1.1

1. Definitions.

1.0.1. "Commercial Use" means distribution or otherwise making the Covered Code available to a third party.

1.1. "Contributor" means each entity that creates or contributes to the creation of Modifications.

1.2. "Contributor Version" means the combination of the Original Code, prior Modifications used by a Contributor, and the Modifications made by that particular Contributor.

1.3. "Covered Code" means the Original Code or Modifications or the combination of the Original Code and Modifications, in each case including portions thereof.

1.4. "Electronic Distribution Mechanism" means a mechanism generally accepted in the software development community for the electronic transfer of data.

1.5. "Executable" means Covered Code in any form other than Source Code.

1.6. "Initial Developer" means the individual or entity identified as the Initial Developer in the Source Code notice required by Exhibit A.

1.7. "Larger Work" means a work which combines Covered Code or portions thereof with code not governed by the terms of this License.

1.8. "License" means this document.

1.8.1. "Licensable" means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently acquired, any and all of the rights conveyed herein.

1.9. "Modifications" means any addition to or deletion from the substance or structure of either the Original Code or any previous Modifications. When Covered Code is released as a series of files, a Modification is:

- A. Any addition to or deletion from the contents of a file containing Original Code or previous Modifications.
- B. Any new file that contains any part of the Original Code or previous Modifications.

1.10. "Original Code" means Source Code of computer software code which is described in the Source Code notice required by Exhibit A as Original Code, and which, at the time of its release under this License is not already Covered Code governed by this License.

1.10.1. "Patent Claims" means any patent claim(s), now owned or hereafter acquired, including without limitation, method, process, and apparatus claims, in any patent Licensable by grantor.

1.11. "Source Code" means the preferred form of the Covered Code for making modifications to it, including all modules it contains, plus any associated interface definition files, scripts used to control compilation and installation of an Executable, or source code differential comparisons against either the Original Code or another well known, available Covered Code of the Contributor's choice. The Source Code can be in a compressed or archival form, provided the appropriate decompression or de-archiving software is widely available for no charge.

1.12. "You" (or "Your") means an individual or a legal entity exercising rights under, and complying with all of the terms of, this License or a future version of this License issued under Section 6.1. For legal entities, "You" includes any entity which controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. Source Code License.

2.1. The Initial Developer Grant. The Initial Developer hereby grants You a world-wide, royalty-free, non-exclusive license, subject to third party intellectual property claims:

- (a) under intellectual property rights (other than patent or trademark) Licensable by Initial Developer to use, reproduce, modify, display, perform, sublicense and distribute the Original Code (or portions thereof) with or without Modifications, and/or as part of a Larger Work; and
- (b) under Patents Claims infringed by the making, using or selling of Original Code, to make, have made, use, practice, sell, and offer for sale, and/or otherwise dispose of the Original Code (or portions thereof).
- (c) the licenses granted in this Section 2.1(a) and (b) are effective on the date Initial Developer first distributes Original Code under the terms of this License.
- (d) Notwithstanding Section 2.1(b) above, no patent license is granted: 1) for code that You delete from the Original Code; 2) separate from the Original Code; or 3) for infringements caused by: i) the modification of the Original Code or ii) the combination of the Original Code with other software or devices.

2.2. Contributor Grant. Subject to third party intellectual property claims, each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license

- (a) under intellectual property rights (other than patent or trademark) Licensable by Contributor, to use, reproduce, modify, display, perform, sublicense and distribute the Modifications created by such Contributor (or portions thereof) either on an unmodified basis, with other Modifications, as Covered Code and/or as part of a Larger Work; and
- (b) under Patent Claims infringed by the making, using, or selling of Modifications made by that Contributor either alone and/or in combination with its Contributor Version (or portions of such combination), to make, use, sell, offer for sale, have made, and/or otherwise dispose of: 1) Modifications made by that Contributor (or portions thereof); and 2) the combination of Modifications made by that Contributor with its Contributor Version (or portions of such combination).
- (c) the licenses granted in Sections 2.2(a) and 2.2(b) are effective on the date Contributor first makes Commercial Use of the Covered Code.

(d) Notwithstanding Section 2.2(b) above, no patent license is granted: 1) for any code that Contributor has deleted from the Contributor Version; 2) separate from the Contributor Version; 3) for infringements caused by: i) third party modifications of Contributor Version or ii) the combination of Modifications made by that Contributor with other software (except as part of the Contributor Version) or other devices; or 4) under Patent Claims infringed by Covered Code in the absence of Modifications made by that Contributor.

3. Distribution Obligations.

3.1. Application of License. The Modifications which You create or to which You contribute are governed by the terms of this License, including without limitation Section 2.2. The Source Code version of Covered Code may be distributed only under the terms of this License or a future version of this License released under Section 6.1, and You must include a copy of this License with every copy of the Source Code You distribute. You may not offer or impose any terms on any Source Code version that alters or restricts the applicable version of this License or the recipients' rights hereunder. However, You may include an additional document offering the additional rights described in Section 3.5.

3.2. Availability of Source Code. Any Modification which You create or to which You contribute must be made available in Source Code form under the terms of this License either on the same media as an Executable version or via an accepted Electronic Distribution Mechanism to anyone to whom you made an Executable version available; and if made available via Electronic Distribution Mechanism, must remain available for at least twelve (12) months after the date it initially became available, or at least six (6) months after a subsequent version of that particular Modification has been made available to such recipients. You are responsible for ensuring that the Source Code version remains available even if the Electronic Distribution Mechanism is maintained by a third party.

3.3. Description of Modifications. You must cause all Covered Code to which You contribute to contain a file documenting the changes You made to create that Covered Code and the date of any change. You must include a prominent statement that the Modification is derived, directly or indirectly, from Original Code provided by the Initial Developer and including the name of the Initial Developer in (a) the Source Code, and (b) in any notice in an Executable version or related documentation in which You describe the origin or ownership of the Covered Code.

3.4. Intellectual Property Matters

(a) Third Party Claims. If Contributor has knowledge that a license under a third party's intellectual property rights is required to exercise the rights granted by such Contributor under Sections 2.1 or 2.2, Contributor must include a text file with the Source Code distribution titled "LEGAL" which describes the claim and the party making the claim in sufficient detail that a recipient will know whom to contact. If Contributor obtains such knowledge after the Modification is made available as described in Section 3.2, Contributor shall promptly modify the LEGAL file in all copies Contributor makes available thereafter and shall take other steps (such as notifying appropriate mailing lists or newsgroups) reasonably calculated to inform those who received the Covered Code that new knowledge has been obtained.

(b) Contributor APIs. If Contributor's Modifications include an application programming interface and Contributor has knowledge of patent licenses which are reasonably necessary to implement that API, Contributor must also include this information in the LEGAL file.

(c) Representations.

Contributor represents that, except as disclosed pursuant to Section 3.4(a) above, Contributor believes that Contributor's Modifications are Contributor's original creation(s) and/or Contributor has sufficient rights to grant the rights conveyed by this License.

3.5. Required Notices. You must duplicate the notice in Exhibit A in each file of the Source Code. If it is not possible to put such notice in a particular Source Code file due to its structure, then You must include such notice in a location (such as a relevant directory) where a user would be likely to look for such a notice. If You created one or more Modification(s) You may add your name as a Contributor to the notice described in Exhibit A. You must also duplicate this License in any documentation for the Source Code where You describe recipients' rights or ownership rights relating to Covered Code. You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Code. However, You may do so only on Your own behalf, and not on behalf of the Initial Developer or any Contributor. You must make it absolutely clear that any such warranty, support, indemnity or liability obligation is offered by You alone, and You hereby agree to indemnify the Initial Developer and every Contributor for any liability incurred by the Initial Developer or such Contributor as a result of warranty, support, indemnity or liability terms You offer.

3.6. Distribution of Executable Versions. You may distribute Covered Code in Executable form only if the requirements of Section 3.1-3.5 have been met for that Covered Code, and if You include a notice stating that the Source Code version of the Covered Code is available under the terms of this License, including a description of how and where You have fulfilled the obligations of Section 3.2. The notice must be conspicuously included in any notice in an Executable version, related documentation or collateral in which You describe recipients' rights relating to the Covered Code. You may distribute the Executable version of Covered Code or ownership rights under a license of Your choice, which may contain terms different from this License, provided that You are in compliance with the terms of this License and that the license for the Executable version does not attempt to limit or alter the recipient's rights in the Source Code version from the rights set forth in this License. If You distribute the Executable version under a different license You must make it absolutely clear that any terms which differ from this License are offered by You alone, not by the Initial Developer or any Contributor. You hereby agree to indemnify the Initial Developer and every Contributor for any liability incurred by the Initial Developer or such Contributor as a result of any such terms You offer.

3.7. Larger Works. You may create a Larger Work by combining Covered Code with other code not governed by the terms of this License and distribute the Larger Work as a single product. In such a case, You must make sure the requirements of this License are fulfilled for the Covered Code.

4. Inability to Comply Due to Statute or Regulation.

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Code due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be included in the LEGAL file described in Section 3.4 and must be included with all distributions of the Source Code. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Application of this License.

This License applies to code to which the Initial Developer has attached the notice in Exhibit A and to related Covered Code.

6. Versions of the License.

6.1. New Versions. Netscape Communications Corporation ("Netscape") may publish revised and/or new versions of the License from time to time. Each version will be given a distinguishing version number.

6.2. Effect of New Versions. Once Covered Code has been published under a particular version of the License, You may always continue to use it under the terms of that version. You may also choose to use such Covered Code under the terms of any subsequent version of the License published by Netscape. No one other than Netscape has the right to modify the terms applicable to Covered Code created under this License.

6.3. Derivative Works. If You create or use a modified version of this License (which you may only do in order to apply it to code which is not already Covered Code governed by this License), You must (a) rename Your license so that the phrases "Mozilla", "MOZILLAPL", "MOZPL", "Netscape", "MPL", "NPL" or any confusingly similar phrase do not appear in your license (except to note that your license differs from this License) and (b) otherwise make it clear that Your version of the license contains terms which differ from the Mozilla Public License and Netscape Public License. (Filling in the name of the Initial Developer, Original Code or Contributor in the notice described in Exhibit A shall not of themselves be deemed to be modifications of this License.)

7. DISCLAIMER OF WARRANTY.

COVERED CODE IS PROVIDED UNDER THIS LICENSE ON AN "AS IS" BASIS, WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES THAT THE COVERED CODE IS FREE OF DEFECTS, MERCHANTABILITY, FIT FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE COVERED CODE IS WITH YOU. SHOULD ANY COVERED CODE PROVE DEFECTIVE IN ANY RESPECT, YOU (NOT THE INITIAL DEVELOPER OR ANY OTHER CONTRIBUTOR) ASSUME THE COST OF ANY NECESSARY SERVICING, REPAIR OR CORRECTION. THIS DISCLAIMER OF WARRANTY CONSTITUTES AN ESSENTIAL PART OF THIS LICENSE. NO USE OF ANY COVERED CODE IS AUTHORIZED HEREUNDER EXCEPT UNDER THIS DISCLAIMER.

8. TERMINATION.

8.1. This License and the rights granted hereunder will terminate automatically if You fail to comply with terms herein and fail to cure such breach within 30 days of becoming aware of the breach. All sublicenses to the Covered Code which are properly granted shall survive any termination of this License. Provisions which, by their nature, must remain in effect beyond the termination of this License shall survive.

8.2. If You initiate litigation by asserting a patent infringement claim (excluding declaratory judgment actions) against Initial Developer or a Contributor (the Initial Developer or Contributor against whom You file such action is referred to as "Participant") alleging that:

(a) such Participant's Contributor Version directly or indirectly infringes any patent, then any and all rights granted by such Participant to You under Sections 2.1 and/or 2.2 of this License shall, upon 60 days notice from Participant terminate prospectively, unless if within 60 days after receipt of notice You agree: (i) agree in writing to pay Participant a mutually agreeable reasonable royalty for Your past and future use of Modifications made by such Participant, or (ii) withdraw Your litigation claim with respect to the Contributor Version against such Participant. If within 60 days of notice, a reasonable royalty and payment arrangement are not mutually agreed

upon in writing by the parties or the litigation claim is not withdrawn, the rights granted by Participant to You under Sections 2.1 and/or 2.2 automatically terminate at the expiration of the 60 day notice period specified above.

(b) any software, hardware, or device, other than such Participant's Contributor Version, directly or indirectly infringes any patent, then any rights granted to You by such Participant under Sections 2.1(b) and 2.2(b) are revoked effective as of the date You first made, used, sold, distributed, or had made, Modifications made by that Participant.

8.3. If You assert a patent infringement claim against Participant alleging that such Participant's Contributor Version directly or indirectly infringes any patent where such claim is resolved (such as by license or settlement) prior to the initiation of patent infringement litigation, then the reasonable value of the licenses granted by such Participant under Sections 2.1 or 2.2 shall be taken into account in determining the amount or value of any payment or license.

8.4. In the event of termination under Sections 8.1 or 8.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or any distributor hereunder prior to termination shall survive termination.

9. LIMITATION OF LIABILITY.

UNDER NO CIRCUMSTANCES AND UNDER NO LEGAL THEORY, WHETHER TORT (INCLUDING NEGLIGENCE), CONTRACT, OR OTHERWISE, SHALL YOU, THE INITIAL DEVELOPER, ANY OTHER CONTRIBUTOR, OR ANY DISTRIBUTOR OF COVERED CODE, OR ANY SUPPLIER OF ANY OF SUCH PARTIES, BE LIABLE TO ANY PERSON FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY CHARACTER INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF GOODWILL, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, OR ANY AND ALL OTHER COMMERCIAL DAMAGES OR LOSSES, EVEN IF SUCH PARTY SHALL HAVE BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. THIS LIMITATION OF LIABILITY SHALL NOT APPLY TO LIABILITY FOR DEATH OR PERSONAL INJURY RESULTING FROM SUCH PARTY'S NEGLIGENCE TO THE EXTENT APPLICABLE LAW PROHIBITS SUCH LIMITATION. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THIS EXCLUSION AND LIMITATION MAY NOT APPLY TO YOU. 10. U.S. GOVERNMENT END USERS.

The Covered Code is a "commercial item," as that term is defined in 48 C.F.R. 2.101 (Oct. 1995), consisting of "commercial computer software" and "commercial computer software documentation," as such terms are used in 48 C.F.R. 12.212 (Sept. 1995). Consistent with 48 C.F.R. 12.212 and 48 C.F.R. 227.7202-1 through 227.7202-4 (June 1995), all U.S. Government End Users acquire Covered Code with only those rights set forth herein.

11. MISCELLANEOUS.

This License represents the complete agreement concerning subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. This License shall be governed by California law provisions (except to the extent applicable law, if any, provides otherwise), excluding its conflict-of-law provisions. With respect to disputes in which at least one party is a citizen of, or an entity chartered or registered to do business in the United States of America, any litigation relating to this License shall be subject to the jurisdiction of the Federal Courts of the Northern District of California, with venue lying in Santa Clara County, California, with the losing party responsible for costs, including without limitation, court costs and reasonable attorneys' fees and expenses. The application of the United

Nations Convention on Contracts for the International Sale of Goods is expressly excluded. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not apply to this License.

12. RESPONSIBILITY FOR CLAIMS.

As between Initial Developer and the Contributors, each party is responsible for claims and damages arising, directly or indirectly, out of its utilization of rights under this License and You agree to work with Initial Developer and Contributors to distribute such responsibility on an equitable basis. Nothing herein is intended or shall be deemed to constitute any admission of liability.

13. MULTIPLE-LICENSED CODE.

Initial Developer may designate portions of the Covered Code as Multiple-Licensed. Multiple-Licensed means that the Initial Developer permits you to utilize portions of the Covered Code under Your choice of the MPL or the alternative licenses, if any, specified by the Initial Developer in the file described in Exhibit A.

EXHIBIT A - Mozilla Public License.

"The contents of this file are subject to the Mozilla Public License Version 1.1 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.mozilla.org/MPL/>

Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

The Original Code is _____.

The Initial Developer of the Original Code is _____.
_____. Portions created by _____ are Copyright (C) _____.
_____. All Rights Reserved.

Contributor(s): _____.

Alternatively, the contents of this file may be used under the terms of the _____ license (the [_____] License), in which case the provisions of [_____] License are applicable instead of those above. If you wish to allow use of your version of this file only under the terms of the [_____] License and not to allow others to use your version of this file under the MPL, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the [_____] License. If you do not delete the provisions above, a recipient may use your version of this file under either the MPL or the [_____] License."

[NOTE: The text of this Exhibit A may differ slightly from the text of the notices in the Source Code files of the Original Code. You should use the text of this Exhibit A rather than the text found in the Original Code Source Code for Your Modifications



Samsung Techwin 在产品制造的各个环节都十分关注环境，并且采取措施以保证向客户提供更加环保的产品。

Eco 标志表明 Samsung Techwin 致力于生产环保型产品，同时也表示该产品符合欧盟 RoHS 标准。



制造商

SAMSUNG TECHWIN CO., LTD.

Samsungtechwin R&D Center, 701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea, 463-400
TEL : +82-70-7147-8740~60 FAX : +82-31-8018-3745

天津三星泰科光电子有限公司 广州分公司 (营业总部)

广州市天河区天河路230号万菱国际中心21楼02-04室, 510620
Room 02-04, 21/F, OneLink Center, NO.230 Tianhe Road,
Tianhe District, Guangzhou, 510620, China
联系电话: 020 38080038

天津三星泰科光电子有限公司

中国天津市西青区津港公路微电子工业区微六路
11号, 300385
No.11 wei 6 Road Micro-Electronics Industrial Park Xiqing
District, Tianjin, 300385, China
联系电话(免费客服热线): 800 818 1212

