

TEST REPORT

for

NETWORK CAMERA

MODEL: XNP-A9314R

Issued to:

Hanwha Vision Co., Ltd.

**6, Pangyo-ro 319Beon-gil, Bundang-gu,
Seongnam-si, Gyeonggi-do, 13488 KOREA**

Issued by:

Compliance Certification Services Inc.

Xindian Lab.

**No.163-1, Jhongsheng Rd., Xindian Dist.,
New Taipei City, Taiwan.**

TEL: 886-2-22170894

FAX: 886-2-22171029

Issued Date: May 12, 2026

Note: This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, NIST or any government agencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 12, 2026	Initial Issue	ALL	Wendy Wang

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	TEST RESULT SUMMARY	5
3	EUT DESCRIPTION	6
4	TEST METHODOLOGY	7
4.1.	MEASURED MODE	7
4.2.	EUT SYSTEM OPERATION	7
5	SETUP OF EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF SUPPORT UNITS	8
5.2.	CONFIGURATION OF SYSTEM UNDER TEST	8
6	TEST PROCEDURE: TRANSIENTS, VOLTAGE	9
6.1.	TEST A: PLACEMENT IN ENVIRONMENTAL CHAMBER AND CHECK-OUT OF HOOK-UP	9
6.2.	TEST B: TRANSIENT TESTS (POWER SERVICE): HIGH-REPETITION NOISE TRANSIENTS	10
6.3.	TEST B: TRANSIENT TESTS (POWER SERVICE): LOW-REPETITION HIGH-ENERGY TRANSIENTS	13
6.4.	TEST B: TRANSIENT TESTS (POWER SERVICE): TRANSIENTS, INPUT-OUTPUT TERMINALS	16
6.5.	TEST B: TRANSIENT TESTS (POWER SERVICE): NON-DESTRUCT TRANSIENT IMMUNITY	19
APPENDIX 1 - PHOTOGRAPHS OF EUT		23

1 TEST RESULT CERTIFICATION

Product: NETWORK CAMERA

Model: XNP-A9314R

Brand: Hanwha Vision

Applicant: Hanwha Vision Co., Ltd.

6, Pangyo-ro 319Beon-gil, Bundang-gu,
Seongnam-si, Gyeonggi-do, 13488 KOREA

Manufacturer: HANWHA VISION VIETNAM COMPANY LIMITED.

Lot O-2, Que Vo Industrial Zone extended area, Nam Son ward,
Bac Ninh province, Vietnam

D-TECH CO.,LTD.

173-25, Saneop-ro, Gwonseon-gu, Suwon-si,
Gyeonggi-do, Korea (Suwon Industrial Complex)

Tested: March 24, 2026 & March 25, 2026

Measurement procedures and Standard

NEMA TS 2-2021 V03.08 Environmental
(Transients Test)

Statements of Conformity

Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.


Statements of Test

Execution of NEMA TS 2-2021 Test A and Test B:
CCS and the testing personnel have no affiliation with Hanwha Vision Co., Ltd.

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Reviewed by:



Howard Peng
Technology Team Leader



Eva Fan
Supervisor of report document dept.

2 TEST RESULT SUMMARY

Report Clause	Phenomenon	Reference Clause(s)	Result
6	Test Procedure: Transients, Voltage		
6.1	Test A: Placement in Environmental Chamber and Check-Out of Hook-Up	2.2.7.1	Passed
6.2	Test B: Transient Tests (Power Service): High-Repetition Noise Transients	2.1.6.1 2.2.7.2	Passed
6.3	Test B: Transient Tests (Power Service): Low-Repetition High-Energy Transients	2.1.6.2 2.2.7.2	Passed
6.4	Test B: Transient Tests (Power Service): Transients, Input-Output Terminals	2.1.7 2.2.7.2	Passed
6.5	Test B: Transient Tests (Power Service): Non-destruct Transient Immunity	2.1.8 2.2.7.2	Passed

3 EUT DESCRIPTION

Product	NETWORK CAMERA
Brand Name	Hanwha Vision
Model	XNP-A9314R
Serial No	ZX5570GYC00006B
Date of manufacture	2025/12
Applicant	Hanwha Vision Co., Ltd.
Housing material	Plastic w/ metal plate
Received Date	March 16, 2026
EUT Power Rating	Power from PoE
AC Power During Test	120VAC, 89VAC, 135VAC
PoE Injector Manufacturer	AMG
PoE Injector Model	AGM155-1GBT-P90
PoE Injector Power Rating	85-264VAC
PoE Injector Serial No	2601080023
PoE Injector Date of manufacture	2026/01/10
AC Power Cable Type	Unshielded, 1.8m (Detachable)

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1. LAN Port	1	1
2. Micro SD Slot	2	2

Note: Client consigns only one model sample to test (Model Number: XNP-A9314R).

4 TEST METHODOLOGY

4.1. MEASURED MODE

The test configuration mode is as the following:

1	Normal Mode
---	-------------

4.2. EUT SYSTEM OPERATION

1. Windows 10 boots system.
2. Press the start menu, select executive and type ping 192.168.1.100 -t (EUT), ping 192.168.1.1 -t (Server Notebook).

Note: Test program is self-repeating throughout the test.

5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Brand Name	Data Cable	Power Cord
1-2	Micro SD Card	N/A	N/A	N/A	Transcend	N/A	N/A
3	Server Notebook	THinkpad T470	PF-0WAG69	BSMI: R33B65	Lenovo	Unshielded, 20m	Unshielded, 1.8m
4	Ground Cable	N/A	N/A	N/A	N/A	Unshielded, 1.8m	N/A

Note: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

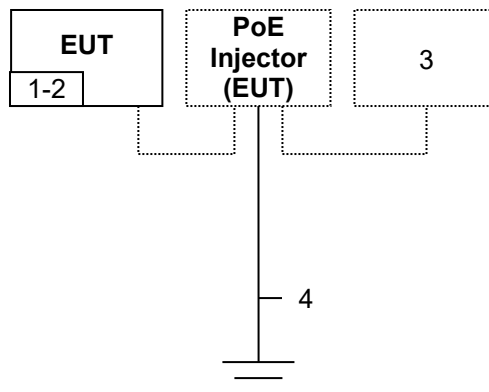

6 TEST PROCEDURE: TRANSIENTS, VOLTAGE

6.1. TEST A: PLACEMENT IN ENVIRONMENTAL CHAMBER AND CHECK-OUT OF HOOK-UP

6.1.1. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Oscilloscope	Tektronix	TDS 3054C	C013600	12/28/2026
Programmable Temp. & Humi. Chamber	CTF	LY-2CS-TH	2016042502	04/13/2026
High Voltage Generator	CCSRF	TS-2-01	00001515	07/02/2026
Waveforms Generator	CCSRF	TS-2-02	00001516	07/02/2026
Test S/W	Win2110S II Ver. 4.7.1			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

6.1.2. TEST PROCEDURES

Reference to NEMA TS 2-2021 V03.08 section 2.2.7.1

- Place the test unit in the environmental chamber. Connect the test unit AC input circuit to a variable voltage power transformer, voltmeter, and transient generator. The transient generator shall be connected to the AC input circuit at a point at least 4.6 meters (15 feet) from the AC power source and not over 3 meters (10 feet) from the input to the test unit.
- Connect test switches to the appropriate terminals to simulate the various features incorporated into the test unit. Place these switches in the proper position for desired operation.
- Verify the test hook-up. Adjust the variable-voltage power transformer to 120 volts AC and apply power to the test unit. Verify that the test unit goes through its prescribed start-up sequence and cycles properly in accordance with the operation determined by the positioning of test switches in item 2.

6.1.3. TEST RESULTS

Test Termination
Set the controls on the environmental chamber to 21°C (70 °F)
All Port ☒ No abnormal

Note: On satisfactory completion of this test, proceed with Test B: Transient Tests (Power Service).

6.2.TEST B: TRANSIENT TESTS (POWER SERVICE): HIGH-REPETITION NOISE TRANSIENTS

6.2.1. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Oscilloscope	Tektronix	TDS 3054C	C013600	12/28/2026
High Voltage Generator	CCSRF	TS-2-01	00001515	07/02/2026
Waveforms Generator	CCSRF	TS-2-02	00001516	07/02/2026

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

6.2.2. TEST PROCEDURES

Reference to NEMA TS 2-2021 V03.08 section 2.2.7.2 (Reference 2.1.6.1)

- Program the test unit to dwell. Verify the input voltage is 120 volts AC.
- Set the transient generator to provide high-repetition noise transients as follows:
 - a. Amplitude: 300 volts + 5 percent, both positive and negative polarity.
 - b. Peak Power: 2500 watts.
 - c. Repetition Rate: One pulse every other cycle moving uniformly over the full wave in order to sweep once every 3 seconds across 360 degrees of line cycle.
 - d. Pulse Rise Time: 1 microsecond.
 - e. Pulse Width: 10 microseconds.
 - f. Test Time : 5 Minutes
 - g. burst period::16.7ms
- Apply the transient generator output to the AC voltage input for at least 5 minutes. Repeat this test for at least two conditions of dwell for the test unit. The test unit must continue to dwell without malfunction.
- Program the test unit to cycle. Turn on the transient generator (output in accordance with item 2) for 10 minutes, during which time the test unit shall continue to cycle without malfunction.



Report No.: TMXD2603000848DT



Page: 11 / 28
Rev.: 00

6.2.3. TEST RESULTS

Temperature	20.1°C	Humidity	55% RH
Tested By	Jacky Lin		

Test Item	Input Voltage	Amplitude	Result
Power Port	120VAC	+300V	Normal
		-300V	Normal

6.2.4. CALIBRATION WAVEFORM

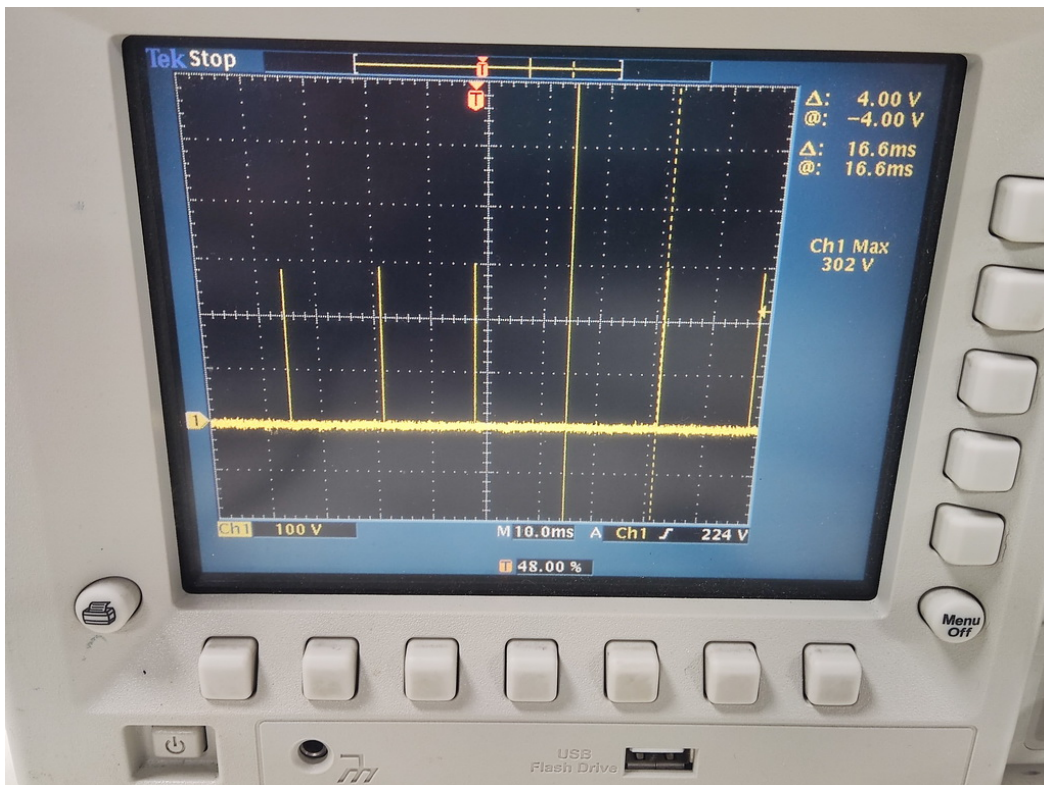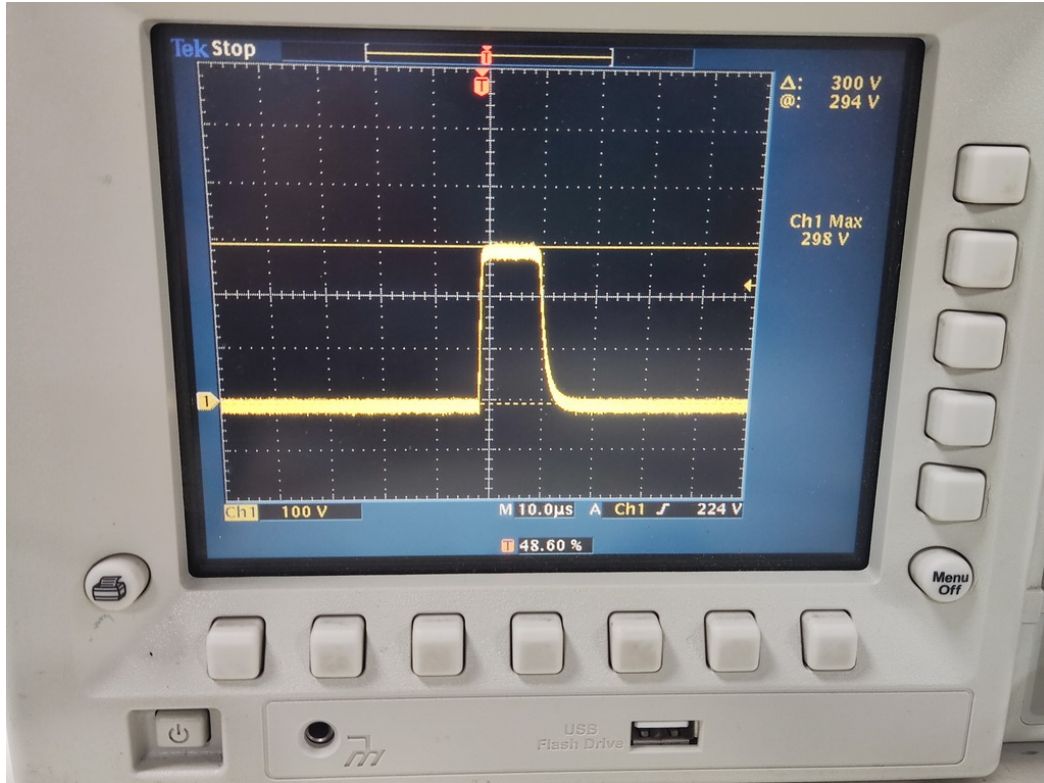

6.3. TEST B: TRANSIENT TESTS (POWER SERVICE): LOW-REPETITION HIGH-ENERGY TRANSIENTS

6.3.1. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Oscilloscope	Tektronix	TDS 3054C	C013600	12/28/2026
High Voltage Generator	CCSRF	TS-2-01	00001515	07/02/2026
Waveforms Generator	CCSRF	TS-2-02	00001516	07/02/2026

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

6.3.2. TEST PROCEDURES

Reference to NEMA TS 2-2021 V03.08 section 2.2.7.2 (Reference 2.1.6.2)

- Set a transient generator to provide low-repetition high-energy transients as follows:
 - a. Amplitude: 600 volts +5 percent, both positive and negative polarity.
 - b. Energy Discharge Source: Capacitor, oil-filled, 10 microfarads.
 - c. Repetition Rate: One discharge each 10 seconds.
 - d. Pulse Position: Random across 360 degrees of line cycle.
- Program the test unit to dwell. Verify the input voltage is 120 volts AC.
- Apply the transient generator (output in accordance with item 5) between logic ground and the connecting cable termination of selected Connector A, B, or C input/output terminals of the test unit.
- A representative sampling of selected input/output terminations shall be tested. The test unit shall continue to dwell without malfunction.
- Program the test unit to cycle. Turn on the transient generator (output in accordance with item 5) and apply its output to the selected Connector A, B, or C input/output terminations. The test unit shall continue to cycle without malfunction.



Report No.: TMXD2603000848DT



Page: 14 / 28
Rev.: 00

6.3.3. TEST RESULTS

Temperature	20.1°C	Humidity	55% RH
Tested By	Jacky Lin		

Test Item	Input Voltage	Amplitude	Result
Power Port	120VAC	+600V	Normal
		-600V	Normal

6.3.4. CALIBRATION WAVEFORM

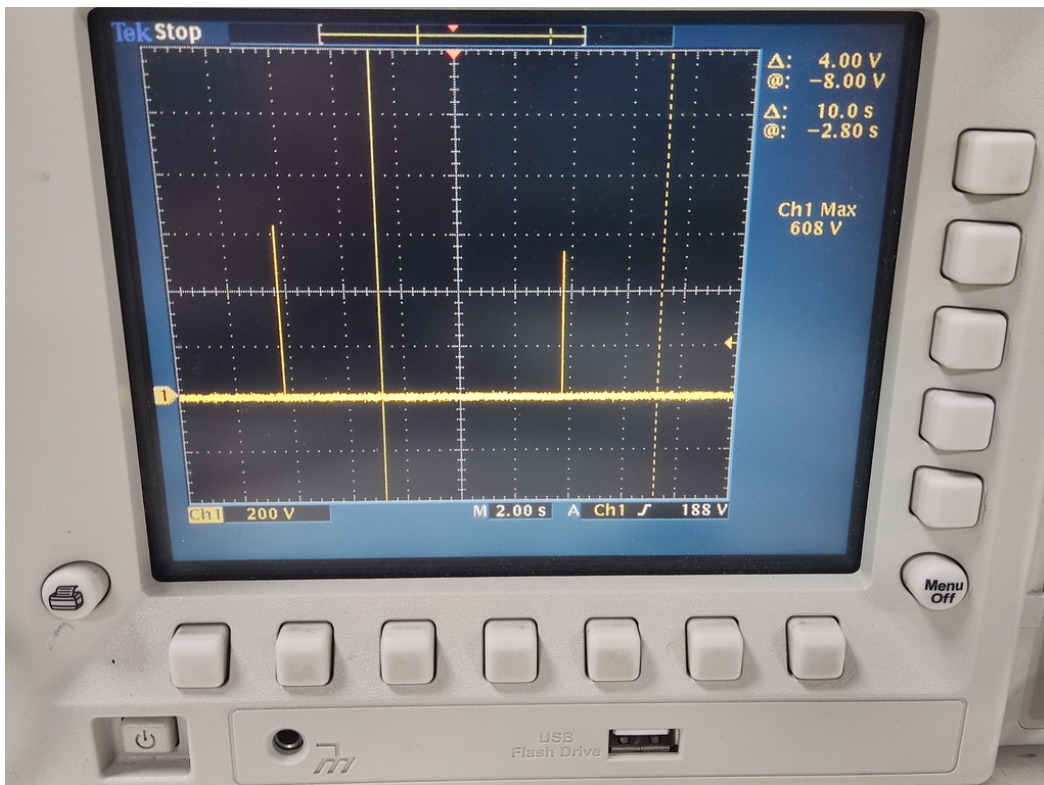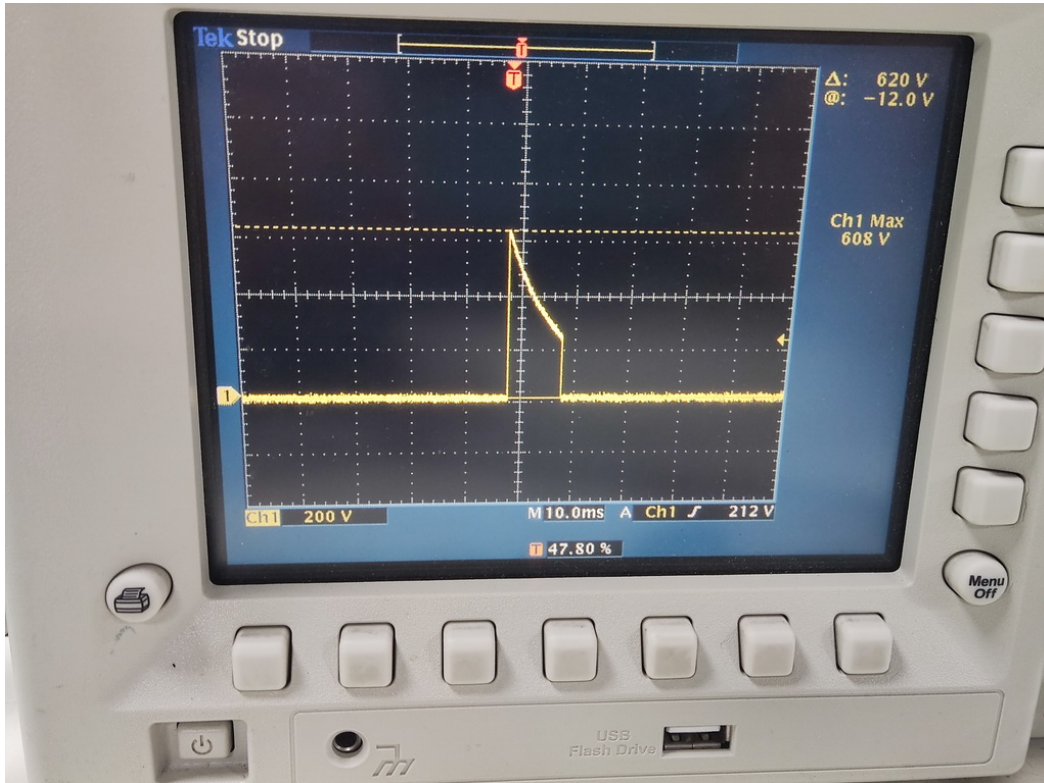

6.4. TEST B: TRANSIENT TESTS (POWER SERVICE): TRANSIENTS, INPUT-OUTPUT TERMINALS

6.4.1. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Oscilloscope	Tektronix	TDS 3054C	C013600	12/28/2026
High Voltage Generator	CCSRF	TS-2-01	00001515	07/02/2026
Waveforms Generator	CCSRF	TS-2-02	00001516	07/02/2026

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.

6.4.2. TEST PROCEDURES

Reference to NEMA TS 2-2021 V03.08 section 2.2.7.2 (Reference 2.1.7)

- Set a transient generator to provide low-repetition high-energy transients as follows:
 - a. Amplitude: 300 volts +5 percent, both positive and negative polarity.
 - b. Source Impedance: Not less than 1000 ohms nominal impedance.
 - c. Repetition: One pulse per second for a minimum of five pulses per selected terminal.
 - d. Pulse Rise Time: 1 microsecond.
 - e. Pulse Width: 10 microseconds.
- Program the test unit to dwell. Verify the input voltage is 120 volts AC.
- Discharge the oil-filled 10-microfarad capacitor ten times for each polarity across the AC voltage input. Repeat this test for at least two conditions of dwell. The test unit shall continue to dwell without malfunction.
- Program the test unit to cycle. Discharge the capacitor ten times for each polarity while the test unit is cycling, during which time the test unit shall continue to cycle without malfunction.
- During the preceding transient tests (item 3 through 11), the test unit must continue its programmed functions.
- The test unit shall not skip intervals or interval portions when cycling; place false calls or produce false indications while in dwell; disrupt normal sequences in any manner; or change timings.



Report No.: TMXD2603000848DT


Page: 17 / 28
Rev.: 00

6.4.3. TEST RESULTS

Temperature	20.1°C	Humidity	55% RH
Tested By	Jacky Lin		

Test Item	Input Voltage	Amplitude	Result
Power Port	120VAC	+300V	Normal
		-300V	Normal

6.4.4. CALIBRATION WAVEFORM

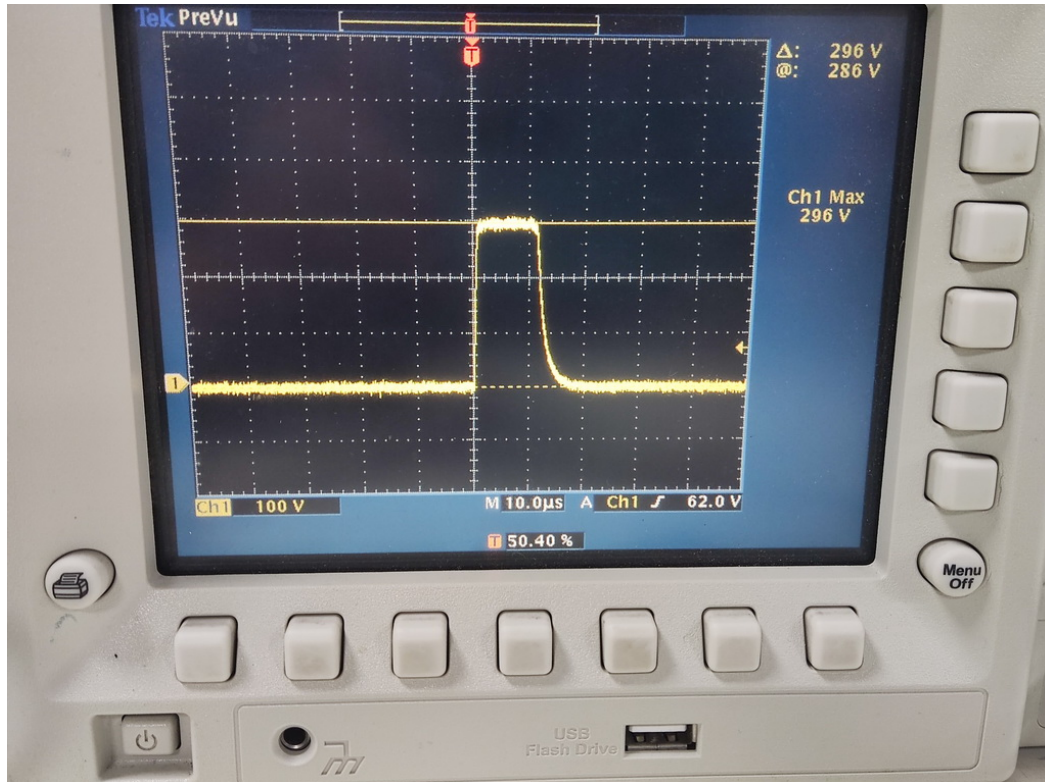

6.5. TEST B: TRANSIENT TESTS (POWER SERVICE): NON-DESTRUCT TRANSIENT IMMUNITY

6.5.1. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Oscilloscope	Tektronix	TDS 3054C	C013600	12/28/2026
High Voltage Generator	CCSRF	TS-2-01	00001515	07/02/2026
Waveforms Generator	CCSRF	TS-2-02	00001516	07/02/2026

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

6.5.2. TEST PROCEDURES

Reference to NEMA TS 2-2021 V03.08 section 2.2.7.2 (Reference 2.1.8)

- Non-destruct Transient Immunity:
- Turn off the AC power input to the test unit from the variable-voltage power source.
- Apply the following high-energy transient to the AC voltage input terminals of the test unit (no other power connected to terminals):
 - a. Amplitude: 1000 volts, both positive and negative polarity.
 - b. Maximum Repetition Rate: Applied to the CA once every 2 seconds for a maximum of three applications for each polarity.
 - c. Test Time : 2 Second (3 Times/Polarity)
- Upon completion of the foregoing, apply 120 volts AC to the test unit and verify that the test unit goes through its prescribed start-up sequence and cycles properly in accordance with the programmed functions. The first operation of the over-current protective device during this test shall not be considered a failure of the test unit.



Report No.: TMXD2603000848DT

Page: 20 / 28
Rev.: 00



6.5.3. TEST RESULTS

Temperature	20.1°C	Humidity	55% RH
Tested By	Jacky Lin		

Test Item	Amplitude	Result
Power Port	+1000V	Normal
	-1000V	Normal

Note: On satisfactory completion of this test, proceed with Test C: Low-Temperature Low-Voltage Test.

6.5.4. CALIBRATION WAVEFORM

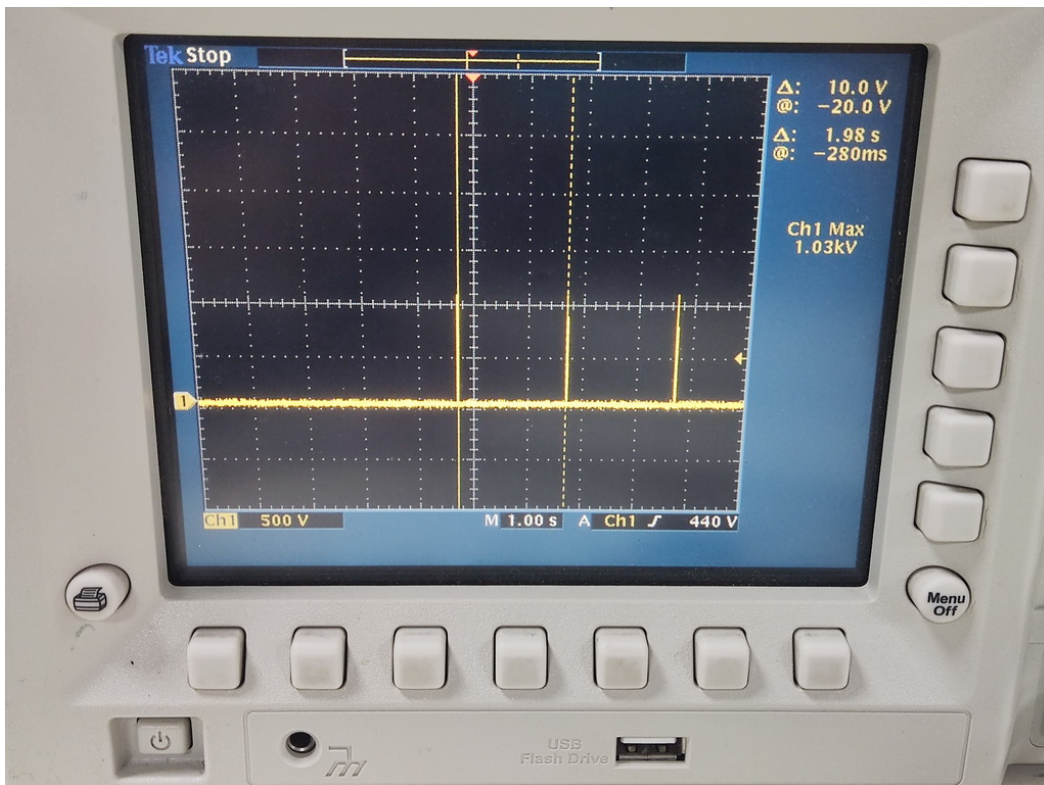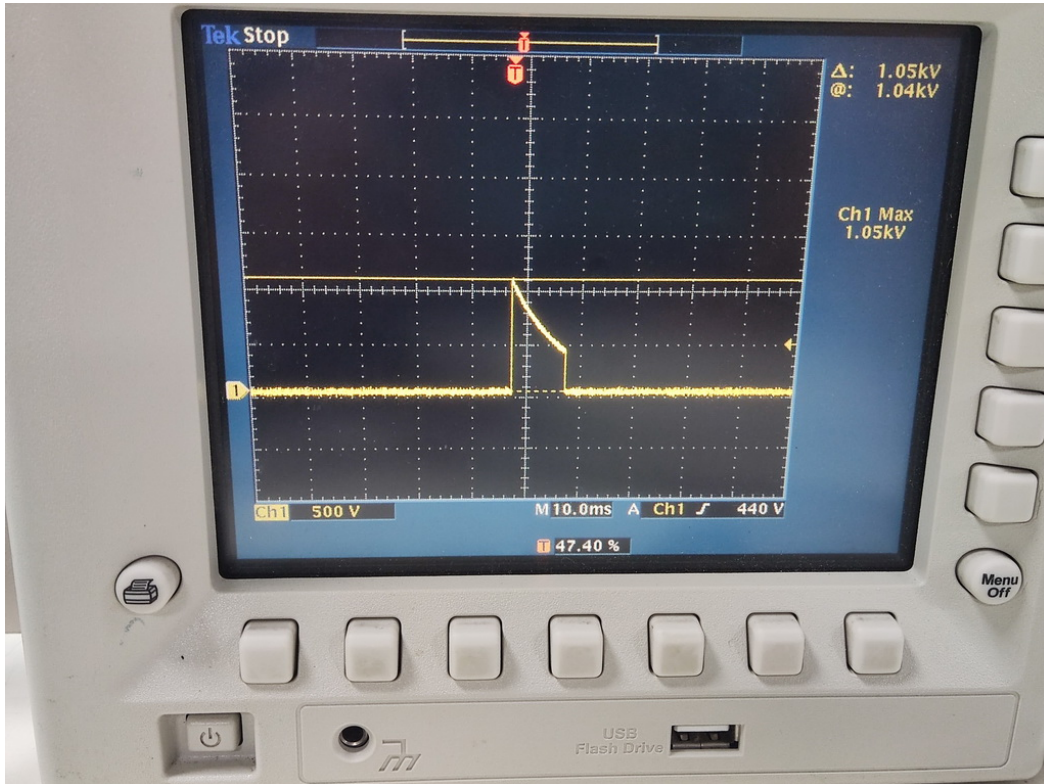

6.5.5. PHOTOGRAPHS OF TEMPERATURE TEST



APPENDIX 1 - PHOTOGRAPHS OF EUT

