



EMC TEST REPORT For VCCI

Test Report No. : KES-EM-22T0890-R1
Date of Issue : Feb. 24, 2023
Product Name : DVR
Model/Type No. : ARD-410
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Oct. 13, 2022
Test date : Oct. 25, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Seong Min, Jang
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0890-R1

Page (2) of (32)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 04, 2022	KES-EM-22T0890	Issued
Feb. 24, 2023	KES-EM-22T0890-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (3) of (32)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Conducted Emissions at Telecommunication Ports		19
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz).....		21
Test Setup Photos and Configuration		22
Conducted Emissions at Mains Power Ports.....		22
Conducted Emissions at Telecommunication Ports		23
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz).....		25
EUT External Photographs		26
EUT Internal Photographs		27

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (4) of (32)

1.0 General Product Description

Main Specifications of EUT are:

			ARD-490
Display	Display		
Analog camera	Analog camera	Input	4CH 1Vp-p 75ohm, BNC
		Signal Type	AVC(SMP, 4MP, 1080p, 720p) HDTV(SMP, 4MP, 1080p, 720p) HDCV(SMP, 4MP, 1080p, 720p) CVBS(NTSC/PAL)
Network camera	Network camera	Input	Additional 2CH (Max. 6CH)
		Resolution	DMP -- CF
		Protocol	SUNAPI(Wanenet), ONVIF
Encoding	Encoding	Local Display	None
		Multi Screen Display	None
		Resolution	None
Use	Use	Local Display	Is HDMI, Is VGA (Single Mode) - HDMI: 3840 x 2160, 2560x1440, 1920x1080, 1280x1024, 1280x720 [Dual Mode] Clone - HDMI: 1920x1080, 1280x1024, 1280x720 - VGA: 1920x1080, 1280x1024, 1280x720
		Multi Screen Display	[Local monitor] - Dynamic layout, Virtual channel view - up to 7 ddition [Web] 1 / 4
		Resolution	[Analog Camera(NTSC/PAL)] DMP(SM Half 30fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) [Network Camera] - Typ. 2MP(120fps)
Performance	Performance		
Operating System	Operating System	Embedded	Linux
Record	Record	Compression	H.265, H.264, MJPEG
		Record Rate/Analog	[Analog Camera(NTSC/PAL)] (Main Stream) DMP(SM Half 30fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) (Sub Stream) 720p or higher : 640x480 full fps/Ch SD signal : upto CF 30/25fps/Ch * The maximum recording frame rate depends on the frame rate of the input camera.
		Recording Bandwidth	Max. 30Mbps
		Resolution	DMP -- CF
		Mode	Manual, Schedule (Continuous/Event, Event/Pre/Post), Dual Track
		Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection/Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual-line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event, Dynamic camera event
		Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Search & Play	Playback Bandwidth	Max. 32Mbps
		User	Max. 4 users (See 1. Remote I/O)
		Simultaneous playback	4CH(Local Monitor), CMS, Wireless Mobile, 1CH(Web)
		Storage Overlapping	WEB / CMS
		Mode	Date & Time (Calendar) / Event log list / Text search (POS), Back up, Motion, Smart search (Virtual line w/ direction, Enter / Exit) * All Search Included Preview Function ASS search
		Resolution	DMP -- CF
		Playback Control	FastForward/Backward (x2,x4,x8,x16,x32,x64,x128,x256) Slow Forward/Backward (x1/2,x1/4,x1/8) Still/Move one frame up/down
Storage	Storage	Supported HDD	Up to 6TB
		HDD Slot	SATA 1bay/Max 6TB
		External	None
		RAM	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (5) of (32)

Backup	Backup	File backup	BU, EXE(include Player), AVI(Webviewer only)
		Function	Max. 6 CH play, Date-time/title display
Network	Network		
Protocol	Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS	DDNS		Wisenet DDNS
Transmission speed	Transmission speed		[Analog Camera(NTSC/PAL)] (Main Stream) 5MP(5M Half 20fps/12fps) 4MP(4M Half 30fps/25fps) 2MP(2M Half 30fps/25fps) 1MP(1M Half 30fps/25fps) (Sub Stream) 720p or higher: 640x368 full fps/CH SD signal : upto CIF 30/25fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
Transmission Bandwidth	Transmission Bandwidth		Max. 30Mbps
Transmission Bandwidth	Transmission Bandwidth		None
Wireless	Wireless	WiFi	None
		3G/LTE	None
Audio	Audio	Input/Output	1 Line in / 1 Line out
		Compression	G.711 (NW Cam G.711, 726)
		Audio Communication	2-Way
Max Remote Users			None
		Security	IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Techwin Root CA)
Web viewer	Web viewer	Supported OS	Windows 10, Mac OS 11 Big Sur and later
		Supported browser	Chrome v89 or above, Edge v89 or above, Safari v14.0.3 or above
Viewer Software	Viewer Software		SSM, Webviewer, Wisenet Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3rd party VMS
Functions	Functions		
Camera Setup	Camera Setup	Register	Auto, Manual
		Item	None
PTZ	PTZ	Control	Via GUI, Webviewer, SSM, Wisenet Viewer, Wisenet Mobile Viewer, System Controller
		Preset	300 presets
Smart phone	Smart phone	Support Model	iOS, Android
		Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
		Control	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
		Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Redundancy	Fallover	None
		ARB	Support
Easy configuration	Easy configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control	Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (6) of (32)

Interface	Interface		
Front	Front	Indicator	LED(Status indicator) : Power(1), Record(1), Network(1)
Storage	Storage		None
Reset	Reset		Switch(1EA)
HDD Key Lock	HDD Key Lock		None
HDMI	HDMI		1EA
VGA	VGA		1EA
BNC	BNC		4CH In / 1CH Out(Spot Output)
DP	DP		None
DVI	DVI		None
e-SATA	e-SATA		None
Audio	Audio		Out(1EA, RCA, Line)
Ethernet	Ethernet		RJ-45(10/100 BASE-T)
Alarm	Alarm		In 4EA, Out 1EA - Relay Out1(NC/NO/COM)
USB	USB		2EA(Front/Rear USB2.0)
GPS	GPS		None
WiFi	WiFi		None
Serial(Protocols)	Serial(Protocols)		RS-485 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power Inlet	Power Inlet		1EA DC Input Jack
System	System		
Log	Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control	System Control		Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
Power Management	Power Management	Shutdown Delay	None
		Startup Delay	None
Language	Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese
Environmental	Environmental		
Operating Temperature			0°C to +40°C(+32°F to +104°F)
Operating Humidity			20% ~ 85% RH
Certification	Certification		UL, CE, FCC, KC
Electrical	Electrical		
Power Input			DC12V
Power Consumption			
PoE Budget	PoE Budget		None
Mechanical	Mechanical		
Color / Material	Color / Material		Black / Metal
Dimension (WxHxD)	Dimension (WxHxD)		300 x 47 x 208.7mm (11.85" x 1.89" x 8.22")
Weight	Weight		
Control Box	Control Box		
Interface	Interface	Indicator	
		Emergency Button	
		Audio/Power Switch	
		Main I/O	
Mechanical	Mechanical	Color / Material	
		Dimension (WxHxD)	
		Weight	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	ARD-410	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Adapter	KPL-048F-VI	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
Mouse	MOKJUO	21H07051	Primax Electronics Ltd.	-
HDD	ST2000VX012	-	SEAGATE	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0890-R1

Page (8) of (32)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Laptop	LG15N54	503NZWY038929	LG	-
Laptop Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
Monitor 1	SMT-2232	C95V67VF90003 8B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	SMT-2233	ZC6U67VH50019 4D	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 3	-	-	DELL. INC	-
Speaker	-	-	Britz	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Controller Adapter	AP-12005A	-	A Power	-
Alarm	PRO-SL	-	SENSOR PRO	-
ButtonAlarm	-	-	-	-
Camera	SCD-6083RN	-	TB-eye Ltd.	-
Camera Adapter	KP-1220	-	Korea Power	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	DC Jack	Adapter (EUT)	DC Jack	1.4	U
	USB A-type	Mouse (EUT)	USB A-type	1.5	U
	BNC(SPOT)	Monitor #1	BNC	3.5	S
	VGA	Monitor #2	VGA	1.5	U
	HDMI	Monitor #3	HDMI	1.4	S
	AUDIO OUT	Speaker	AUDIO OUT	2.0	U
	RS-485	Controller	RS-485	3.2	U
	Alarm OUT	Alarm	Alarm IN	3.1	U
	Alarm IN	ButtonAlarm	Alarm OUT	3.2	U
	VIDEO IN	Camera	BNC	3.5	S
	RJ-45	Laptop	RJ-45	3.0	U
	AUDIO IN	Laptop	AUDIO IN	1.5	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.4	S
Controller	DC Jack	Controller Adapter	DC Jack	1.4	S
Camera	DC Jack	Camera Adapter	DC Jack	1.4	S

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
Operating Mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

1.8 Configuration

■ AC Main
 □ DC Main

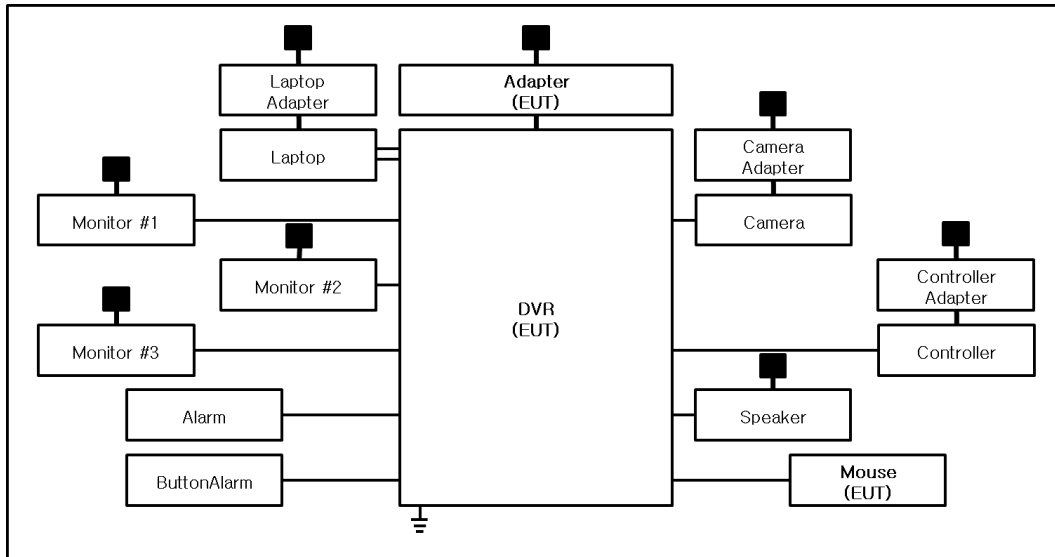

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (12) of (32)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions Mains Power Ports

Test Date

Oct. 25, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (23,0 ± 0,1) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Oct. 25, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 28, 2022

Test Conditions

Temperature: (23,0 ± 0,1) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Oct. 25, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (22,5 ± 0,2) °C
Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0890-R1

Page (16) of (32)

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Oct. 25, 2022

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 01, 2023
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 01, 2023
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (22,8 ± 0,2) °C

Relative Humidity: (47,2 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
 Model No.: ARD-410
 Phase:
 Mode: L1
 Operator Name: KES

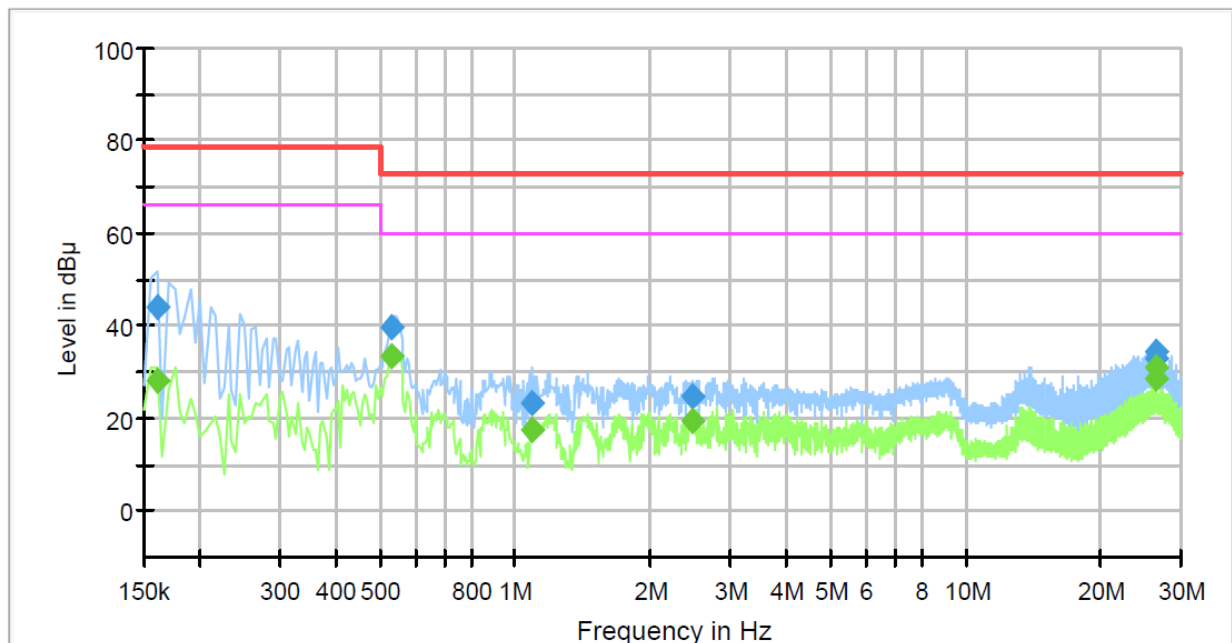

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	27.96	66.00	38.04	1000.0	9.000	L1	19.4
0.160000	44.26	---	79.00	34.74	1000.0	9.000	L1	19.4
0.530000	---	33.46	60.00	26.54	1000.0	9.000	L1	19.8
0.530000	39.58	---	73.00	33.42	1000.0	9.000	L1	19.8
1.090000	---	17.42	60.00	42.58	1000.0	9.000	L1	20.1
1.090000	23.26	---	73.00	49.74	1000.0	9.000	L1	20.1
2.465000	---	19.22	60.00	40.78	1000.0	9.000	L1	20.2
2.465000	24.71	---	73.00	48.29	1000.0	9.000	L1	20.2
26.490000	---	28.77	60.00	31.23	1000.0	9.000	L1	20.2
26.490000	32.99	---	73.00	40.01	1000.0	9.000	L1	20.2
26.610000	---	31.05	60.00	28.95	1000.0	9.000	L1	20.2
26.610000	34.25	---	73.00	38.75	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	ARD-410
Phase:	
Mode:	N
Operator Name:	KES

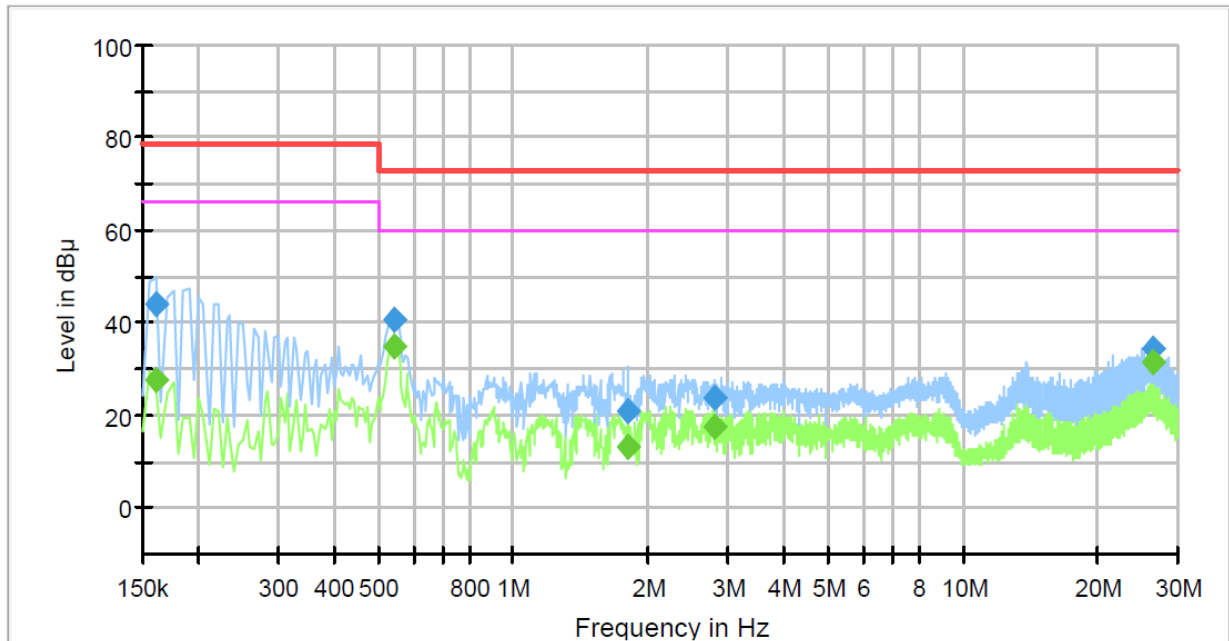

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	27.48	66.00	38.52	1000.0	9.000	N	19.4
0.160000	44.24	---	79.00	34.76	1000.0	9.000	N	19.4
0.545000	---	34.66	60.00	25.34	1000.0	9.000	N	19.8
0.545000	40.87	---	73.00	32.13	1000.0	9.000	N	19.8
1.800000	---	13.24	60.00	46.76	1000.0	9.000	N	20.3
1.800000	20.99	---	73.00	52.01	1000.0	9.000	N	20.3
2.805000	---	17.67	60.00	42.33	1000.0	9.000	N	20.2
2.805000	23.78	---	73.00	49.22	1000.0	9.000	N	20.2
26.610000	---	31.27	60.00	28.73	1000.0	9.000	N	20.2
26.610000	34.35	---	73.00	38.65	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: ARD-410
Mode :
Speed : 1000 Mbps
Operator Name: KES

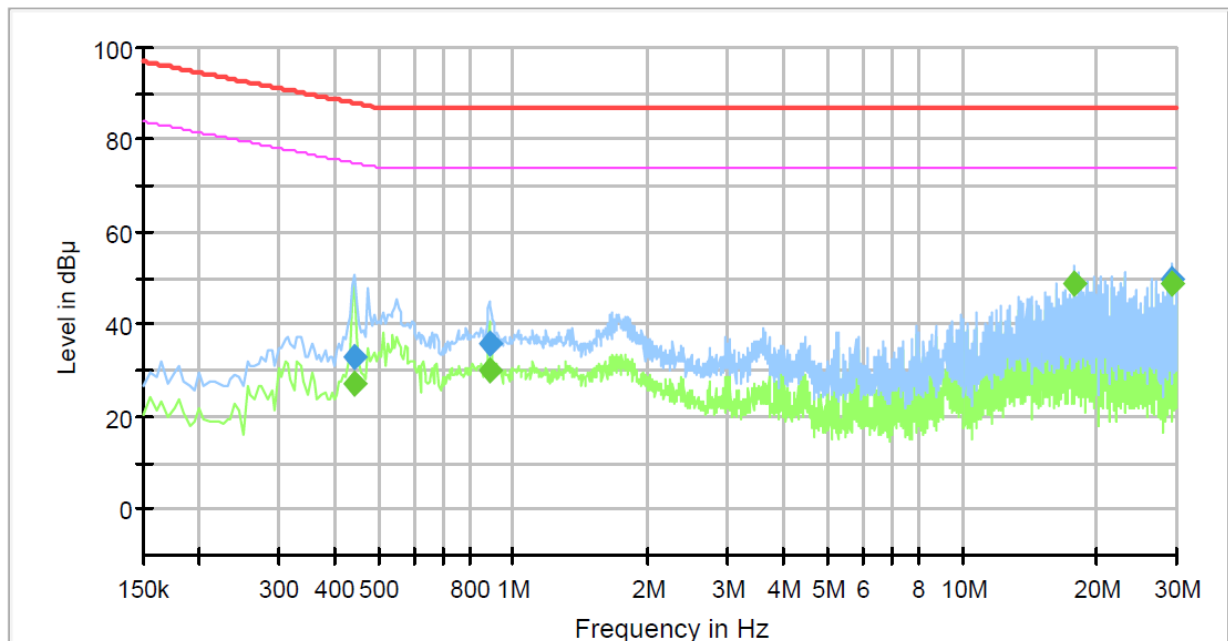

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	32.84	---	87.97	55.13	1000.0	9.000	Single Line	19.7
0.445000	---	26.94	74.97	48.03	1000.0	9.000	Single Line	19.7
0.885000	35.70	---	87.00	51.30	1000.0	9.000	Single Line	20.0
0.885000	---	30.07	74.00	43.93	1000.0	9.000	Single Line	20.0
17.695000	---	48.87	74.00	25.13	1000.0	9.000	Single Line	19.7
29.235000	49.99	---	87.00	37.01	1000.0	9.000	Single Line	20.1
29.235000	---	48.92	74.00	25.08	1000.0	9.000	Single Line	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

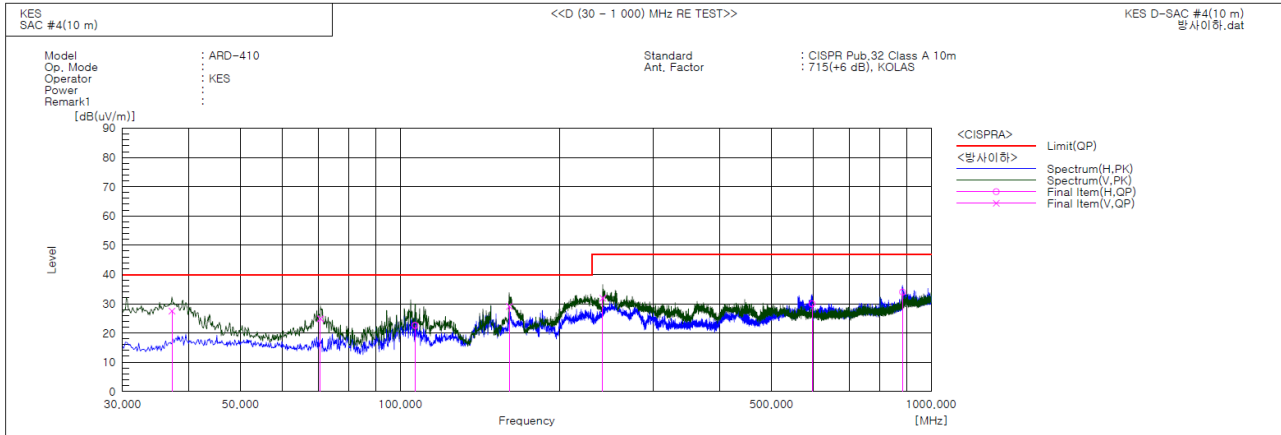

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	37.154	V	51.4	-23.9	27.5	40.0	12.5	105.0	357.0	
2	70.740	V	49.9	-25.0	24.9	40.0	15.1	110.0	136.0	
3	106.630	H	44.8	-22.2	22.6	40.0	17.4	387.0	344.0	
4	160.465	V	53.6	-24.5	29.1	40.0	10.9	120.0	16.0	
5	240.733	V	51.2	-19.3	31.9	47.0	15.1	125.0	13.0	
6	596.359	H	38.2	-8.2	30.0	47.0	17.0	390.0	322.0	
7	883.600	H	37.9	-3.9	34.0	47.0	13.0	386.0	340.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0890-R1
Page (21) of (32)

Radiated Electric Field Emissions(Above 1 GHz)

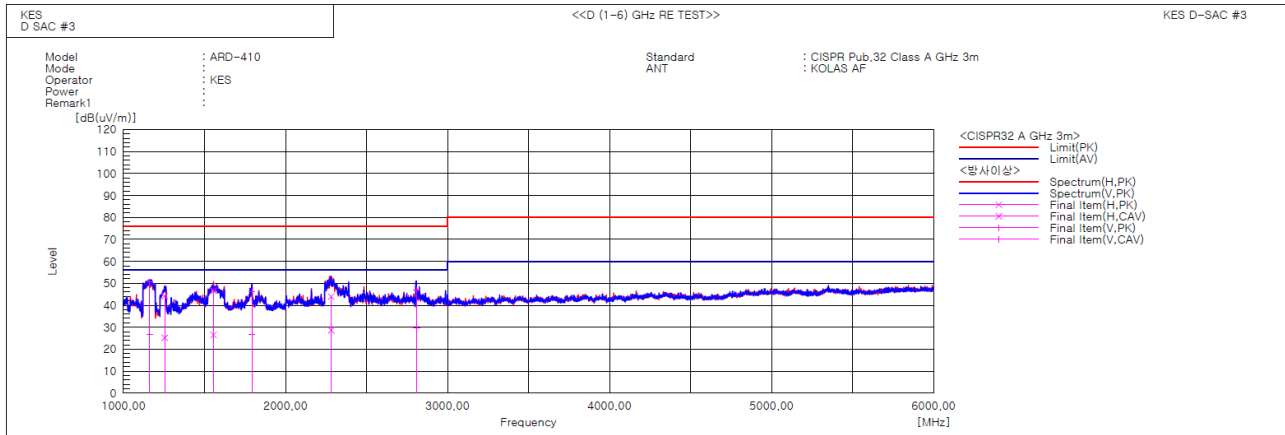

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1160.554	V	59.4	35.6	-8.8	50.6	26.8	76.0	56.0	25.4	29.2	100.0	355.8	
2	1254.487	H	52.5	33.4	-8.2	44.3	25.2	76.0	56.0	31.7	30.8	100.0	345.7	
3	1555.478	H	52.3	32.2	-5.7	46.6	26.5	76.0	56.0	29.4	29.5	100.0	11.4	
4	1792.456	V	48.8	29.4	-2.8	46.0	26.6	76.0	56.0	30.0	29.4	100.0	22.8	
5	2281.659	H	44.2	28.8	-0.2	44.0	28.6	76.0	56.0	32.0	27.4	100.0	66.2	
6	2807.650	V	45.2	27.8	1.7	46.9	29.5	76.0	56.0	29.1	26.5	100.0	70.0	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

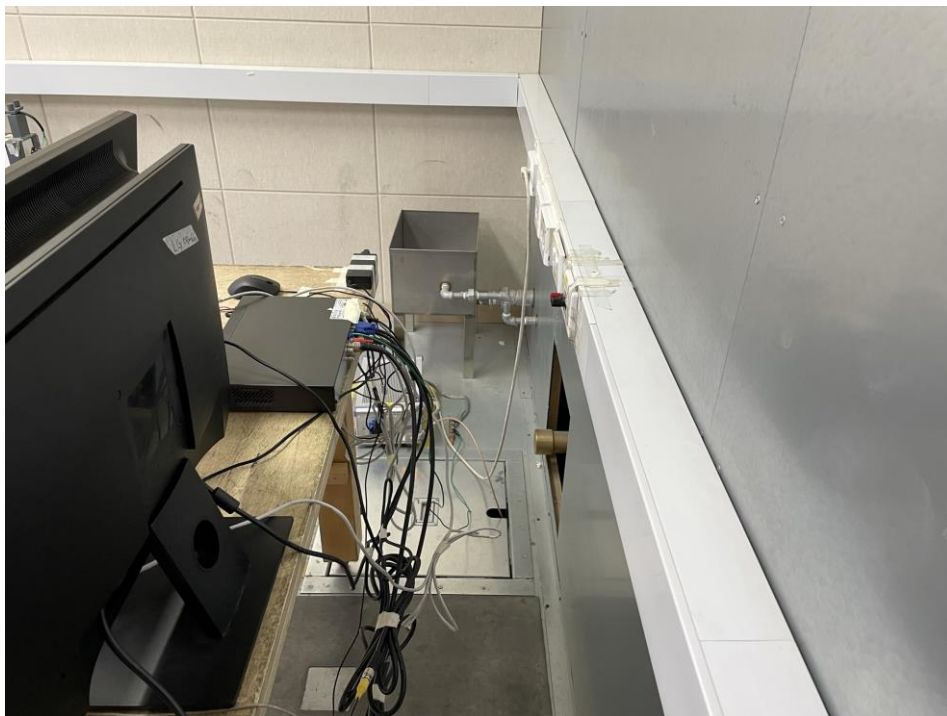


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

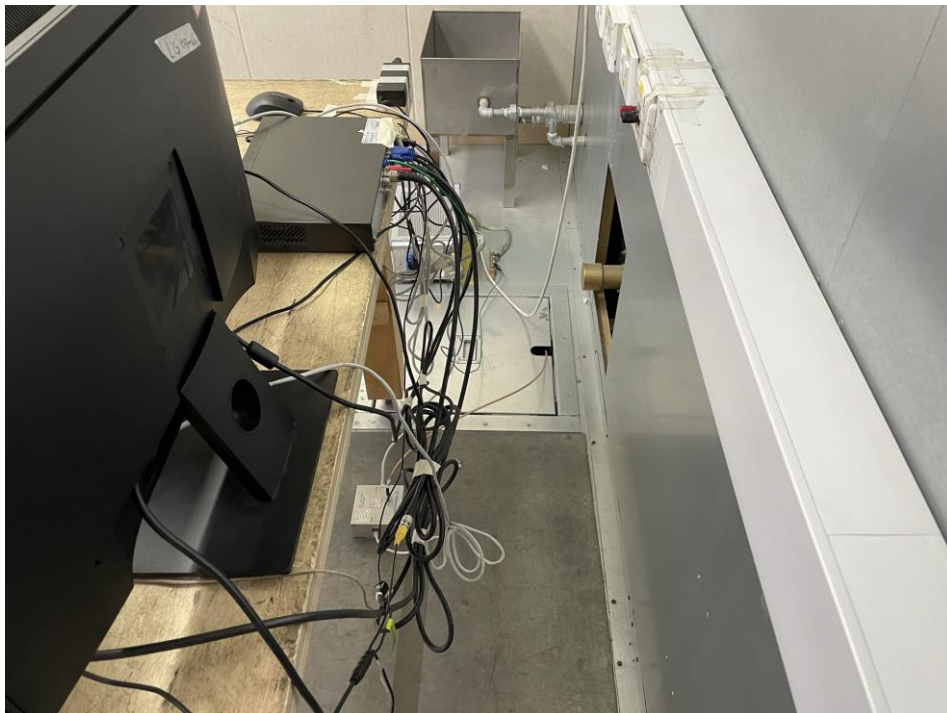



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

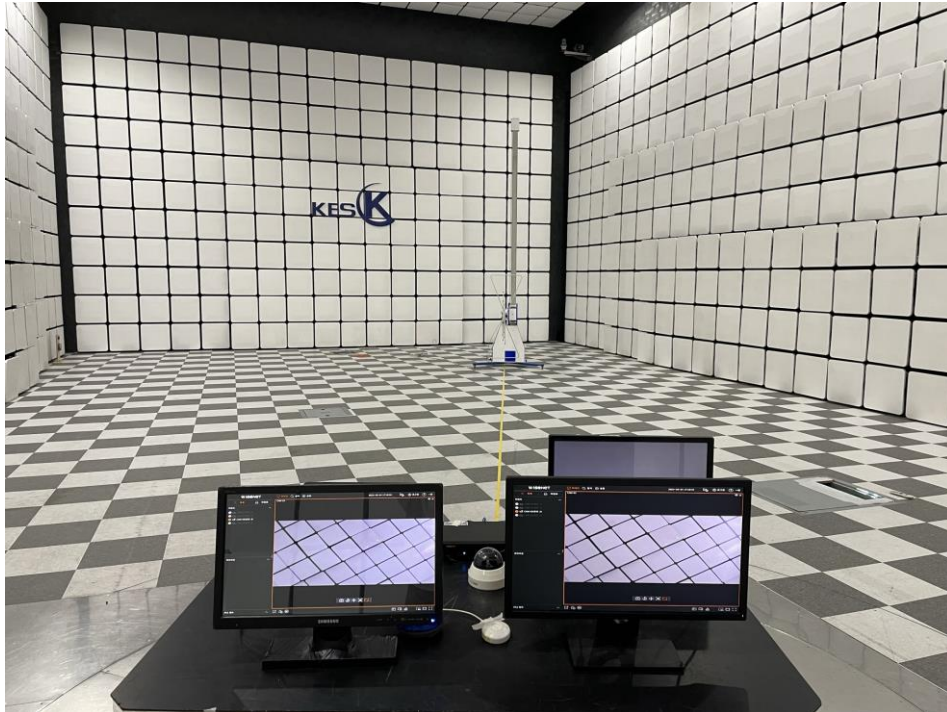

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

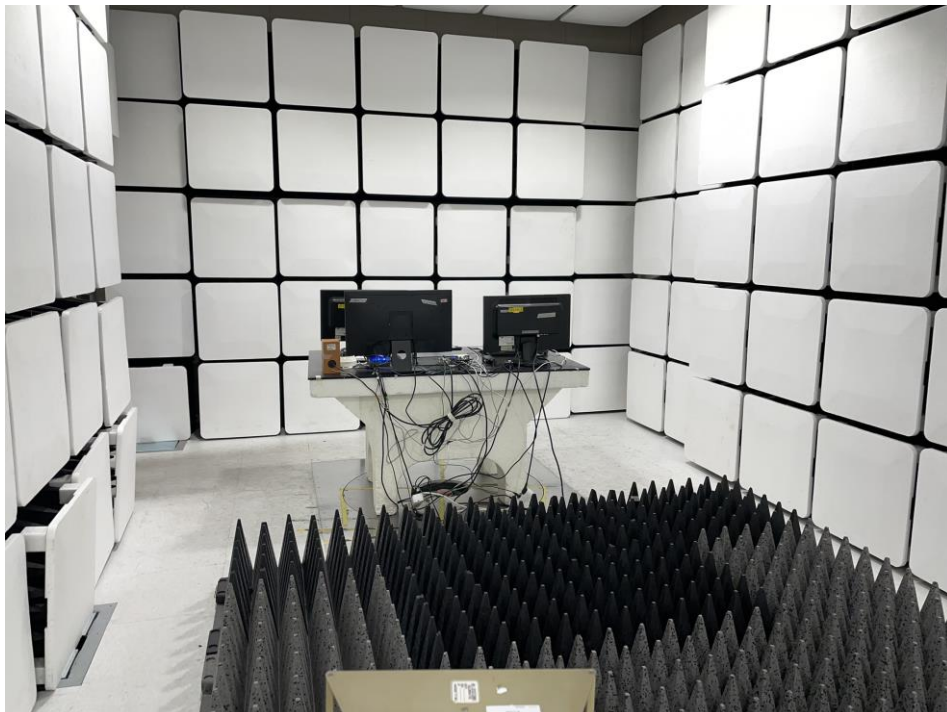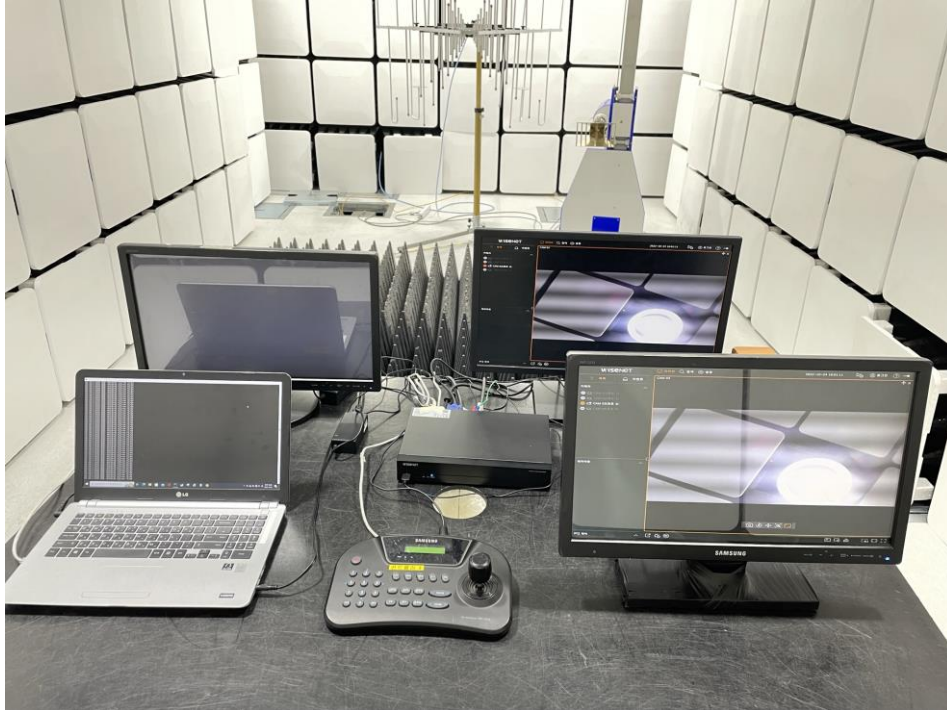

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs

(Internal View)

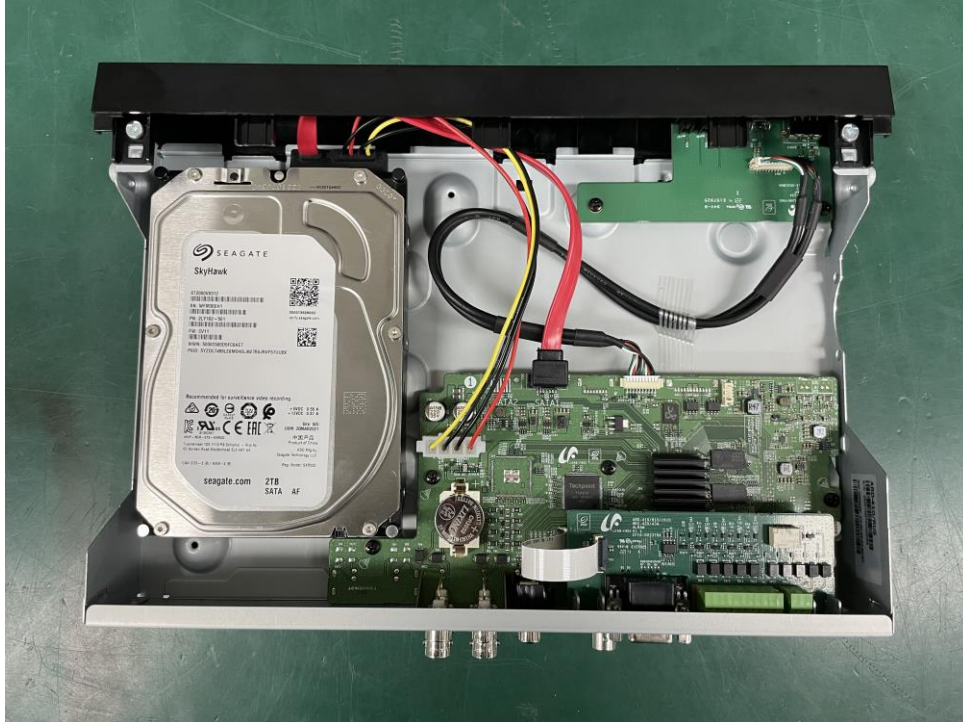


EUT Internal View – Board 1

(Top)




(Bottom)

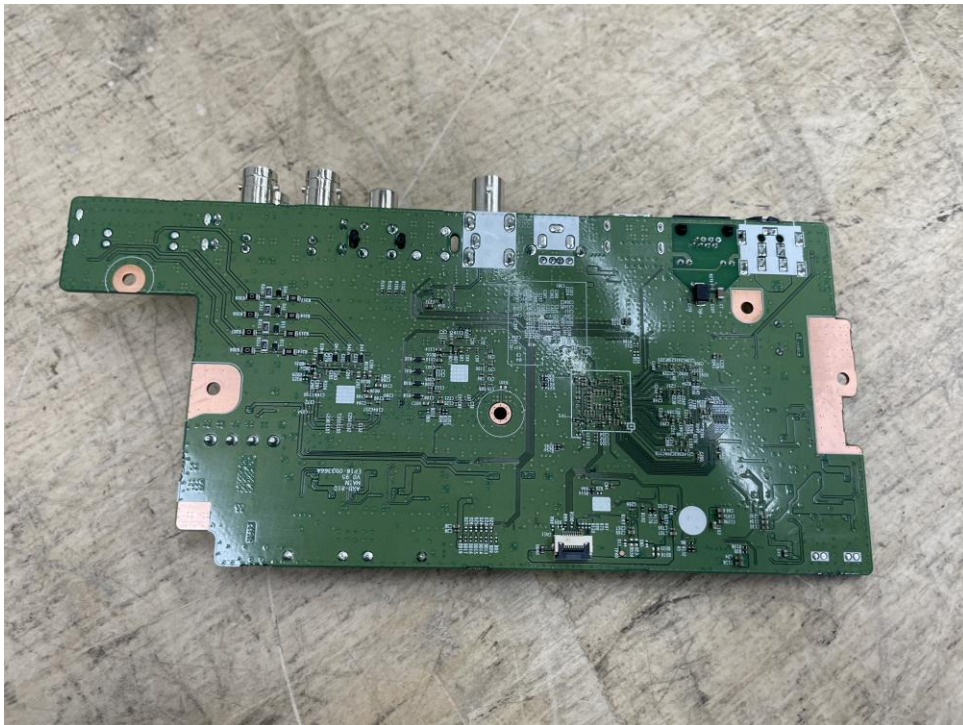


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

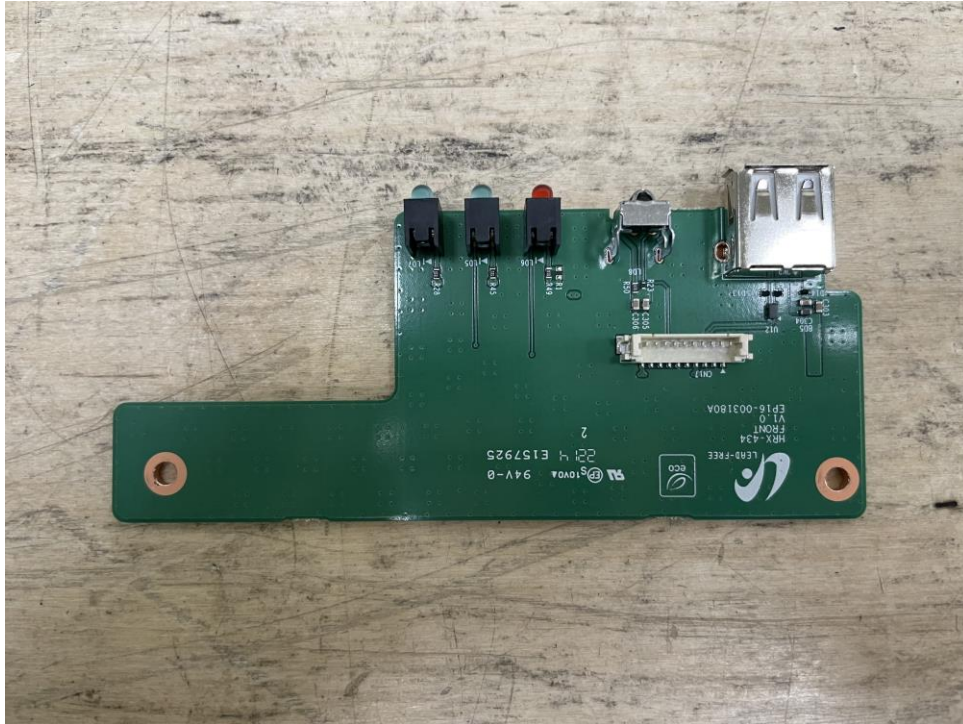


(Bottom)

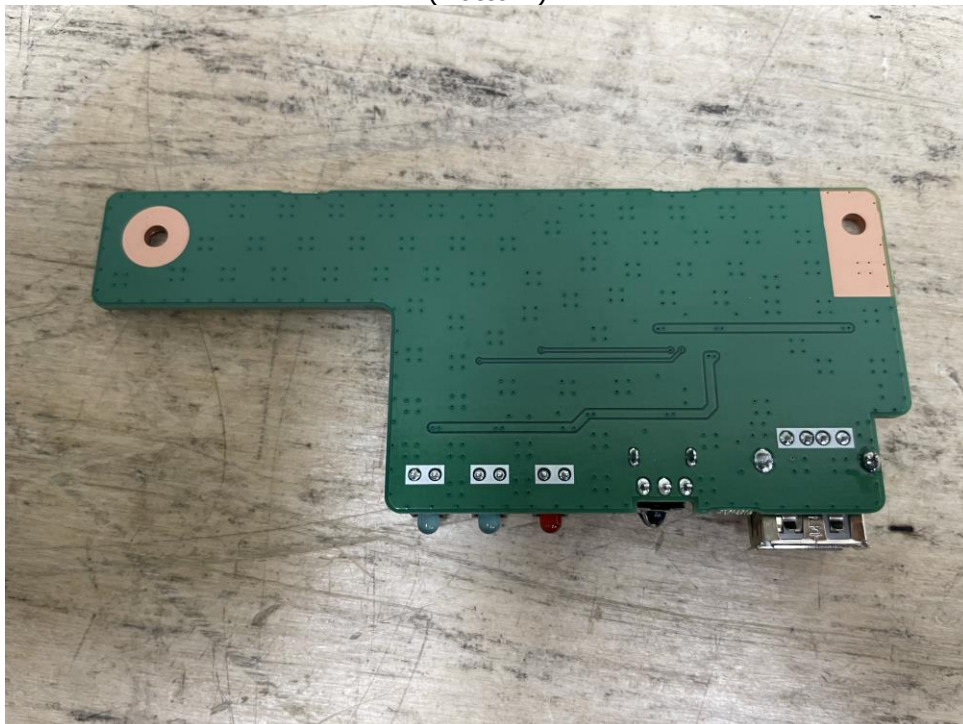


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)

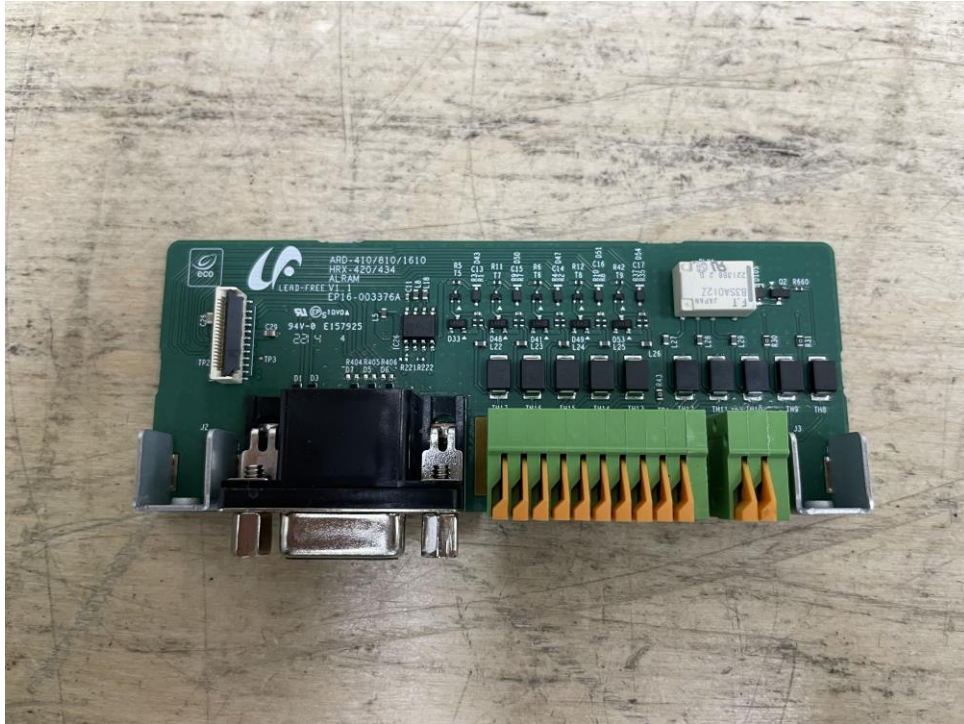

(Bottom)

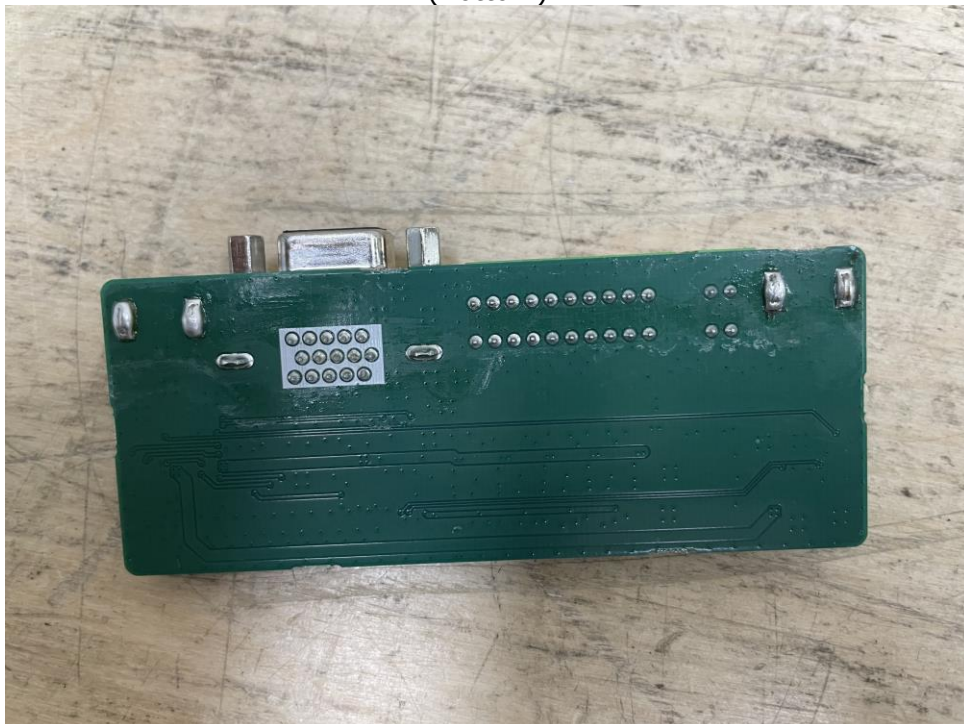

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – HDD

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

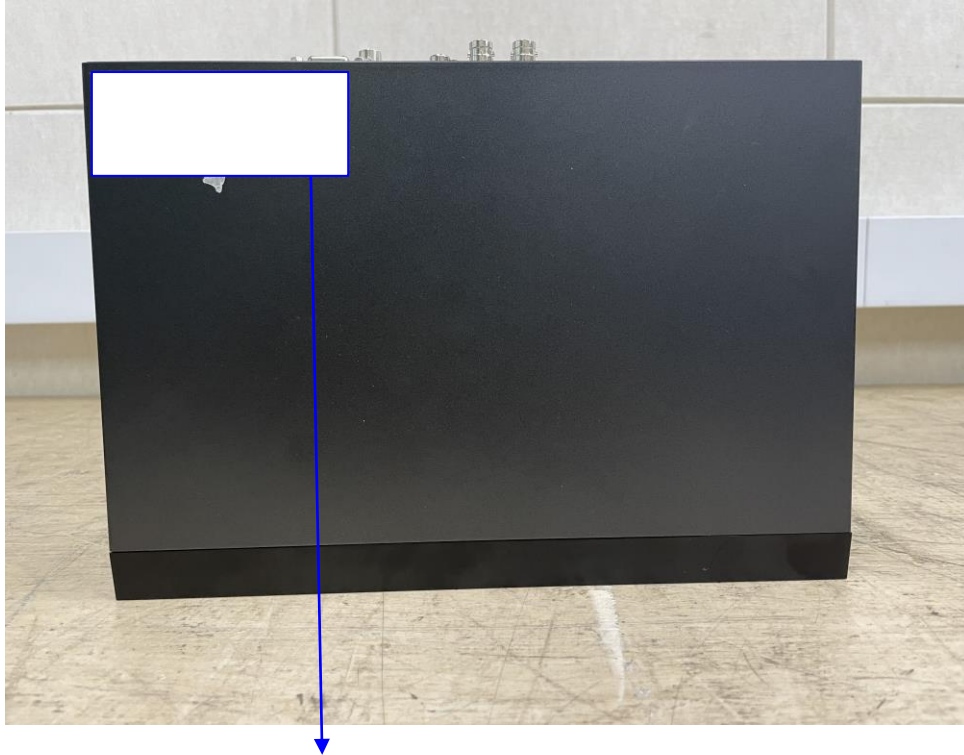

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A