



File E158873

Vol X13

Authorization Page 1

Issued: 2020-07-22

Revised: 2021-05-26

FOLLOW-UP SERVICE PROCEDURE
(TYPE R)

AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT
(AZOT, AZOT7)

Manufacturer:	SEE ADDENDUM FOR MANUFACTURER LOCATIONS
Applicant: (813307-003)	105140 (Party Site) Hanwha Techwin Co Ltd 6, Pangyo-ro 319beon-gil, Bundang-gu Seongnam-si Gyeonggi-do 13488 KR
Listee/Classified Company: (813307-003)	105140 (Party Site) SAME AS APPLICANT

Use of the Mark

This Follow-Up Service Procedure authorizes the above Manufacturer(s) to use the marking specified by UL LLC, or any authorized licensee of UL LLC, including the UL Contracting Party, only on products when constructed, tested and found to be in compliance with the requirements of this Follow-Up Service Procedure and in accordance with the terms of the applicable service agreement with UL Contracting Party. The UL Contracting Party for Follow-Up Services is listed in the addendum to this Follow-Up Service Procedure ("UL Contracting Party"). UL Contracting Party and UL LLC are referred to jointly herein as "UL."

It is the responsibility of the Applicant, Manufacturer(s), and Listee/Classified Company to make sure that only the products meeting the aforementioned requirements bear the authorized Marks of UL LLC, or any authorized licensee of UL LLC.

Additional Responsibilities

Additional responsibilities, duties and requirements for the Applicant and Manufacturers are defined under Additional Resources at the following web-site: <http://www.ul.com/fus>. Manufacturers without Internet access may obtain the current version of these documents from their local UL customer service representative or UL field representative. For assistance, or to obtain a paper copy of these documents or the Follow-Up Service Terms referenced below, please contact UL's Customer Service at <http://www.ul.com/aboutul/locations/>, select a location and enter your request, or call the number listed for that location.

Acceptance of Follow-Up Services

The Applicant and the specified Manufacturer(s) and any Listee/Classified Company in this Follow-Up Service Procedure must agree to receive Follow-Up Services from UL Contracting Party. If your applicable service agreement is a Global Services Agreement ("GSA"), the Applicant, the specified Manufacturer(s), and any Listee/Classified Company will be bound to a Service Agreement for Follow-Up Services upon the earliest by any Subscriber of a) use of the prescribed UL Mark, b) acceptance of the factory inspection, or c) payment of the Follow-Up Service fees. The Service Agreement incorporates such GSA, this Follow-Up Service Procedure and the Follow-Up Service Terms which can be accessed by clicking the following link: <http://services.ul.com/fus-service-terms>. In all other events, Follow-Up Services will be governed by and incorporate the terms of your applicable service agreement and this Follow-Up Service Procedure.

Use and Ownership of the Follow-Up Service Procedure

This Follow-Up Service Procedure, and any subsequent revisions, is the property of UL and is not transferable. This Follow-Up Service Procedure contains confidential information for use only by the Applicant, the specified Manufacturer(s), and representatives of UL and is not to be used for any other purpose. It is provided to the Subscribers with the understanding

that it is not to be copied, either wholly or in part unless specifically allowed, and that it will be returned to UL, upon request.

Definition of Terms

Capitalized terms used but not defined herein have the meanings set forth in the GSA and the applicable Service Terms or any other applicable UL service agreement.

No Third Party Liability

UL shall not incur any obligation or liability for any loss, expense or damages, including incidental, consequential or punitive damages arising out of or in connection with the use or reliance upon this Follow-Up Service Procedure to anyone other than the above Manufacturer(s) as provided in the agreement between UL LLC or an authorized licensee of UL LLC, including UL Contracting Party, and the Manufacturer(s).

Certification Body

UL LLC has signed below solely in its capacity as the certification body to indicate that this Follow-Up Service Procedure fulfills the requirements for certification documentation issued by the certification body.

Bruce A. Mahrenholz
Director
Conformity Assessment Programs (CPO)
UL LLC

LOCATION

135422 (Party Site)
D-TECH CO LTD
173-25 Saneop-ro Gwonseon-gu
Suwon-si Gyeonggi-do 16648 KR
Factory ID: D
UL Contracting Party for above site is: UL GmbH

1846102 (Party Site)
Hanwha Techwin Security Vietnam Co Ltd
Lot O-2 Que Vo Industrial Zone extended area Nam Son Ward
Bac Ninh VN
Factory ID: V
UL Contracting Party for above site is: UL GmbH

(100578-786) 241273 (Party Site)
OIC KOREA CO LTD
5F, 12 Annam-ro 369beon-gil Bupyeong-gu
Incheon 21312 KR
Factory ID: O
UL Contracting Party for above site is: UL GmbH

2637173 (Party Site)
KOSTEM CO.,Ltd.
4-74, 228, Haan-ro
Gwangmyeong-si Gyeonggi-do KR
Factory ID: KOS
UL Contracting Party for above site is: UL GmbH

File		Volume	Page	Date:
E158873	Index	X13	1	07-Aug-22

Index

Product Type	Model/Type Reference	Report Reference #	Status
NETWORK VIDEO RECORDER	XRN-6410B4, XRN-3210B4	E158873-A6027-UL	
NETWORK VIDEO RECORDER	PRN-6410B4, PRN-3210B4, XRP-4210B4, PRN-6400B4, PRN-3200B4	E158873-A6028-UL	
NETWORK VIDEO RECORDER	XRN-6410DB4	E158873-A6029-UL	
NETWORK VIDEO RECORDER	PRN-6410DB4, XRP-4310DB4, PRN-6400DB4	E158873-A6030-UL	
NETWORK CAMERA	PNM-9002VQ	E158873-A6031-UL	
NETWORK CAMERA	XNF-9010RV, XNF-9010RVM, XNF-9010RS	E158873-A6032-UL	
NETWORK CAMERA	PNM-9000QB	E158873-A6033-UL	
NETWORK CAMERA	XNP-9300RW, XNP-8300RW, XNP-6400RW	E158873-A6034-UL	
NETWORK CAMERA	TNV-8010C, TNV-8011C	E158873-A6035-UL	
OUTDOOR NETWORK CAMERA	PNM-8082VT	E158873-A6036-UL	
THERMAL CAMERA	TNM-3620TDY	E158873-A6037-UL	
DIGITAL VIDEO RECORDER	HRX-1621* (* is Blank or N or P : P=PAL, N=NTSC)	E158873-A6038-UL	
NETWORK CAMERA	PNM-9022V	E158873-A6039-UL	
NETWORK CAMERA	PNM-9322VQP	E158873-A6040-UL	
DIGITAL VIDEO RECORDER	HRX-821* (* is Blank or N or P : P=PAL, N=NTSC)	E158873-A6041-UL	
NETWORK I/O BOX	SPM-4210	E158873-A6042-UL	
NETWORK VIDEO RECORDER	XRN-2011*, XRN-2010*, XRN-3010*, XRN-1610*, XRN-2010P/DM, XRN-3010P/DM, XRN-3010A, XRN-2011A, XRN-2010A, XRN-1610A (* is blank or N or P: N=NTSC, P=PAL)	E158873-A6043-UL	
PUBLIC VIEW MONITOR	SMT-2730PV	E158873-A6044-UL	
PUBLIC VIEW MONITOR	SMT-3230PV	E158873-A6045-UL	
CAMERA HOUSING	SHB-9000H	E158873-A6046-UL	
PUBLIC VIEW MONITOR	SMT-1030PV	E158873-A6047-UL	
NETWORK CAMERA	XNP-9250R, XNP-8250R, XNP-6400R	E158873-A6049-UL	
NETWORK CAMERA	XNP-9250, XNP-8250, XNP-6400	E158873-A6050-UL	
NETWORK CAMERA	ONO-9081R	E158873-A6051-UL	
NETWORK CAMERA	ONV-9081R	E158873-A6052-UL	
NETWORK VIDEO RECORDER	XRN-1620B2	E158873-A6053-UL	

File		Volume	Page	Date:
E158873	Index	X13	2	07-Aug-22

NETWORK VIDEO RECORDER	XRN-1620SB1	E158873-A6054-UL	
NETWORK VIDEO RECORDER	XRN-820S	E158873-A6055-UL	
NETWORK CAMERA	SCO-6020	E158873-A6056-UL	
NETWORK CAMERA	TNF-9010	E158873-A6057-UL	
NETWORK VIDEO RECORDER	PRN-3210B2, PRN-1610B2, XRN-6410RB2, XRN-3210RB2, XRN-6410B2, XRN-3210B2, PRN-3200B2, PRN-3205B2, PRN-1600B2, PRN-1605B2	E158873-A6058-UL	
NETWORK CAMERA	PNB-A6001	E158873-A6059-UL	
NETWORK CAMERA	PND-A6081RV, PND-A6081RF	E158873-A6060-UL	
NETWORK CAMERA	PNO-A6081R	E158873-A6061-UL	
LENS MODULE	SLA-T2480*, SLA-T2480V*, SLA-T4680*, SLA-T4680V*, SLA-T4680D, SLA-T4680DW, SLA-T4680DS, SLA-T2415, SLA-T2815B, SLA-T2480A, SLA-T2480VA, SLA-T4680A, SLA-T4680VA (* is blank or N or P: N = NTSC, P=PAL)	E158873-A6062-UL	
NETWORK CAMERA	PNV-A6081R	E158873-A6063-UL	
NETWORK CAMERA	XNB-6001*, XNB-H6240A, XNB-H6242A	E158873-A6064-UL	
NETWORK THERMAL CAMERA	TNO-3030T, TNO-3020T, TNO-3010T, TNO-3040T, TNO-3050T	E158873-A6067-UL	
NETWORK CAMERA	QNP-6320, QNP-6250, QNP-6251	E158873-A6068-UL	
NETWORK CAMERA	QNP-6320H, QNP-6250H	E158873-A6069-UL	
NETWORK CAMERA	XNV-C9083R, XNV-C8083R, XNV-C7083R, XNV-C6083R, XNV-C6083	E158873-A6070-UL	
NETWORK CAMERA	TID-600R	E158873-A6071-UL	
DIGITAL VIDEO RECORDER	HRX-1632, HRX-835	E158873-A6072-UL	
LED MONITOR	SMT-4343	E158873-A6073-UL	
NETWORK CAMERA	TNO-7180R	E158873-A6075-UL	
NETWORK CAMERA	XND-C9083RV, XND-C8083RV, XND-C7083RV, XND-C6083RV	E158873-A6076-UL	
NETWORK CAMERA	PNM-9031RV	E158873-A6077-UL	
NETWORK CAMERA	QNO-7082R	E158873-A6078-UL	
NETWORK CAMERA	QND-7082R	E158873-A6080-UL	
NETWORK CAMERA	QNV-7082R	E158873-A6081-UL	
NETWORK CAMERA	XNO-C9083R, XNO-C8083R, XNO-C7083R, XNO-C6083R	E158873-A6082-UL	
NETWORK CAMERA	XNV-9083R, XNV-8083R, XNV-8093R, XNV-6083R	E158873-A6083-UL	
NETWORK CAMERA	XND-9083RV, XND-8083RV, XND-8093RV, XND-6083RV	E158873-A6084-UL	
NETWORK CAMERA	QNO-7032R, QNO-7022R, QNO-7012R	E158873-A6088-UL	

File		Volume	Page	Date:
E158873	Index	X13	3	07-Aug-22

NETWORK CAMERA	XNB-9003, XNB-8003, XNB-6003	E158873-A6089-UL	
NETWORK CAMERA	XNO-9083R, XNO-8083R, XNO-6083R	E158873-A6091-UL	
NETWORK CAMERA	QNV-7012R, QNV-7022R, QNV-7032R	E158873-A6092-UL	
NETWORK CAMERA	QND-7012R, QND-7022R, QND-7032R	E158873-A6093-UL	
NETWORK CAMERA	QNP-6320R, QNP-6250R	E158873-A6094-UL	
NETWORK CAMERA	XNV-6123R	E158873-A6100-UL	
NETWORK CAMERA	XNO-6123R	E158873-A6101-UL	
NETWORK CAMERA	LNO-6072R	E158873-A6102-UL	
NETWORK CAMERA	LVN-6012R, LVN-6022R, LVN-6032R, ANV-L6012R	E158873-A6103-UL	
NETWORK CAMERA	LVN-6072R	E158873-A6104-UL	
NETWORK CAMERA	LND-6012R, LND-6022R, LND-6032R	E158873-A6105-UL	
NETWORK CAMERA	LND-6072R	E158873-A6106-UL	
NETWORK CAMERA	LNO-6012R, LNO-6022R, LNO-6032R, ANO-L6012R, ANO-L6022R	E158873-A6107-UL	
NETWORK CAMERA	ANO-L7022R, ANO-L7012R	E158873-A6108-UL	
NETWORK CAMERA	TNV-7010RC, TNV-7011RC	E158873-A6109-UL	
NETWORK CAMERA	ANV-L7012R	E158873-A6110-UL	
NETWORK CAMERA	XNZ-6320A	E158873-A6111-UL	
NETWORK CAMERA	QNP-6320HS	E158873-A6112-UL	
NETWORK CAMERA	PNM-A9083RVD, PNM-A7083RVD, PNM-C12083RVD, PNM-C7083RVD	E158873-A6113-UL	
NETWORK VIDEO RECORDER	ARN-1610S	E158873-A6114-UL	
NETWORK CAMERA	XNZ-L6320A	E158873-A6115-UL	
NETWORK VIDEO RECORDER	QRN-1630S, XRN-815S	E158873-A6116-UL	
NETWORK CAMERA	ANO-L7082R, ANO-L6082R	E158873-A6117-UL	
THERMAL NETWORK CAMERA	TNM-C4940TD, TNM-C4950TD, TNM-C4960TD	E158873-A6118-UL	
NETWORK CAMERA	ANE-L7012R, ANE-L6012R	E158873-A6119-UL	
NETWORK CAMERA	PNM-12082RVD, PNM-7082RVD	E158873-A6120-UL	
NETWORK CAMERA	ANV-L7082R, ANV-L6082R	E158873-A6121-UL	
DIGITAL VIDEO RECORDER	HRX-1635	E158873-A6122-UL	
DIGITAL VIDEO RECORDER	HRX-835A	E158873-A6123-UL	
NETWORK CAMERA	XNF-9013RV	E158873-A6124-UL	
NETWORK VIDEO ENCODER	SPE-1630	E158873-A6125-UL	
NETWORK VIDEO RECORDER	QRN-430S, ARN-410S	E158873-A6126-UL	
NETWORK VIDEO RECORDER	XRN-420S	E158873-A6127-UL	

File		Volume	Page	Date:
E158873	Index	X13	4	07-Aug-22

NETWORK VIDEO RECORDER	QRN-830S	E158873-A6128-UL	
NETWORK VIDEO RECORDER	ARN-810S	E158873-A6129-UL	

UL TEST REPORT AND PROCEDURE

Standard:	UL 62368-1, 3rd Ed, 2021-10-22 (Audio/video, information and communication technology equipment Part 1: Safety requirements) CAN/CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22 (Audio/video, information and communication technology equipment Part 1: Safety requirements)
Certification Type:	Listing
CCN:	AZOT, AZOT7 (Audio/video, Information and Communication Technology Equipment)
Complementary CCN:	N/A
Product:	NETWORK VIDEO RECORDER
Model:	QRN-430S, ARN-410S
Rating:	54.0 Vdc, 0.96 A
Applicant Name and Address:	HANWHA TECHWIN CO LTD 6, PANGYO-RO 319BEON-GIL, BUNDANG-GU SEONGNAM-SI GYEONGGI-DO 13488 KOREA

This is to certify that representative samples of the products covered by this Test Report have been investigated in accordance with the above referenced Standards. The products have been found to comply with the requirements covering the category and the products are judged to be eligible for Follow-Up Service under the indicated Test Procedure. The manufacturer is authorized to use the UL Mark on such products which comply with this Test Report and any other applicable requirements of UL LLC ('UL') in accordance with the Follow-Up Service Agreement. Only those products which properly bear the UL Mark are considered as being covered by UL's Follow-Up Service under the indicated Test Procedure.

The applicant is authorized to reproduce the referenced Test Report provided it is reproduced in its entirety.

UL authorizes the applicant to reproduce the latest pages of the referenced Test Report consisting of the first page of the Specific Technical Criteria through to the end of the Conditions of Acceptability.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

Prepared By: Lawrence Lee / Project Handler Reviewed By: SeulKi Park / Reviewer

Supporting Documentation

The following documents located at the beginning of this Procedure supplement the requirements of this Test Report:

A. Authorization - The Authorization page may include additional Factory Identification Code markings.

B. Generic Inspection Instructions -

- i. Part AC details important information which may be applicable to products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of this Test Report.
- ii. Part AE details any requirements which may be applicable to all products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of each Test Report.
- iii. Part AF details the requirements for the UL Certification Mark which is not controlled by the technical standard used to investigate these products. Products are permitted to bear only the Certification Mark(s) corresponding to the countries for which it is certified, as indicated in each Test Report.

Product Description

NETWORK VIDEO RECORDER. This unit was supplied by adaptor and consist of main board, 1 hard disk-drive and numerous components mounted on PWB.

This unit connect CCTV camera using 4 PoE ports. (PoE 54 Vdc Each, Total Max. 0.65 A)

Model Differences

QRN-430S is basic model.

ARN-410S are identical to basic model except model designation and software.

Test Item Particulars

Product group	end product
Classification of use by	Ordinary person
Supply Connection	not mains connected: ES1
Supply tolerance	None
Supply connection – type	N/A
Considered current rating of protective device	N/A
Equipment mobility	movable
Over voltage category (OVC)	OVC I
Class of equipment	Class III
Special installation location	N/A
Pollution degree (PD)	PD 2
Manufacturer's specified Tma (°C)	40
IP protection class	IPX0
Power systems	not AC mains
Altitude during operation (m)	2000 m or less
Altitude of test laboratory (m)	2000 m or less
Mass of equipment (kg)	1.648

Technical Considerations

- ☐ The product was submitted and evaluated for use at the maximum ambient temperature (Tma) permitted by the manufacturer's specification of : 40 °C
- ☐ The product is intended for use on the following power systems : No direct connection

- ☐ Considered current rating of protective device as part of the building installation (A) : N/A
- ☐ Mains supply tolerance (%) or absolute mains supply : No direct connection
- ☐ The equipment disconnect device is considered to be : N/A
- ☐ The following circuit locations (with circuit/schematic designation) were investigated as a limited power source (LPS) : All output ports
- ☐ The following are available from the Applicant upon request : Installation (Safety) Instructions / Manual

Additional Information

4790449757

- Maximum Normal Load: Continuous operating and connected CCTV camera through 4 PoE ports, front and rear USB ports each load 0.5 A and HDMI port connect to monitor.

Additional Standards

The product fulfills the requirements of: N/A

Markings and Instructions

Clause Title	Marking or Instruction Details
Equipment identification marking – Manufacturer identification	Listee's or Recognized Company's name, Trade Name, Trademark or File Number
Equipment identification marking – model identification	Model Number
Equipment rating marking – ratings	Input Ratings (voltage, frequency/dc, current/power) Output Ratings (voltage, frequency/dc, current/power)

Special Instructions to UL Representative

N/A

BD1.0	TABLE: Production-Line Testing Requirements					
BD1.1	Electric Strength Test Special Constructions – Refer to Generic Inspection Instructions, Part AC for further information.					
Model	Component	Removable parts	Test probe location	Test V rms	Test V dc	Test Time, s
-	-	-	-	-	-	-
BD1.2	Earthing Continuity Test Exemptions – This test is not required for the following models:					
	All model					
BD1.3	Electric Strength Test Exemptions – This test is not required for the following models:					
	All model					
BD1.4	Electric Strength Test Component Exemptions – The following solid-state components may be disconnected from the remainder of the circuitry during the performance of this test.					
	All model					

BE1.0	Sample and Test Specifics for Follow-Up Tests at UL				
Model	Component	Material	Test	Sample (s)	Test Specifics
-	-	-	-	-	-

4.1.2	TABLE: List of critical components					Pass
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Product Category CCN(s)	Mark(s) of conformity	Supplement ID
Switching Power Adapter	FSP GROUP INC	FSP065-DWAN3	Input: 100-240 Vac, 50-60 Hz, 1.8 A, Output: 54 Vdc, 1.2 A, 65.0 W	QQJQ	UL (E190414)	
Power cord set (For Adapter)	LONGWELL	LP-30B +SVT 18AWG X 3C+LS-13	Detachable, Min. 1.5 m, Max. 4.5 m long, rated 125 V, 10 A, 18/3 AWG, 60 deg. C, SVT type flexible cord. One end with NEMA 5-15P the other end with appliance coupler.	ELBZ	UL (E55349)	
Power cord set (For Adapter) - Alternate	KOREA KDK CO LTD	KKP-30 + SVT 3/18AWG + KKS-16A	Detachable, Min. 1.5 m, Max. 4.5 m long, rated 125 V, 7 A, 18/3 AWG, 105 deg. C, SVT type flexible cord. One end with NEMA 1-15 other end with appliance coupler.	ELBZ	UL (E58075)	
Power cord set (For Adapter) - Alternate	CHANGZHOU HONG CHANG ELECTRONICS CO LTD	DTII-3P-11+UL SVT 18AWG/3C +DTII-3P-04	Detachable, Min. 1.5 m, Max. 4.5 m long, rated 125 V, 10 A, 18/3 AWG, 105 deg. C, SVT type flexible cord. One end with NEMA 5-15P the other end with appliance coupler.	ELBZ2	UL (E205766)	
Power cord set (For Adapter) - Alternate	WEIHAI HONG LIN ELECTRONIC CO LTD	HL-002S + SVT 18AWG X 3C + HL-004	Detachable, Min 1.5 m, Max. 4.5 m long, rated 125 V, 10 A, 18/3 AWG, 105 deg. C, SVT type flexible cord. One end with NEMA 5-15P the other end with appliance coupler.	ELBZ2	UL (E254927)	





Enclosure Top (Metal) (Fire/Mech)	Interchangeable	Interchangeable	Steel electrolytic cold commercial, Min. 0.6 mm thickness, see enclosure for dimension.	-	-	
Enclosure Side, Bottom, Rear (Metal) (Fire/Mech)	Interchangeable	Interchangeable	Steel electrolytic cold commercial, Min. 0.6 mm thickness, see enclosure for dimension.	-	-	
Enclosure Front (Plastic) (Fire/Mech)	LOTTE CHEMICAL CORPORATION	NH-1017(p)	Min. 2.5 mm thickness, rated Min. V-0, 85 deg. C, see enclosure for dimension.	QMFZ2	UL (E115797)	
DC fan	HuiTong Electronic Co., Ltd.	HTD-040(X)12M	12 Vdc, 0.07 A, 4000 RPM (N/15000+K/2400 = 0.275738 < 1, N=4000, K=21.7728)	GPWV2	UL (E311396)	
DC fan - Alternate	SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO LTD	HA40101V4-1(Y) (HA40101V4-1000U-A99)	12 Vdc, Max 0.038 A, 5 000 RPM (N/15000+K/2400 = 0.278816 < 1, N=5000, K=29.16)	GPWV2	UL (E77551)	
Lithium Battery (CN1)	Wuhan Lixing (Torch) Power Sources Co., Ltd.	CR2032	Lithium / manganese dioxide (Coin), Non-rechargeable, Max Abnormal Charging Current: 10 mA, Max Abnormal Charging Voltage: 5 Vdc	BBCV2	UL (MH26236)	
Reverse Current Protection Circuit for Lithium Coin Battery (CN1)	Interchangeable	Interchangeable	Diode (D16, 30 V, 1 A) and resistor (R39, 1 kohm) in series.	-	-	
Transformer (T6)	SHENZHEN GROUP-TEK ELECTRONICS	PDT25117SR	130 deg. C, see enclosure for dimension	-	-	

	TECHNOLOGY CO. , LTD					
Opto-coupler(LS1)	LITE-ON Technology Corporation	LTV-816-G	Isolation Voltage: 5 000. Max. Operation Temperature: 110 deg. C	FPQU2	UL (E113898)	
USB Protection IC (U10, U27)	DIODES INC	AP2182ASG-13	Rated 2.7-5.5 Vdc, Continuous current: 1.5 A, Protection current: 2.4 A	QVGS2	UL (E322375)	
USB Protection IC (U10, U27) - Alternate	Texas InstrumentsInc	TPS2062	Rated 2.7-5.5 Vdc, Continuous current: 1 A, Protection current: 5.0 A	QVGS2	UL (E169910)	
Hard Disk Drive (Max. 1 EA)	Interchangeable	Interchangeable	Rated 5 Vdc or 12 Vdc	AZOT2 or NWGQ2	UL	
Internal Wiring	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or marked VW-1; minimum 30 V, 80 degree C	AVLV2	UL	
Connectors and Receptacles (Secondary circuits)	Interchangeable	Interchangeable	-	ECBT2	UL	
Connectors and Receptacles (Secondary circuits) -Alternate	Interchangeable	Interchangeable	Copper alloy pins housed in bodies of plastic rated Min. V-2	QMFZ2	UL	
FFC cable	FAT CO LTD	20861	Min. VW-1, 105 deg. C.	AVLV2	UL (E363546)	
FFC cable - Alternate	Interchangeable	Interchangeable	Min. VW-1	AVLV2	UL	
PWB	HANNSTAR BOARD CORP	MV-4	Min. V-0, 130 deg. C.	ZPMV2	UL (E89382)	
PWB - Alternate	Interchangeable	Interchangeable	Min. V-0, Min 130 deg. C.	ZPMV2	UL	

Label	Interchangeable	Interchangeable	Min. 40 deg. C if max. surface temperature not specified.	PGDQ2 or PGJ12	UL	
-------	-----------------	-----------------	---	----------------	----	--

Enclosures

Type	Supplement Id	Description
Photographs	03-01	External View - 1
Photographs	03-02	External View - 2
Photographs	03-03	Internal View
Photographs	03-04	Rear ports View
Photographs	03-05	Main Board - Top
Photographs	03-06	Main Board - Bottom
Photographs	03-07	Fan
Photographs	03-08	Adapter
Diagrams	04-01	Enclosure Diagram
Manuals	06-01	Manual
Miscellaneous	07-01	Transformer (T6) Specification
Miscellaneous	07-02	Label

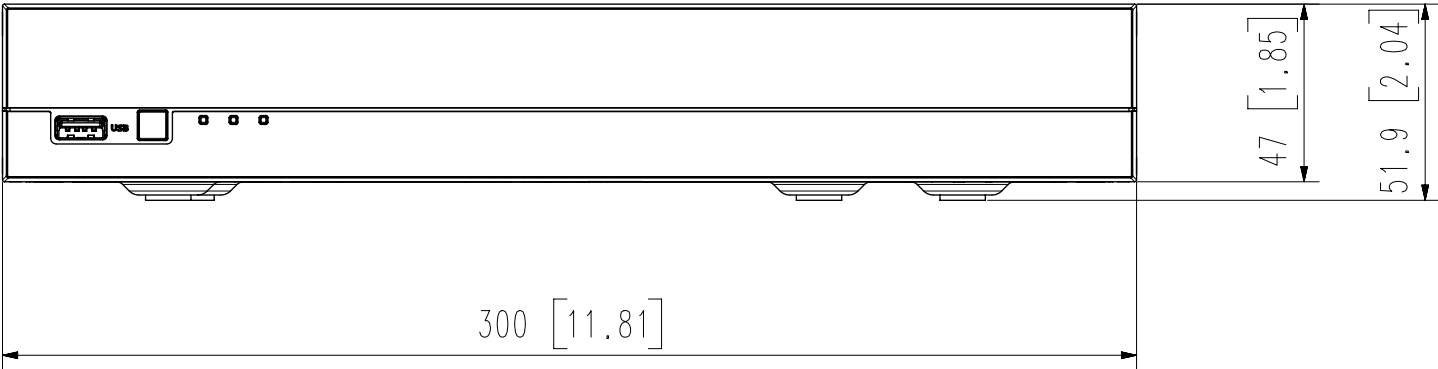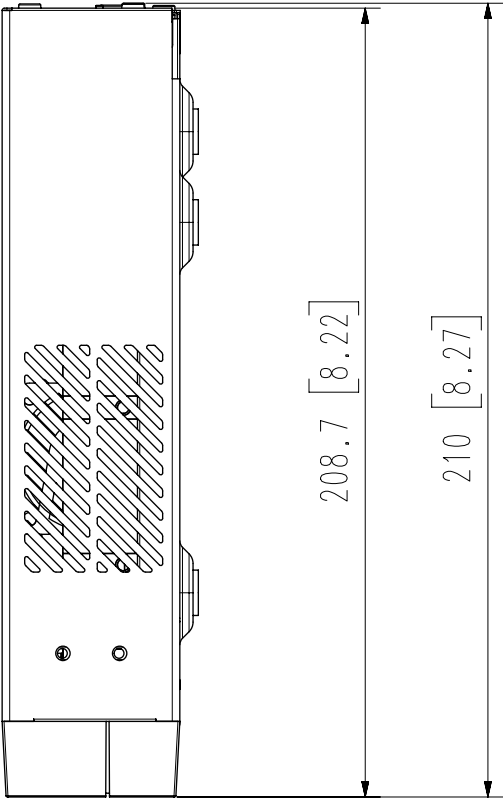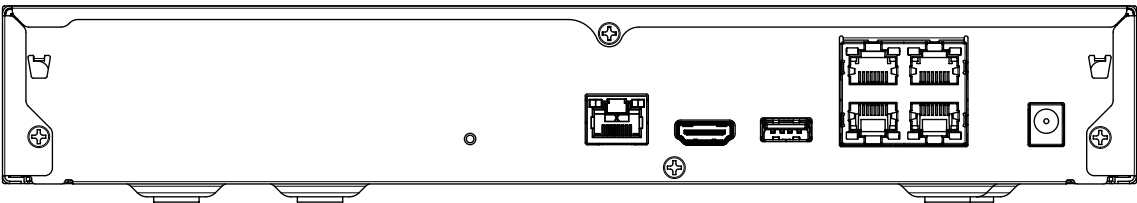

3		
2		
1	QRN-430S	'21.06.01
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/2
Hanwha Techwin		

IMPORTANT SAFETY INSTRUCTIONS

- Read these operating instructions carefully before using the unit.
- Follow all the safety instructions listed below.
- Keep these operating instructions handy for future reference.
- 1) Read these instructions.
 - 2) Keep these instructions.
 - 3) Heed all warnings.
 - 4) Follow all instructions.
 - 5) Do not use this apparatus near water.
 - 6) Clean the contaminated area on the product surface with a soft, dry cloth or a damp cloth. (Do not use a detergent or cosmetic products that contain alcohol, solvents or surfactants or oil constituents as they may deform or cause damage to the product.)
 - 7) Do not block any ventilation openings, Install in accordance with the manufacturer's instructions.
 - 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
 - 9) Do not defeat the safety purpose of the polarized or grounding- type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. if the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
 - 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
 - 11) Only use attachments/accessories specified by the manufacturer.
 - 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Standards Approvals



- ! Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- ⚡ This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
 - This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

PRODUCT USER MANUAL DESCRIPTION

- This document is a user manual for Recorder product. Before using this product, please read this document carefully in order to use it properly.
- This user manual explains how to use the product based on the defaults and default screens of this product.
 - The content of this manual is subject to change depending on the product software updates and the company policies. It is subject to partial changes without prior notification to users.

TARGET AUDIENCE

This user manual contains contents for Recorder users.

HOW TO USE THE PRODUCT

- Users of this product can perform the following:
- Monitor cameras registered to Recorder in real time
 - Search for or play videos saved in Recorder
 - Monitor text data being transmitted to the POS device connected to Recorder in real time
 - Search for text data from the POS device connected to Recorder
 - Monitor real time events that occur in Recorder, sensors, and cameras or search through logs

Before using this product, check if the latest version of this software is installed. Go to Hanwha Techwin's website (<http://www.hanwha-security.com>) to check the software version and download necessary files.


CAUTION

- RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- Do not ingest battery, Chemical Burn Hazard.
- This product contains a coin / button cell battery. If the coin / button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children.
If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

ATTENTION

- IL Y A RISQUE D'EXPLOSION SI LA BATTERIE EST REMPLACÉE PAR UNE BATTERIE DE TYPE INCORRECT. METTRE AU REBUT LES BATTERIES USAGÉES CONFORMÉMENT AUX INSTRUCTIONS.
- Ne pas ingérer la pile, risque de brûlure chimique.
- Ce produit contient une pile de type bouton/pièce de monnaie. Si la pile de type bouton/pièce de monnaie est avalée, elle peut causer de graves brûlures internes en seulement 2 heures et peut entraîner la mort.
- Gardez les piles neuves et usagées hors de portée des enfants. Si le compartiment de la pile ne se ferme pas correctement, cessez d'utiliser le produit et gardez-le d'atteinte des enfants.
Si vous suspectez que des piles ont été avalées ou insérées dans une partie du corps, consultez un médecin sans tarder.

2. Mechanical Dimensions:

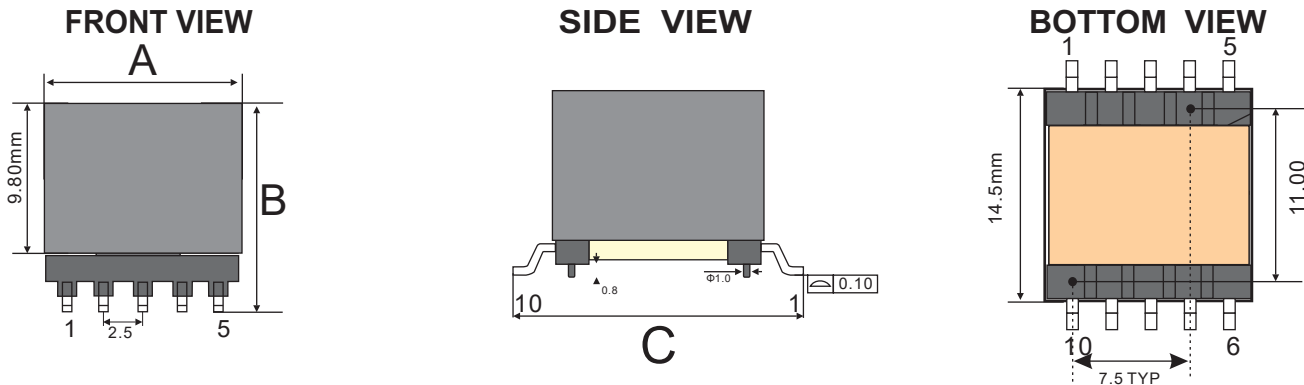

Note:

- 1.Wrap 2Ts of 7mm tape around the finished part.
- 2.Place the epoxy to fixed the core.
- 3.Wrap the copper shield for the finished part,then wrap 2T tape.

Unit: mm

A MAX	B MAX	C MAX
15.0	14.0	17.8


Laser Marking information

PDT25117SR
GROUP-TEK

● YYWW



Suggested PCB Paad Layout



3.Electrical Characteristics :

Specifications: at 25 degree C. Operating Temperature -40 to +105°C


NO.	ITEM	TEST CONDITION	SPECIFICATION
1	Inductance	(3-2) @100KHz, 1.0V	77.0uH ±15%.
2	Inductance	(4-5) @100KHz, 1.0V	23.0uH ±20%.
3	Inductance	(8,9-6,7) @100KHz, 1.0V	31uH ±20%.
4	Leakage Inductance	(3-2) @100KHz, 1.0V with shorted other pins.	3.0uH Max.
5	DCR	(3-2) @ 25°C	0.20Ω Max.
6		(4-5) @ 25°C	0.15Ω Max..
7		(8,9-6,7) @ 25°C	0.15Ω Max.
8	HI-POT	PRI TO SEC	1200Vac 5mA 3Sec.
9	TURN RATIO	(3-2):(8,9-6,7)	1:0.64±2%.
10	TURN RATIO	(3-2):(4-5)	1:0.55±2%.

4.Winding Information:


WINDING SEQ.	ST-FN	WIRE/FOIL	TURNS	WRAP INSUL.	MARGIN TAPE	SLEEVE	NOTE
1	3--2	0.30mm 2UEW	22	2T w8.0mm	N/A	N/A	1.
2	8,9--6,7	2*0.30mm 2UEW	14	2T w8.0mm	2T W=1.0mm	N/A	1.
3	4--5	0.30mm 2UEW	12	3T w8.0mm	1T W=1.0mm	N/A	1.

NOTE :
1.Place the bobbin pin 1 left side of operator.

5.Schematic:

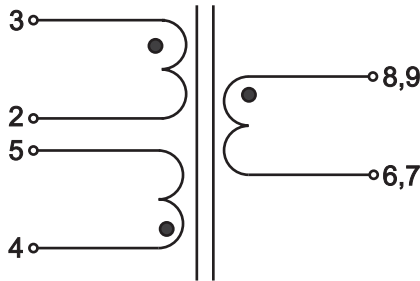

6.Winding detail:

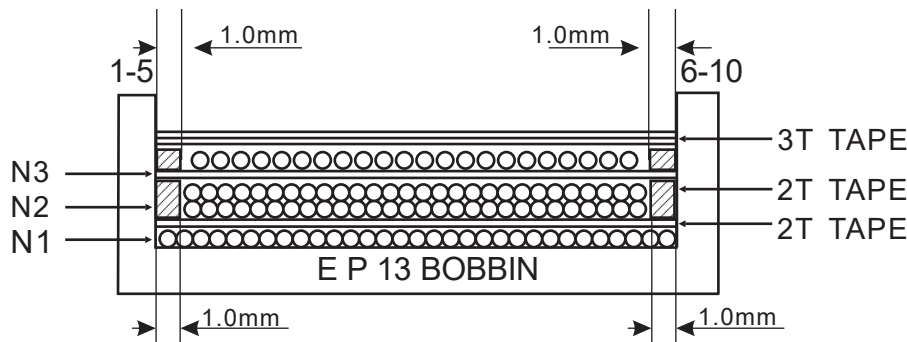


7.Material List:

NO.	ITEM.	MATERIALS	SUPPLIERS/MANUFACTURERS	UL FILE NO.
1	BOBBIN	PF2A5-151J(b)	Changshu South EastPlastics Co.,Ltd	E136137
2	CORE	E P13 PG242A	Advance Electronics Products Co.,Ltd	N/A
3	WIRE	POLYURETHANE ENAMELED TYPE NO.: 2UEW ϕ 0.30 THERMAL RATING:180°C	Shing Shun Magnet wire(HuiZhou) Co.,Ltd	E255839
4	TAPE	ADHESIVE POLYESTER TAPE TYPE NO.:CT*(c)(g) THERMAL RATING:130°C yellow tape : for inner coils	JingJiang yahua pressure sensitive glue Co.,Ltd	E165111
5	SOLDER	SN/CU: 99.3/0.7	Gao Xin stannum industry Co., Ltd	N/A
6	EPOXY	H-1026	Dongguan city Eatto electronics material Co.,Ltd	N/A
7	CASE	PF2A5-151J(b)	Changshu South EastPlastics Co.,Ltd	E136137

8.PACKING INFORMATION:

DESCRIPTION	QTY
PIECES PER REEL	150
PIECES PER POCKET	1
PIECES PER BOX	450
REEL PER BOX	3
GROSS WEIGHT PER BOX(KG)	TBD
NET WEIGHT PER BOX(KG)	TBD

广东肇庆微硕电子有限公司技术标准

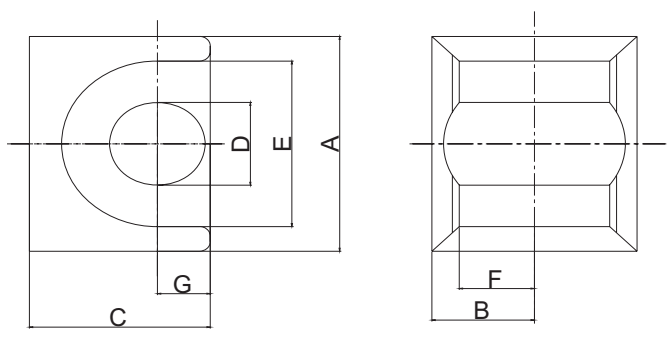CUSTOMER	联泰兴	CUSTOMER' S PART NO. /DWG NO.	
ITEM	PG242A-EP13		
DIMENSIONS (Unit : mm)		DRAWING: 	
A	12.60±0.30		
B	6.52±0.15		
C	8.80±0.2		
D	4.35±0.15		
E	10.10±0.20		
F	4.70±0.15		
G	2.20REF	TEST INSTRUMENTS: ☐ ☒ CALLIPER ☐ MICROMETER	
$C_1=1.27(\text{mm}^{-1})$, $A_e= 19.5 (\text{mm})^2$, $L_e= 24.70 (\text{mm})$, $V_e=482 (\text{mm})^3$, Weight=5 .10(g/prs)...			
ELECTRICAL REQUIREMENTS (Environmental Conditions: Temperature= 25± 3 °C ,Humidity <80 %).			
ITEMS	PERF. VALUE	TESTING TERMS	TEST INSTRUMENTS
AL (nH/N ²)	1600±0.5%	Freq = 1KHz, Voltage= 0.25 v, Winding:φ 0.12 mm× 10 Ts.	☐ HP4284A [√] E4980A或同等仪器
ISSUED		CHECKED 黄龙友	CUSTOMER APPROVED

NETWORK VIDEO RECORDER

MODEL: QRN-430S

DC 54V ... 0.96A

M/C: QRN-430S/KUS Fac. ID: D



2022.06 S/N: Serial No.

MAC ADDRESS 1: XX-XX-XX-XX-XX-01

MAC ADDRESS 2: XX-XX-XX-XX-XX-02

CAN ICES-3(A)/NMB-3(A)

MADE IN KOREA

Hanwha Techwin Co., Ltd.





