

DECLARATION OF CONFORMITY

We; Hanwha Techwin Co., Ltd.

DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No: KES-E1-17T0170

**Type of
equipment:** CCTV CAMERA

Model Name: HCO-6070RP

Variant Model: -

Applicant: Hanwha Techwin Co., Ltd.

Address: 1204, Changwon-daero, Seongsan-gu,
Chang-won-si, Gyeongsangnam-do, Korea

Manufacturer : Hanwha Techwin (Tianjin) Co., Ltd.

Address: No.11 Weiliu Rd, Micro-Electronic
Industrial Park,
TEDA, Tianjin, 300385, People's Republic
of China.

Test standards : AS/NZS CISPR22:2009+A1:2010

Classification: C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

Feb. 27, 2017
(Date of issue)

(Name and signature of authorized person)



EMC TEST REPORT For C-TICK

Test Report No. : KES-E1-17T0170
Date of Issue : Feb, 27, 2017
Product name : CCTV CAMERA
Model/Type No. : HCO-6070RP
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial
Park, TEDA, Tianjin, 300385, People's Republic of China
Date of Receipt : Feb, 03, 2017
Test date : Feb, 14, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jin Bae, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0170
Page (2) of (39)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 27, 2017	KES-E1-17T0170	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration	7
1.9	Calibration Details of Equipment Used for Measurement.....	8
1.10	Test Facility	8
1.11	Laboratory Accreditations and Listings	8
2.0	Test Regulations	9
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Conducted Emissions at Telecommunication Ports	12
2.3	Radiated Electric Field Emissions(Below 1 GHz)	13
2.4	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA		15
Conducted Emissions at Mains Power Ports		15
Conducted Emissions at Telecommunication Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		19
Radiated Electric Field Emissions(Above 1 GHz)		20
Test Setup Photos and Configuration.....		28
Conducted Voltage Emissions		28
Conducted Telecommunication Emissions		29
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz)		32
EUT External Photographs.....		34
EUT Internal Photographs		35



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1,945(H) x 1,109(V) 2.16M pixels
Effective Pixels	1,945(H) x 1,097(V) 2.13M pixels
Scanning System	Progressive Scan
Min. Illumination	Color : 0.2Lux (F1.4, 50IRE); 0.11Lux (F1.4, 30IRE) B/W : 0Lux(IR LED on)
S / N Ratio	52dB (AGC off, Weight on)
Video Output	BNC(AHD / TVI / CVI / CVBS Selectable)
Resolution	1920 x 1080
Max. Frame rate	30fps @1080p 25fps @1080p
Lens Type	
Focal Length (Zoom Ratio)	2.8 ~ 12mm (4.3x) varifocal
Max. Aperture Ratio	F1.4
Angular Field of View	H : 103.8°(Wide) ~ 32.4°(Tele) / V : 53.7°(Wide) ~ 18.4°(Tele) D : 121.9°(Wide) ~ 37.1°(Tele)
Min. Object Distance	0.5m (1.64ft)
Focus Control	Manual
Lens Type	DC Auto Iris
Mount Type	Board-in type
Auto Back Focus(ABF)	-
Operational	
IR LED	
Viewable length	30m (98.43ft)
On Screen Display	Multi-language Support(16) English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish
Camera Title	Off / On (Displayed 15 characters)
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / User BLC / HLC
Wide Dynamic Range	120dB
Contrast Enhancement	-
Digital Noise Reduction	SSNR4 (Off / On)
Defog	AUTO / MANUAL / OFF
Digital Image Stabilization	Not support
Motion Detection	Off / On(4 zones)
Privacy Masking	Off / On (4zones rectangle)
Gain Control	Off / Low / Middle / High / Very High
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,800K ~ 10,500K)
LDC (Lens Distortion Correction)	Not support
Electronic Shutter Speed	1sec~ 1/12,000sec
Digital Zoom	Not support
Reverse	Off / H-Rev / V-Rev / HV-Rev
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User
Intelligent Video Analytics	Not support
Alarm	MD output 1
Remote control interface	Coaxial
Protocol	NTSC/PAL : Pelco-C (Coaxitron) AHD : ACP(AHD Coax Protocol)
Video Transmission Distance	500m(5C2V Coaxial Cable)
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -10°C
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage/Current	Dual (24VAC±10% & 12VDC±10%)
Power Consumption	Max. 6W
Mechanical	
Color / Material	Dark Gray / Aluminum
Dimension (WxHxD)	280* Ø 78 mm
Weight	922g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 240 Vac ☐ 110 Vac ☒ 24ac ☒ 12 Vdc ☐ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
CCTV CAMERA	HCO-6070RP	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR	M1950DM	206KCLH81256	LG Electronics Co., Ltd.	-
MONITOR Adapter	PA-1650-64	OE9FA612314103637	LITE-ON TECHNOLOGY CORPORATION	-
Alarm	-	-	-	-



1.6 External I / O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
CCTV CAMERA (E.U.T)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
CCTV CAMERA (E.U.T)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V, DC 12 V	E.U.T Monitoring

E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-


1.8 Configuration

■ AC Main
□ DC Main

- AC 24 V Mode

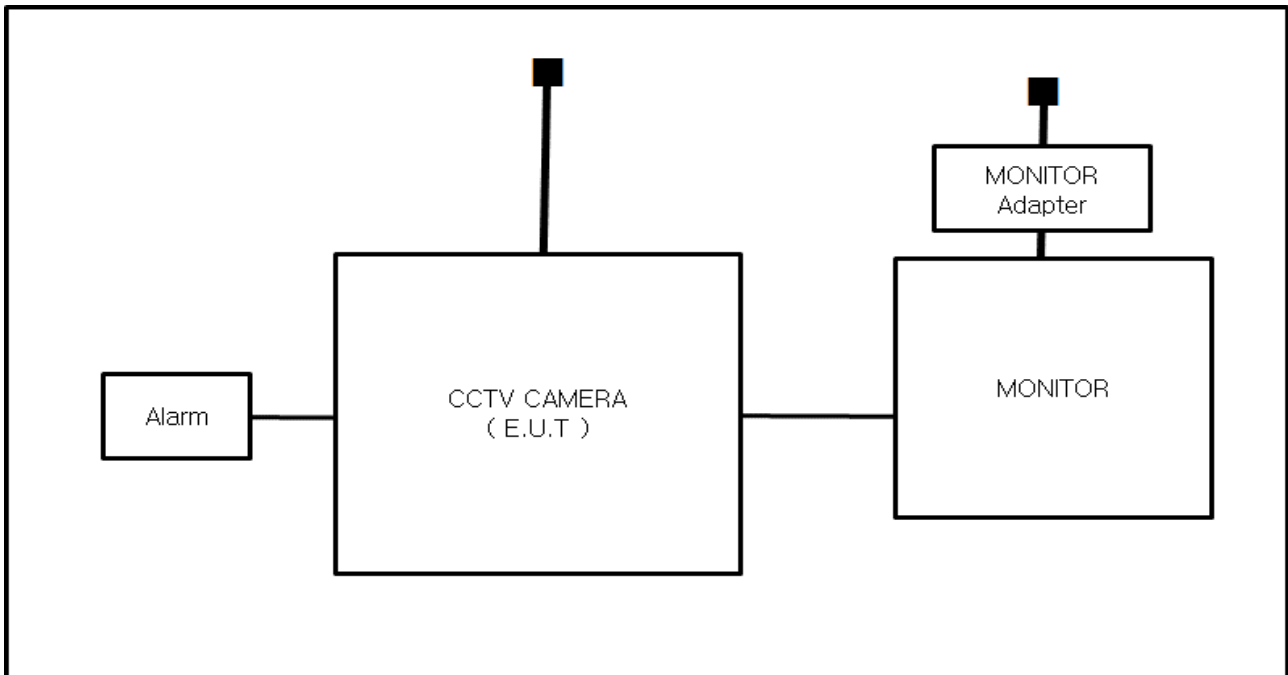

- DC 12 V Mode

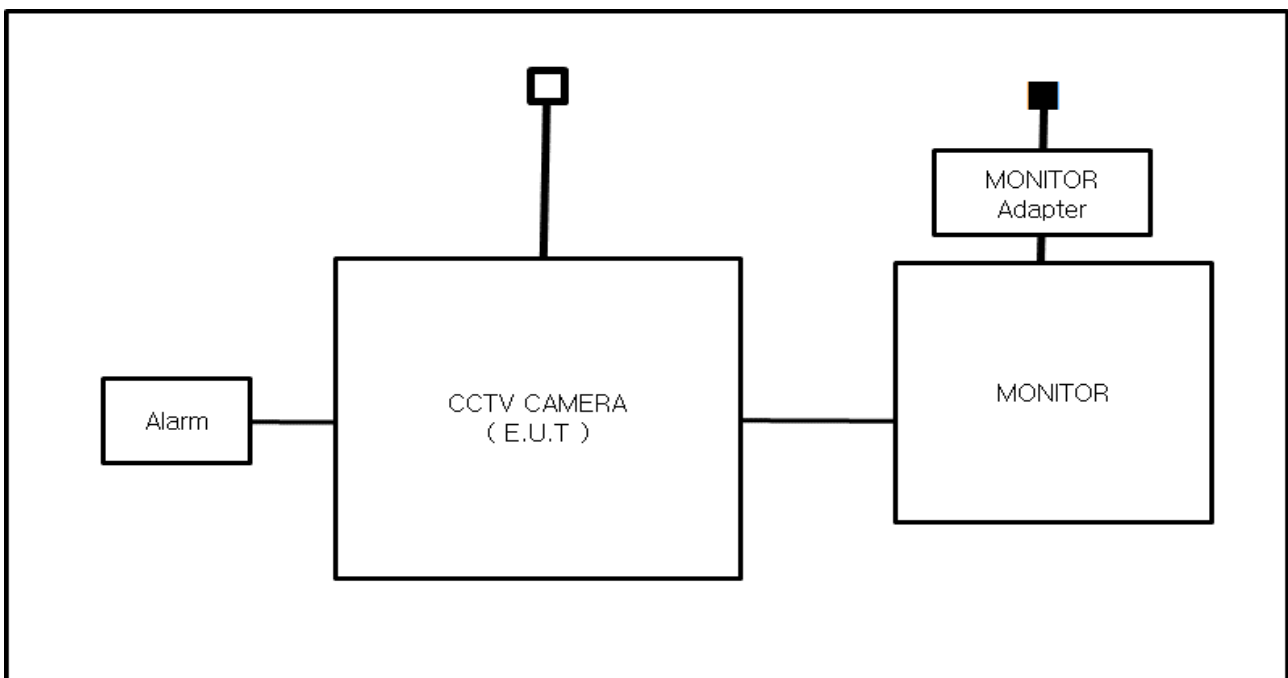

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2012

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0170
Page (10) of (39)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR22:2009 + A1:2010 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
|
 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
|
 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

Feb, 14, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	PULSE LIMITER	ESH3-Z2	R&S	101914	12, 13, 2017
☒	Shield Room #3	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 41,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 03, 2018
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☐	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☐	Shield Room #3	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb, 14, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R & S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	715	04, 14, 2018
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 5,1 °C
Relative Humidity: 45,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb, 14, 2017

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R & S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 22,9 °C

Relative Humidity: 41,3 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

HCO-6070RP

AC 24 V_H

KES

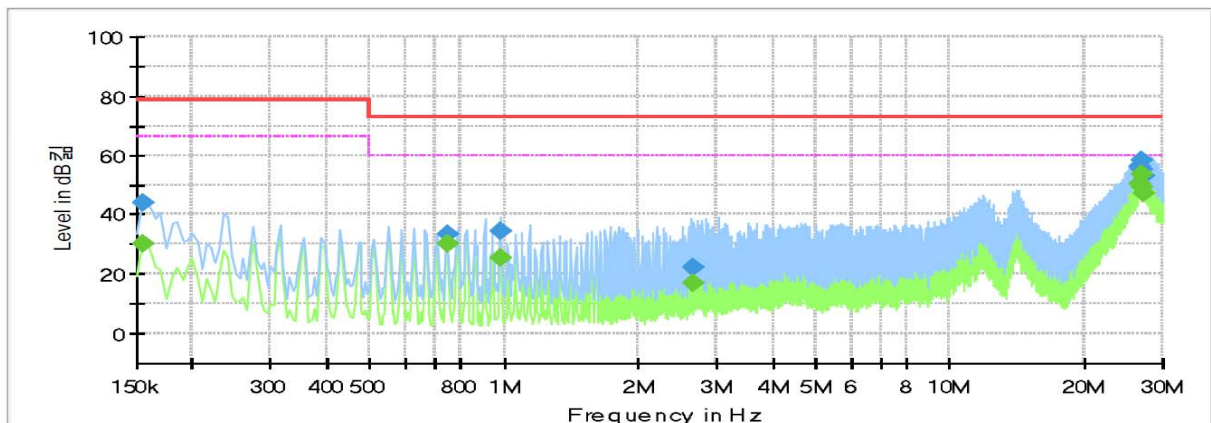

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	43.83	---	79.00	35.17	1000.0	9.000	L1	21.0
0.155000	---	30.12	66.00	35.88	1000.0	9.000	L1	21.0
0.745000	33.29	---	73.00	39.71	1000.0	9.000	L1	20.3
0.745000	---	30.33	60.00	29.67	1000.0	9.000	L1	20.3
0.980000	34.25	---	73.00	38.75	1000.0	9.000	L1	20.2
0.980000	---	25.17	60.00	34.83	1000.0	9.000	L1	20.2
2.665000	22.00	---	73.00	51.00	1000.0	9.000	L1	19.8
2.665000	---	17.07	60.00	42.93	1000.0	9.000	L1	19.8
26.705000	---	50.30	60.00	9.70	1000.0	9.000	L1	20.3
26.705000	55.91	---	73.00	17.09	1000.0	9.000	L1	20.3
26.985000	---	49.15	60.00	10.85	1000.0	9.000	L1	20.3
26.985000	55.10	---	73.00	17.90	1000.0	9.000	L1	20.3
27.025000	---	53.72	60.00	6.28	1000.0	9.000	L1	20.3
27.025000	58.17	---	73.00	14.83	1000.0	9.000	L1	20.3
27.060000	---	47.04	60.00	12.96	1000.0	9.000	L1	20.3
27.060000	53.17	---	73.00	19.83	1000.0	9.000	L1	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	HCO-6070RP
Mode	AC 24 V_N
Operator Name:	KES

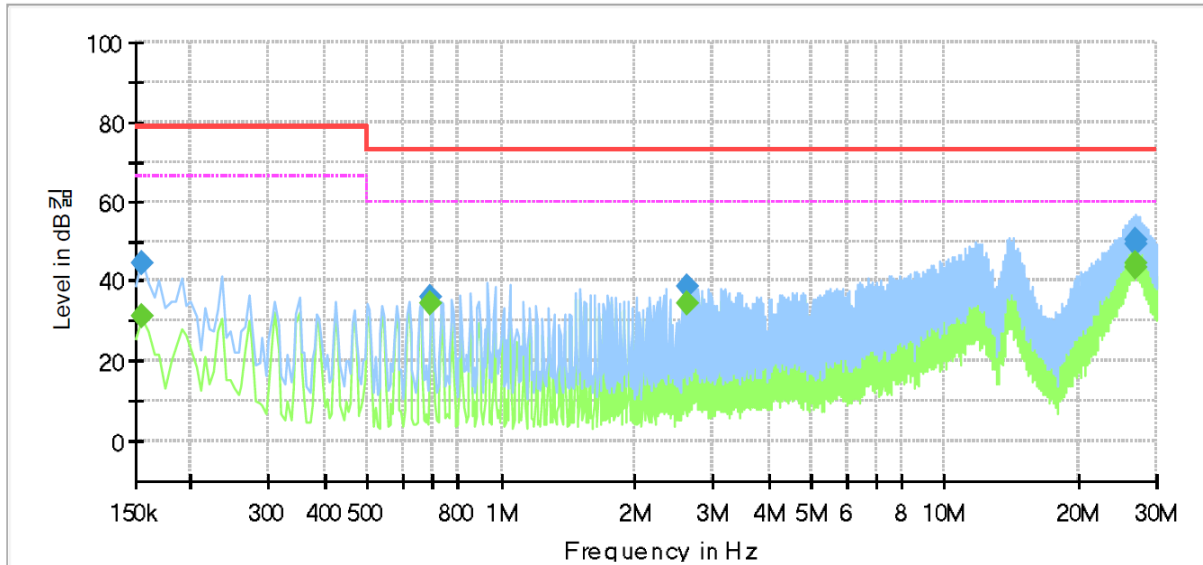

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	31.14	66.00	34.86	1000.0	9.000	N	21.0
0.155000	44.56	---	79.00	34.44	1000.0	9.000	N	21.0
0.695000	---	34.35	60.00	25.65	1000.0	9.000	N	20.4
0.695000	35.93	---	73.00	37.07	1000.0	9.000	N	20.4
2.630000	---	34.48	60.00	25.52	1000.0	9.000	N	19.8
2.630000	38.85	---	73.00	34.15	1000.0	9.000	N	19.8
26.990000	---	44.37	60.00	15.63	1000.0	9.000	N	20.3
26.990000	50.21	---	73.00	22.79	1000.0	9.000	N	20.3
27.030000	---	43.42	60.00	16.58	1000.0	9.000	N	20.3
27.030000	49.43	---	73.00	23.57	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Conducted Emissions at Telecommunication Ports

[10 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0170
Page (18) of (39)

[100 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Radiated Electric Field Emissions(Below 1 GHz)**

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
130.88	16.43	V	1.01	8.72	2.79	27.94	40.00	12.06
162.35	10.61	H	3.98	8.60	3.18	22.39	40.00	17.61
242.61	10.33	H	3.99	12.39	4.06	26.78	47.00	20.22
297.38	10.18	V	1.02	13.36	4.59	28.13	47.00	18.87
371.24	10.24	V	1.00	14.95	5.08	30.27	47.00	16.73
546.42	9.84	H	4.00	18.21	6.44	34.49	47.00	12.51

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
45.52	11.24	V	1.01	13.27	1.62	26.13	40.00	13.87
158.04	10.98	H	3.94	8.44	3.13	22.55	40.00	17.45
207.51	10.84	H	3.99	11.63	3.63	26.10	40.00	13.90
297.03	17.31	V	1.00	13.35	4.59	35.25	47.00	11.75
371.44	10.88	H	3.98	14.95	5.08	30.91	47.00	16.09
545.00	9.86	V	1.03	18.19	6.43	34.48	47.00	12.52

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

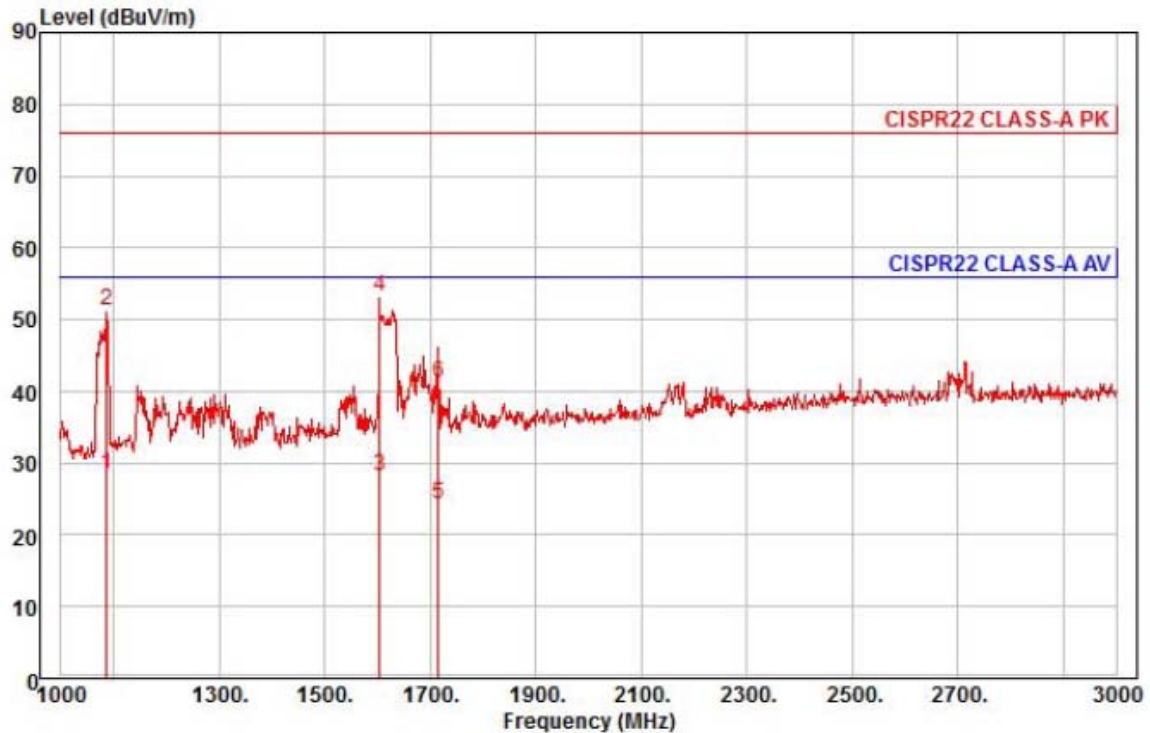


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 av	1086.00	37.37	24.25	6.76	39.88	333	56.00	-27.50	horizontal	Average
2	1086.00	60.02	24.25	6.76	39.88	333	76.00	-24.85	horizontal	Peak
3	1604.00	32.75	26.31	8.32	39.23	27	56.00	-27.85	horizontal	Average
4 pp	1604.00	57.71	26.31	8.32	39.23	27	76.00	-22.89	horizontal	Peak
5	1716.00	28.22	26.75	8.61	39.28	15	56.00	-31.70	horizontal	Average
6	1716.00	45.08	26.75	8.61	39.28	15	76.00	-34.84	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

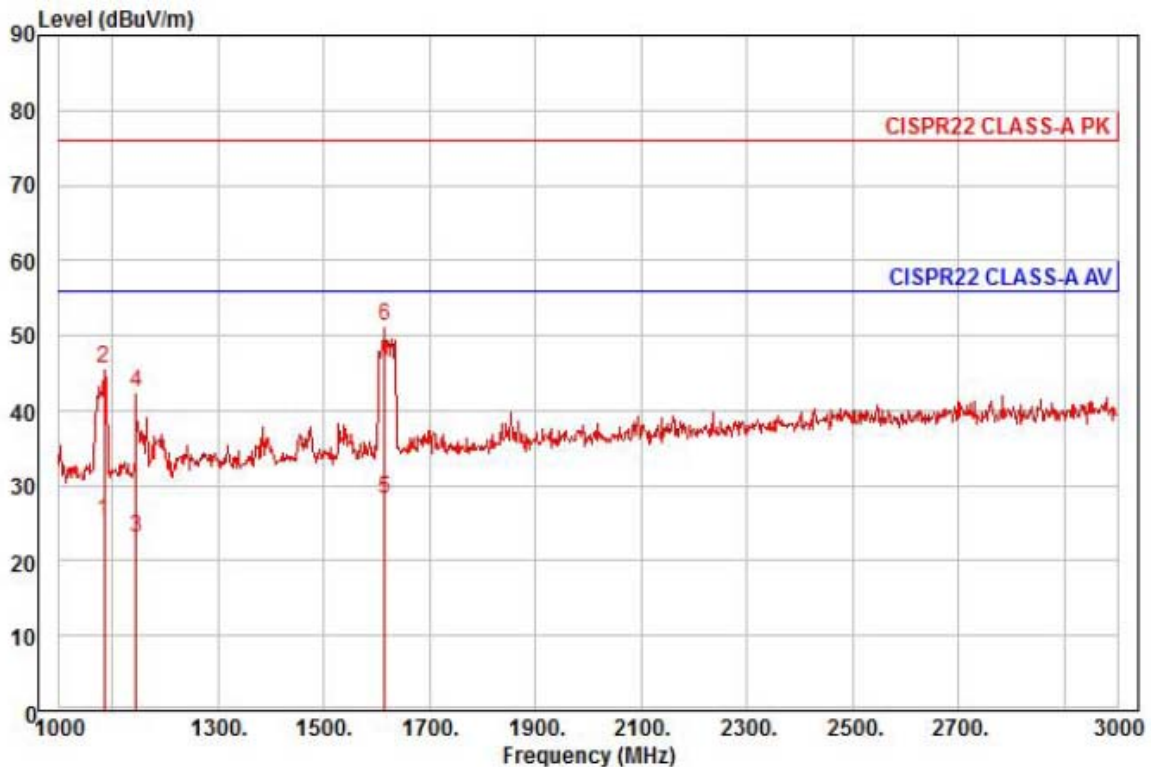


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1084.00	34.12	24.24	6.76	39.89	353	56.00	-30.77	vertical	Average
2	1084.00	54.54	24.24	6.76	39.89	353	76.00	-30.35	vertical	Peak
3	1146.00	31.27	24.49	6.96	39.74	11	56.00	-33.02	vertical	Average
4	1146.00	50.63	24.49	6.96	39.74	11	76.00	-33.66	vertical	Peak
5 av	1614.00	32.75	26.35	8.35	39.23	2	56.00	-27.78	vertical	Average
6 pp	1614.00	55.71	26.35	8.35	39.23	2	76.00	-24.82	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

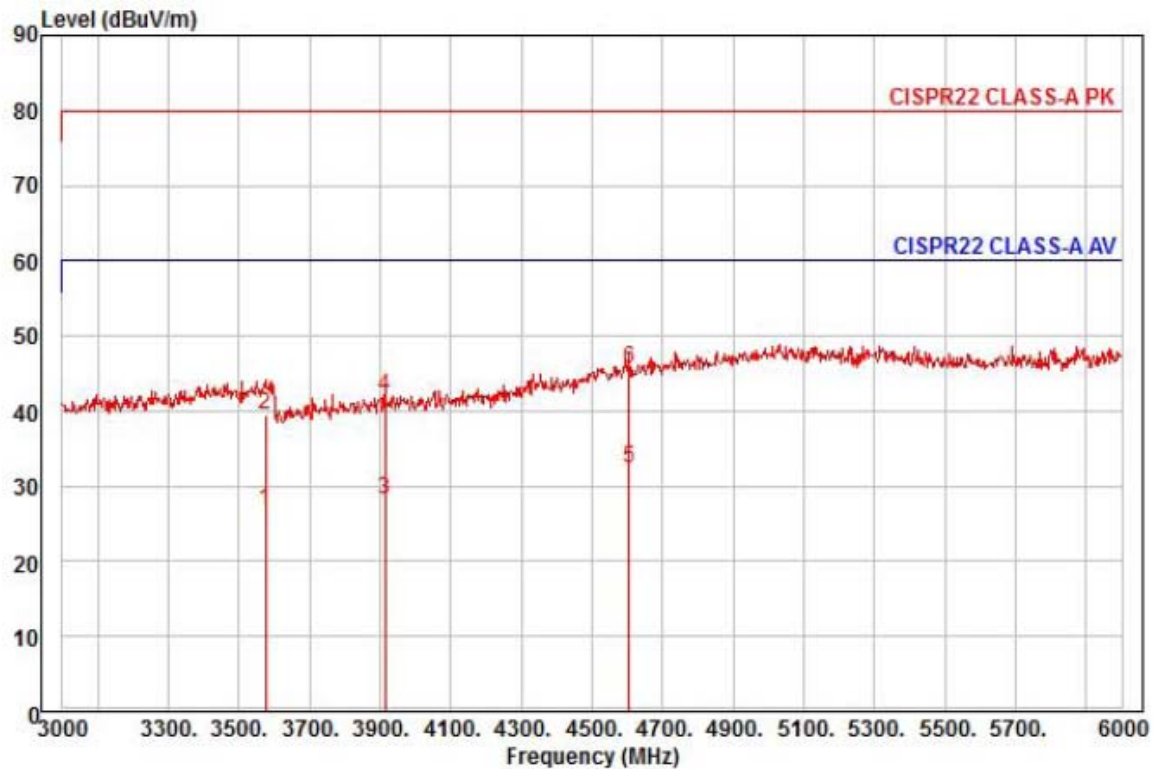

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3576.00	23.40	31.30	12.76	40.85	316	60.00	-33.39	horizontal Average
2	3576.00	36.16	31.30	12.76	40.85	316	80.00	-40.63	horizontal Peak
3	3915.00	23.78	31.87	13.40	40.73	310	60.00	-31.68	horizontal Average
4	3915.00	37.51	31.87	13.40	40.73	310	80.00	-37.95	horizontal Peak
5 pp	4605.00	22.89	35.46	14.67	40.67	3	60.00	-27.65	horizontal Average
6 pk	4605.00	36.26	35.46	14.67	40.67	3	80.00	-34.28	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

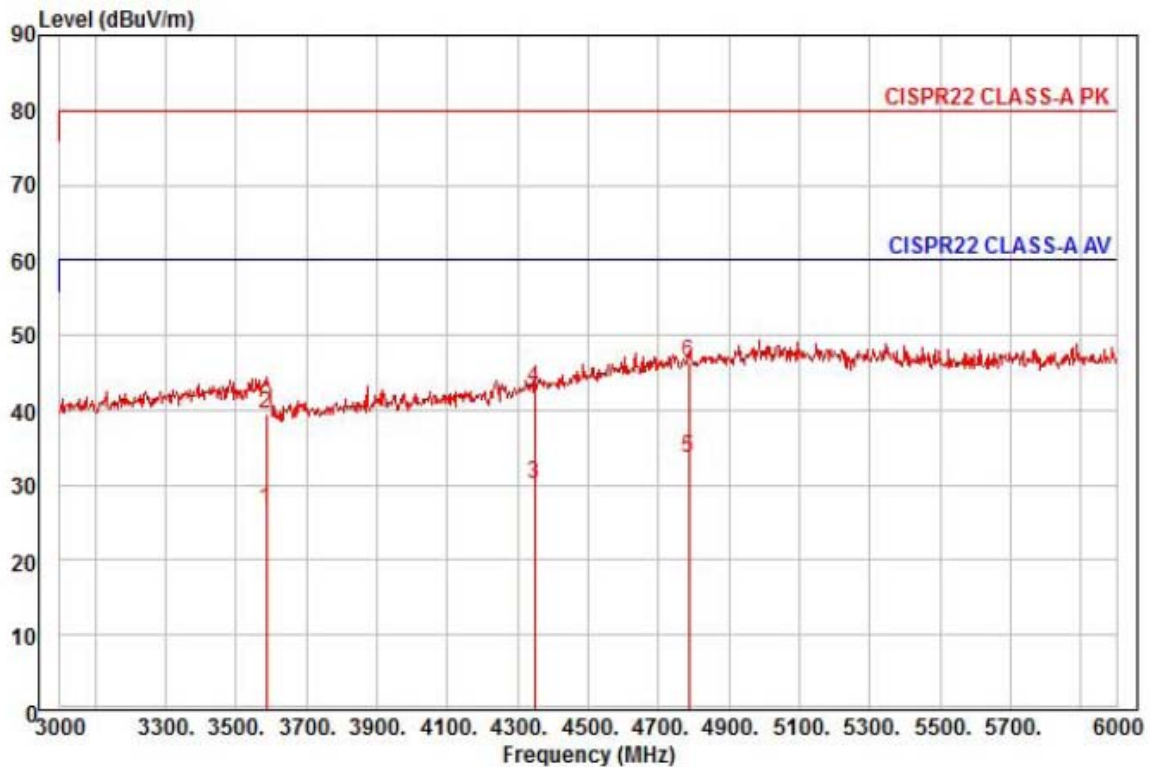

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3585.00	23.50	31.31	12.78	40.85	288	60.00	-33.26	vertical
2	3585.00	36.21	31.31	12.78	40.85	288	80.00	-40.55	vertical
3	4347.00	22.84	33.99	14.18	40.75	119	60.00	-29.74	vertical
4	4347.00	35.55	33.99	14.18	40.75	119	80.00	-37.03	vertical
5 pp	4785.00	22.47	36.49	15.06	40.49	113	60.00	-26.47	vertical
6 pk	4785.00	35.39	36.49	15.06	40.49	113	80.00	-33.55	vertical

◆ Calculation


Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



- DC 12 V Mode

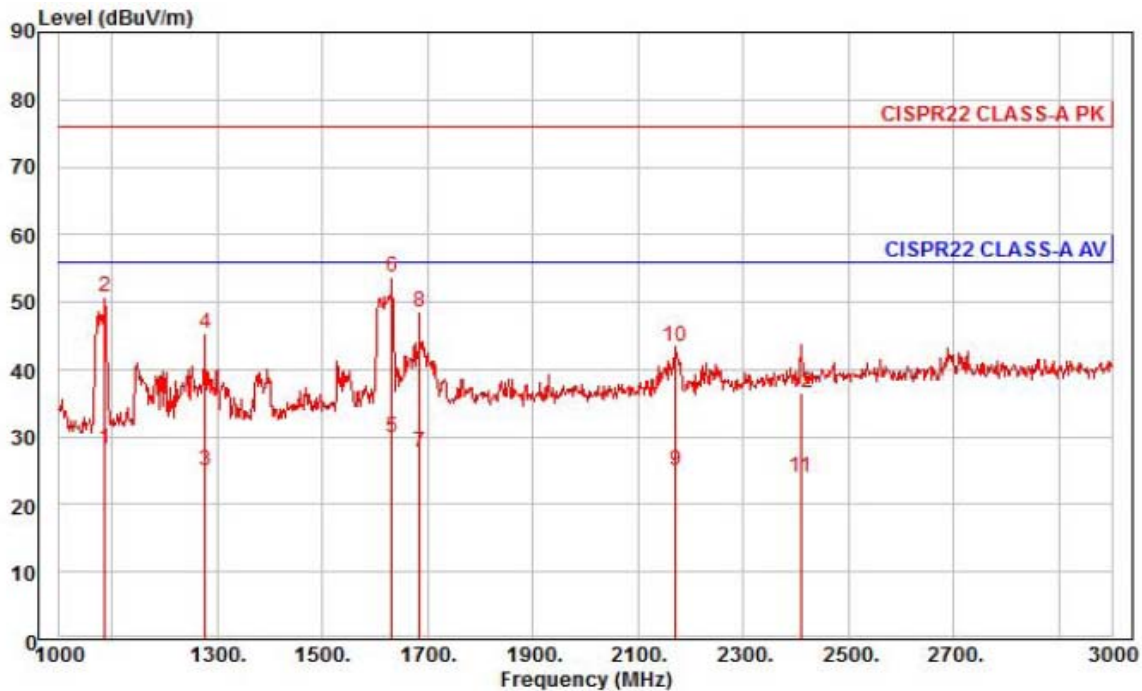

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1086.00	37.10	24.25	6.76	39.88	336	56.00	-27.77	horizontal	Average
2	1086.00	59.68	24.25	6.76	39.88	336	76.00	-25.19	horizontal	Peak
3	1278.00	31.97	25.01	7.37	39.42	319	56.00	-31.07	horizontal	Average
4	1278.00	52.52	25.01	7.37	39.42	319	76.00	-30.52	horizontal	Peak
5 av	1632.00	34.30	26.42	8.39	39.24	15	56.00	-26.13	horizontal	Average
6 pp	1632.00	58.23	26.42	8.39	39.24	15	76.00	-22.20	horizontal	Peak
7	1684.00	31.72	26.63	8.53	39.26	15	56.00	-28.38	horizontal	Average
8	1684.00	52.58	26.63	8.53	39.26	15	76.00	-27.52	horizontal	Peak
9	2172.00	26.44	28.30	9.74	39.41	319	56.00	-30.93	horizontal	Average
10	2172.00	44.75	28.30	9.74	39.41	319	76.00	-32.62	horizontal	Peak
11	2410.00	24.18	28.88	10.34	39.43	359	56.00	-32.03	horizontal	Average
12	2410.00	36.80	28.88	10.34	39.43	359	76.00	-39.41	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

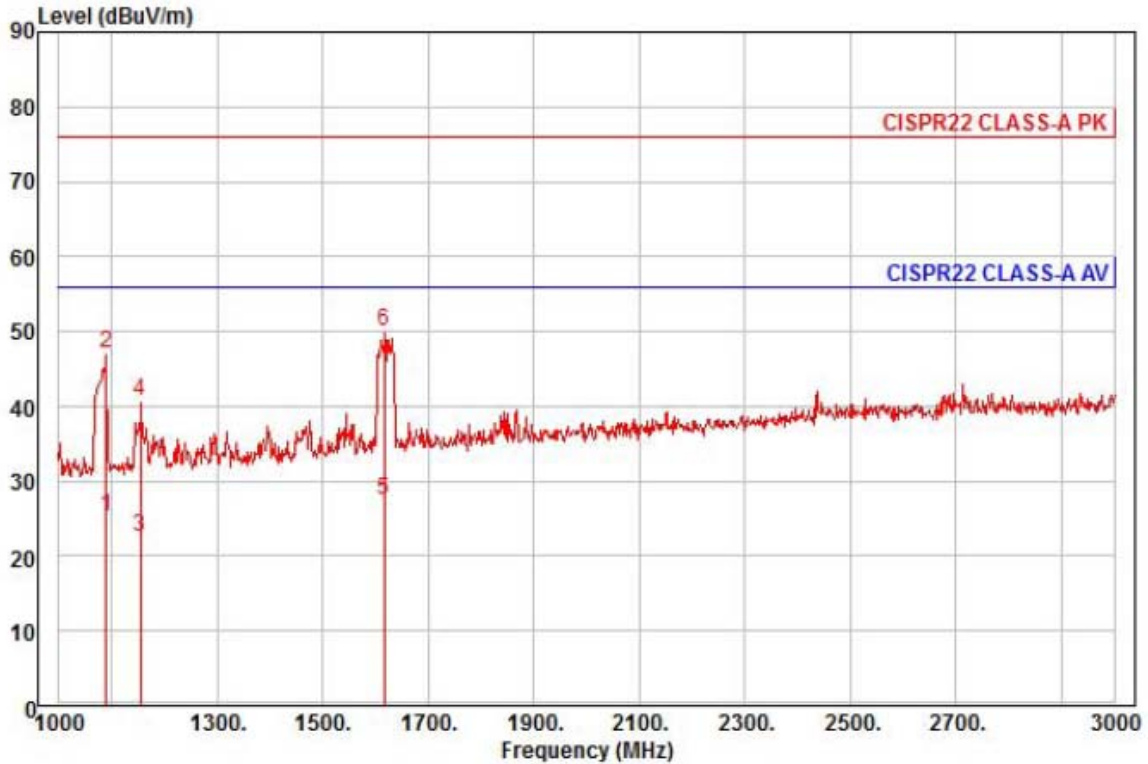


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1090.00	33.98	24.27	6.78	39.87	331	56.00	-30.84	vertical	Average
2	1090.00	55.97	24.27	6.78	39.87	331	76.00	-28.85	vertical	Peak
3	1154.00	30.85	24.52	6.99	39.72	14	56.00	-33.36	vertical	Average
4	1154.00	48.95	24.52	6.99	39.72	14	76.00	-35.26	vertical	Peak
5 av	1616.00	31.89	26.36	8.35	39.23	20	56.00	-28.63	vertical	Average
6 pp	1616.00	54.58	26.36	8.35	39.23	20	76.00	-25.94	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

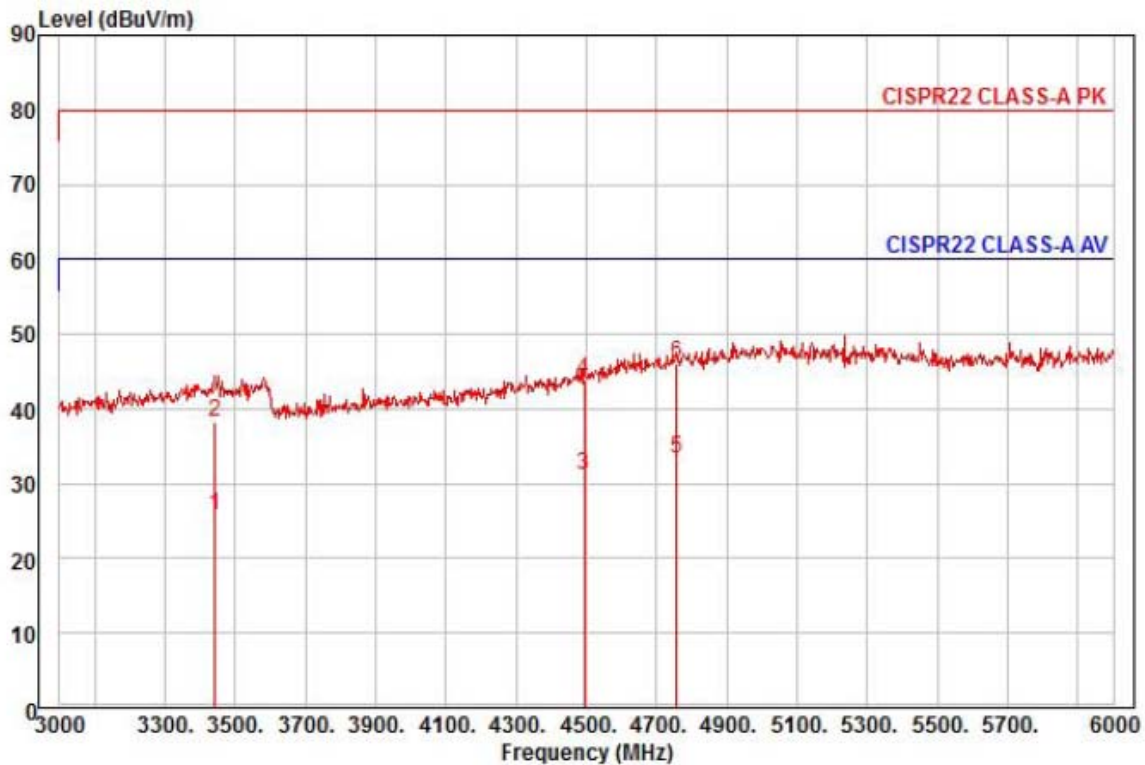

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : HCO-6070RP

Mode : DC 12 V

Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3441.00	22.88	31.07	12.52	40.79	50	60.00	-34.32	horizontal Average
2	3441.00	35.55	31.07	12.52	40.79	50	80.00	-41.65	horizontal Peak
3	4494.00	22.53	34.83	14.45	40.77	283	60.00	-28.96	horizontal Average
4	4494.00	35.44	34.83	14.45	40.77	283	80.00	-36.05	horizontal Peak
5 pp	4758.00	22.60	36.34	15.01	40.51	214	60.00	-26.56	horizontal Average
6 pk	4758.00	35.38	36.34	15.01	40.51	214	80.00	-33.78	horizontal Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[dBuV]} + \text{Ant Factor[dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line[dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

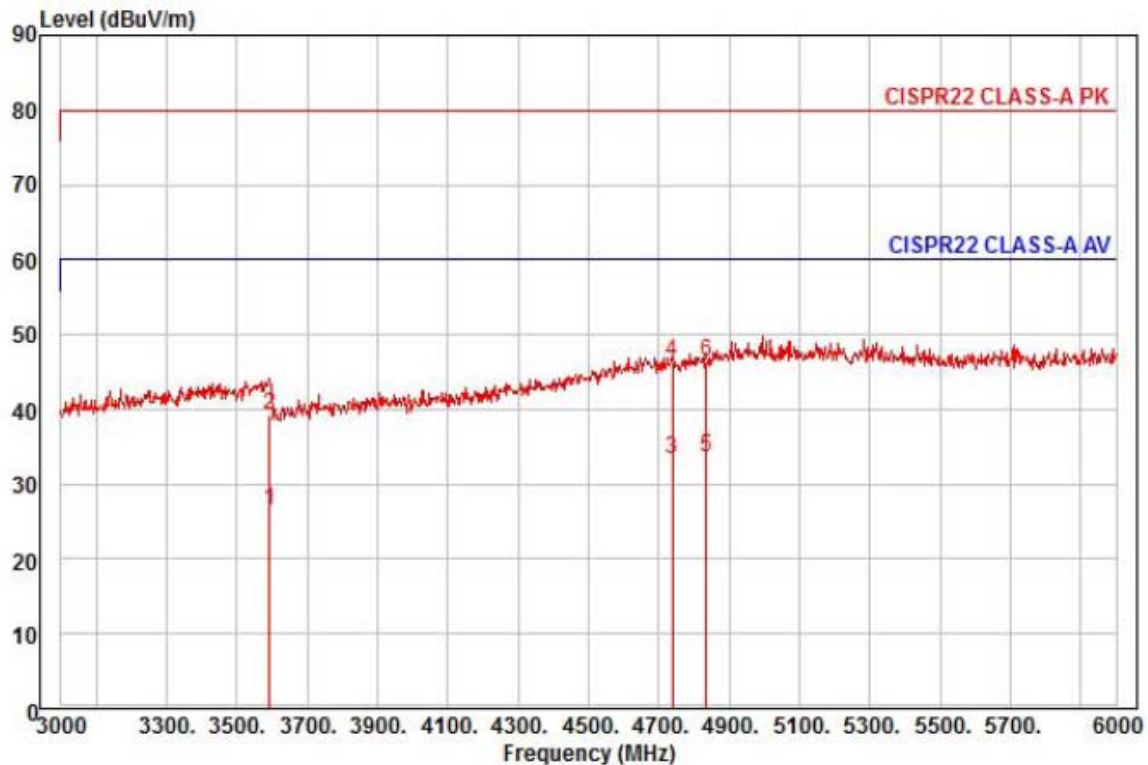

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3594.00	23.24	31.33	12.79	40.85	108	60.00	-33.49	vertical
2	3594.00	35.97	31.33	12.79	40.85	108	80.00	-40.76	vertical
3	4740.00	22.76	36.24	14.97	40.53	8	60.00	-26.56	vertical
4	4740.00	35.64	36.24	14.97	40.53	8	80.00	-33.68	vertical
5 pp	4836.00	22.15	36.78	15.14	40.43	219	60.00	-26.36	vertical
6 pk	4836.00	34.95	36.78	15.14	40.43	219	80.00	-33.56	vertical

◆ Calculation


Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration

Conducted Voltage Emissions

-AC 24 V Mode

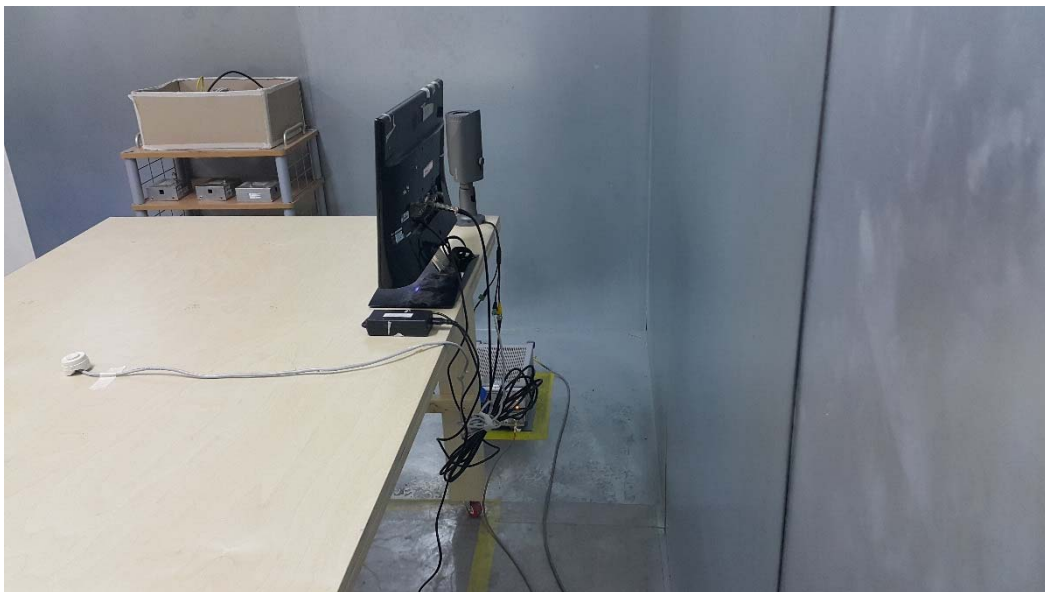

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0170
Page (29) of (39)

Conducted Telecommunication Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode

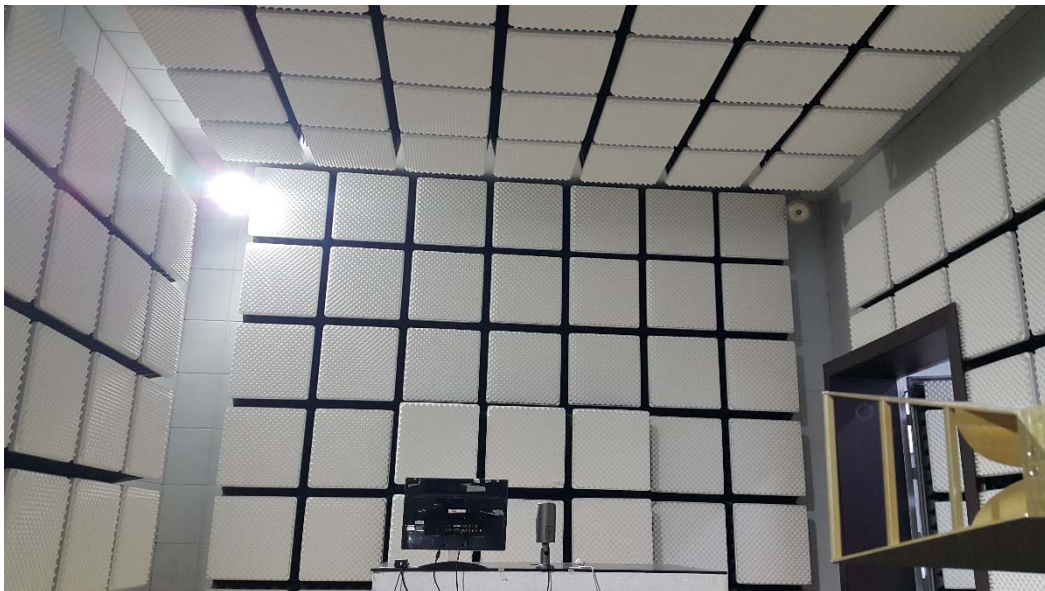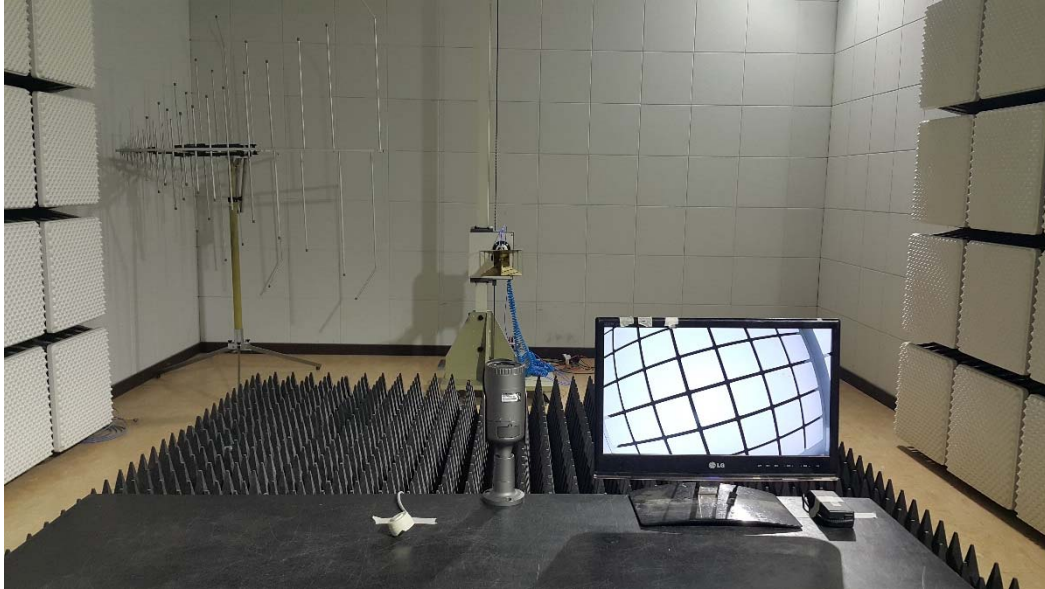

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)

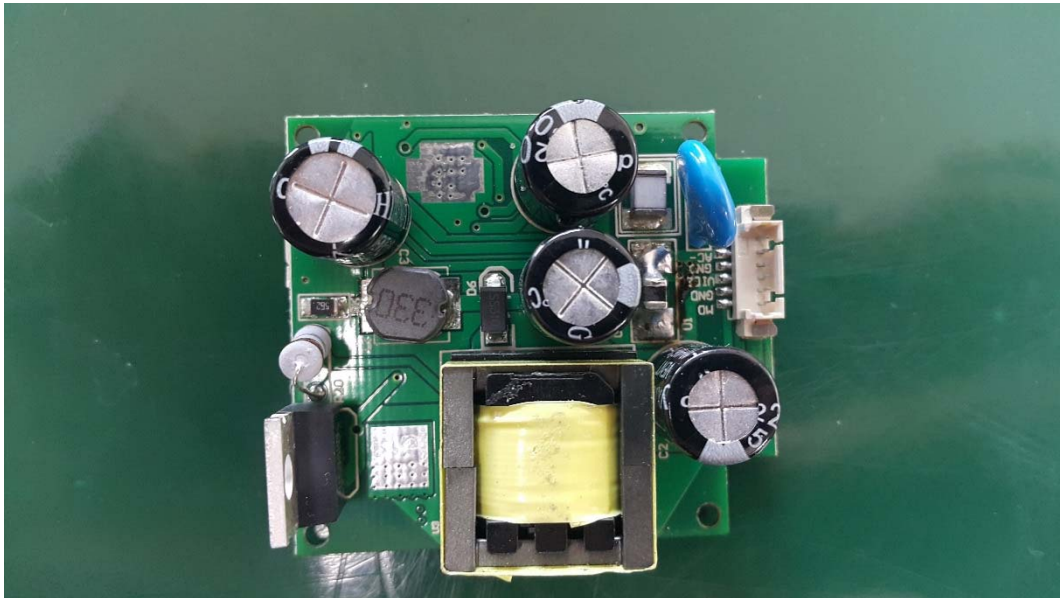


(Bottom)

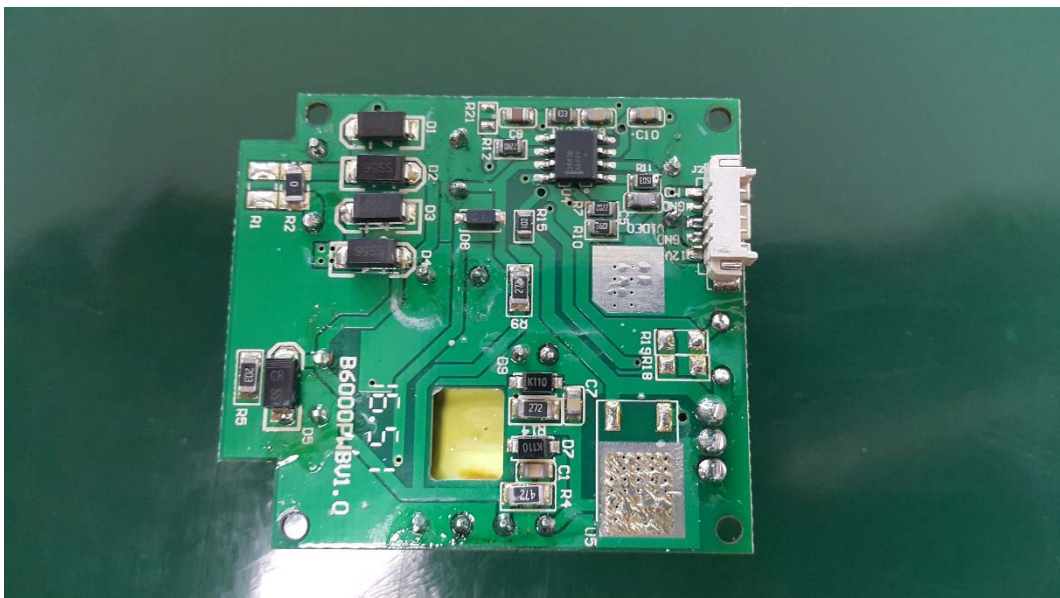


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Sub Board

(Top)

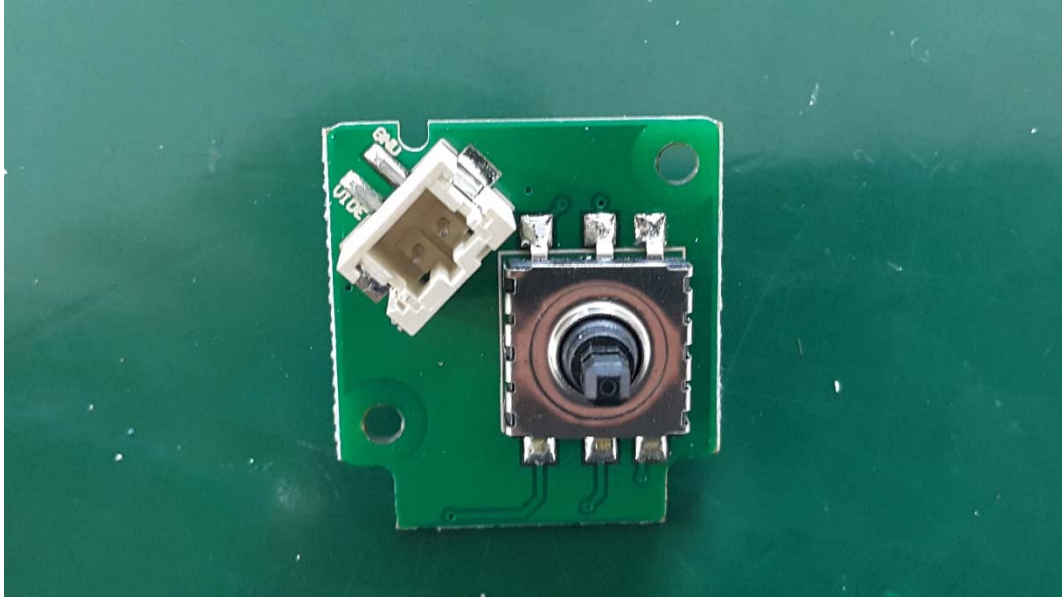


(Bottom)

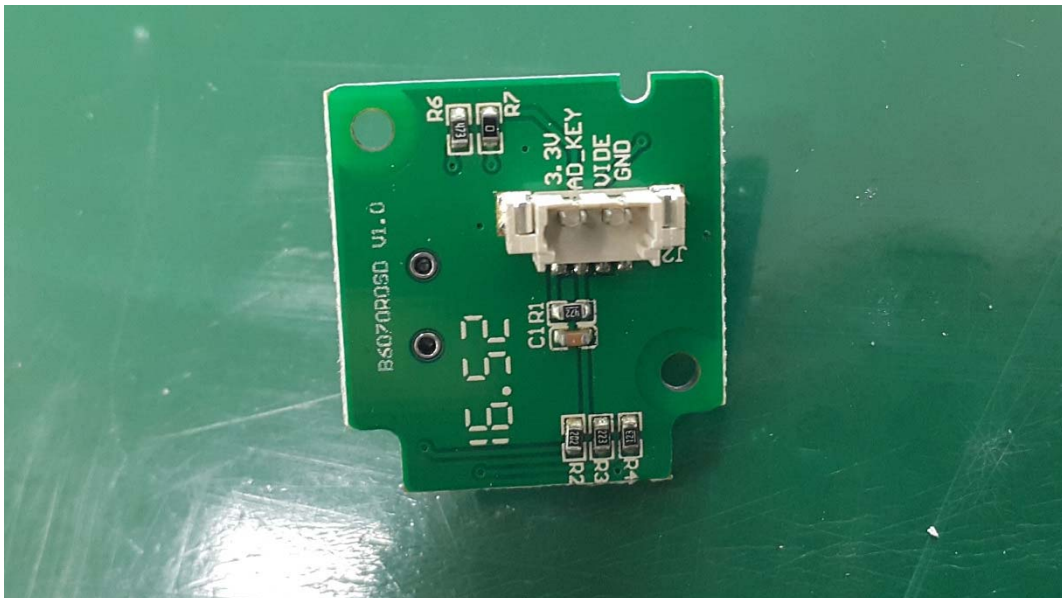

EUT Internal View – Lens Board

(Top)

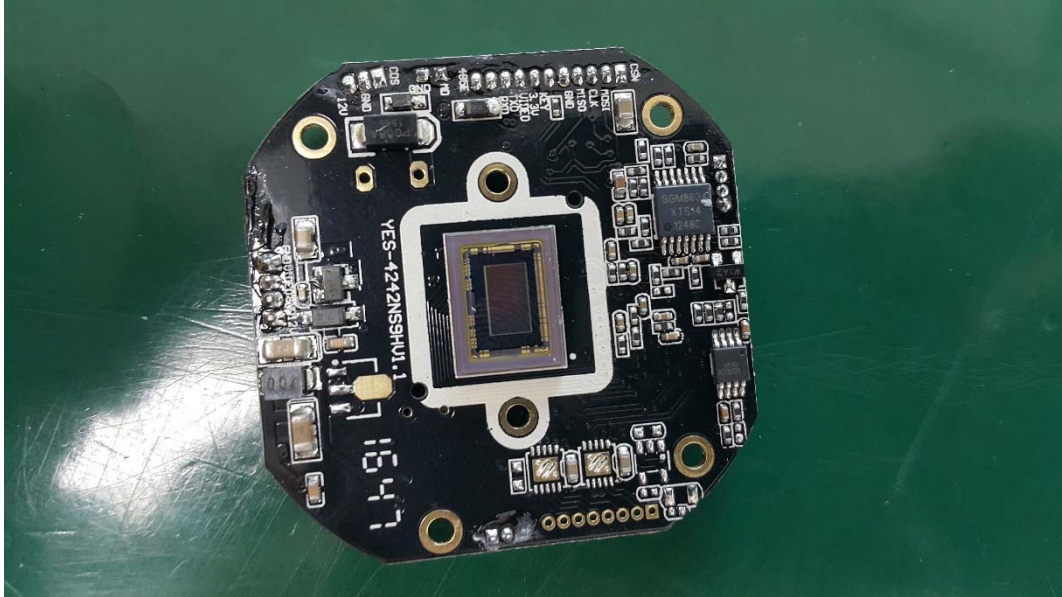

(Bottom)



EUT Internal View – LED Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.