



EMC TEST REPORT For FCC

Test Report No. : KES-E1-17T0525
Date of Issue : Aug. 14, 2017
Product name : CCTV CAMERA
Model/Type No. : HCV-6080RN
Variant Model : HCV-6070RN
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co., Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
Equipment authorization : ☐ Declaration of Conformity
☒ Verification
☐ Certification
Date of Receipt : Aug. 01, 2017
Test date : Aug. 02, 2017 ~ Aug. 03, 2017
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dong Il, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0525
Page (2) of (24)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Aug. 14, 2017	KES-E1-17T0525	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jul be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration	8
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Radiated Electric Field Emissions(Below 1 GHz)	13
2.3	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA.....		15
	Conducted Emissions at Mains Power Ports.....	15
	Radiated Electric Field Emissions(Below 1 GHz)	17
	Radiated Electric Field Emissions(Above 1 GHz)	19
	Test Setup Photos and Configuration	21
	Conducted Voltage Emissions	21
	Radiated Electric Field Emissions(Below 1 GHz)	22
	Radiated Electric Field Emissions(Above 1 GHz)	23
	EUT External Photographs	24
	EUT Internal Photographs	25



1.0 General Product Description

Main Specifications of EUT are:

	HCV-6080RN	HCV-6080RP
Video		
Imaging Device	1/2.8" 2M CMOS	
Total Pixels	1,945(H) x 1,109(V) 2.16M pixels	
Effective Pixels	1,945(H) x 1,097(V) 2.13M pixels	
Scanning System	Progressive Scan	
Min. Illumination	Color : 0.2Lux (F1.4, 50IRE); 0.11Lux (F1.4, 30IRE) B/W : 0Lux(IR LED on)	
S / N Ratio	52dB (AGC off, Weight on)	
Video Output	BNC(AHD / TVI / CVI / CVBS Selectable)	
Resolution	1920 x 1080	
Max. Framerate	30fps @1080p	25fps @1080p
Pan / Tilt / Rotate		
Pan / Tilt / Rotate Range	0° ~ 350° / 0° ~ 67° / 0° ~ 355°	
Lens Type		
Focal Length (Zoom Ratio)	2.8 ~ 12mm (4.3x) motorized varifocal	
Max. Aperture Ratio	F1.4	
Angular Field of View	H : 103.8°(Wide) ~ 32.4°(Tele) / V : 53.7°(Wide) ~ 18.4°(Tele) D : 121.9°(Wide) ~ 37.1°(Tele)	
Min. Object Distance	0.5m (1.64ft)	
Focus Control	Simple focus(Motorized V/F) / Manual	
Lens Type	DC Auto Iris	
Mount Type	Board-in type	
Auto Back Focus(ABF)	-	
Operational		
IR LED		
Viewable length	30m (98.43ft)	
On Screen Display	Multi-language Support(16) English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish	
Camera Title	Off / On (Displayed 15 characters)	
Day & Night	Auto (ICR) / Color / B/W	
Backlight Compensation	Off / User BLC / HLC	
Wide Dynamic Range	120dB	
Contrast Enhancement	-	
Digital Noise Reduction	SSNR4 (Off / On)	
Defog	AUTO / MANUAL / OFF	
Digital Image Stabilization	Not support	
Motion Detection	Off / On(4 zones)	
Privacy Masking	Off / On (4zones rectangle)	
Gain Control	Off / Low / Middle / High / Very High	

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0525
Page (5) of (24)

White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,800K° ~ 10,500K°)
LDC (Lens Distortion Correction)	Not support
Electronic Shutter Speed	1sec~ 1/12,000sec
Digital Zoom	Not support
Reverse	Off / H-Rev / V-Rev / HV-Rev
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User
Intelligent Video Analytics	Not support
Alarm	MD output 1
Remote control interface	Coaxial
Protocol	NTSC/PAL : Pelco-C (Coaxitron) AHD : ACP(AHD Coax Protocol)
Video Transmission Distance	500m(5C2V Coaxial Cable)
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -10°C
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage/Current	Dual (24VAC±10% & 12VDC±10%)
Power Consumption	Max. 4.2W
Mechanical	
Color / Material	Ivory / Aluminum
Dimension (WxHxD)	106.1* Φ137mm
Weight	716g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☒ 24 Vac ☒ 12 Vdc ☐ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

The Variant model is management model of each different sellers.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
CCTV CAMERA	HCV-6080RP	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR	23MA53D	303KKMH9Z019	LG Electronics Co., Ltd.	-
MONITOR Adapter	PSAB-L205A	EAY62850201	LG Innotek Yantai Co. Ltd.	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
CCTV CAMERA (E.U.T)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
CCTV CAMERA (E.U.T)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V	E.U.T Monitoring
DC 12 V	E.U.T Monitoring

E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-


1.8 Configuration

■ AC Main
□ DC Main

- AC 24 V Mode

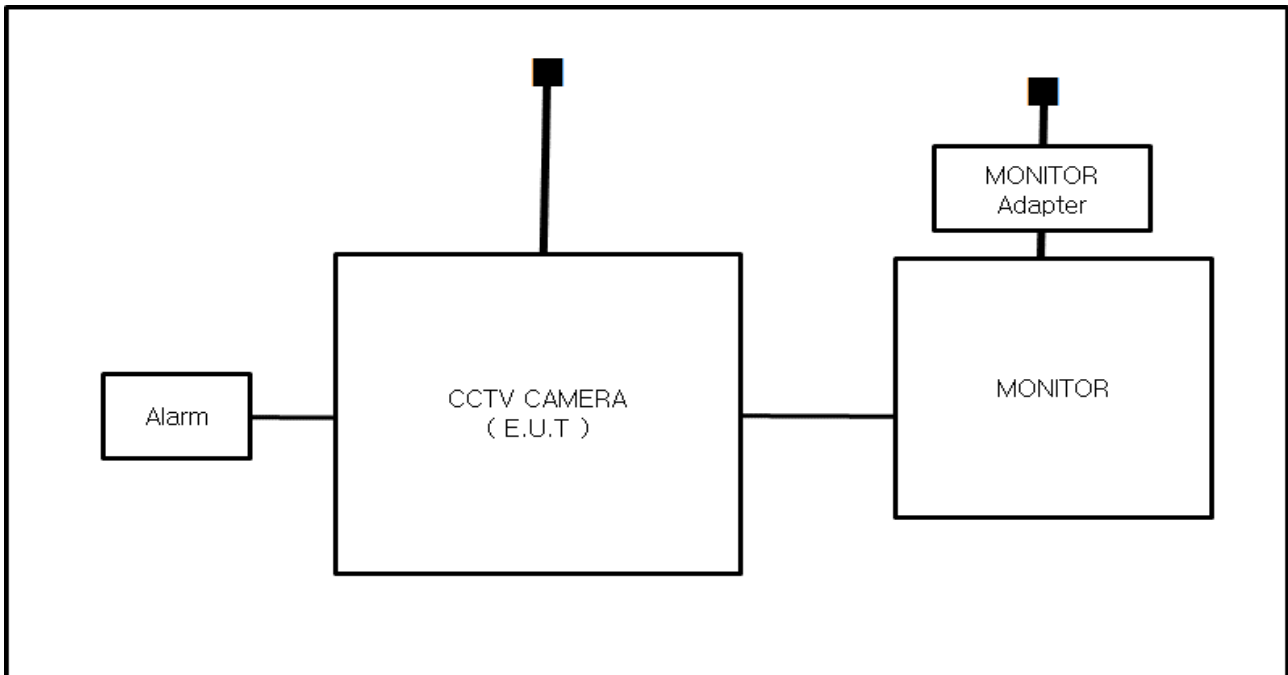

- DC 12 V Mode

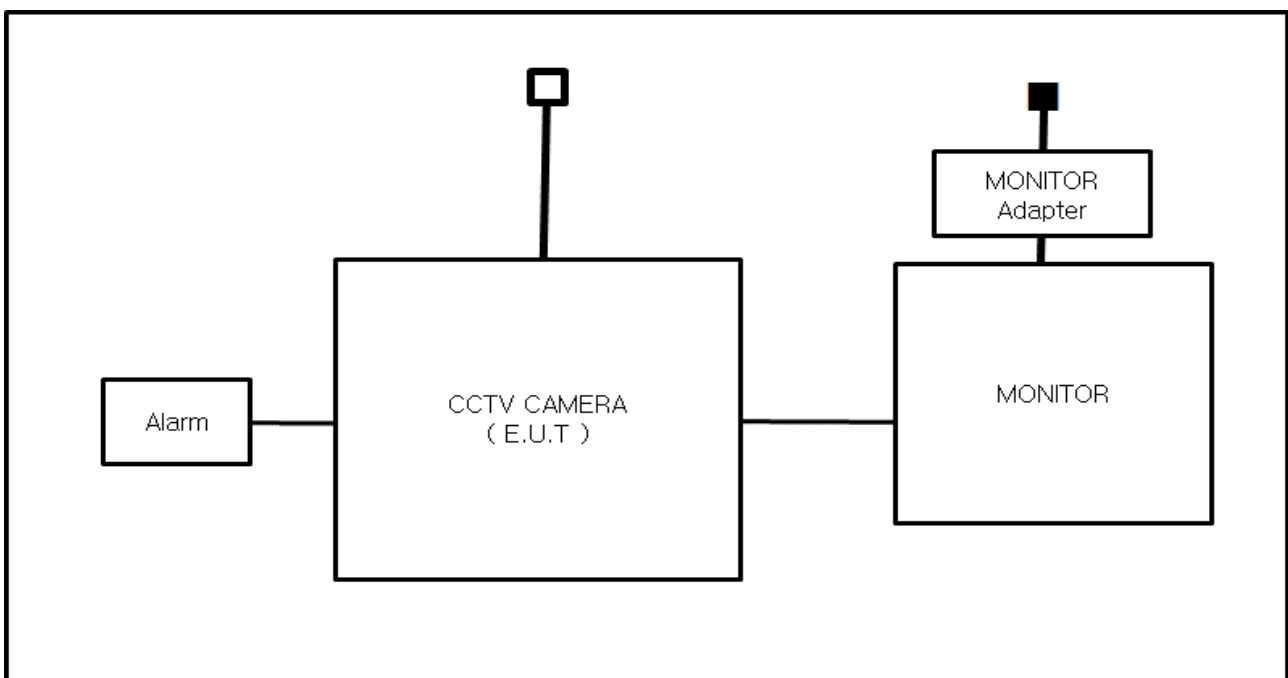

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Remarks when standards applied

- N/A


1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2014 | ☒ Class A | ☐ Class B |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

2.1 Conducted Emissions at Mains Power Ports

Test Date

Aug. 02, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017

Test Conditions

Temperature: 22,9 °C

Relative Humidity: 49,2 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Aug. 02, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 24,9 °C

Relative Humidity: 54,1 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Aug. 03, 2017

Test Location

SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 17, 2018
☐	PREAMPLIFIER	SCU 18	R & S	102232	06, 29, 2017
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2017
☐	ATTENUATOR	8491A	HP	32173	03, 24, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 23,6 °C
Relative Humidity: 51,7 %

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	HCV-6080RN
Mode	AC
Operator Name:	KES

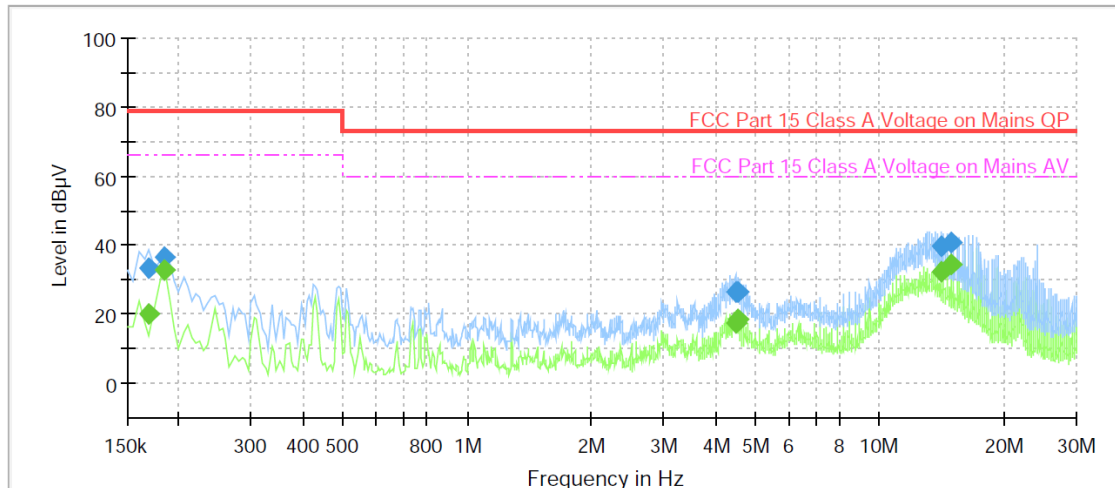

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	19.88	66.00	46.12	1000.0	9.000	L1	19.4
0.170000	33.40	---	79.00	45.60	1000.0	9.000	L1	19.4
0.185000	---	32.77	66.00	33.23	1000.0	9.000	L1	19.4
0.185000	36.32	---	79.00	42.68	1000.0	9.000	L1	19.4
4.460000	---	17.44	60.00	42.56	1000.0	9.000	L1	19.9
4.460000	26.58	---	73.00	46.42	1000.0	9.000	L1	19.9
4.525000	---	18.34	60.00	41.66	1000.0	9.000	L1	19.9
4.525000	26.52	---	73.00	46.48	1000.0	9.000	L1	19.9
14.070000	---	32.37	60.00	27.63	1000.0	9.000	L1	19.9
14.070000	39.64	---	73.00	33.36	1000.0	9.000	L1	19.9
14.850000	---	34.41	60.00	25.59	1000.0	9.000	L1	19.9
14.850000	40.68	---	73.00	32.32	1000.0	9.000	L1	19.9

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: HCV-6080RN
Mode: AC
Operator Name: KES

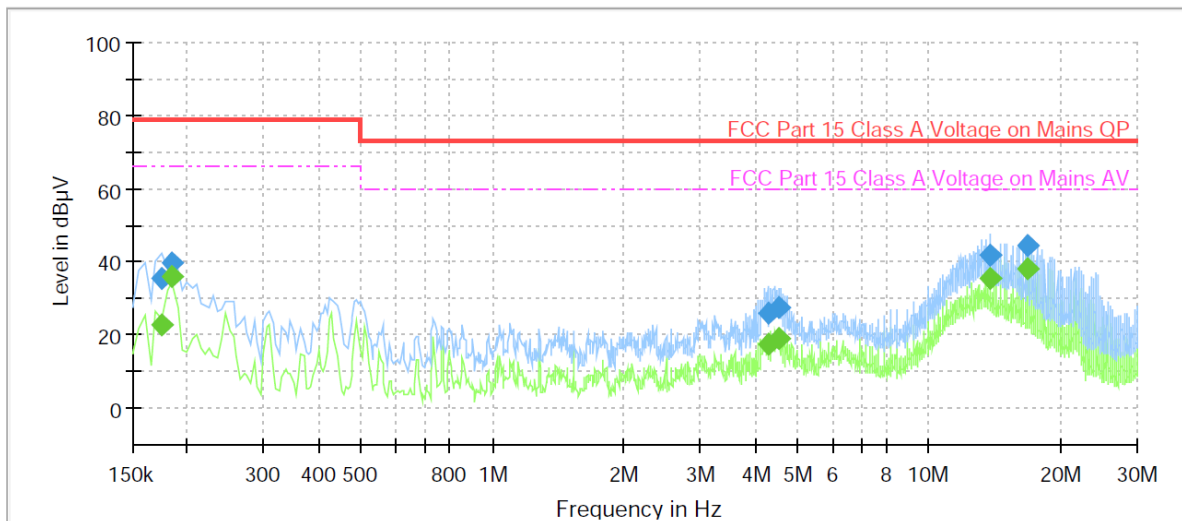

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.175000	---	22.75	66.00	43.25	1000.0	9.000	N	19.4
0.175000	35.49	---	79.00	43.51	1000.0	9.000	N	19.4
0.185000	---	36.17	66.00	29.83	1000.0	9.000	N	19.4
0.185000	39.66	---	79.00	39.34	1000.0	9.000	N	19.4
4.270000	---	17.29	60.00	42.71	1000.0	9.000	N	19.9
4.270000	26.10	---	73.00	46.90	1000.0	9.000	N	19.9
4.510000	---	19.09	60.00	40.91	1000.0	9.000	N	19.9
4.510000	27.81	---	73.00	45.19	1000.0	9.000	N	19.9
13.820000	---	35.33	60.00	24.67	1000.0	9.000	N	19.9
13.820000	41.68	---	73.00	31.32	1000.0	9.000	N	19.9
16.890000	---	38.21	60.00	21.79	1000.0	9.000	N	20.0
16.890000	44.64	---	73.00	28.36	1000.0	9.000	N	20.0

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

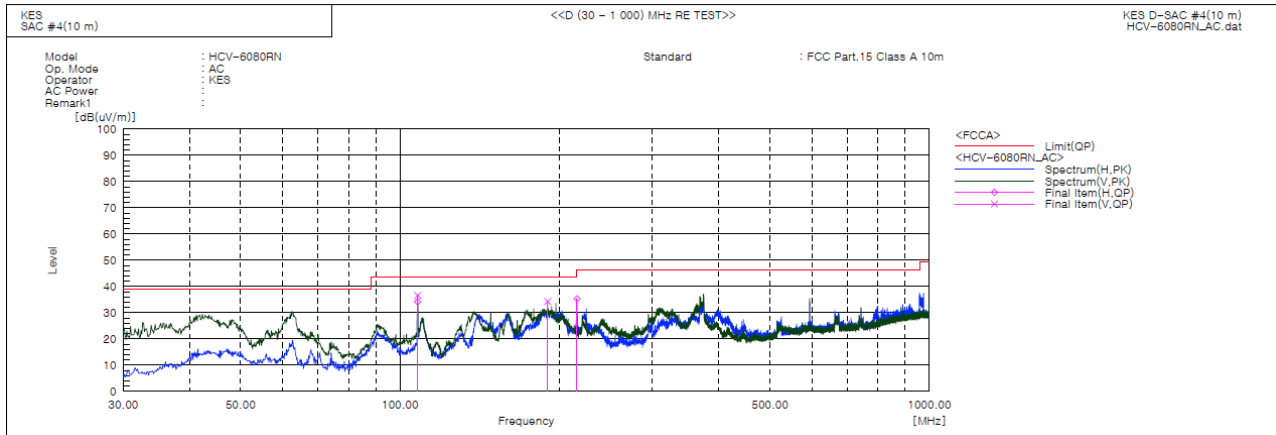

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	107.964	V	65.5	-28.9	36.6	43.5	6.9	100.0	250.0	
2	107.964	H	63.1	-28.9	34.2	43.5	9.3	400.0	229.0	
3	190.050	V	62.1	-27.8	34.3	43.5	9.2	100.0	99.0	
4	215.998	H	61.7	-26.4	35.3	43.5	8.2	400.0	357.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamplifier Factor), Margin: Margin value




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0525
Page (18) of (24)

- DC 12 V Mode

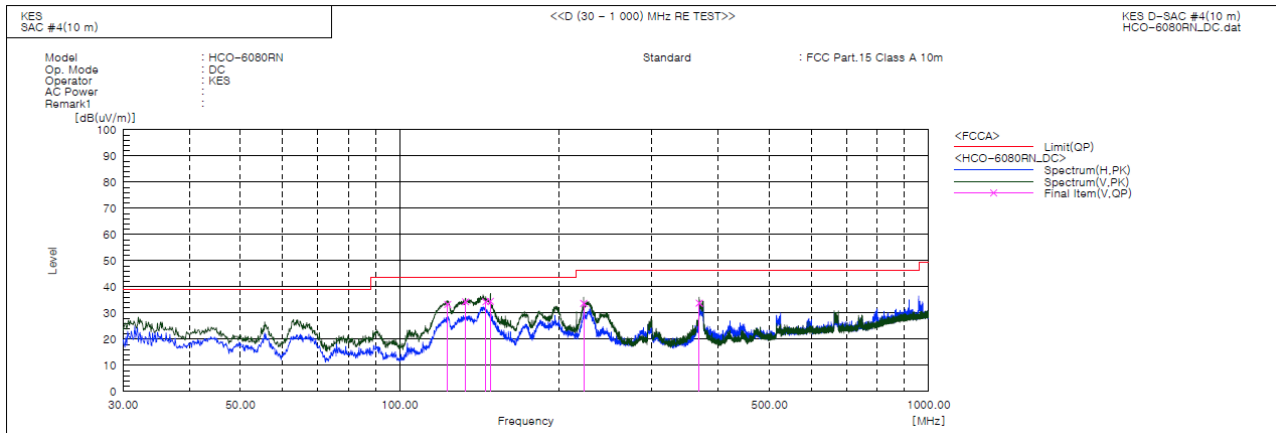

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	65.9	-31.4	34.5	43.5	9.0	100.0	153.0	
2	145.430	V	65.9	-31.6	34.3	43.5	9.2	100.0	177.0	
3	123.241	V	64.6	-31.3	33.3	43.5	10.2	100.0	116.0	
4	222.788	V	59.9	-26.2	33.7	46.5	12.8	100.0	153.0	
5	368.288	V	55.1	-21.3	33.8	46.5	12.7	400.0	168.0	
6	133.184	V	66.1	-31.8	34.3	43.5	9.2	100.0	113.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

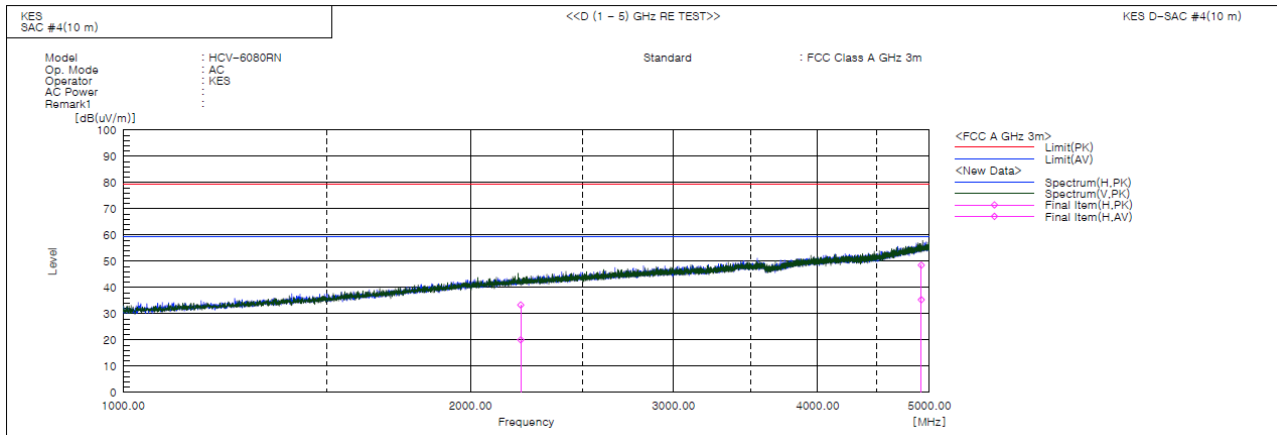

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2211.420	H	29.3	15.9	4.1	33.4	20.0	79.5	59.5	46.1	39.5	366.0	223.0	
2	4920.405	H	31.3	18.1	17.2	48.5	35.3	79.5	59.5	31.0	24.2	172.0	43.0	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0525
Page (20) of (24)

- DC 12 V Mode

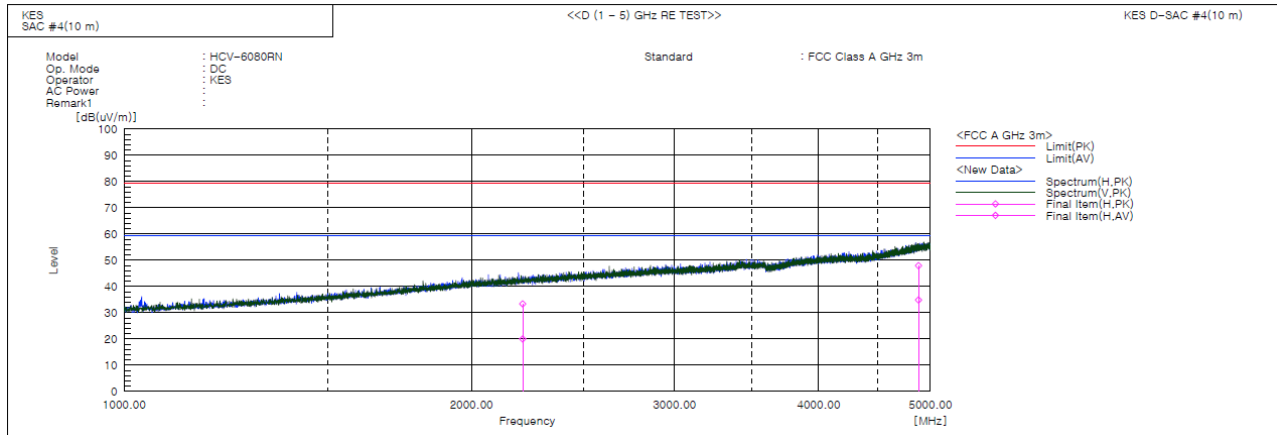

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2215.875	H	29.3	15.9	4.1	33.4	20.0	79.5	59.5	46.1	39.5	339.0	42.0	
2	4882.960	H	31.1	18.0	16.9	48.0	34.9	79.5	59.5	31.5	24.6	100.0	224.0	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]


Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions

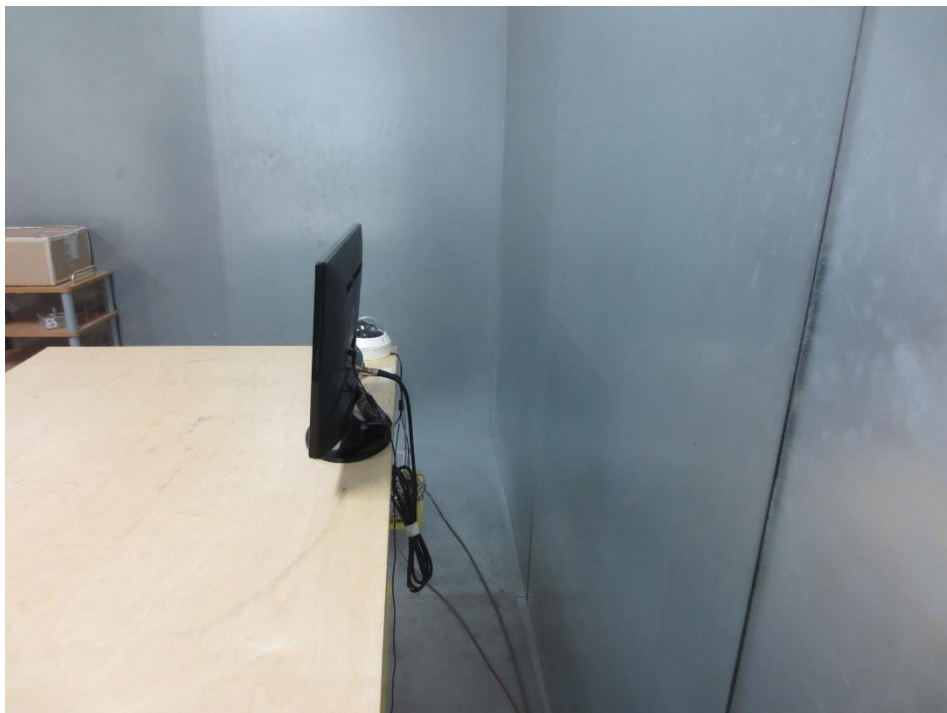


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

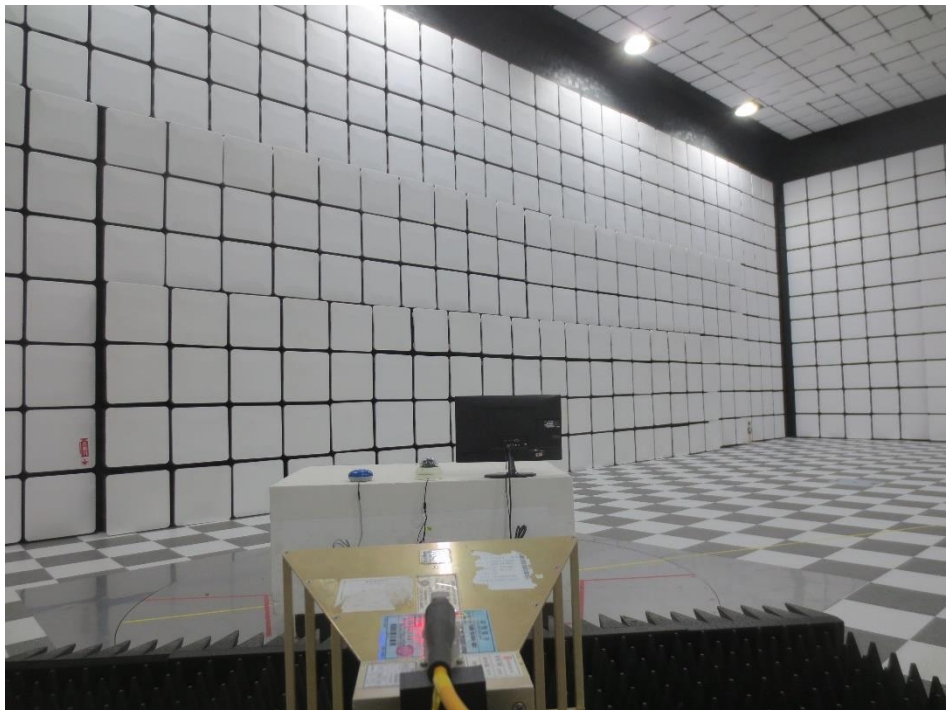

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


EUT Internal Photographs

(Internal View)




EUT Internal View – Main board

(Top)

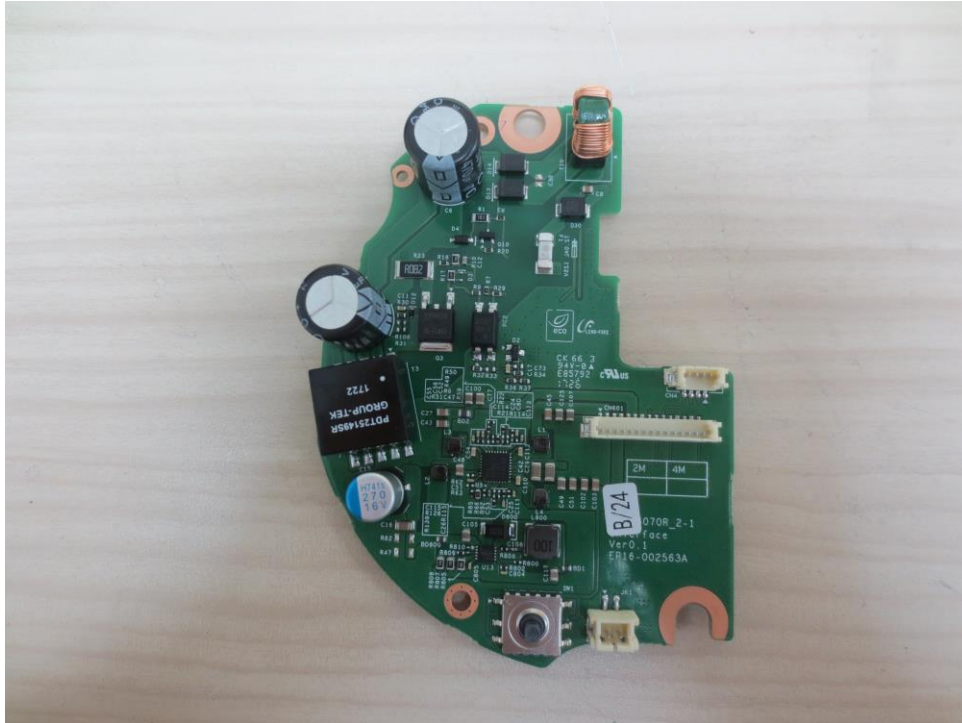

(Bottom)

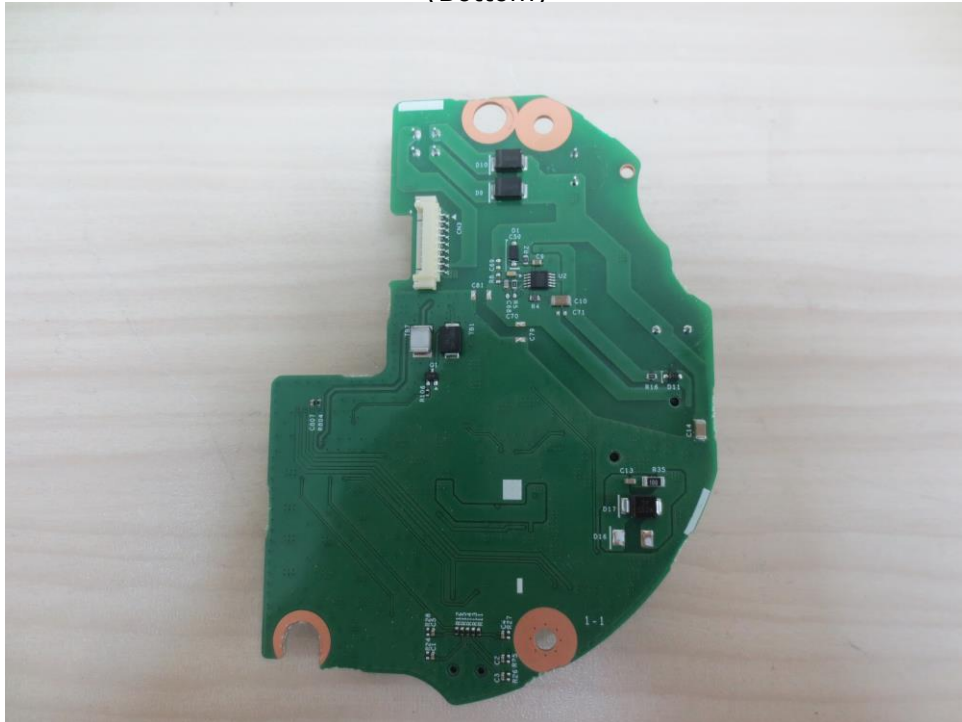

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Serve board 1

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Serve board 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.