



EMC TEST REPORT For RCM

Test Report No. : KES-E1-17T0521
Date of Issue : Aug. 14, 2017
Product name : DVR
Model/Type No. : HRD-1641P
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co., Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial
Park, TEDA, Tianjin, 300385, People's Republic of China
Date of Receipt : Jul. 10, 2017
Test date : Aug. 04, 2017 – Aug. 05, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jin Bae, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0521
Page (2) of (34)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Aug. 14, 2017	KES-E1-17T0521	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration.....	8
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Conducted Emissions at Telecommunication Ports		18
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz).....		22
Test Setup Photos and Configuration		26
Conducted Voltage Emissions		26
Conducted Telecommunication Emissions		27
Radiated Electric Field Emissions(Below 1 GHz)		28
Radiated Electric Field Emissions(Above 1 GHz).....		29
EUT External Photographs.....		30
EUT Internal Photographs		31



1.0 General Product Description

Main Specifications of EUT are:

HRD-1641			
Video	Inputs	16channel BNC : AHD(2MP, 4MP), HDTVI(Only 2MP), HDCVI(Only 2MP), NTSC/PAL	
	Resolution	2560x1440, 1920 x 1080, 960 x 480, 704 x 480 / 960 x 576, 704 x 576	
Live	Frame rate	480fps , 400fps	
	Resolution	2560x1440, 1920 x 1080, 960 x 480, 704 x 480 / 960 x 576, 704 x 576	
	Multi Screen display	1/4/7/9/13/16/16A/PIP/Sequence	
Performance			
Operating System	Embedded	Linux	
Recording	Compression	H.264, Wisestream	
	Record Rate(Analog)	NTSC : Up to 240fps@4MP / PAL : Up to 200fps@4MP NTSC : Up to 480fps@1920 x 1080 / PAL : Up to 400fps@1920 x 1080 NTSC: Up to 480fps @ 1280 x 720, 928x480, 704X480, 704X240, 352X240 PAL: Up to 400fps @ 1280 x 720, 928x576, 704x576, 704x288, 352x288	
		Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Time lapse (1~30 fps(N), 1~25fps(P))
		Event	Video Loss, Motion(Level 1~10), Alarm, Tampering(Level Low,Medium, High)
	Overwrite modes	Continuous	
	Pre-alarm	Up to 30 sec (5,10,20,30 Sec)	
	Post-Alarm	Up to 6 hour (5,10,20,30 sec,1,3,5,10,20 min,1,2,3,4,5,6 hour)	
	Search & Playback	Search mode	Date/time, Event, Back up, Motion (* All Search Included Preview Function)
		Playback function	Fast Forward/Backward (x2,x4,x8,x16,x32,x64,) * Backward Play with I-frame Only, Slow Forward/Backward (x1/2,x1/4,x1/8) Step Forward/Backward * Backward Play with I-frame Only
		Simultaneous playback	16CH(Local Monitor, CMS)
Network(IPv4)	Transmission speed	Record(Main) Stream) 4MP : 15fps/CH, 1080p/720p/WD1/4CIF/2CIF/CIF : 30fps/CH(N), 25fps/CH(P) Network(Sub) Stream) WD1/4CIF : 12fps/CH, 2CIF/CIF/QVGA/QCUF : 30fps/CH(N), 25fps/CH(P)	
		Transmission Bandwidth	Up to 64Mbps
	Bandwidth control	Selectable	
	Stream	Record Stream and Network Stream Selectable (at monitoring Viewer)	
	Remote users Maximum	Search(3)/Live Unicast(10)/Live Multicast(20)	
	Protocol support	TCP/IP,DHCP,PPPoE,SMTP,NTP,HTTP,DDNS,RTP,RTSP,SNMP	
	Web Browser	Windows OS : Internet Explorer 8, 9, 10, Firefox 3.6 or higher, Chrome 12 or higher Mac OS : Safari 5 or higher, Firefox 3.6 or higher	
	Viewer Software	SSM, Webviewer, SmartViewer, iPOLIS mobile viewer	
	Smart phone	Platform	Android , iOS
		Protocol support	RTP, RTSP, HTTP,
Control		Live(8ch) : Multi-Profile Support Playback(1ch)	
Storage	Remote users Maximum	Search (3), Live Unicast (10), Multicast (20)	
	Internal	Up to 2 SATA HDDs (0~6TB HDD)	
	External (e-SATA Interface)	e-SATA, USB(for Backup)	
Security	File Format (Back-up)	BU(DVR Player), SEC(Include Player), AVI	
	Password Protection	1 Admin, 10 Group , 10 User per 1 Group	
	Data Authentication	Watermark	
Easy Configuration	Easy Configuration	N/A	
Interface			
Monitors	VGA	1 VGA (1920x1080, 1280x1024, 1280x720)	
	HDMI	1 HDMI (4K(3840 x 2160), 2K(2560 x 1440), 1920x1080, 1280x1024, 1280x720)	
	Composite(Spot)	BNC(1CH) * Included OSD On Screen, Multi mode Support	
	Loop Outputs	N/A	
Audio	Inputs/Output	4CH line in / 1CH line out	
	Compression	G.711	
	Sampling rate	8KHz	
Alarm	Inputs/Outputs	Terminal 16 Inputs (NO/NC) / Terminal 4 relay Outputs (NO/NC), Rating : 30V DC/2A, 250V AC/0.25A	
	Remote notification	Notification via e-mail	
Connections	Ethernet	1 RJ45 10/100/1000 Base-T	
	Serial interface	RS-485(Half Duplex) for PTZ, Samsung System Keyboard	
	USB	1 ports(USB 3.0, Rear), 2 ports(USB 2.0, Front)	
	e-SATA	1 External SATA ports	
	Application Suport	Mouse, IR Remocon	
	Protocol support(RS-485)	Samsung-E/Samsung-T/Pelco-D/Pelco-p/Panasonic/ Phillips/ AD/ DIAMOND/ ERNA/ KALATEL/ VCL TP/VICON/ ELMO/GE	
	Protocol support(Coaxial)	NTSC/PAL : Pelco-C (Coaxitron) AHD : ACP(AHD Coax Protocol)	
General			
Electrical	Input Voltage/Current	DC12V Adaptor(100~250V AC $\pm$ 10% , 50/60Hz)	
	Power consumption	Max. 52W	
Environmental	Operating Temperature/Humidity	+0°C to +40°C (+32°F to +104°F) / 20% to 85% RH	
Mechanical	Dimension (W x H x D)	W370.0x H44.0 xD320(14.57" x 1.73" x 12.6")	
	Weight (no hard disks)	Approx. 2.328kg	
Lauguage	GUI	English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese(Traditional), Thai , Chinese(Simplified)(25 Language) * For Korean Model : Korean	
		English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese(Traditional), Thai , Chinese(Simplified)(25 Language) * For Korean Model : Korean	
	Web Browser		



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 240 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	HRD-1641P	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T
DVR ADAPTOR	FSP060-DIBAN2	H00000212	Zhonghan Electronics (Shenzhen) Co., Ltd.	-
HDD	WD40PURX- 64N960	WCC7K5PX74R4	WD	4 TB
IR REMOTE CONTROL	EP10-000331A	-	-	-
MOUSE	MOKJUO	-	Primax Electronics Ltd.	-



1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR 1	LT23C350	009MHYCH106388P	SAMSUNG	-
MONITOR 1 ADAPTOR	A4514_DSM	CN07BN4400721ASE 38GCOY0XS	Samsung Electro-Mechanics Co.,Ltd	-
MONITOR 2	S24E370DL	0NTWHTPH200179Y	SAMSUNG	-
MONITOR 2 ADAPTOR	A3514_FPN	CN07BN4400832ASK 28GCTR235 R.D	POWERNET Technologies Crop.	-
MONITOR 3	SMT-2232	C95V67VF900038B	Weihai Daewoo Electronics Co., Ltd.	-
CCTV CAMERA	SDH-C74041-CAM	-	SMASUNG	-
CCTV CAMERA ADAPTOR	FSP060-DIBAN2	H00000195	Zhonghan Electronics (Shenzhen) Co., Ltd.	
CONTROLLER	SPC-1010	C50E67WG10100F	SamSung Techwin Co.,Ltd	-
CONTROLLER ADAPTOR	RS-AB1000	-	Dongguan Jinhuaasheng Power Technology Co.,Ltd	-
SPEAKER	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
ALARM 1	-	-	-	-
ALARM 2	-	-	-	-
USB 3.0 Memory	-	-	-	16 GB
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook ADAPTOR	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
SSD Memory	SSD320	B12734-0373	Transcend	64 GB

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (E.U.T)	D-SUB	MONITOR 1	D-SUB	1.4	S
	HDMI	MONITOR 2	HDMI	1.4	S
	BNC	MONITOR 3	BNC	2.5	S
	BNC	CCTV CAMERA	BNC	10.0	S
	2 Pin	CONTROLLER	2 Pin	3.2	U
	Audio Out	SPEAKER	Audio Out	1.2	U
	Audio IN	MIC	Audio IN	1.2	U
	3 Pin	ALARM 1	3 Pin	3.2	U
	3 Pin	ALARM 2	3 Pin	3.6	U
	USB 3.0	USB 3.0 Memory	USB 3.0	-	-
	RJ-45	Notebook	RJ-45	5.2	U
	e-SATA	SSD Memory	e-SATA	0.5	U
	USB 2.0	MOUSE	USB 2.0	1.5	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


operating
1. Check the output of the camera images on the monitor 2. Check the video output of the camera via the laptop and ping test.

E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.8 Configuration

■ AC Main
□ DC Main

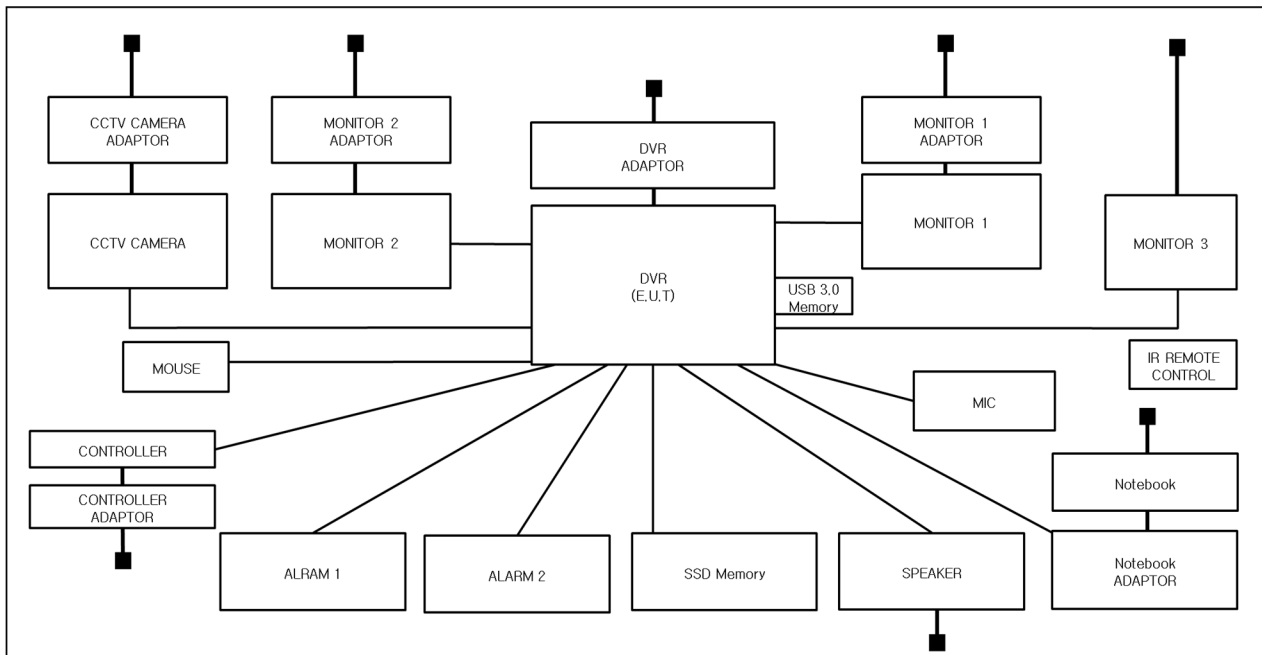

1.9 Remarks when standards applied

- N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32.

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



-
- | | | |
|---|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR 32:2013 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |



2.1 Conducted Emissions at Mains Power Ports

Test Date

Aug. 04, 2017

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 45,1 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Aug. 04, 2017

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☒	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 29, 2018
☒	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 29, 2018
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	05, 12, 2018

Test Conditions

Temperature: 23,5 °C

Relative Humidity: 45,1 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Aug. 05, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 24,1 °C

Relative Humidity: 54,9 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Aug. 05, 2017

Test Location

SEMI ANECHOIC CHAMBER #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	e3	AUDIX	8.083b	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01729	05, 31, 2018
☒	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018

Test Conditions

Temperature: 23,7 °C

Relative Humidity: 42,3 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: HRD-1641P
Mode: H
Operator Name: KES

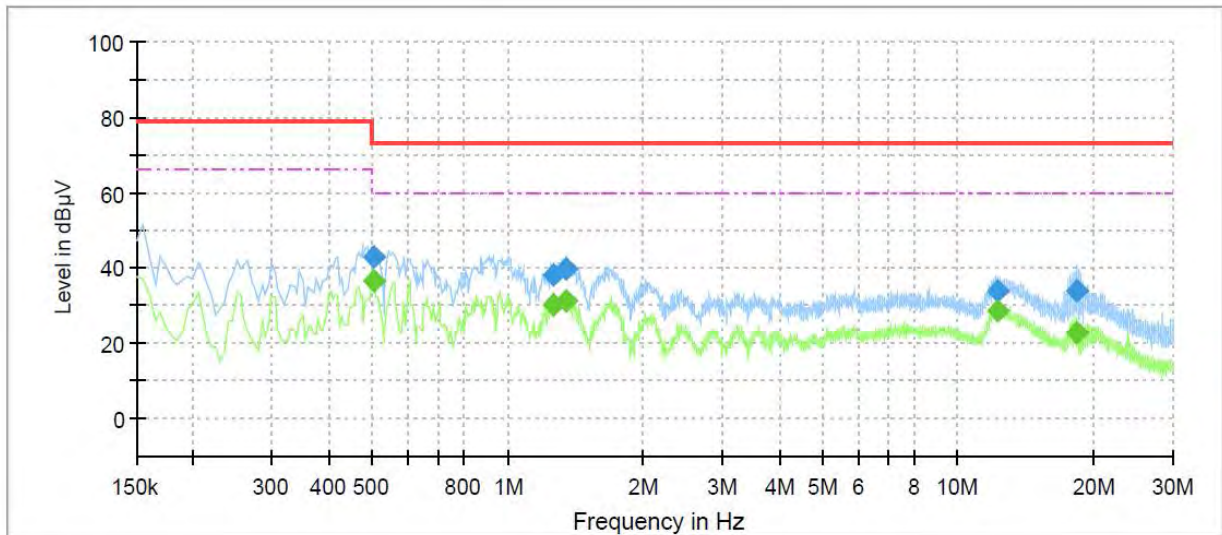

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.505000	---	36.47	60.00	23.53	1000.0	9.000	L1	19.6
0.505000	43.05	---	73.00	29.95	1000.0	9.000	L1	19.6
1.265000	---	30.33	60.00	29.67	1000.0	9.000	L1	19.9
1.265000	38.19	---	73.00	34.81	1000.0	9.000	L1	19.9
1.355000	---	31.50	60.00	28.50	1000.0	9.000	L1	19.9
1.355000	39.47	---	73.00	33.53	1000.0	9.000	L1	19.9
12.280000	---	28.59	60.00	31.41	1000.0	9.000	L1	19.8
12.280000	33.68	---	73.00	39.32	1000.0	9.000	L1	19.8
18.385000	---	22.63	60.00	37.37	1000.0	9.000	L1	20.2
18.385000	33.70	---	73.00	39.30	1000.0	9.000	L1	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: HRD-1641P
Mode: N
Operator Name: KES

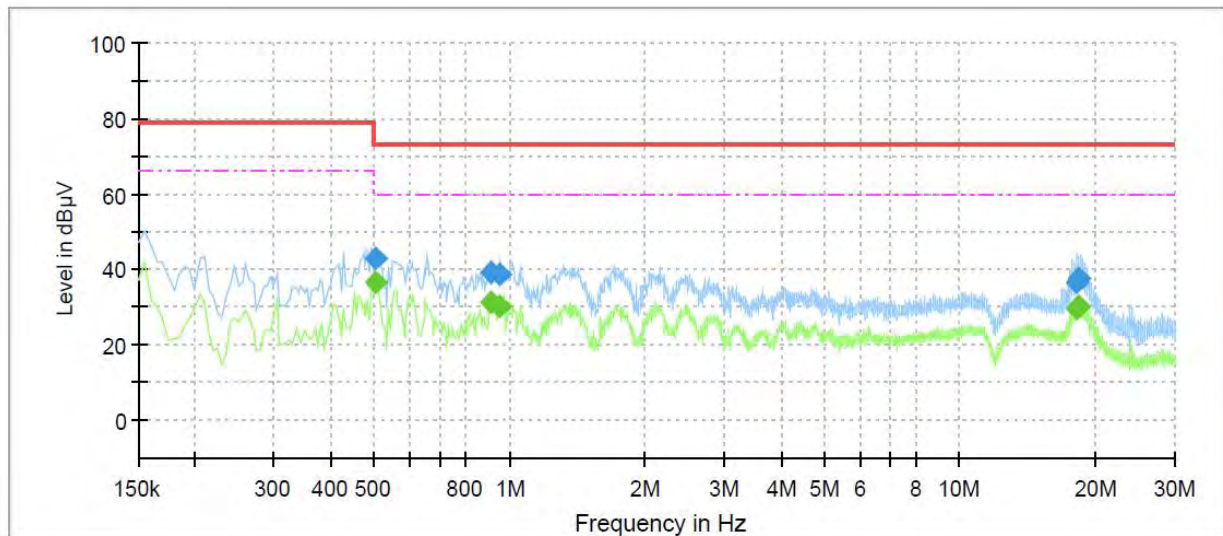

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.505000	---	36.31	60.00	23.69	1000.0	9.000	N	19.6
0.505000	43.06	---	73.00	29.94	1000.0	9.000	N	19.6
0.910000	---	31.30	60.00	28.70	1000.0	9.000	N	19.8
0.910000	39.06	---	73.00	33.94	1000.0	9.000	N	19.8
0.955000	---	30.32	60.00	29.68	1000.0	9.000	N	19.8
0.955000	38.62	---	73.00	34.38	1000.0	9.000	N	19.8
18.125000	---	29.46	60.00	30.54	1000.0	9.000	N	20.1
18.125000	36.77	---	73.00	36.23	1000.0	9.000	N	20.1
18.400000	---	30.00	60.00	30.00	1000.0	9.000	N	20.1
18.400000	37.48	---	73.00	35.52	1000.0	9.000	N	20.1

◆ Calculation

QuasiPeak[dBμV] / CAverage [dBμV] = Reading Value[dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Conducted Emissions at Telecommunication Ports

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	HRD-1641P
Mode	10 Mbps
Operator Name:	KES

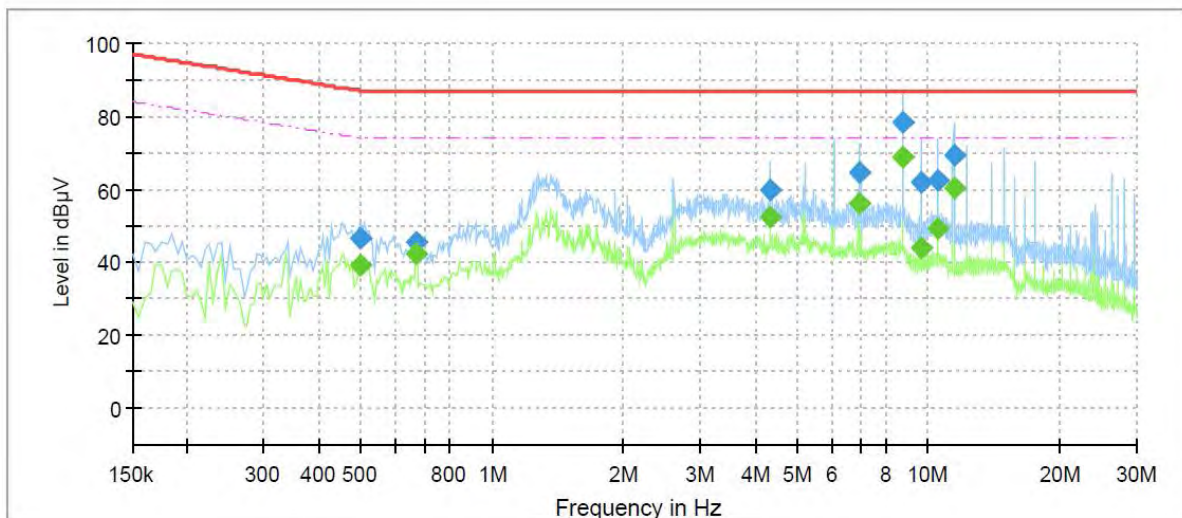

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.500000	46.42	---	87.00	40.58	1000.0	9.000	Single Line	19.9
0.500000	---	39.25	74.00	34.75	1000.0	9.000	Single Line	19.9
0.670000	45.42	---	87.00	41.58	1000.0	9.000	Single Line	19.9
0.670000	---	42.50	74.00	31.50	1000.0	9.000	Single Line	19.9
4.350000	59.64	---	87.00	27.36	1000.0	9.000	Single Line	20.0
4.350000	---	52.14	74.00	21.86	1000.0	9.000	Single Line	20.0
6.955000	64.65	---	87.00	22.35	1000.0	9.000	Single Line	19.8
6.955000	---	56.22	74.00	17.78	1000.0	9.000	Single Line	19.8
8.750000	---	68.85	74.00	5.15	1000.0	9.000	Single Line	19.8
8.750000	78.14	---	87.00	8.86	1000.0	9.000	Single Line	19.8
9.610000	---	43.76	74.00	30.24	1000.0	9.000	Single Line	19.8
9.610000	62.08	---	87.00	24.92	1000.0	9.000	Single Line	19.8
10.495000	---	49.19	74.00	24.81	1000.0	9.000	Single Line	19.8
10.495000	62.61	---	87.00	24.39	1000.0	9.000	Single Line	19.8
11.410000	---	60.11	74.00	13.89	1000.0	9.000	Single Line	19.8
11.410000	69.40	---	87.00	17.60	1000.0	9.000	Single Line	19.8

♦ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	HRD-1641P
Mode	100 Mbps
Operator Name:	KES

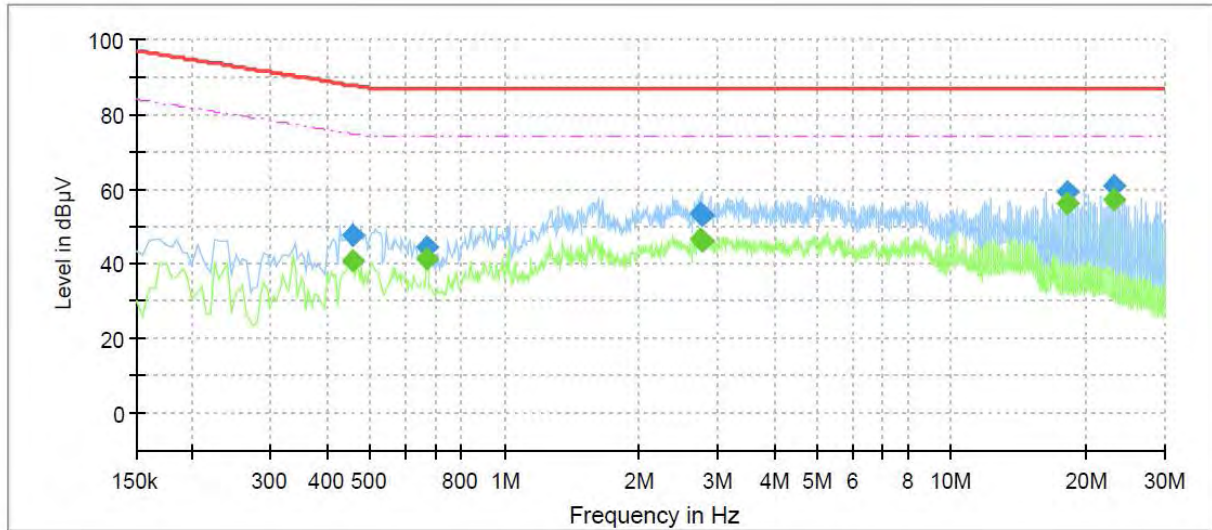

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	40.82	74.78	33.96	1000.0	9.000	Single Line	19.4
0.455000	47.76	---	87.78	40.02	1000.0	9.000	Single Line	19.4
0.670000	---	41.53	74.00	32.47	1000.0	9.000	Single Line	19.4
0.670000	44.54	---	87.00	42.46	1000.0	9.000	Single Line	19.4
2.755000	---	46.50	74.00	27.50	1000.0	9.000	Single Line	19.5
2.755000	53.27	---	87.00	33.73	1000.0	9.000	Single Line	19.5
2.780000	---	46.13	74.00	27.87	1000.0	9.000	Single Line	19.5
2.780000	53.02	---	87.00	33.98	1000.0	9.000	Single Line	19.5
18.245000	---	55.97	74.00	18.03	1000.0	9.000	Single Line	19.5
18.245000	59.31	---	87.00	27.69	1000.0	9.000	Single Line	19.5
23.130000	---	57.13	74.00	16.87	1000.0	9.000	Single Line	19.4
23.130000	60.89	---	87.00	26.11	1000.0	9.000	Single Line	19.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	HRD-1641P
Mode	1 000 Mbps
Operator Name:	KES

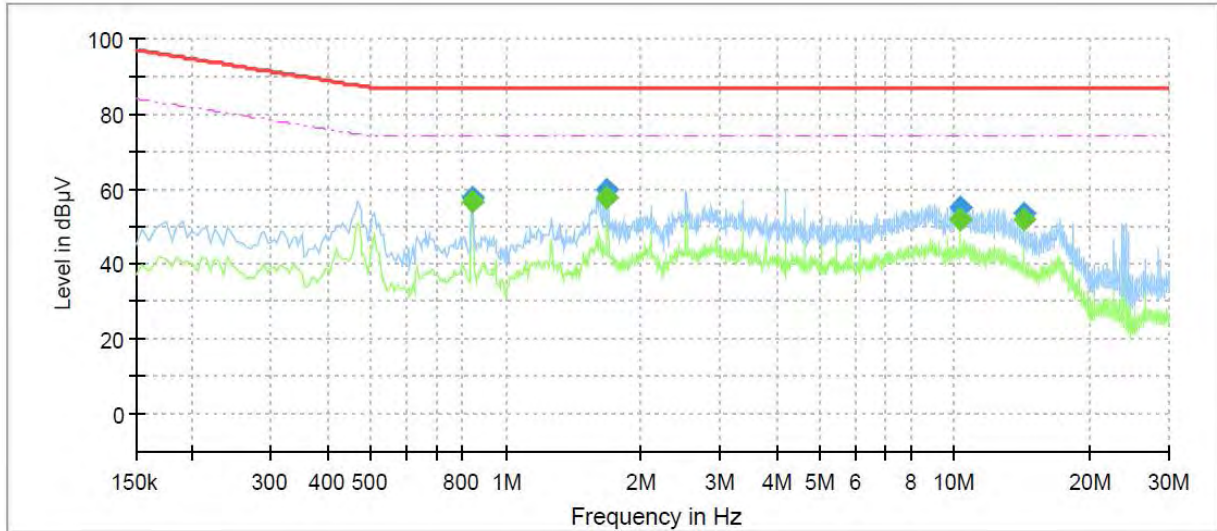

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.840000	---	56.58	74.00	17.42	1000.0	9.000	Single Line	19.6
0.840000	57.84	---	87.00	29.16	1000.0	9.000	Single Line	19.6
1.680000	---	57.71	74.00	16.29	1000.0	9.000	Single Line	19.8
1.680000	59.65	---	87.00	27.35	1000.0	9.000	Single Line	19.8
10.240000	---	51.93	74.00	22.07	1000.0	9.000	Single Line	19.6
10.240000	55.04	---	87.00	31.96	1000.0	9.000	Single Line	19.6
14.335000	---	51.93	74.00	22.07	1000.0	9.000	Single Line	19.9
14.335000	53.56	---	87.00	33.44	1000.0	9.000	Single Line	19.9

◆ Calculation


QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Radiated Electric Field Emissions(Below 1 GHz)

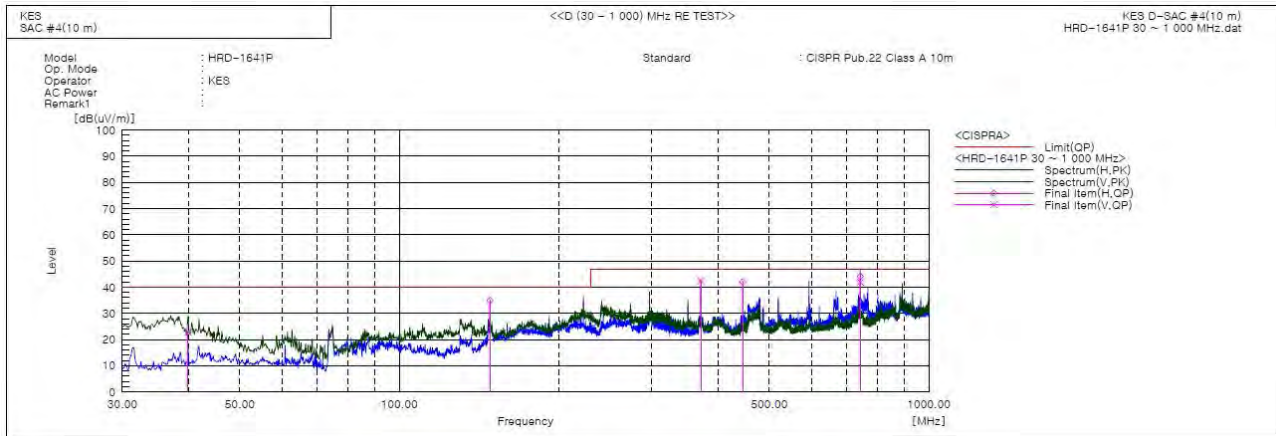

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.943	V	52.2	-29.4	22.8	40.0	17.2	100.0	54.0	
2	148.461	H	66.3	-31.4	34.9	40.0	5.1	363.0	15.0	
3	371.198	V	63.6	-21.2	42.4	47.0	4.6	100.0	33.0	
4	445.524	H	61.1	-19.1	42.0	47.0	5.0	108.0	102.0	
5	742.504	H	57.2	-13.1	44.1	47.0	2.9	173.0	358.0	
6	742.504	V	55.0	-13.1	41.9	47.0	5.1	100.0	358.0	

◆ Calculation


Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Radiated Electric Field Emissions(Above 1 GHz)

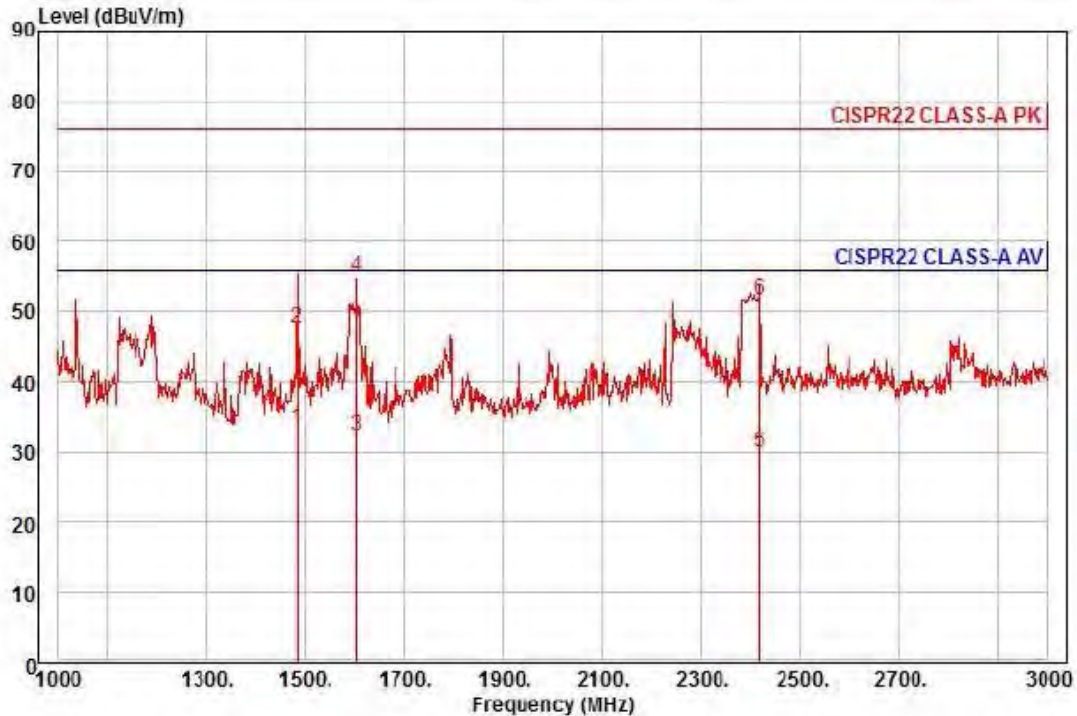


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-1641P
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 av	1484.00	36.86	23.97	8.17	35.63	50	56.00	-22.63	horizontal	Average
2	1484.00	51.10	23.97	8.17	35.63	50	76.00	-28.39	horizontal	Peak
3	1604.00	34.96	24.43	8.52	35.52	321	56.00	-23.61	horizontal	Average
4 pp	1604.00	57.46	24.43	8.52	35.52	321	76.00	-21.11	horizontal	Peak
5	2418.00	27.22	27.28	10.64	35.33	42	56.00	-26.19	horizontal	Average
6	2418.00	49.13	27.28	10.64	35.33	42	76.00	-24.28	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB])
– Limit Line[dBuV]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

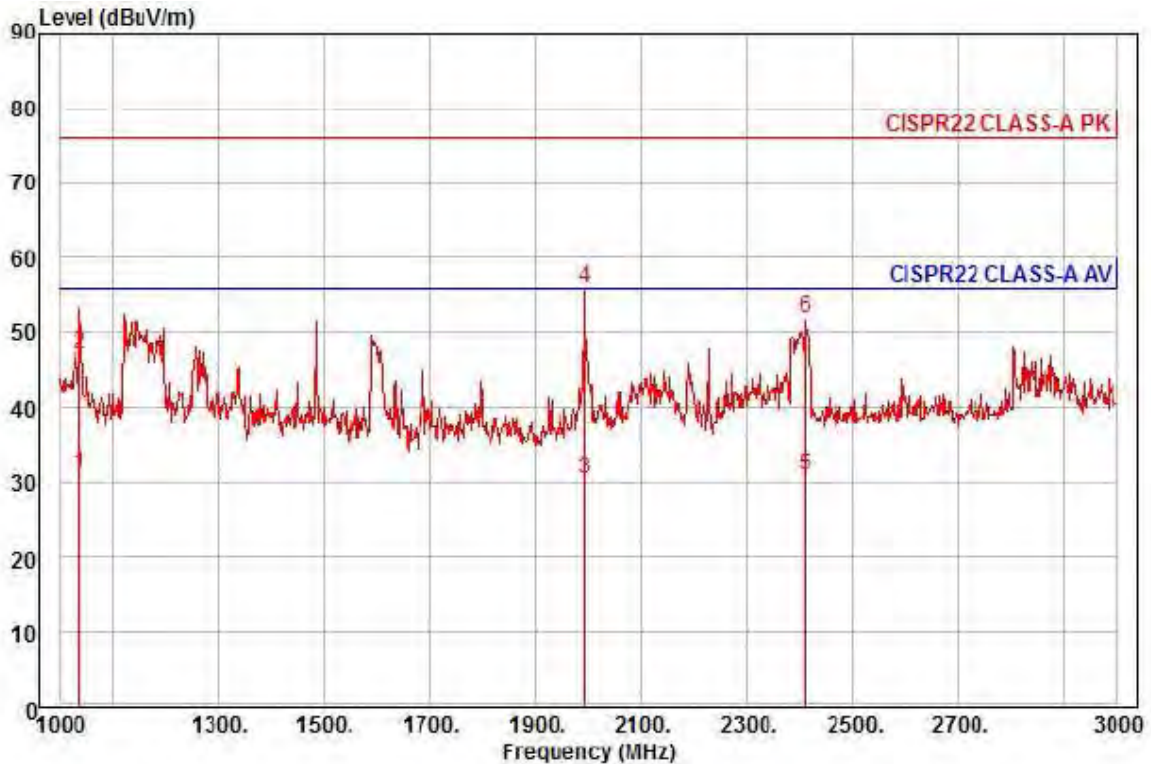


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-1641P
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 av	1038.00	37.73	22.62	6.76	36.03	275	56.00	-24.92	vertical	Average
2	1038.00	53.64	22.62	6.76	36.03	275	76.00	-29.01	vertical	Peak
3	1994.00	30.07	25.99	9.63	35.18	360	56.00	-25.49	vertical	Average
4 pp	1994.00	55.38	25.99	9.63	35.18	360	76.00	-20.18	vertical	Peak
5	2412.00	28.44	27.26	10.62	35.33	343	56.00	-25.01	vertical	Average
6	2412.00	49.55	27.26	10.62	35.33	343	76.00	-23.90	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBμV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB])
– Limit Line[dBμV]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

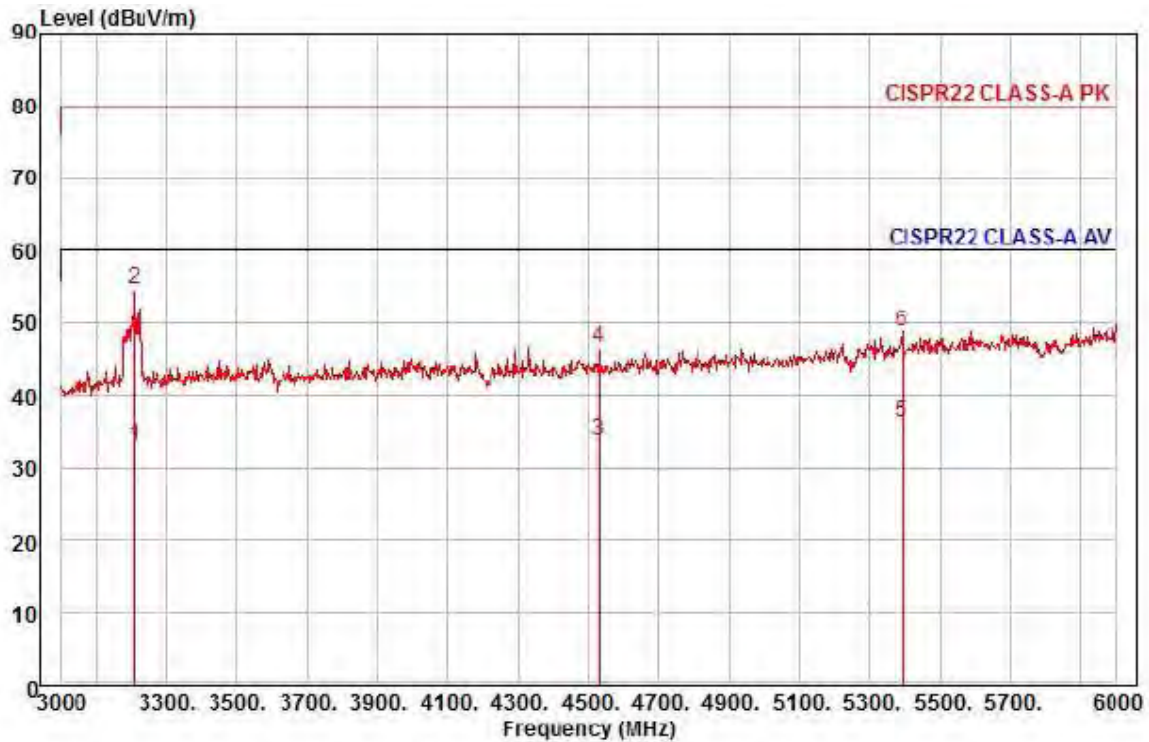


Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-1641P
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3207.00	25.53	30.32	12.68	35.50	333	60.00	-26.97	horizontal	Average
2 pk	3207.00	47.26	30.32	12.68	35.50	333	80.00	-25.24	horizontal	Peak
3	4530.00	21.80	32.42	15.01	35.47	162	60.00	-26.24	horizontal	Average
4	4530.00	34.75	32.42	15.01	35.47	162	80.00	-33.29	horizontal	Peak
5 pp	5391.00	20.63	34.94	16.44	35.65	194	60.00	-23.64	horizontal	Average
6	5391.00	33.09	34.94	16.44	35.65	194	80.00	-31.18	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB])
– Limit Line[dBuV]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

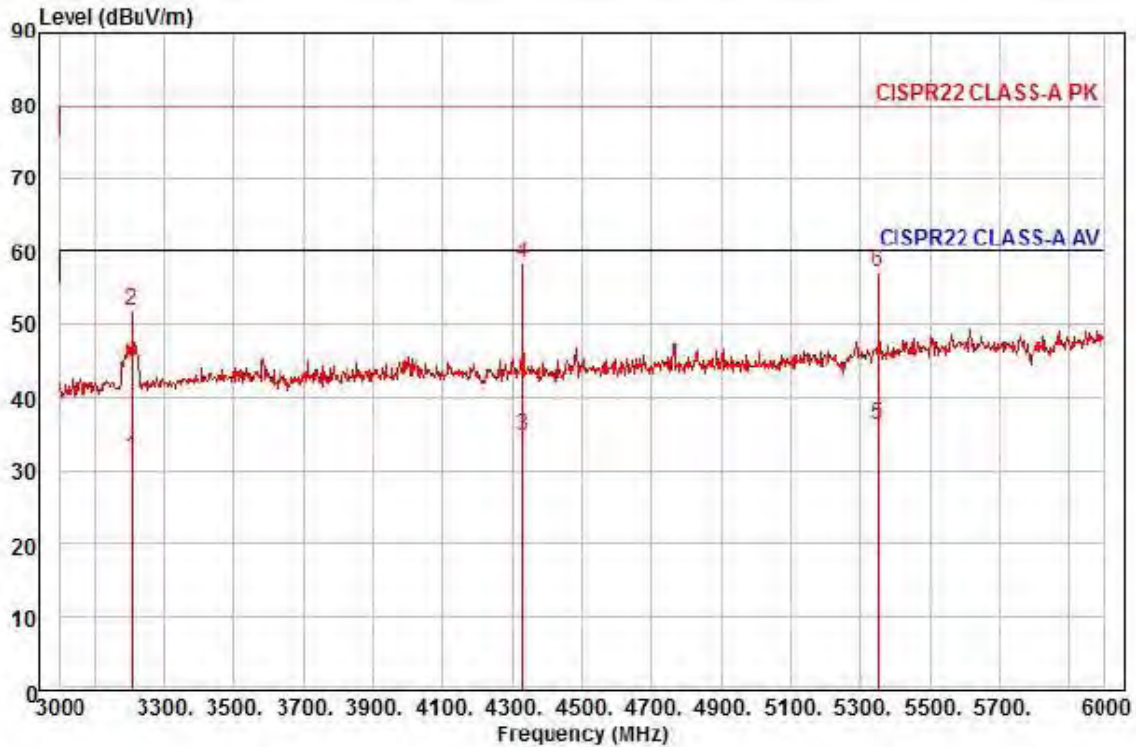

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HRD-1641P
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3204.00	24.35	30.32	12.67	35.50	50	60.00	-28.16	vertical	Average
2	3204.00	44.61	30.32	12.67	35.50	50	80.00	-27.90	vertical	Peak
3	4329.00	23.17	32.41	14.66	35.40	340	60.00	-25.16	vertical	Average
4 pp	4329.00	46.79	32.41	14.66	35.40	340	80.00	-21.54	vertical	Peak
5 av	5349.00	20.86	34.78	16.35	35.65	75	60.00	-23.66	vertical	Average
6	5349.00	41.76	34.78	16.35	35.65	75	80.00	-22.76	vertical	Peak


◆ Calculation

Over Limit [dB] = (Read Level[dBμV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB])
– Limit Line[dBμV]

Over Limit : Marjin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration

Conducted Voltage Emissions

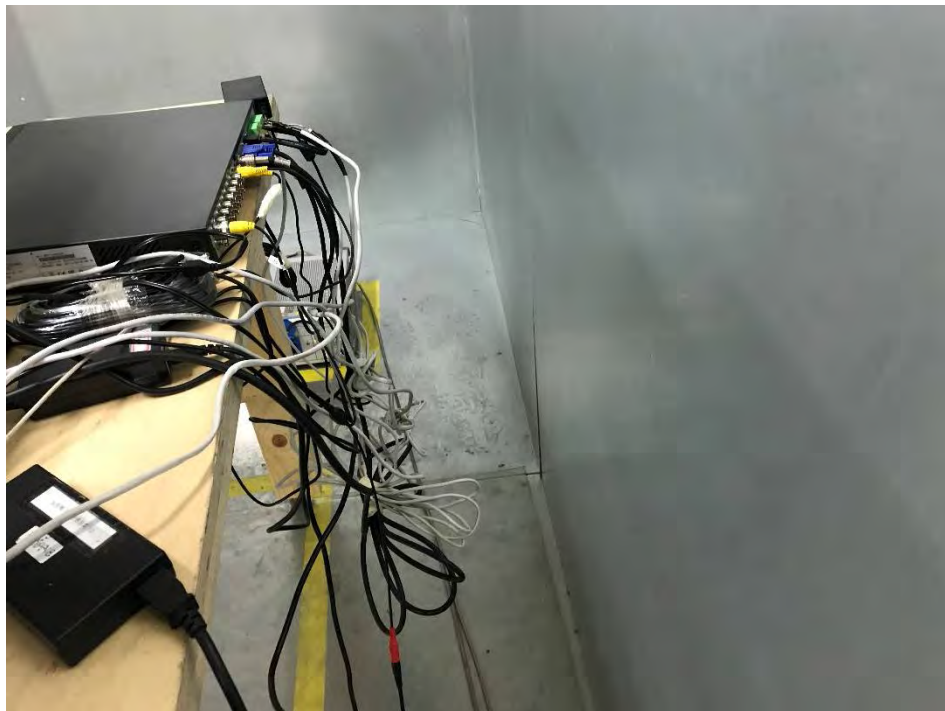

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

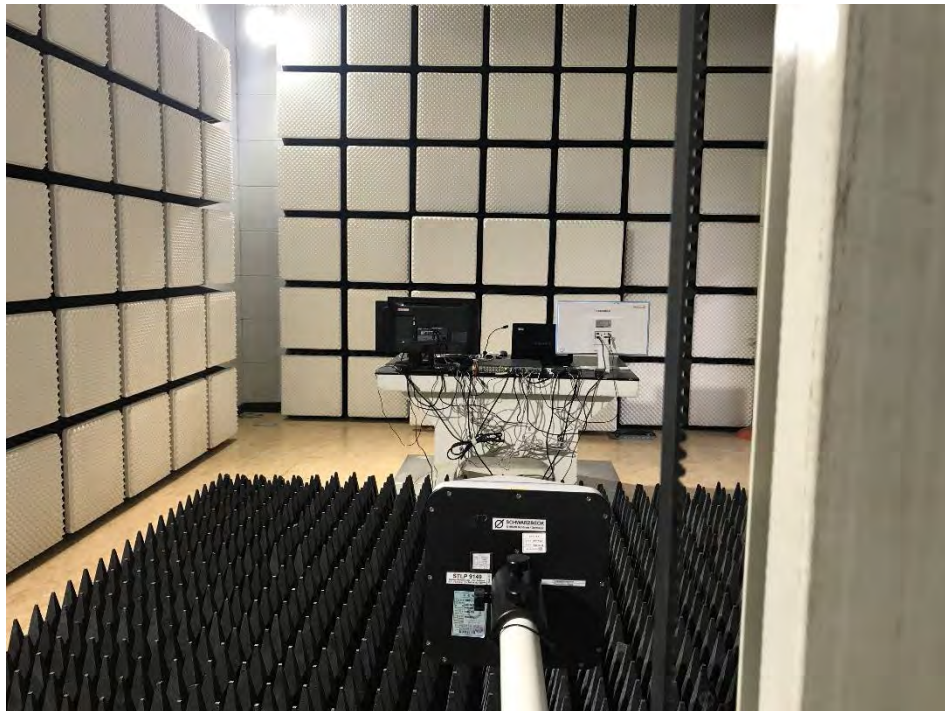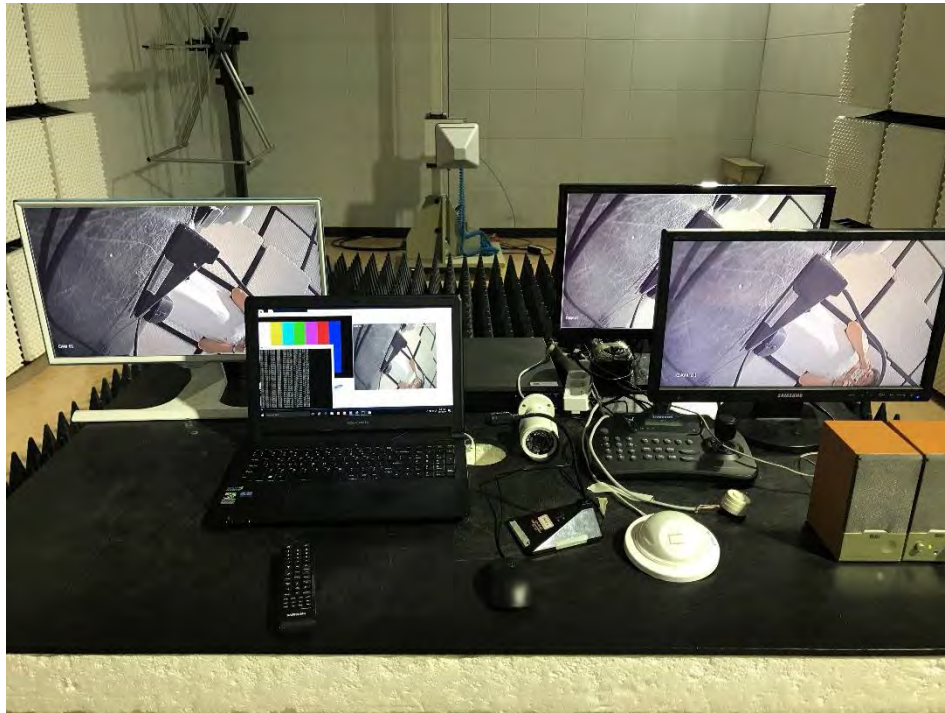

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)

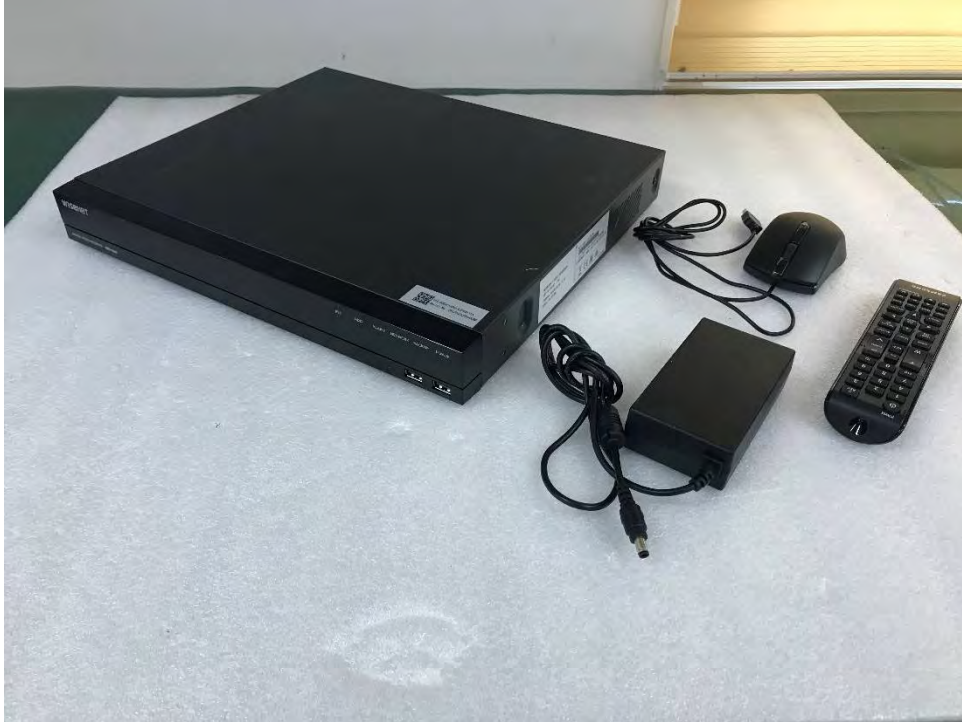


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)

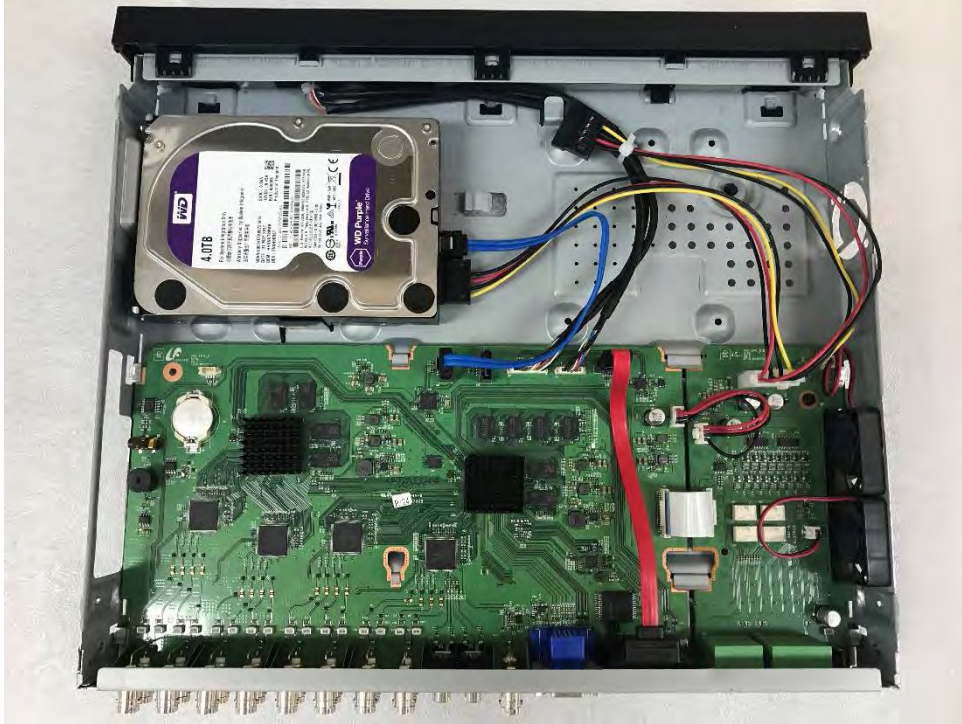


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 1

(Top)

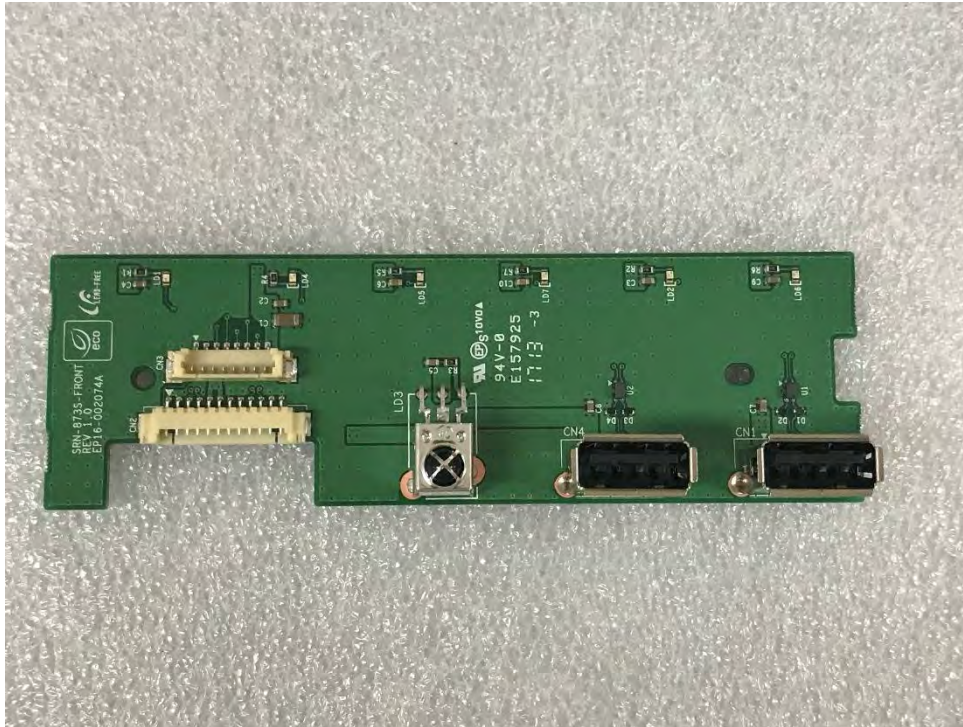


(Bottom)

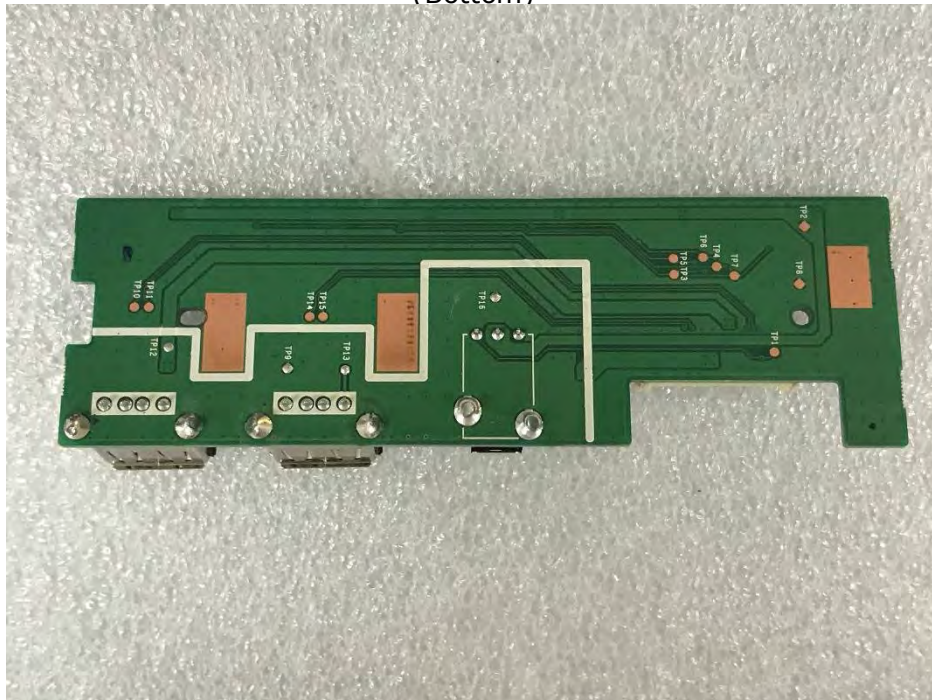


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 2

(Top)

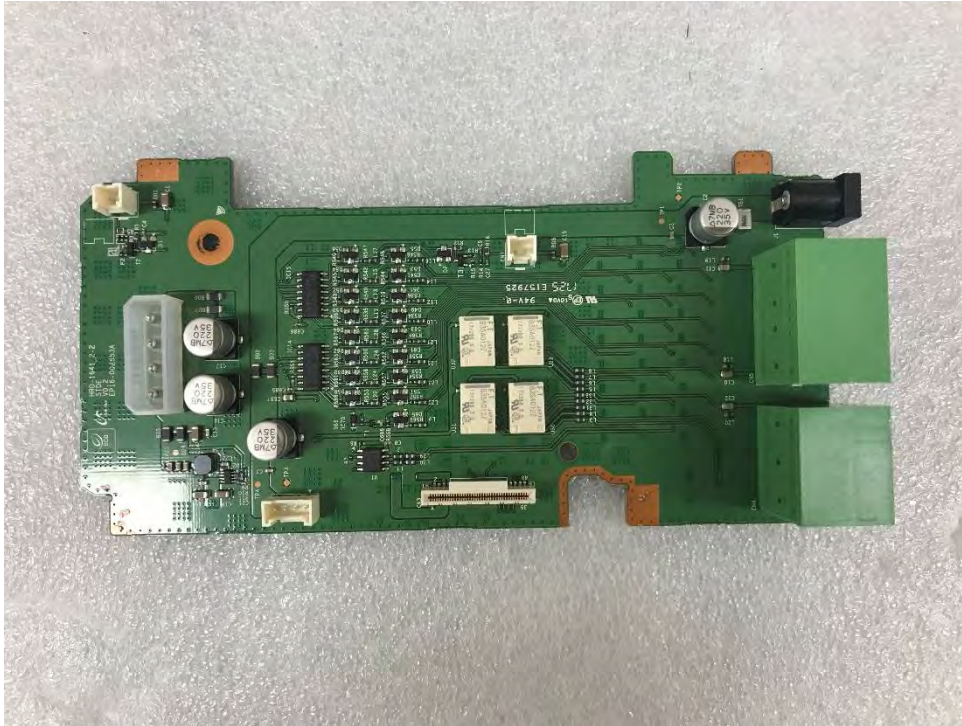

(Bottom)

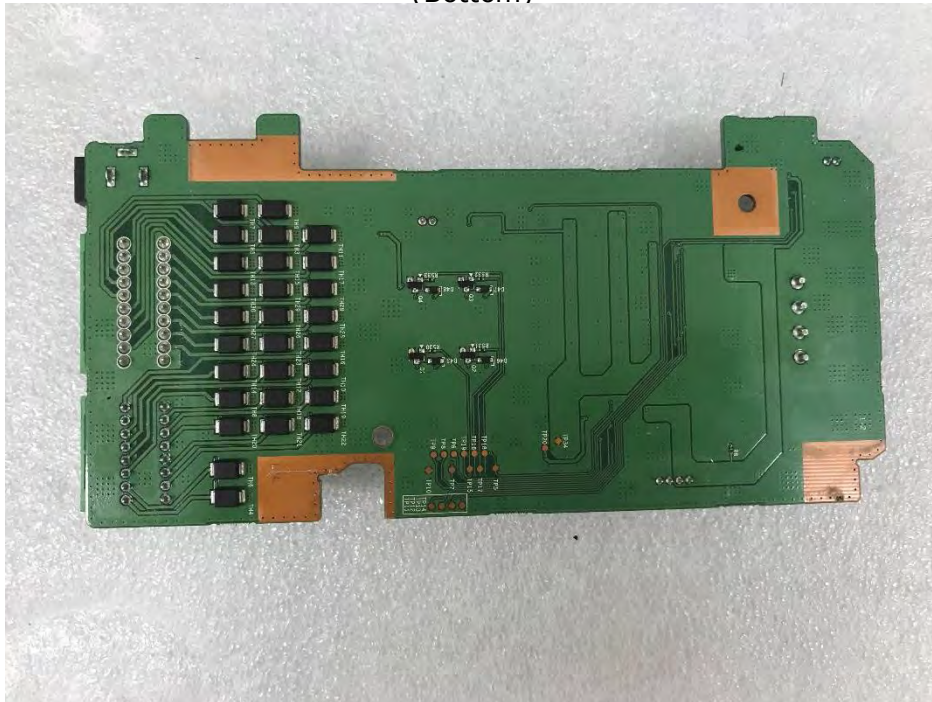


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 3

(Top)



(Bottom)

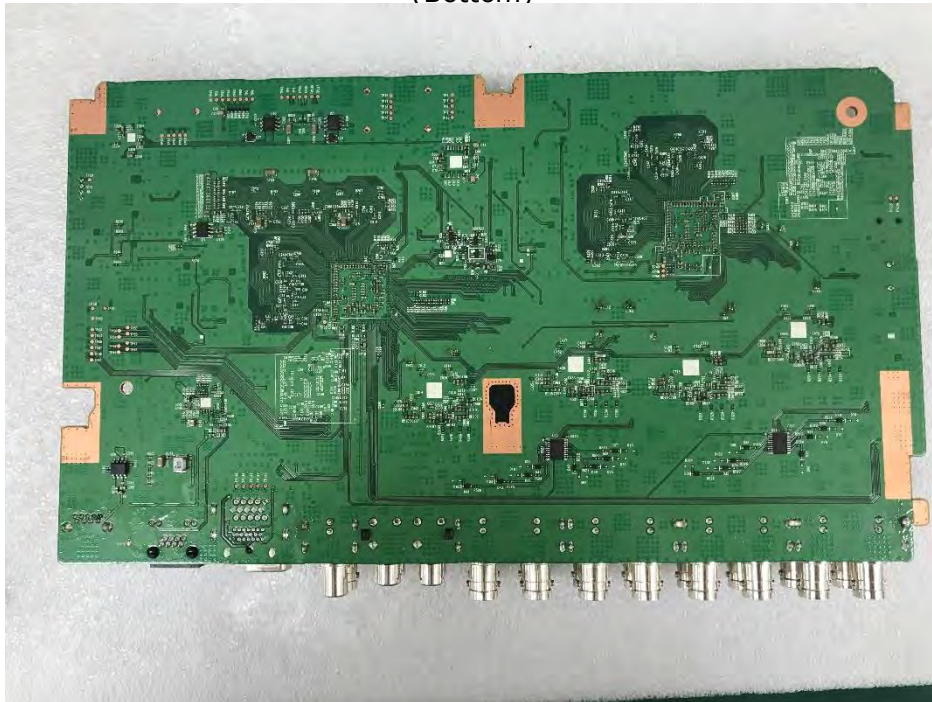

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.