



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (1) of (63)

EMC TEST REPORT For CE

Test Report No. : KES-EM-22T0282-R1
Date of Issue : Feb. 24, 2023
Product name : DVR
Model/Type No. : HRX-1635
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
x)
Date of Receipt : Mar. 02, 2022
Test date : Mar. 07, 2022 ~ Mar. 11, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (2) of (63)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 30, 2022	KES-EM-22T0282	Issued
Feb. 24, 2023	KES-EM-22T0282-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
2.5	Harmonic Current Emissions	18
2.6	Voltage Fluctuations and Flicker	19
3.0	Criteria for compliance	20
3.1	Electrostatic Discharge.....	22
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	31
3.5	Conducted Disturbance	34
3.6	Voltage Dips and Short Interruptions	37
APPENDIX A – TEST DATA.....		39
Conducted Emissions at Mains Power Ports.....		39
Conducted Emissions at Telecommunication Ports		43
Radiated Electric Field Emissions(Below 1 GHz)		44
Radiated Electric Field Emissions(Above 1 GHz)		45
Harmonic Current Emissions and Voltage Fluctuations and Flicker		46
Test Setup Photos and Configuration		49
Conducted Emissions at Mains Power Ports.....		49
Conducted Emissions at Telecommunication Ports		50
Radiated Electric Field Emissions(Below 1 GHz)		51
Radiated Electric Field Emissions(Above 1 GHz)		52
Harmonic Current Emissions and Voltage Fluctuations and Flicker		53
Electrostatic Discharge		54
Radiated Electric Field Immunity		54
Electrical Fast Transients/Bursts		55
Surge Transients.....		55
Conducted Disturbance.....		56
Voltage Dips and Short Interruptions.....		56
EUT External Photographs		57
EUT Internal Photographs		58



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (4) of (63)

1.0 General Product Description

Main Specifications of EUT are:

Display		
Analog camera	Inputs	16CH(1Vp-p 75ohm, BNC)
	Signal Type	- AHD(8MP, 5MP, 4MP, 1080p, 720p) - HDTVI(8MP, 5MP, 4MP, 1080p, 720p) - HDCVI(8MP, 5MP, 4MP, 1080p, 720p) - NTSC/PAL
Network camera	Inputs	2CH (Up to 16CH)
	Resolution	8MP – CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160, 2560x1440, 1920x1080, 1280x1044, 1280x720 (Expand mode 1920x1080) VGA: 1920x1080, 1280x1024, 1280x720 (Expand 1024*768)
	Multi Screen Display	[Local monitor] Dynamic layout/Sequence, [Web] 1 / 4 / 9 / sequence
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps), 1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(480fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	(Main Stream, NT/PAL) 8M 8/8fps, 5M 12/12fps, 4M 15/12fps, 2M 30/25fps, 720p 30/25fps, Under 960H 30/25fps/CH (Sub Stream) 720p/CH or Higher : 640x360 Full fps, SD : upto SD Full fps * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 128Mbps (H.265)
	Resolution	8MP – CIF
	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event, Dynamic camera event
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Playback Bandwidth	Max. 32Mbps (16CH simultaneously)
	User	Max. 4 users (Set 1, Remote 3)
	Simultaneous playback	16CH(Local Monitor), 16Ch (CMS), 4Ch (Wisenet Mobile), 1Ch(Web)
	Fisheye Dewarping	WEB / CMS
	Search Mode	Date & Time (Calendar) / Event log list / Text search (POS), Back up, Motion, Smart search (Virtual Line w/ direction, Enter / Exit) * All Search Included Preview Function ARB search
	Resolution	8MP – CIF
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA Bays(Max. 48TB)
Backup	File backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 16 CH play, Date-time/title display
Network		
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Wisenet DDNS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (5) of (63)

Transmission speed		- Analog Camera(NTSC/PAL) (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH (Sub Stream) HD 640x360 full fps/CH, SD upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
Transmission Bandwidth		Max. 100Mbps
Audio	Input/Output	16 Uline in (RCA 4 Line, Option : Audio Extension Cable) / 1Line line out
	Compression	G.711 (N/W Cam G.711, 726)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Techwin Root CA)
Web viewer	Supported OS	Windows 10, Mac OS 11 Big Sur and later
	Supported browser	Chrome v99 / Edge v99 /Safari v14.0.3 Higher (2022/03)
Viewer Software		SSM, Webviewer, SmartViewer, Wisenet Mobile Viewer, Wisenet Viewer Support SDK/CGI(SUNAPI) for integration to 3rd party VMS
Functions		
Camera Setup	Register	Auto, Manual
	Item	None
PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
	Preset	300 presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max. Remote Users	Search(3), Live Unicast(10)
Easy configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control		CVBS/Pelco-C/AHD/CVI/TVI
Interface		
Front	Indicator	LED(Status Indicator) : Power(1), HDD Action(1), Alarm(1), Record(1), Network(1), Backup(1)
Reset		Switch(1EA)
HDMI		1EA
VGA		1EA
BNC		16CH In / 1CH Out(Spot Output)
Ethernet		RJ-45(10/100/1000BASE-T)
Alarm		In 16EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
USB		2EA(Front USB2.0, Rear USB 3.0))
Serial(Protocols)		RS-485/422 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power inlet		1EA AC (AC100~240V)
System		
Log	Log List	Max. 100,000 (System Log, Event Log each), (HRX-1632)
System Control		Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
Operating Temperature		0°C to +40°C(+32°F to +104°F)
Operating Humidity		20% ~ 85% RH

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (6) of (63)

Certification		UL, CE, FCC, KC, UKCA
Electrical		
Power Input		100~240 VAC±10%, 50/60 Hz
Power Consumption		Max. 200W (6T HDD 8ea)
PoE Budget		None
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		440 x 88 x 384.8mm(17.32" x 3.46" x 15.15")
Weight		Approx. 5.7Kg (4TB HDD 1ea)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (7) of (63)

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	HRX-1635	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
HDD	ST2000VX012	WFM30EFP	SEAGATE	2 TB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (8) of (63)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	P98F004	21599158359	DELL INC.	-
Notebook Adapter	LA240PM190	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Monitor 1	SMT-2232	C95V67VF90002 5B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 2	SMT-2232	C95V67VF90003 8B	Weihai Daewoo Electronics Co., Ltd.	-
Monitor 3	DELL E2222H DVT	8221TCM10D001 03X	DELL INC.	-
Speaker	E5	-	PreSonus®	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Controller Adapter	-	-	-	-
Alarm	PRO-SL	-	SENSOR PRO	-
ButtonAlarm	-	-	-	-
Camera 1	SCD-6083RN	-	TB-eye Ltd.	-
Camera 1 Adapter	KP-1220	JH10099-15001	KEPCO	-
Camera 2	HCV-6070R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Camera 2 Adapter	DAD12050DKA	KTLSA10022-8001	Dream Electronics Inc.	-
NETWORK VIDEO ENCODER 1	SPE-410	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
NETWORK VIDEO ENCODER 1 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
NETWORK VIDEO ENCODER 2	SPE-410	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
NETWORK VIDEO ENCODER 2 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
USB Memory	-	-	NOVOMATIC	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (9) of (63)

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	USB 2.0	Mouse (EUT)	USB	1.5	U
	RJ-45	Notebook	RJ-45	-	S
	AUDIO IN	Notebook	3.5 mm	1.6	U
	AUDIO IN	Notebook	3.5 mm	1.6	U
	SPOT	Monitor 1	BNC	3.5	S
	D-SUB	Monitor 2	D-SUB	1.8	S
	HDMI	Monitor 3	HDMI	2.0	S
	AUDIO OUT	Speaker	RCA	2.8	U
	RS-485	Controller	RS-485	4.0	U
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	ButtonAlarm	Alarm OUT	3.0	U
	BNC	NETWORK VIDEO ENCODER 1	BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC	NETWORK VIDEO ENCODER 2	BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U
	BNC		BNC	10.0	U

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (10) of (63)

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	USB 3.0	USB Memory	USB	-	-
NETWORK VIDEO ENCODER 1	BNC	Camera 1	BNC	1.6	U
NETWORK VIDEO ENCODER 2	BNC	Camera 2	BNC	1.5	U
Notebook	DC Jack	Notebook Adapter	DC Jack	2.2	S
Controller	DC Jack	Controller Adapter	DC Jack	1.8	U
NETWORK VIDEO ENCODER 1	2 Pin	NETWORK VIDEO ENCODER 1 Adapter	2 Pin	2.0	U
NETWORK VIDEO ENCODER 2	2 Pin	NETWORK VIDEO ENCODER 2 Adapter	2 Pin	2.0	U
Camera 1	2 Pin	Camera 1 Adapter	2 Pin	1.8	U
Camera 2	2 Pin	Camera 2 Adapter	2 Pin	2.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
Operating Mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.8 Configuration

■ AC Main
□ DC Main

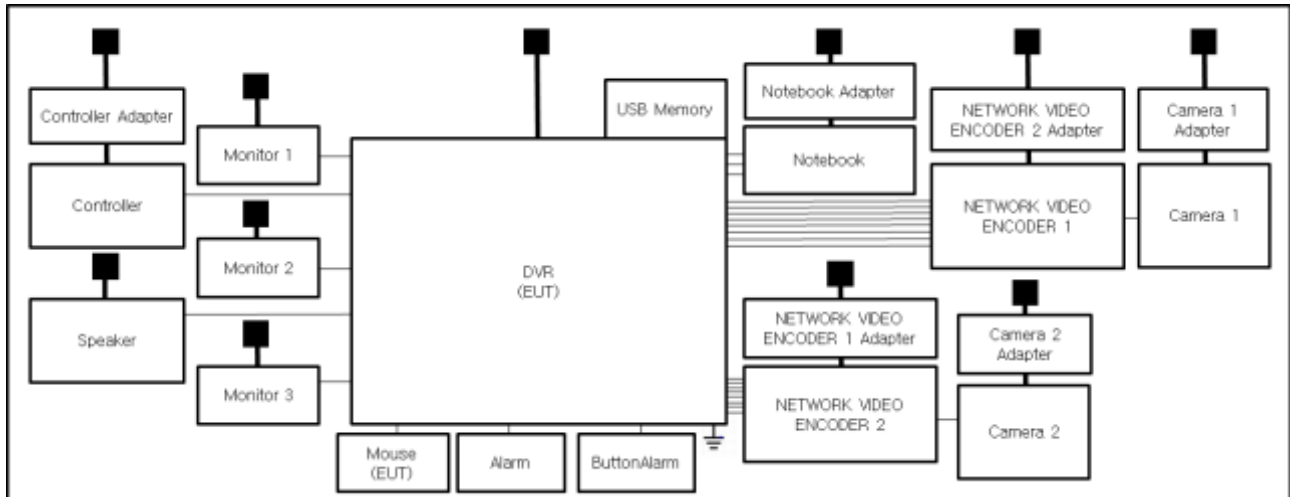

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (14) of (63)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (43,5 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Mar. 07, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 07, 2023

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (43,5 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (16) of (63)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 07, 2022

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (23,7 ± 0,2) °C

Relative Humidity: (43,7 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (17) of (63)

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 08, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	04, 01, 2022
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

Test ConditionsTemperature: (23,2 $\pm$ 0,2) °CRelative Humidity: (43,1 $\pm$ 0,1) % R.H.**Frequency Range of Measurement**

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.5 Harmonic Current Emissions

Test Date

Mar. 11, 2022

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,5 ± 0,1) °C
Relative Humidity: (44,6 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Mar. 11, 2022

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,5 ± 0,1) °C
Relative Humidity: (44,6 ± 0,1) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 / BS EN 50130-4:2011/A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009
BS EN 61000-4-2:2009

Test Date

Mar. 11, 2022

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 24, 2023
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (24,4 ± 0,1) °C
Relative Humidity: (44,6 ± 0,1) % R.H.
Atmospheric Pressure: (100,6 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV




Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Location of Discharge:

Air
Contact

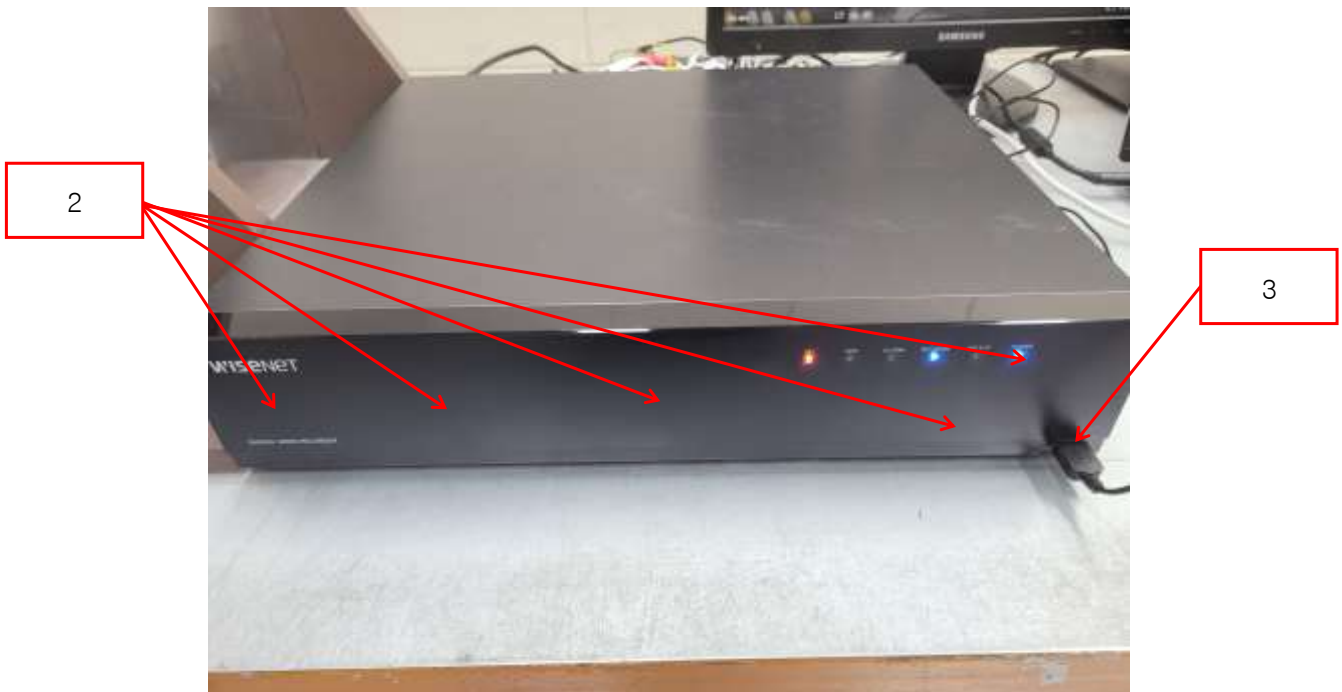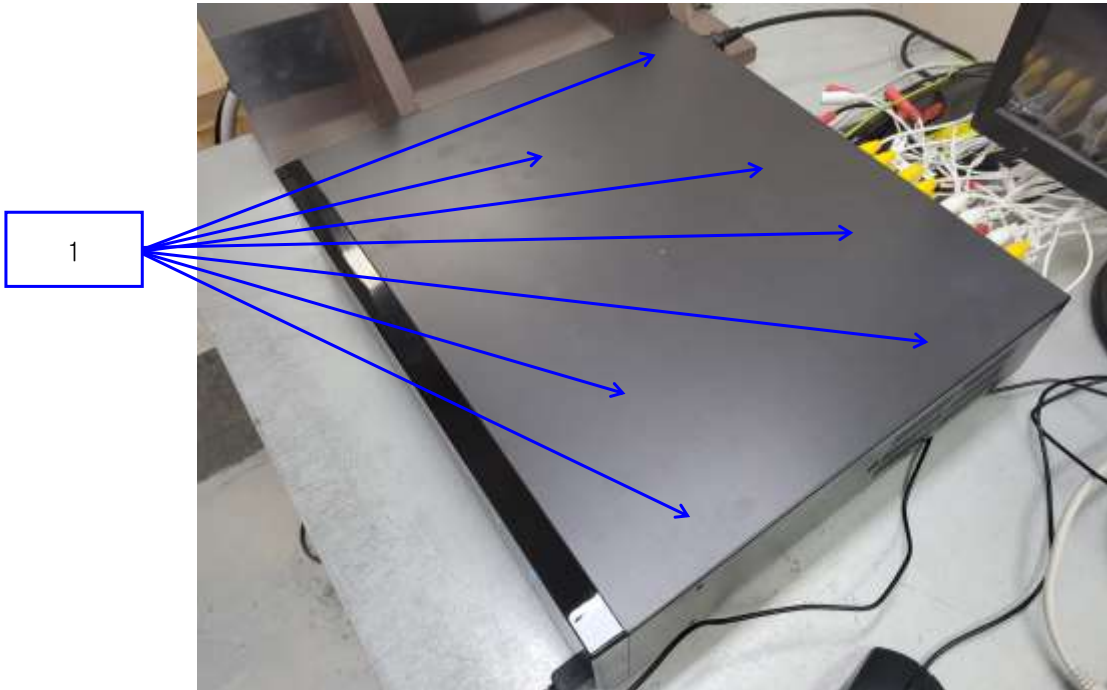



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (25) of (63)

Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Contact Discharge	Complied	-
2	Enclosure 2	Air Discharge	Complied	-
3	USB Port	Air Discharge	Complied	-
4	Mouse Enclosure	Air Discharge	Complied	-
5	Screw	Contact Discharge	Complied	-
6	Port	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010
BS EN 61000-4-3:2006 +A2:2010

Test Date

Mar. 08, 2022

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 03, 2022
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 01, 2022
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (24,2 ± 0,2) °C
Relative Humidity: (43,9 ± 0,1) % R.H.
Atmospheric Pressure: (100,9 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (27) of (63)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (28) of (63)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (29) of (63)

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

BS EN 61000-4-4:2012

Test Date

Mar. 10, 2022

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	12, 03, 2022

Test Conditions

Temperature: (24,3 ± 0,2) °C
Relative Humidity: (44,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,7 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied
RS-485	Complied	Complied
BNC	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (31) of (63)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014
BS EN 61000-4-5:2014

Test Date

Mar. 10, 2022

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022
☒	CDN	CNV 508N1	EM TEST	P1610176296	12, 03, 2022

Test Conditions

Temperature: (24,3 ± 0,2) °C
Relative Humidity: (44,5 ± 0,2) % R.H.
Atmospheric Pressure: (100,7 ± 0,1) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (32) of (63)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (33) of (63)

Test Data

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (34) of (63)

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014
BS EN 61000-4-6:2014

Test Date

Mar. 09, 2022

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 24, 2022
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43694	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43697	11, 24, 2022
☒	CDN	CDN ST08A	TESEQ	43886	11, 24, 2022
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 25, 2022

Test Conditions

Temperature: (23,9 ± 0,2) °C
Relative Humidity: (43,6 ± 0,2) % R.H.
Atmospheric Pressure: (100,8 ± 0,1) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (35) of (63)

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (36) of (63)

Test Data

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied
RS-485	Clamp	Complied
BNC	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (37) of (63)

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

BS EN 61000-4-11:2004

Test Date

Mar. 10, 2022

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	04, 01, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022

Test Conditions

Temperature: (24,3 ± 0,1) °C
Relative Humidity: (44,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,7 ± 0,1) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (38) of (63)

Test Specifications & Observations/Remarks**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks


During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports [HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	HRX-1635
Phase:	
Mode:	H
Operator Name:	KES

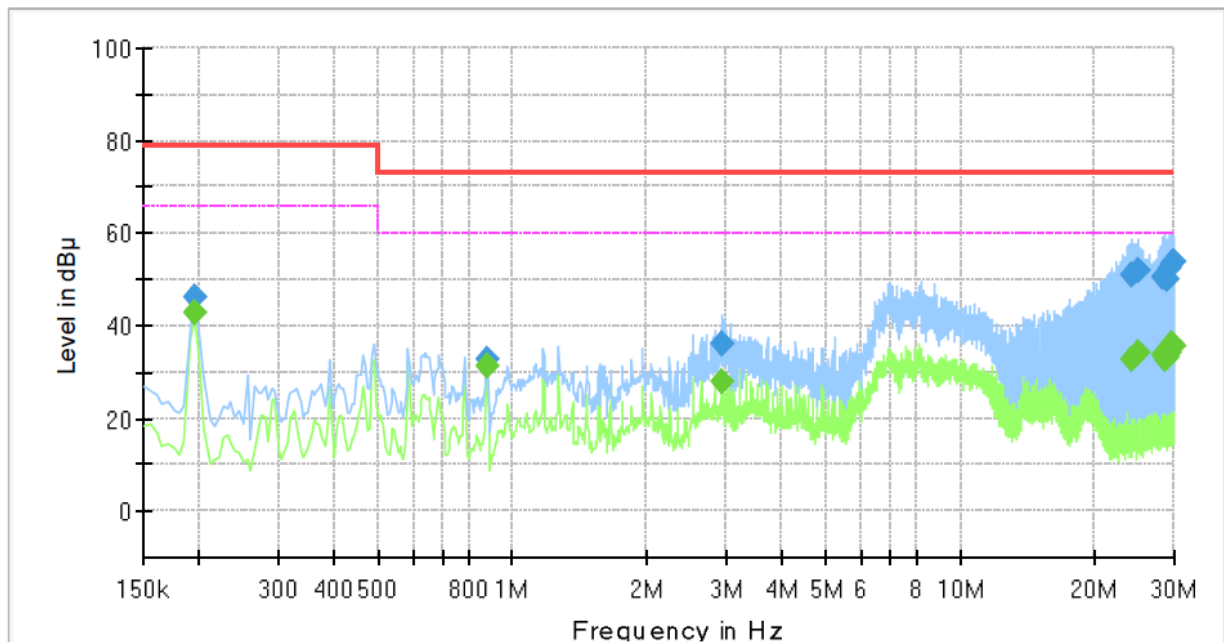



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (40) of (63)

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	46.20	---	79.00	32.80	1000.0	9.000	L1	19.4
0.195000	---	42.72	66.00	23.28	1000.0	9.000	L1	19.4
0.880000	32.89	---	73.00	40.11	1000.0	9.000	L1	20.1
0.880000	---	31.43	60.00	28.57	1000.0	9.000	L1	20.1
2.930000	35.92	---	73.00	37.08	1000.0	9.000	L1	20.2
2.930000	---	27.83	60.00	32.17	1000.0	9.000	L1	20.2
24.235000	51.00	---	73.00	22.00	1000.0	9.000	L1	20.1
24.235000	---	32.66	60.00	27.34	1000.0	9.000	L1	20.1
24.980000	---	34.17	60.00	25.83	1000.0	9.000	L1	20.1
24.980000	51.93	---	73.00	21.07	1000.0	9.000	L1	20.1
28.415000	---	33.50	60.00	26.50	1000.0	9.000	L1	20.3
28.415000	50.70	---	73.00	22.30	1000.0	9.000	L1	20.3
28.750000	50.72	---	73.00	22.28	1000.0	9.000	L1	20.3
28.750000	---	32.89	60.00	27.11	1000.0	9.000	L1	20.3
28.945000	49.90	---	73.00	23.10	1000.0	9.000	L1	20.3
28.945000	---	33.05	60.00	26.95	1000.0	9.000	L1	20.3
29.225000	52.56	---	73.00	20.44	1000.0	9.000	L1	20.3
29.225000	---	34.32	60.00	25.68	1000.0	9.000	L1	20.3
29.665000	53.41	---	73.00	19.59	1000.0	9.000	L1	20.3
29.665000	---	35.88	60.00	24.12	1000.0	9.000	L1	20.3
29.965000	54.07	---	73.00	18.93	1000.0	9.000	L1	20.3
29.965000	---	35.53	60.00	24.47	1000.0	9.000	L1	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (41) of (63)

[NEUTRAL]

Common Information

Test Description:

Model No.:

Phase:

Mode:


Operator Name:

Conducted Emission

HRX-1635

N

KES

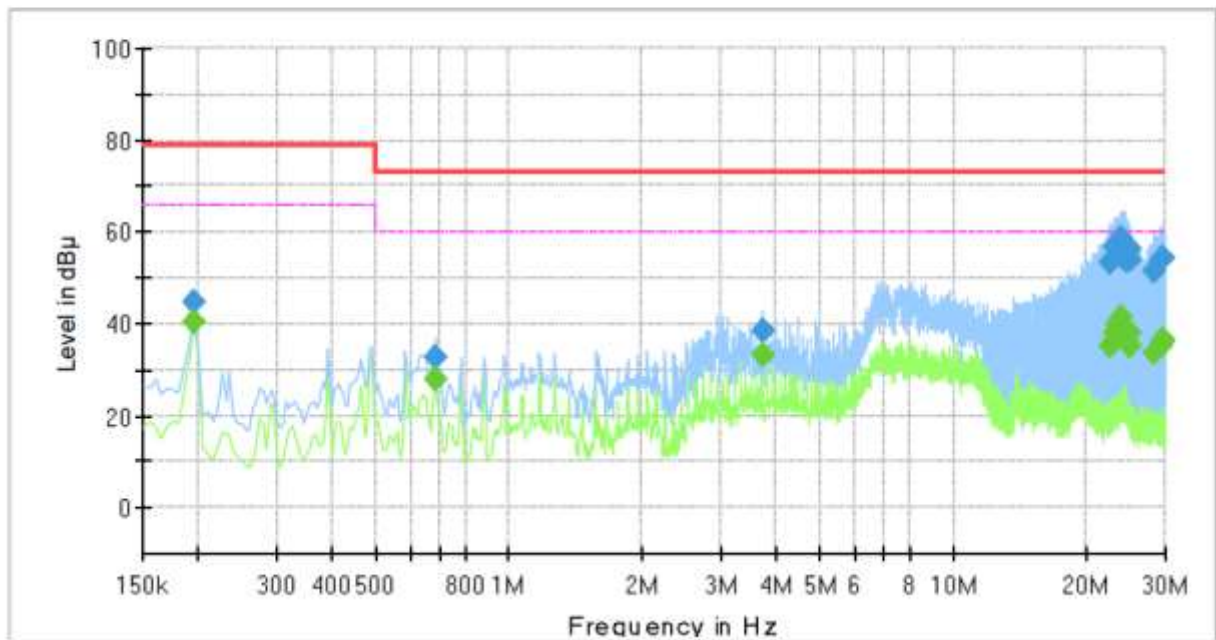

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (42) of (63)

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	44.73	---	79.00	34.27	1000.0	9.000	N	19.4
0.195000	---	40.52	66.00	25.48	1000.0	9.000	N	19.4
0.685000	32.77	---	73.00	40.23	1000.0	9.000	N	19.9
0.685000	---	27.78	60.00	32.22	1000.0	9.000	N	19.9
3.710000	38.44	---	73.00	34.56	1000.0	9.000	N	20.0
3.710000	---	33.28	60.00	26.72	1000.0	9.000	N	20.0
22.560000	53.27	---	73.00	19.73	1000.0	9.000	N	20.2
22.560000	---	35.22	60.00	24.78	1000.0	9.000	N	20.2
23.040000	56.59	---	73.00	16.41	1000.0	9.000	N	20.1
23.040000	---	37.89	60.00	22.11	1000.0	9.000	N	20.1
23.230000	---	39.77	60.00	20.23	1000.0	9.000	N	20.1
23.230000	56.71	---	73.00	16.29	1000.0	9.000	N	20.1
23.910000	58.90	---	73.00	14.10	1000.0	9.000	N	20.1
23.910000	---	41.47	60.00	18.53	1000.0	9.000	N	20.1
24.090000	55.38	---	73.00	17.62	1000.0	9.000	N	20.1
24.090000	---	37.66	60.00	22.34	1000.0	9.000	N	20.1
24.310000	---	38.68	60.00	21.32	1000.0	9.000	N	20.1
24.310000	57.27	---	73.00	15.73	1000.0	9.000	N	20.1
24.570000	---	36.48	60.00	23.52	1000.0	9.000	N	20.1
24.570000	53.97	---	73.00	19.03	1000.0	9.000	N	20.1
24.885000	---	38.01	60.00	21.99	1000.0	9.000	N	20.2
24.885000	56.30	---	73.00	16.70	1000.0	9.000	N	20.2
25.020000	---	35.35	60.00	24.65	1000.0	9.000	N	20.2
25.020000	53.91	---	73.00	19.09	1000.0	9.000	N	20.2
28.340000	---	33.83	60.00	26.17	1000.0	9.000	N	20.3
28.340000	51.32	---	73.00	21.68	1000.0	9.000	N	20.3
29.320000	---	35.36	60.00	24.64	1000.0	9.000	N	20.3
29.320000	53.72	---	73.00	19.28	1000.0	9.000	N	20.3
29.675000	---	36.83	60.00	23.17	1000.0	9.000	N	20.4
29.675000	54.53	---	73.00	18.47	1000.0	9.000	N	20.4
29.810000	---	36.22	60.00	23.78	1000.0	9.000	N	20.4
29.810000	54.36	---	73.00	18.64	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports [100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	HRX-1635
Mode :	
Speed :	1 000 Mbps
Operator Name:	KES

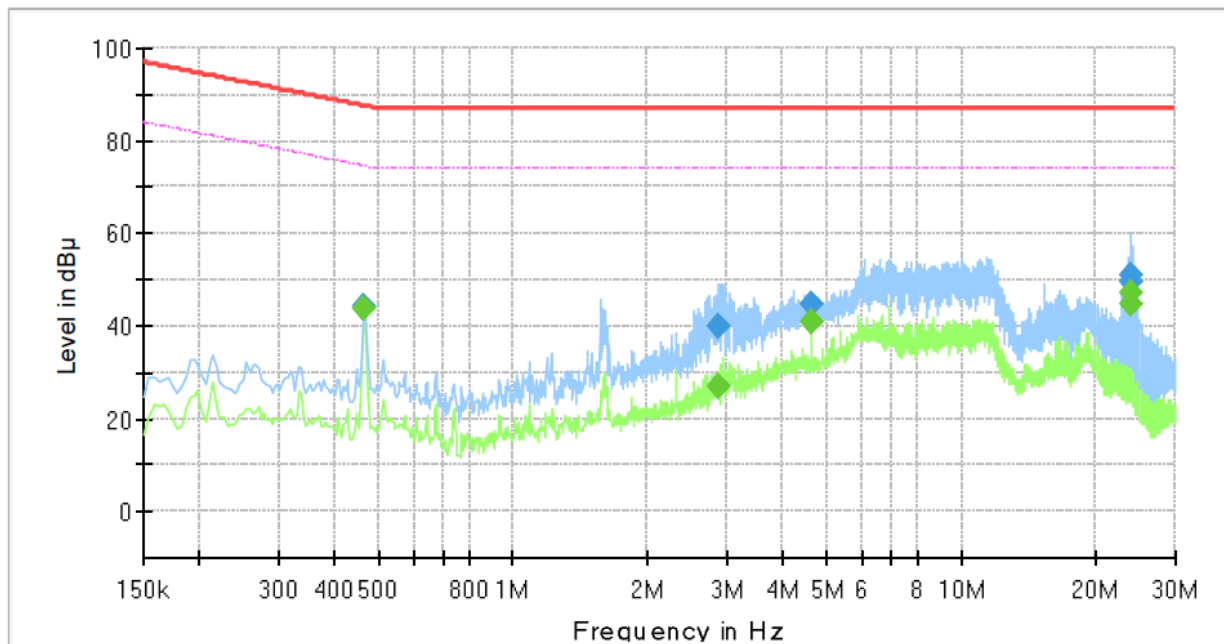

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.466000	---	43.90	74.58	30.68	1000.0	9.000	Single Line	19.5
0.466000	44.36	---	87.58	43.22	1000.0	9.000	Single Line	19.5
2.874000	---	27.04	74.00	46.96	1000.0	9.000	Single Line	20.1
2.874000	40.12	---	87.00	46.88	1000.0	9.000	Single Line	20.1
4.618000	---	41.14	74.00	32.86	1000.0	9.000	Single Line	19.6
4.618000	44.84	---	87.00	42.16	1000.0	9.000	Single Line	19.6
23.878000	---	44.82	74.00	29.18	1000.0	9.000	Single Line	20.2
23.878000	51.09	---	87.00	35.91	1000.0	9.000	Single Line	20.2
23.982000	---	47.33	74.00	26.67	1000.0	9.000	Single Line	20.2
23.982000	49.68	---	87.00	37.32	1000.0	9.000	Single Line	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (44) of (63)

Radiated Electric Field Emissions(Below 1 GHz)

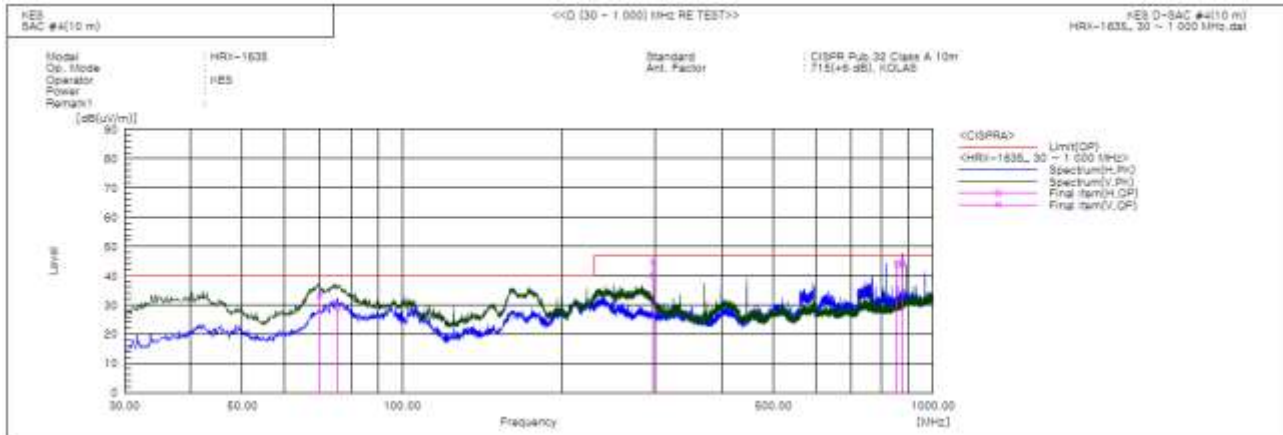

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	69.891	V	57.8	-24.8	33.0	40.0	7.0	148.0	142.0	
2	75.711	H	56.0	-27.1	28.9	40.0	11.1	400.0	148.0	
3	296.993	H	58.1	-18.1	40.0	47.0	7.0	286.0	194.0	
4	297.016	V	63.1	-18.1	45.0	47.0	2.0	100.0	187.0	
5	853.894	H	49.4	-5.4	44.0	47.0	3.0	365.0	11.0	
6	874.991	V	48.3	-4.6	43.7	47.0	3.3	152.0	213.0	
7	875.000	H	49.1	-4.6	44.5	47.0	2.5	395.0	174.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(uV/m)] = (Reading(QP)[dB(uV)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(uV/m)] - Result(QP) [dB(uV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0282-R1

Page (45) of (63)

Radiated Electric Field Emissions(Above 1 GHz)

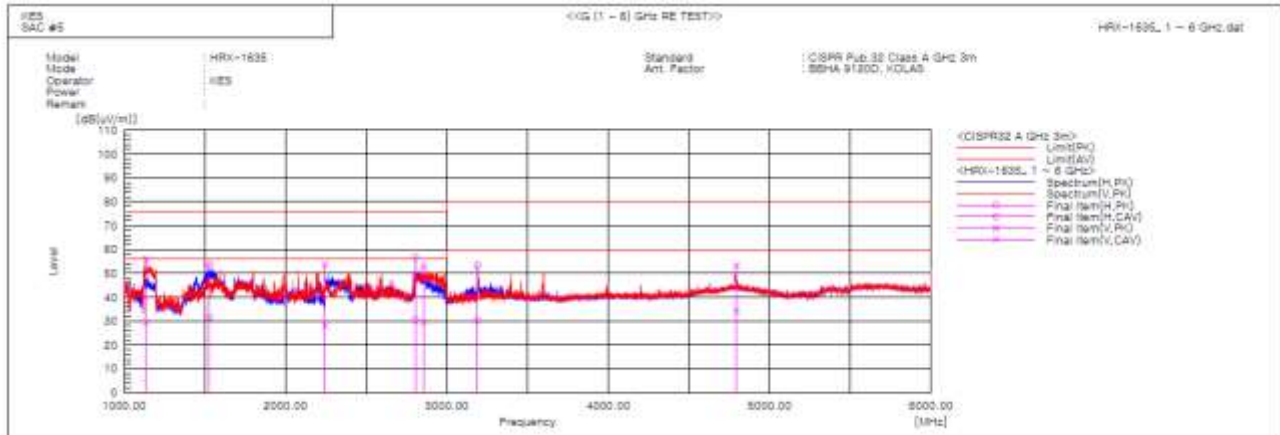

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1135.323	V	63.0	36.3	-6.9	56.1	29.4	76.0	56.0	19.9	26.6	100.0	14.1	
2	1527.800	H	58.6	36.3	-4.8	53.8	31.5	76.0	56.0	22.2	24.5	100.0	295.1	
3	2244.920	V	55.9	30.2	-2.2	53.7	28.0	76.0	56.0	22.3	28.0	100.0	317.4	
4	2804.822	H	56.5	30.0	0.4	56.9	30.4	76.0	56.0	19.1	25.6	100.0	297.1	
5	2856.482	V	52.6	29.0	0.6	53.2	29.6	76.0	56.0	22.8	26.4	100.0	348.5	
6	3190.842	H	52.0	28.8	1.5	53.5	30.3	80.0	60.0	26.5	29.7	100.0	91.2	
7	4794.777	V	46.7	27.7	6.6	53.3	34.3	80.0	60.0	26.7	25.7	100.0	150.7	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.153			
2	0.080	7.415	1.080	PASS
3	0.177	7.707	2.300	PASS
4	0.068	15.810	0.430	PASS
5	0.048	4.177	1.140	PASS
6	0.012	4.085	0.300	PASS
7	0.013	1.627	0.770	PASS
8	0.007	3.062	0.230	PASS
9	0.011	2.685	0.400	PASS
10	0.009	4.927	0.184	PASS
11	0.013	4.019	0.330	PASS
12	0.010	6.668	0.153	PASS
13	0.012	5.493	0.210	PASS
14	0.009	6.497	0.131	PASS
15	0.012	8.126	0.150	PASS
16	0.009	7.399	0.115	PASS
17	0.008	6.262	0.132	PASS
18	0.006	5.431	0.102	PASS
19	0.006	4.879	0.118	PASS
20	0.004	3.993	0.092	n/a
21	0.004	2.644	0.161	n/a
22	0.005	5.562	0.084	n/a
23	0.004	2.574	0.147	n/a
24	0.005	6.183	0.077	n/a
25	0.004	2.961	0.135	n/a
26	0.003	4.757	0.071	n/a
27	0.004	3.522	0.125	n/a
28	0.005	7.121	0.066	n/a
29	0.005	4.295	0.116	n/a
30	0.004	6.969	0.061	n/a
31	0.004	3.266	0.109	n/a
32	0.002	4.208	0.058	n/a
33	0.003	2.533	0.102	n/a
34	0.003	4.947	0.054	n/a
35	0.002	2.508	0.096	n/a
36	0.002	4.322	0.051	n/a
37	0.002	2.107	0.091	n/a
38	0.002	4.528	0.048	n/a
39	0.002	2.593	0.087	n/a
40	0.002	4.442	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.163			
2	0.089	5.515	1.620	PASS
3	0.190	5.522	3.450	PASS
4	0.077	11.867	0.645	PASS
5	0.053	3.081	1.710	PASS
6	0.020	4.387	0.450	PASS
7	0.015	1.338	1.155	PASS
8	0.012	3.343	0.345	PASS
9	0.012	1.989	0.600	PASS
10	0.011	3.912	0.276	PASS
11	0.015	3.072	0.495	PASS
12	0.011	4.966	0.230	PASS
13	0.014	4.414	0.315	PASS
14	0.011	5.756	0.197	PASS
15	0.013	5.920	0.225	PASS
16	0.010	5.678	0.173	PASS
17	0.009	4.779	0.199	PASS
18	0.007	4.530	0.153	PASS
19	0.007	3.855	0.178	PASS
20	0.005	3.858	0.138	PASS
21	0.005	3.214	0.161	PASS
22	0.005	4.220	0.125	PASS
23	0.005	3.131	0.147	n/a
24	0.005	4.677	0.115	PASS
25	0.005	3.714	0.135	PASS
26	0.005	4.519	0.106	n/a
27	0.005	4.166	0.125	PASS
28	0.005	5.283	0.099	PASS
29	0.005	4.571	0.116	PASS
30	0.005	5.050	0.092	n/a
31	0.004	3.707	0.109	n/a
32	0.003	3.941	0.086	n/a
33	0.003	3.251	0.102	n/a
34	0.003	4.065	0.081	n/a
35	0.003	3.128	0.096	n/a
36	0.003	3.842	0.077	n/a
37	0.003	2.801	0.091	n/a
38	0.003	3.765	0.073	n/a
39	0.003	2.965	0.087	n/a
40	0.002	3.564	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0282-R1
Page (48) of (63)

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.153	0.153	0.006	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports




Radiated Electric Field Emissions(Below 1 GHz)

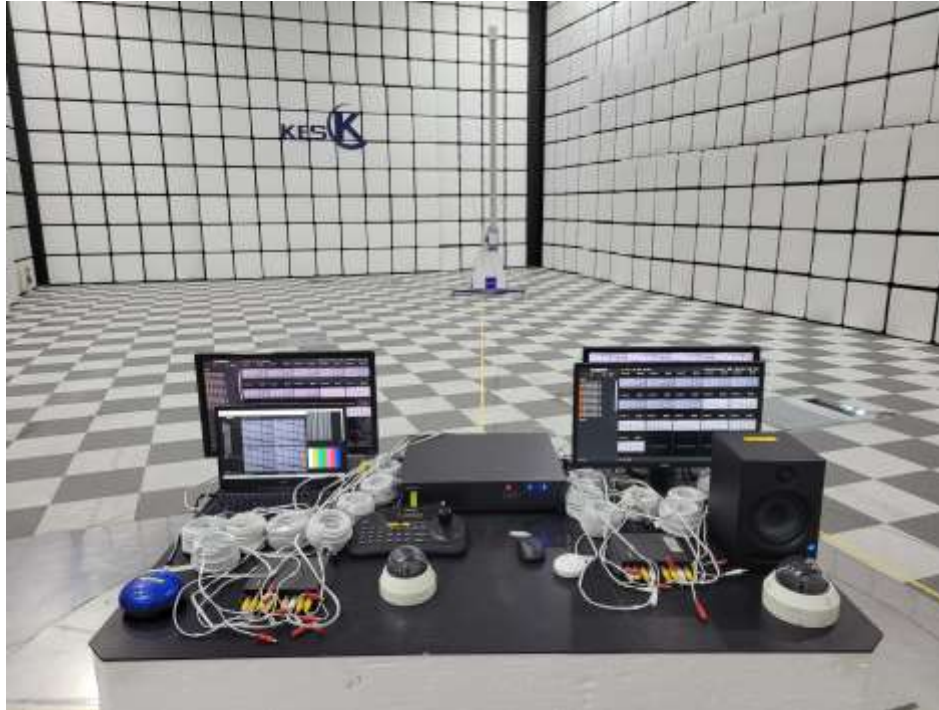

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

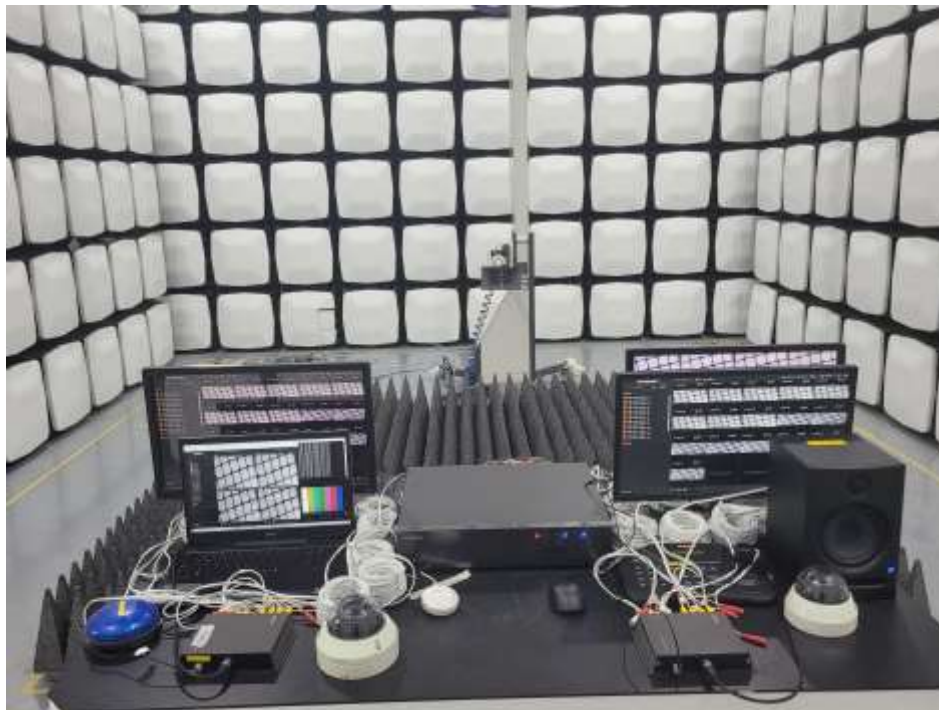

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



EUT Internal Photographs

(Internal View)



EUT Internal View – Main Board

(Top)



(Bottom)



EUT Internal View – LED Board

(Top)



EUT Internal View – USB Port Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Port Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location



DVR

Model No : HRX-1635

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

