
EMC TEST REPORT


Test Report No.	:	KES-EM-22T1009-R1
Date of Issue	:	Dec. 27, 2022
Product name	:	NETWORK CAMERA
Model/Type No.	:	MGC-F9010LI
Variant Model	:	-
Applicant	:	Hanwha Vision Co., Ltd
Applicant Address	:	6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Manufacturer	:	1. HANWHA VISION VIETNAM COMPANY LIMITED 2. D-TECH CO.,LTD.
Manufacturer Address	:	1. Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam 2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)
Equipment authorization	:	**Supplier's Declaration of Conformity**
Date of Receipt	:	Nov. 08, 2022
Test date	:	Dec. 02, 2022
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Sung Keun, Park
EMC Test Engineer

Reviewed by

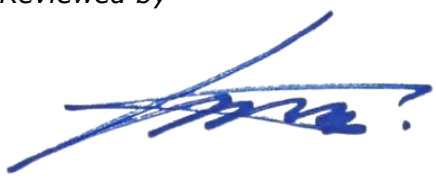

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 27, 2022	KES-EM-22T1009	Issued
Feb. 24, 2023	KES-EM-22T1009-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 10
1.2 Variant Model Differences 10
1.3 Device Modifications 10
1.4 Equipment Under Test 10
1.5 Support Equipments 10
1.6 External I/O Cabling 11
1.7 EUT Operating Mode(s) 11
1.8 Configuration 12
1.9 Remarks when standards applied 13
1.10 Calibration Details of Equipment Used for Measurement 13
1.11 Test Facility 13
1.12 Laboratory Accreditations and Listings ..... 오류! 책갈피가 정의되어 있지 않습니다.
2.0 Test Regulations 14
2.1 Conducted Emissions at Mains Power Ports 15
2.2 Radiated Electric Field Emissions(Below 1 ㎓) 17
2.3 Radiated Electric Field Emissions(Above 1 ㎓) 19
APPENDIX A – TEST DATA 21
Conducted Emissions at Mains Power Ports 21
Radiated Electric Field Emissions(Below 1 ㎓) 25
Radiated Electric Field Emissions(Above 1 ㎓) 29
Test Setup Photos and Configuration 31
Conducted Emissions at Mains Power Ports 31
Radiated Electric Field Emissions(Below 1 ㎓) 33
Radiated Electric Field Emissions(Above 1 ㎓) 35
EUT External Photographs 37
EUT Internal Photographs 38

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.0 General Product Description

Main Specifications of EUT are:

ITEM	MGC-F9010LI
SoC	CV2S88
Sensor	IMX226
Lens	1.29mm fixed focal
Video	
Imaging Device	1/1.7" 12MP CMOS(IMX226)
Resolution	Original view(1:1): 3008x3008, 2048x2048, 800x800 Dewarping View: 2048x1152, 640x360 ※1CH Original view, 2~3CH Dewarping View
Max. Framerate	H.265/H.264: Max. 20fps@3008x3008 MJPEG: Max. 20fps@3008x3008
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.32 Lux (F2.4, 1/30sec)
Video Out	USB: Micro USB Type B(800x800)
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	1.29mm fixed focal
Max. Aperture Ratio	F2.4
Angular Field of View	H: 190° / V: 190° / D: 190°
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	None
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Pan / Tilt / Rotate Range	Rotate : +/- 180°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(Electrical)
Backlight Compensation	BLC,DWDR,SSDR
Wide Dynamic Range	60dB
Digital Noise Reduction	WiseNR Ⅱ(Based on AI engine), SSNR Ⅴ
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, polygonal zones
Privacy Masking	6ea, rectangle zones - Color: Black/Gray/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	None
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec) Auto prefer shutter control based on AI engine
Digital PTZ	Support
Video Rotation	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Analytics	- Parking guidance and license plate recognition based on AI engine (1) Parking spot detection / Parking area occupancy detection / LPR · Parking spot detection: 6 cars(3 cars on each side) · Parking area occupancy detection: Occupied / Vacant · LPR: 6 cars(3 cars on each side) (2) LED · Color: Green, Red, Blue, Pink, Skyblue, Purple · LED Integrated(1ea)/Seprated(2ea) mode - Analytics events based on AI engine(NPU) : Object detection, Line crossing, IVA Area - Analytics events : Defocus detection, Motion detection, Tampering, Audio detection, Sound classification
Business Intelligence	None
Serial Interface	None
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	When alarm trigger occurred - File upload via FTP and e-mail - Notification via e-mail - Alarm output - Handover - Audio playback - LED control(Parking guidance only)
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	None
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None
Temperature detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000 BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(5ea area), WiseStream Ⅱ, WiseStream Ⅲ(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 3 profiles per each channel)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA, pre-installed) TPM 2.0 with FIPS 140-2 level2
Application Programming Interface	ONVIF Profile S/T/M SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	None
Memory	4096MB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-40°C ~ +55°C/ Less than 95% RH *Start up should be above at -35˚C
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 95% RH
Certification	IP66, IK08, NEMA 4X
Input Voltage	PoE+(IEEE802.3at), 12VDC
Power Consumption	PoE 53V : Max. 20.0W / Typ. 16.5W DC 12V : Max. 18.0W / Typ. 15.0W Power redundancy failover
Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL9003
Product dimensions / weight	Φ200mm * H80mm / 1550g
Conduit hole	None
Hanging mount(Dome)	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	36.3m(119.0ft)
Observe (63PPM/ 19PPF)	14.5m(47.6ft)
Recognize (125PPM/ 38PPF)	7.3m(23.8ft)
Identify (250PPM/ 76PPF)	3.6m(11.9ft)
Certifications & Standards	
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A , KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Environment	IEC/EN 63000 IEC/EN 60529 IP66, IEC/EN 62262 IK08 NEMA 250 type 4X

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz (DC Adapter Input Power)
☒ AC 120 V, 60 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	MGC-F9010LI	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	LG15N54	503NZWY038929	LG Electronics	-
Notebook Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
LED Alarm	-	-	-	-
Smartphone	SHV-E330S	-	SAMSUNG	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

■ Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.0	U
	Alarm	LED Alarm	Alarm	3.0	U
	Audio IN	Smarphone	3.5 mm	1.7	U
	Audio OUT	Speaker	3.5 mm	1.7	U
	DC Jack	Adapter	DC Jack	1.6	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.7	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.0	U
	Alarm	LED Alarm	Alarm	3.0	U
	Audio IN	Smarphone	3.5 mm	1.7	U
	Audio OUT	Speaker	3.5 mm	1.7	U
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45 (LAN)	3.5	U
	DC Jack	Notebook Adapter	DC Jack	1.7	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test Mode	operating
ADAPTER, PoE Mode	1. Check the camera video output on the laptop 2. Check if the network status is operating normally during PING TEST 3. Check if the 1KHz tone played by the smartphone is normally output from the speaker 4. check the normal operation of the LED Alarm.


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
□ DC Main

■ Adapter Mode

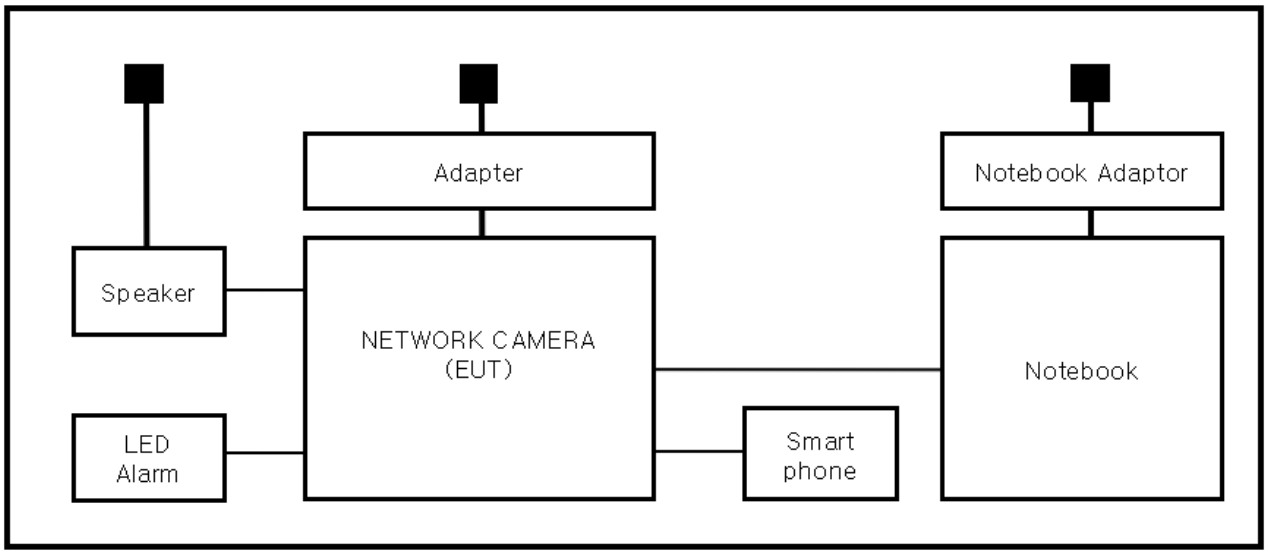

■ PoE Mode

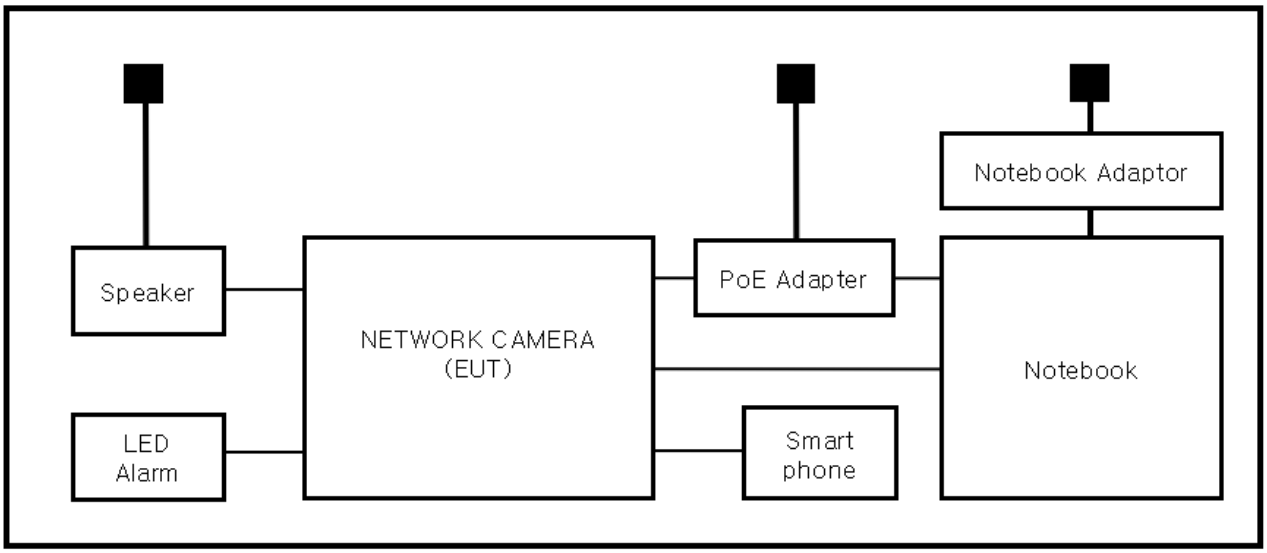

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.9 Remarks when standards applied

The USB port was excluded from the test as a Management port.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	**RRA**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
International	**KOLAS**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KT489
USA	**FCC**	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	KR0100
Canada	**ISED**	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	23298
JAPAN	**VCCI**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	C-20136, T-20137, R-20181, G-20176
Europe	**TÜV SÜD**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010	☐ Class A	☐ Class B
☒ ANSI C63.4a-2017	☒ Class A	☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17	☐ Class A	☐ Class B
☒ ANSI C63.4a-2017	☒ Class A	☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports


Test Date
Dec. 02, 2022

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Diagram of test setup

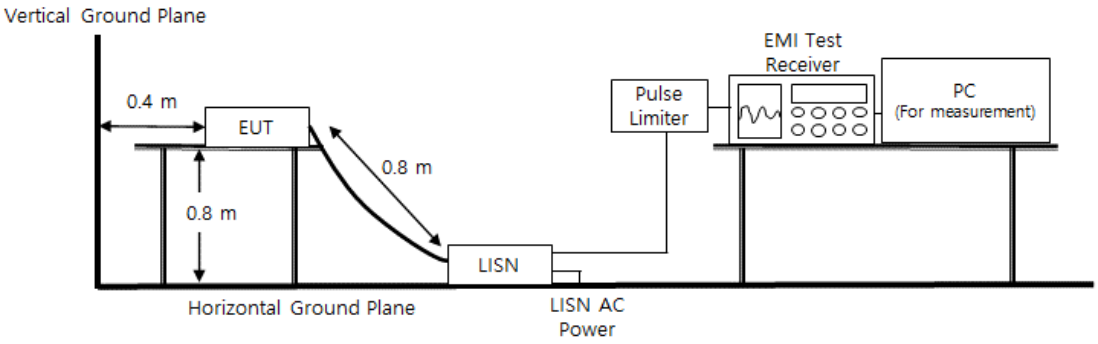

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Conditions

Temperature: (23,0 ± 0,1) ℃
Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement

150 ㎑ to 30 ㎒

Instrument Settings

IF Band Width: 9 ㎑

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Radiated Electric Field Emissions(Below 1 ㎓)


Test Date
Dec. 02, 2022

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Diagram of test setup

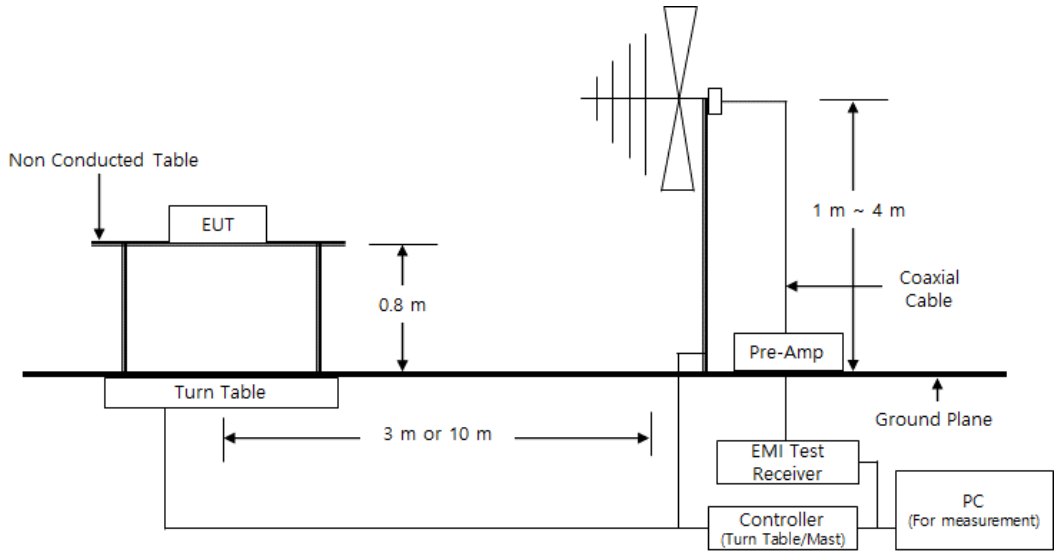

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Conditions

Temperature: (22,0 ± 0,1) ℃
Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 ㎒ to 1 ㎓

Instrument Settings

IF Band Width: 120 ㎑

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.3 Radiated Electric Field Emissions(Above 1 ㎓)


Test Date
Dec. 05, 2022

Test Location
SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
☒	ATTENUATOR	8491B	HP	23094	04, 21, 2023

Diagram of test setup

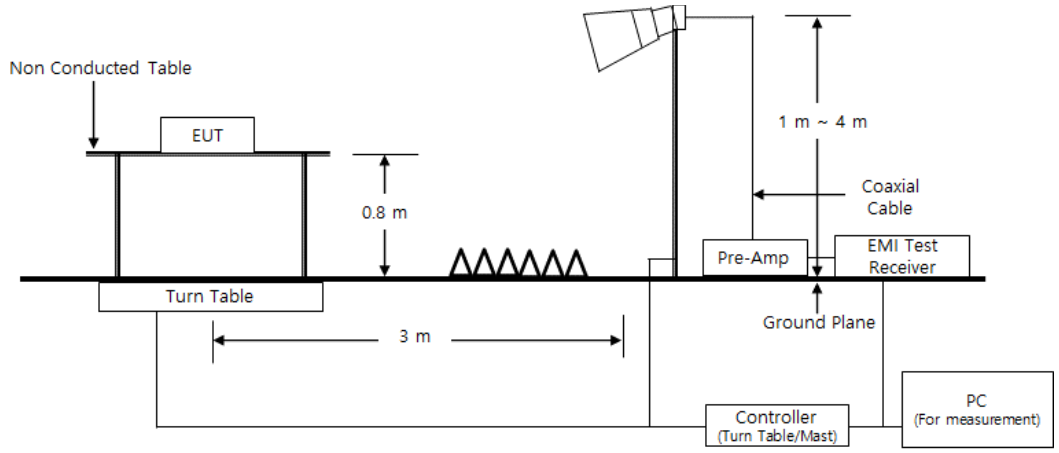

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Conditions

Temperature: (22,0 ± 0,1) ℃
Relative Humidity: (46,5 ± 0,1) % R.H.

Frequency Range of Measurement

1 ㎓ to 5 ㎓

Instrument Settings

IF Band Width: 1 ㎒

Test Results

The requirements are:
☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ Adapter Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	L1
Mode:	ADAPTER
Operator Name:	KES

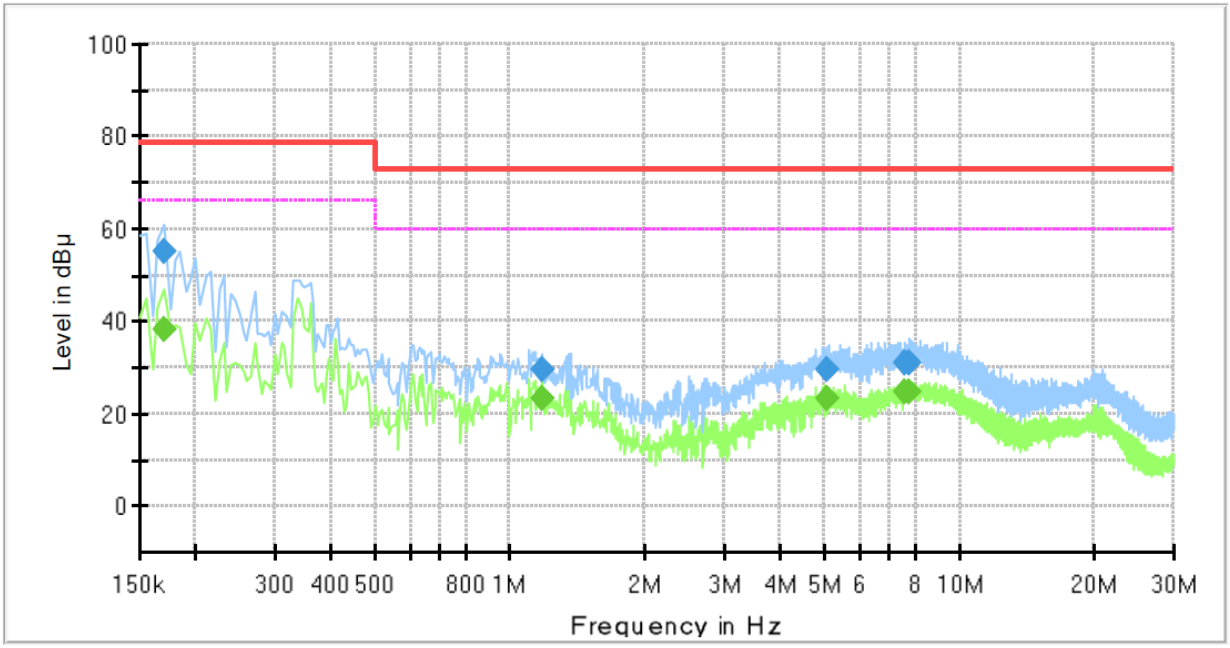

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	38.42	66.00	27.58	1000.0	9.000	L1	19.5
0.170000	55.00	---	79.00	24.00	1000.0	9.000	L1	19.5
1.175000	---	23.20	60.00	36.80	1000.0	9.000	L1	20.1
1.175000	29.36	---	73.00	43.64	1000.0	9.000	L1	20.1
5.065000	---	23.30	60.00	36.70	1000.0	9.000	L1	19.7
5.065000	29.74	---	73.00	43.26	1000.0	9.000	L1	19.7
7.535000	---	24.86	60.00	35.14	1000.0	9.000	L1	19.6
7.535000	30.79	---	73.00	42.21	1000.0	9.000	L1	19.6
7.695000	---	24.96	60.00	35.04	1000.0	9.000	L1	19.6
7.695000	30.77	---	73.00	42.23	1000.0	9.000	L1	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	N
Mode:	ADAPTER
Operator Name:	KES

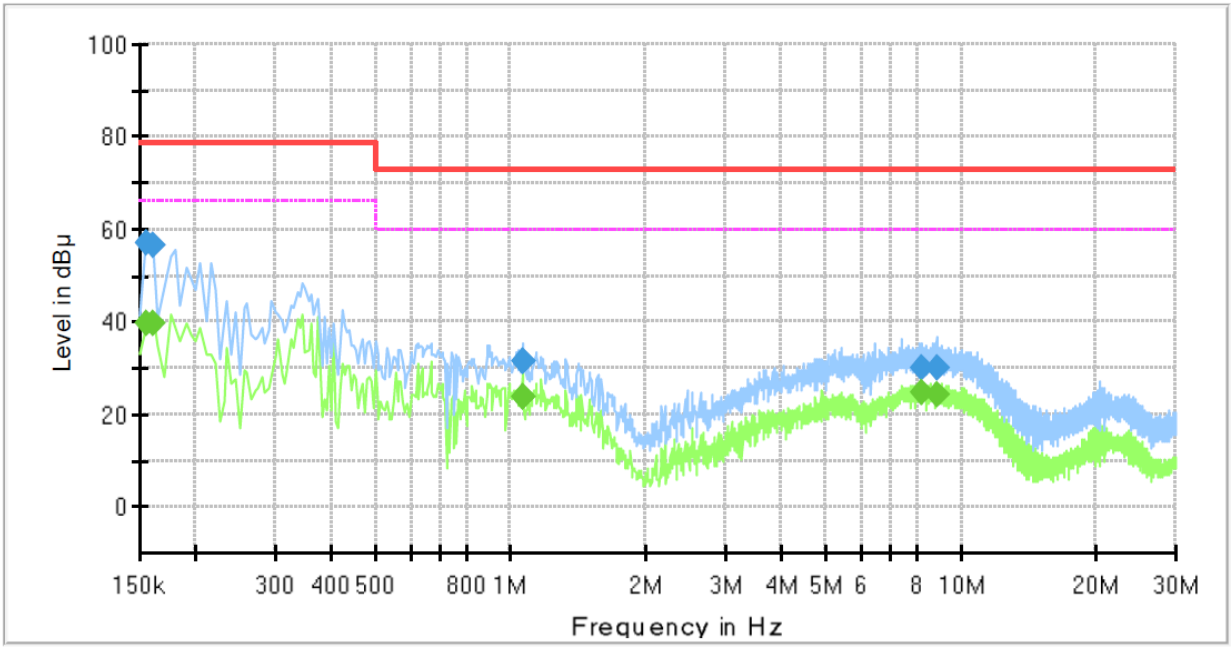

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	39.93	66.00	26.07	1000.0	9.000	N	19.4
0.155000	57.24	---	79.00	21.76	1000.0	9.000	N	19.4
0.160000	---	39.57	66.00	26.43	1000.0	9.000	N	19.4
0.160000	56.74	---	79.00	22.26	1000.0	9.000	N	19.4
1.060000	---	23.88	60.00	36.12	1000.0	9.000	N	20.1
1.060000	31.31	---	73.00	41.69	1000.0	9.000	N	20.1
1.065000	---	23.70	60.00	36.30	1000.0	9.000	N	20.1
1.065000	31.57	---	73.00	41.43	1000.0	9.000	N	20.1
8.180000	---	24.63	60.00	35.37	1000.0	9.000	N	19.7
8.180000	30.25	---	73.00	42.75	1000.0	9.000	N	19.7
8.815000	---	24.47	60.00	35.53	1000.0	9.000	N	19.8
8.815000	30.08	---	73.00	42.92	1000.0	9.000	N	19.8


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	L1
Mode:	PoE
Operator Name:	KES

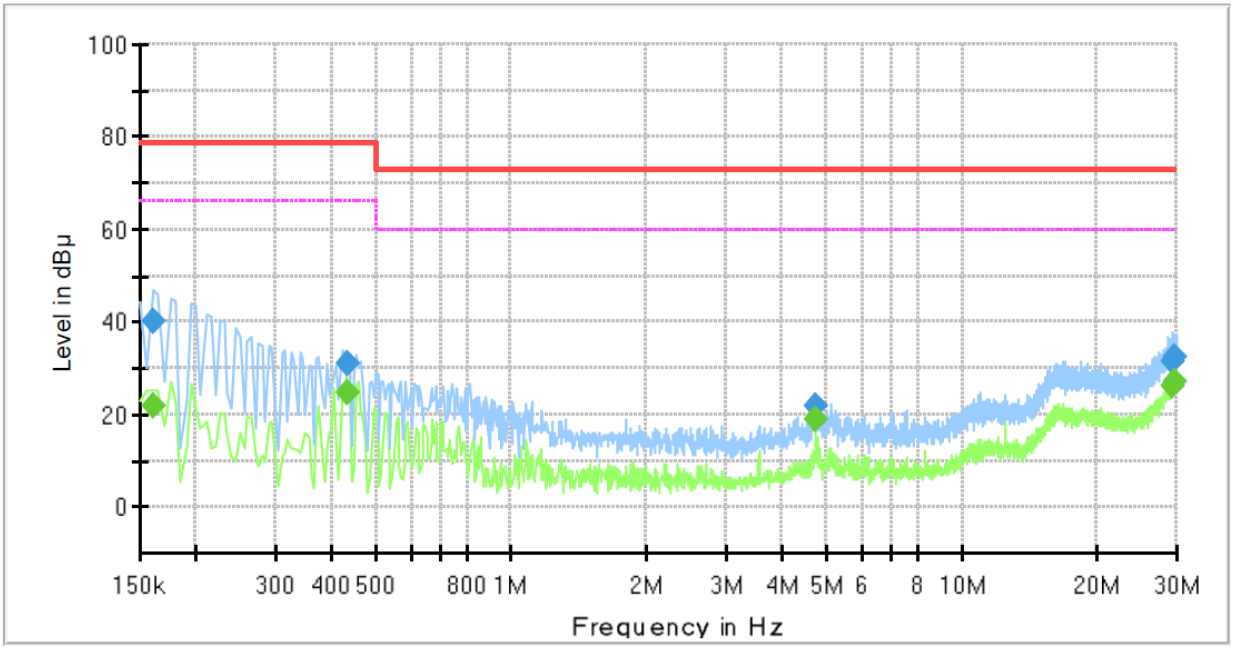

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	21.84	66.00	44.16	1000.0	9.000	L1	19.5
0.160000	40.38	---	79.00	38.62	1000.0	9.000	L1	19.5
0.435000	---	24.79	66.00	41.21	1000.0	9.000	L1	19.7
0.435000	31.06	---	79.00	47.94	1000.0	9.000	L1	19.7
4.725000	---	19.07	60.00	40.93	1000.0	9.000	L1	19.7
4.725000	21.87	---	73.00	51.13	1000.0	9.000	L1	19.7
29.340000	---	26.31	60.00	33.69	1000.0	9.000	L1	20.4
29.340000	31.67	---	73.00	41.33	1000.0	9.000	L1	20.4
29.605000	---	26.91	60.00	33.09	1000.0	9.000	L1	20.4
29.605000	32.29	---	73.00	40.71	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	N
Mode:	PoE
Operator Name:	KES

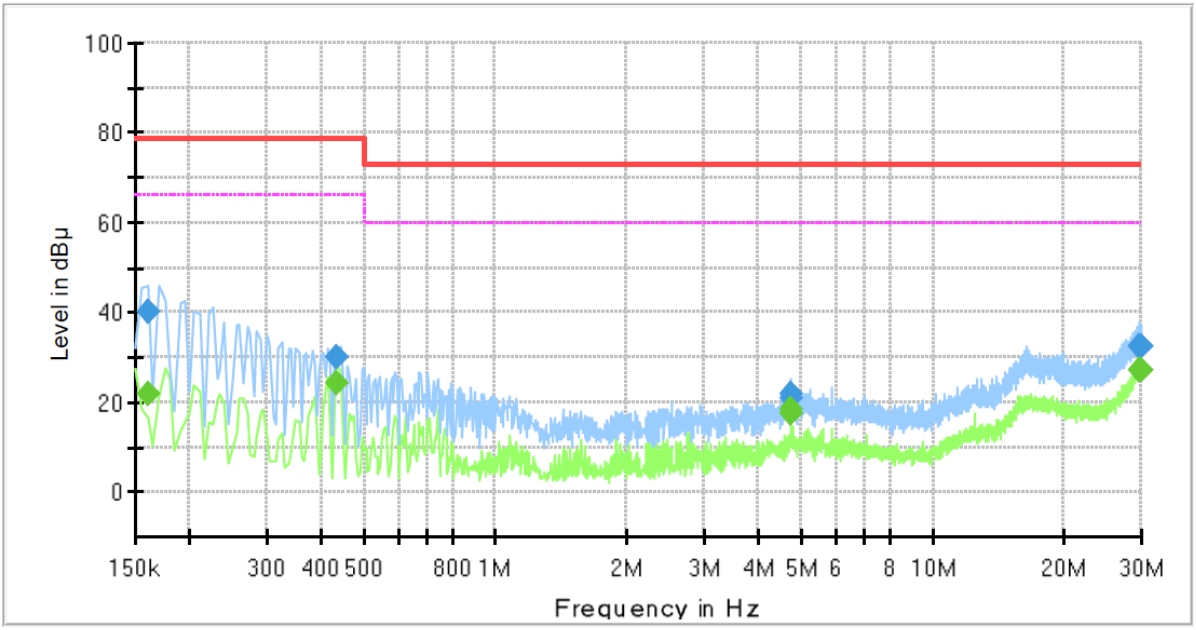

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	21.68	66.00	44.32	1000.0	9.000	N	19.4
0.160000	40.41	---	79.00	38.59	1000.0	9.000	N	19.4
0.435000	---	24.49	66.00	41.51	1000.0	9.000	N	19.7
0.435000	29.90	---	79.00	49.10	1000.0	9.000	N	19.7
4.725000	---	18.58	60.00	41.42	1000.0	9.000	N	19.7
4.725000	21.67	---	73.00	51.33	1000.0	9.000	N	19.7
4.730000	---	17.74	60.00	42.26	1000.0	9.000	N	19.7
4.730000	21.08	---	73.00	51.92	1000.0	9.000	N	19.7
29.680000	---	26.98	60.00	33.02	1000.0	9.000	N	20.4
29.680000	32.47	---	73.00	40.53	1000.0	9.000	N	20.4
29.930000	---	27.10	60.00	32.90	1000.0	9.000	N	20.5
29.930000	32.42	---	73.00	40.58	1000.0	9.000	N	20.5

◆ Calculation

QuasiPeak[㏈uV] / CAverage [㏈uV] = Reading Value[㏈uV] + Corr. [㏈]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 ㎓)

- 47 CFR Part 15, Subpart B

■ Adapter Mode

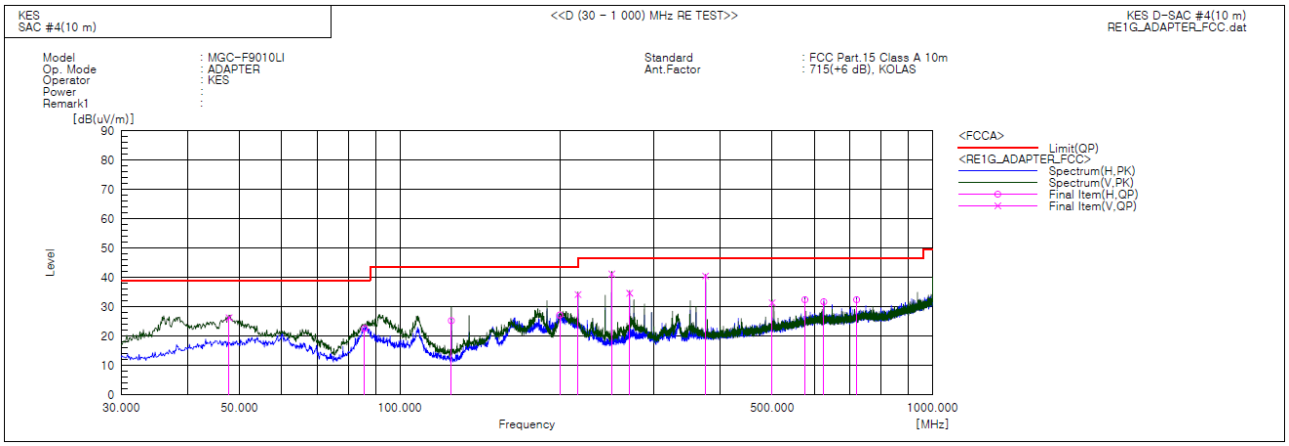


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.824	V	46.9	-20.6	26.3	39.0	12.7	100.0	121.0	
2	85.896	H	48.2	-25.6	22.6	39.0	16.4	378.0	97.0	
3	124.939	H	49.6	-24.3	25.3	43.5	18.2	366.0	249.0	
4	199.629	H	48.3	-21.1	27.2	43.5	16.3	299.0	160.0	
5	215.998	V	54.0	-19.8	34.2	43.5	9.3	215.0	143.0	
6	249.948	V	60.0	-18.8	41.2	46.5	5.3	188.0	53.0	
7	269.954	V	53.0	-18.4	34.6	46.5	11.9	208.0	42.0	
8	374.956	V	54.5	-14.0	40.5	46.5	6.0	233.0	95.0	
9	499.965	V	42.1	-10.7	31.4	46.5	15.1	272.0	4.0	
10	575.989	H	40.8	-8.4	32.4	46.5	14.1	309.0	74.0	
11	625.095	H	39.3	-7.6	31.7	46.5	14.8	200.0	74.0	
12	720.034	H	39.0	-6.6	32.4	46.5	14.1	172.0	275.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

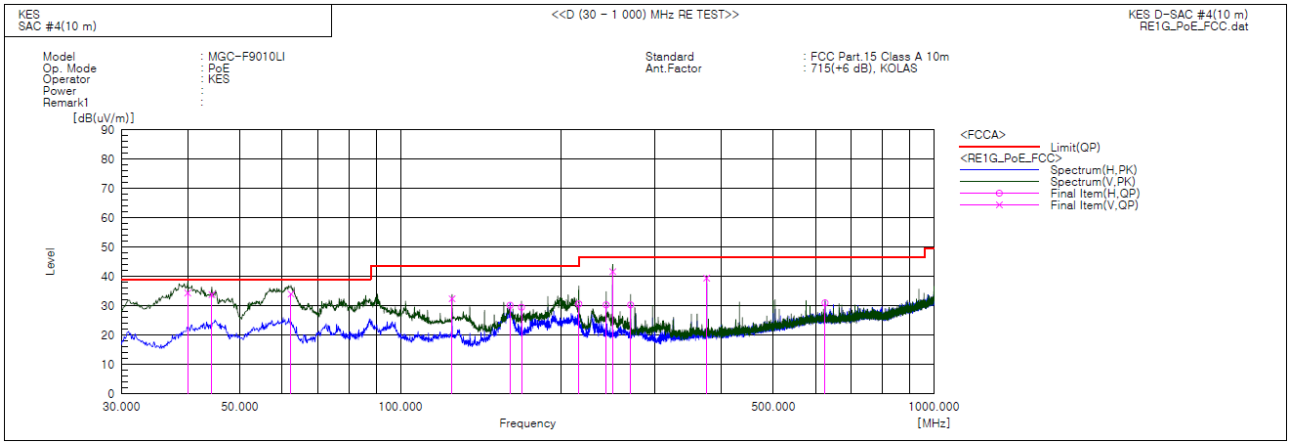


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.943	V	56.7	-22.3	34.4	39.0	4.6	100.0	322.0	
2	44.308	V	54.8	-21.0	33.8	39.0	5.2	109.0	285.0	
3	62.374	V	56.1	-22.1	34.0	39.0	5.0	117.0	65.0	
4	124.939	V	56.7	-24.3	32.4	43.5	11.1	165.0	248.0	
5	160.586	H	54.8	-24.6	30.2	43.5	13.3	379.0	27.0	
6	168.710	H	53.7	-24.2	29.5	43.5	14.0	356.0	169.0	
7	215.998	H	50.4	-19.8	30.6	43.5	12.9	273.0	79.0	
8	243.036	H	49.2	-18.9	30.3	46.5	16.2	318.0	221.0	
9	249.948	V	60.4	-18.8	41.6	46.5	4.9	195.0	51.0	
10	269.954	H	48.7	-18.4	30.3	46.5	16.2	250.0	90.0	
11	374.956	V	53.4	-14.0	39.4	46.5	7.1	334.0	233.0	
12	625.095	H	38.6	-7.6	31.0	46.5	15.5	209.0	75.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- IC Regulation ICES-003 Issue 7

■ Adapter Mode

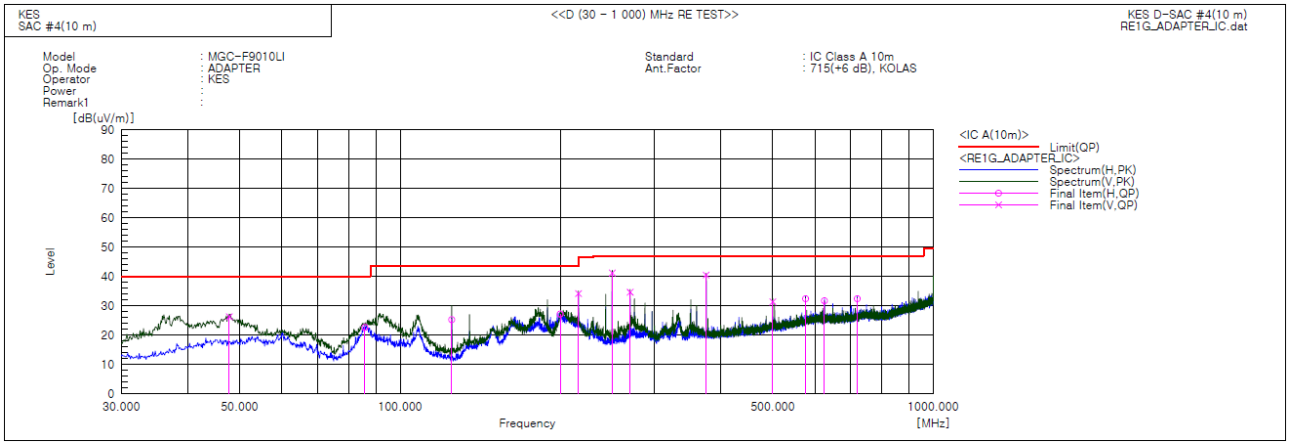


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.824	V	46.9	-20.6	26.3	40.0	13.7	100.0	121.0	
2	85.896	H	48.2	-25.6	22.6	40.0	17.4	378.0	97.0	
3	124.939	H	49.6	-24.3	25.3	43.5	18.2	366.0	249.0	
4	199.629	H	48.3	-21.1	27.2	43.5	16.3	299.0	160.0	
5	215.998	V	54.0	-19.8	34.2	43.5	9.3	215.0	143.0	
6	249.948	V	60.0	-18.8	41.2	47.0	5.8	188.0	53.0	
7	269.954	V	53.0	-18.4	34.6	47.0	12.4	208.0	42.0	
8	374.956	V	54.5	-14.0	40.5	47.0	6.5	233.0	95.0	
9	499.965	V	42.1	-10.7	31.4	47.0	15.6	272.0	4.0	
10	575.989	H	40.8	-8.4	32.4	47.0	14.6	309.0	74.0	
11	625.095	H	39.3	-7.6	31.7	47.0	15.3	200.0	74.0	
12	720.034	H	39.0	-6.6	32.4	47.0	14.6	172.0	275.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

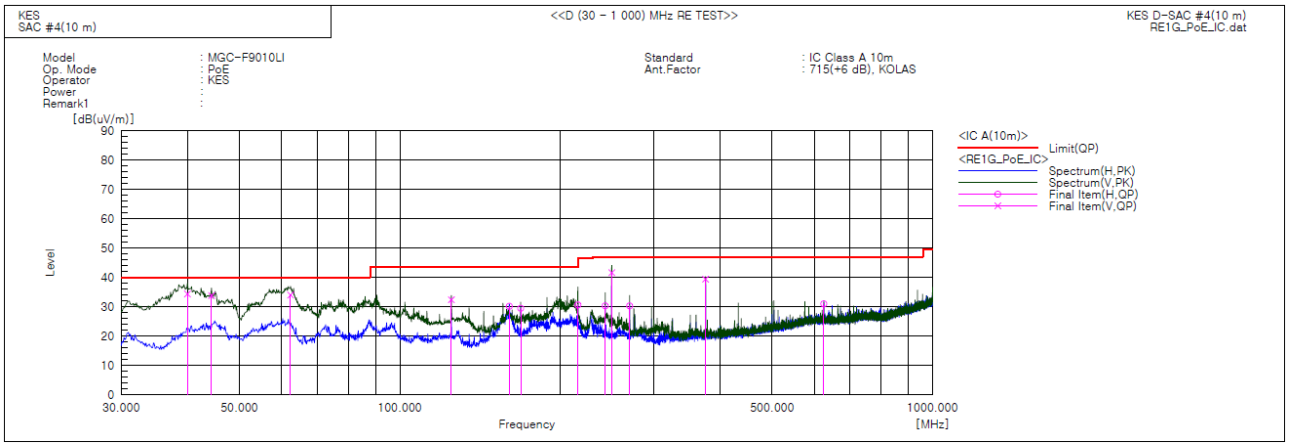

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.943	V	56.7	-22.3	34.4	40.0	5.6	100.0	322.0	
2	44.308	V	54.8	-21.0	33.8	40.0	6.2	109.0	285.0	
3	62.374	V	56.1	-22.1	34.0	40.0	6.0	117.0	65.0	
4	124.939	V	56.7	-24.3	32.4	43.5	11.1	165.0	248.0	
5	160.586	H	54.8	-24.6	30.2	43.5	13.3	379.0	27.0	
6	168.710	H	53.7	-24.2	29.5	43.5	14.0	356.0	169.0	
7	215.998	H	50.4	-19.8	30.6	43.5	12.9	273.0	79.0	
8	243.036	H	49.2	-18.9	30.3	47.0	16.7	318.0	221.0	
9	249.948	V	60.4	-18.8	41.6	47.0	5.4	195.0	51.0	
10	269.954	H	48.7	-18.4	30.3	47.0	16.7	250.0	90.0	
11	374.956	V	53.4	-14.0	39.4	47.0	7.6	334.0	233.0	
12	625.095	H	38.6	-7.6	31.0	47.0	16.0	209.0	75.0	

♦ Calculation – SAC #4(10 m)
Result(QP) [dB(㎶/m)] = (Reading(QP)[dB(㎶)] + c.f[dB(1/m)]
Margin(QP)[dB] = Limit[dB(㎶/m)] - Result(QP) [dB(㎶/m)]
Reading(QP) : Reading value, Result(QP) : Reading value + Factor value
Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 ㎓)

■ Adapter Mode

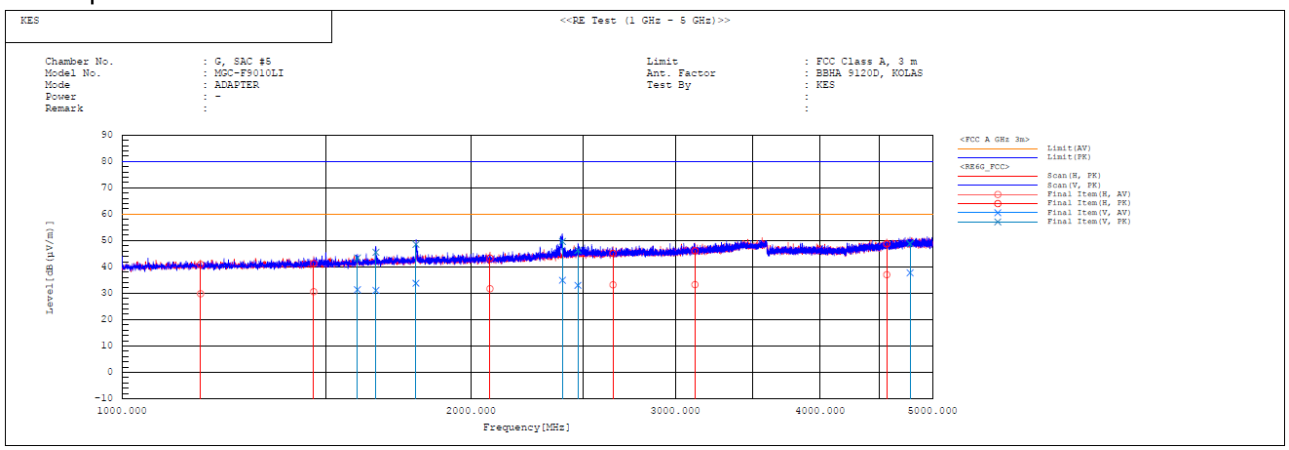


Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1169.214	H	31.4	42.5	-1.6	29.8	40.9	60.0	80.0	30.2	39.1	206.0	18.0	
2	1463.549	H	30.9	41.6	-0.3	30.6	41.3	60.0	80.0	29.4	38.7	334.0	189.0	
3	1596.374	V	31.1	43.1	0.3	31.4	43.4	60.0	80.0	28.6	36.6	109.0	43.8	
4	1656.302	V	30.5	44.9	0.6	31.1	45.5	60.0	80.0	28.9	34.5	259.0	75.0	
5	1793.197	V	32.6	47.3	1.2	33.8	48.5	60.0	80.0	26.2	31.5	157.0	166.9	
6	2076.771	H	29.5	41.1	2.2	31.7	43.3	60.0	80.0	28.3	36.7	384.0	10.6	
7	2398.816	V	31.6	46.3	3.3	34.9	49.6	60.0	80.0	25.1	30.4	227.0	176.7	
8	2473.552	V	29.6	42.9	3.4	33.0	46.3	60.0	80.0	27.0	33.7	119.0	176.7	
9	2651.167	H	29.2	41.1	4.0	33.2	45.1	60.0	80.0	26.8	34.9	291.0	91.3	
10	3119.997	H	28.1	40.9	5.2	33.3	46.1	60.0	80.0	26.7	33.9	163.0	336.4	
11	4565.847	H	28.0	39.8	9.0	37.0	48.8	60.0	80.0	23.0	31.2	203.0	314.3	
12	4782.338	V	27.8	38.9	9.9	37.7	48.8	60.0	80.0	22.3	31.2	347.0	232.3	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

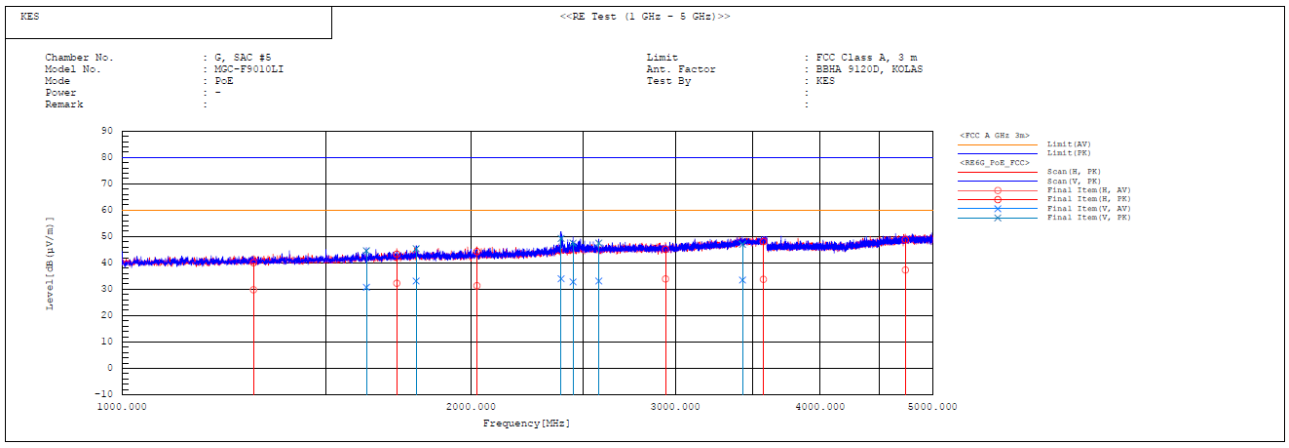

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1298.771	H	30.8	41.1	-1.0	29.8	40.1	60.0	80.0	30.2	39.9	100.0	159.4	
2	1625.292	V	30.3	44.2	0.4	30.7	44.6	60.0	80.0	29.3	35.4	387.0	23.5	
3	1726.439	H	31.4	42.4	0.9	32.3	43.3	60.0	80.0	27.7	36.7	324.0	30.9	
4	1793.599	V	31.9	44.2	1.2	33.1	45.4	60.0	80.0	26.9	34.6	247.0	25.3	
5	2023.601	H	29.4	42.3	2.0	31.4	44.3	60.0	80.0	28.6	35.7	201.0	4.9	
6	2392.391	V	30.8	46.1	3.2	34.0	49.3	60.0	80.0	26.0	30.7	339.0	182.1	
7	2449.377	V	29.4	44.1	3.4	32.8	47.5	60.0	80.0	27.2	32.5	128.0	38.2	
8	2577.558	V	29.4	43.8	3.7	33.1	47.5	60.0	80.0	26.9	32.5	153.0	187.8	
9	2943.294	H	29.1	40.3	4.8	33.9	45.1	60.0	80.0	26.1	34.9	303.0	85.8	
10	3428.331	V	28.0	41.5	5.5	33.5	47.0	60.0	80.0	26.5	33.0	297.0	254.3	
11	3574.409	H	27.9	42.2	5.9	33.8	48.1	60.0	80.0	26.2	31.9	199.0	110.5	
12	4737.612	H	27.6	39.1	9.7	37.3	48.8	60.0	80.0	22.7	31.2	224.0	110.5	

♦ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports


■ Adapter Mode




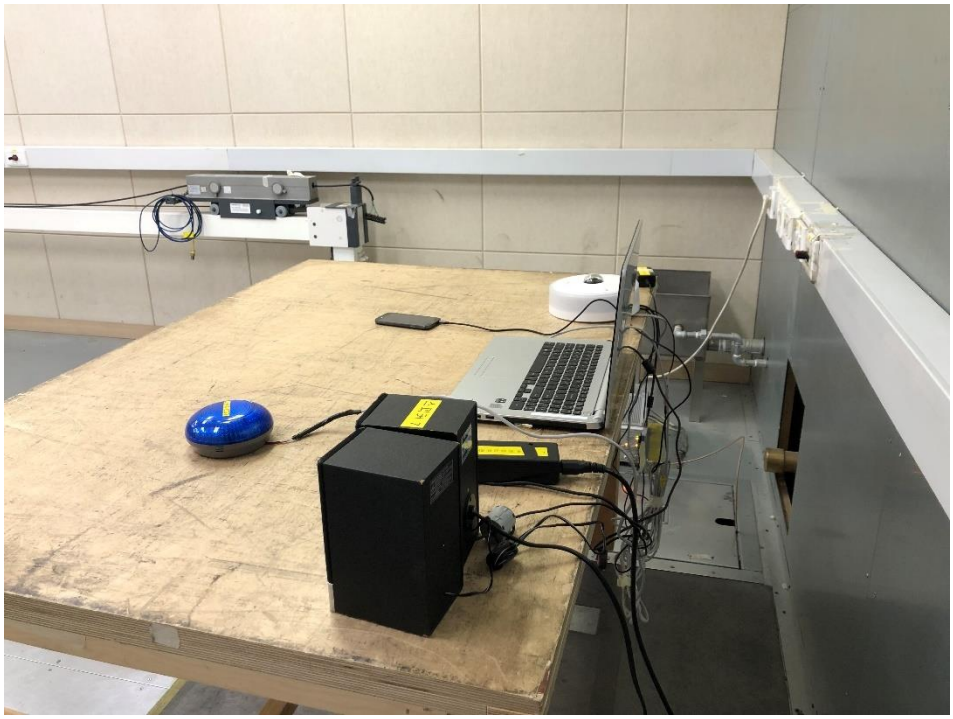

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

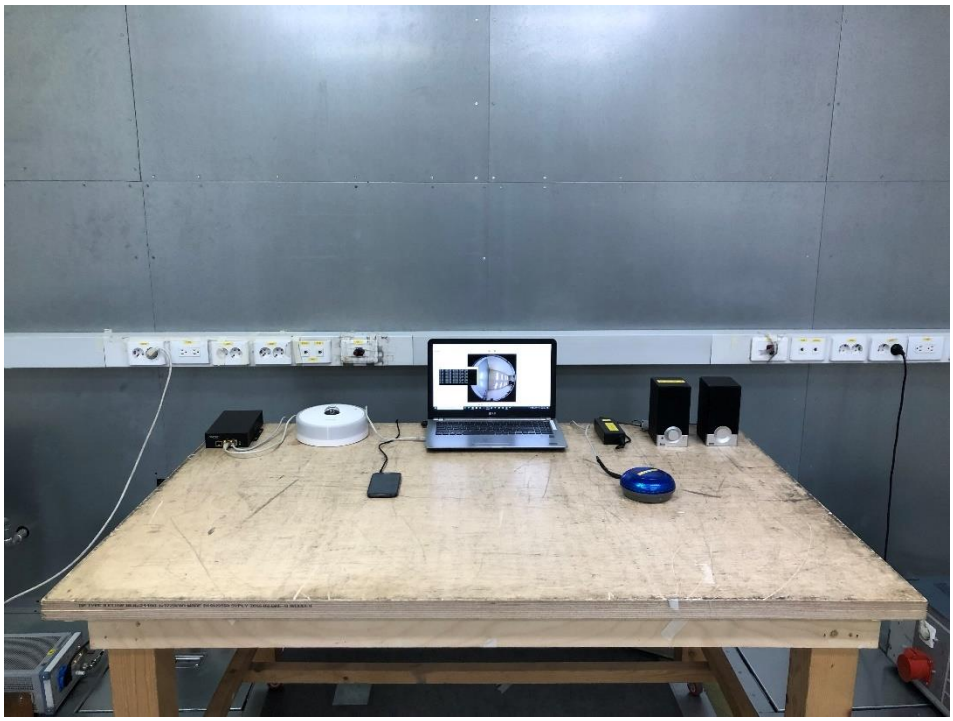


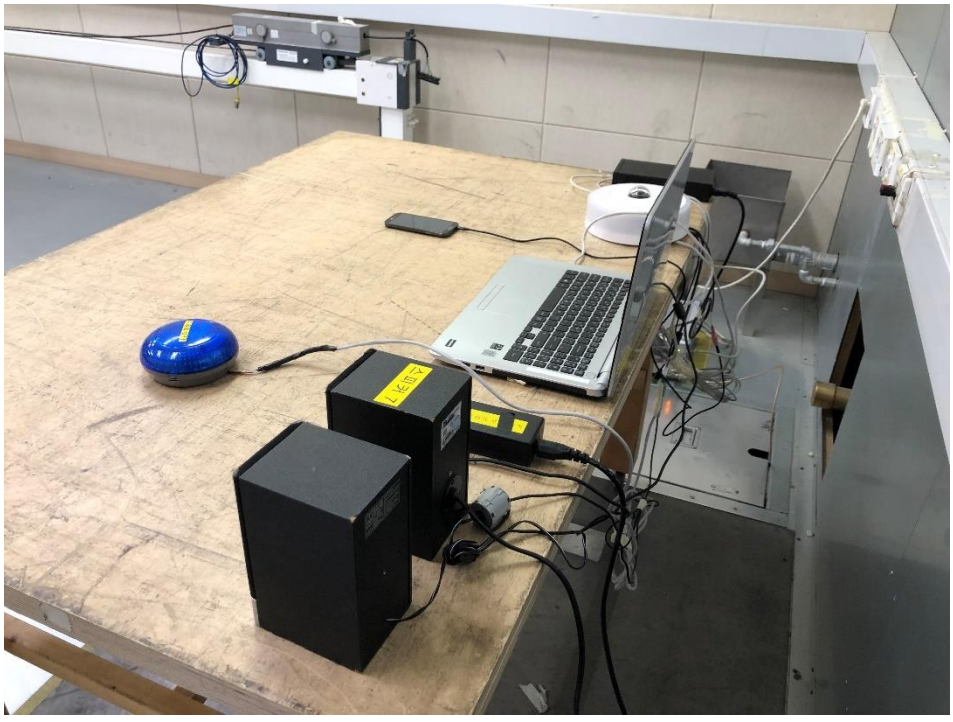


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 ㎓)


■ Adapter Mode

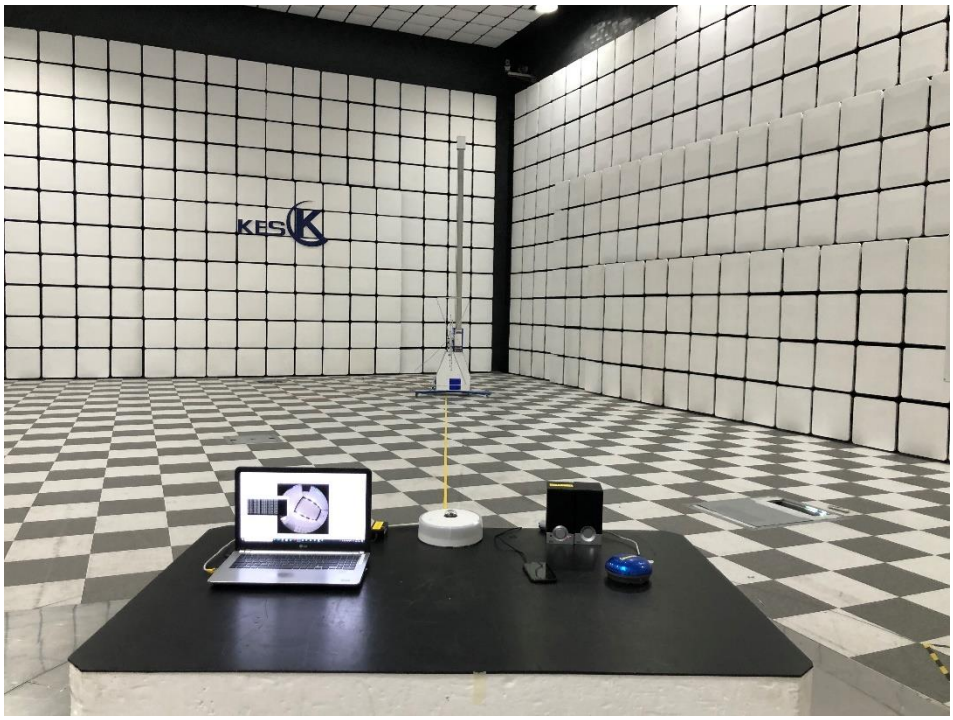


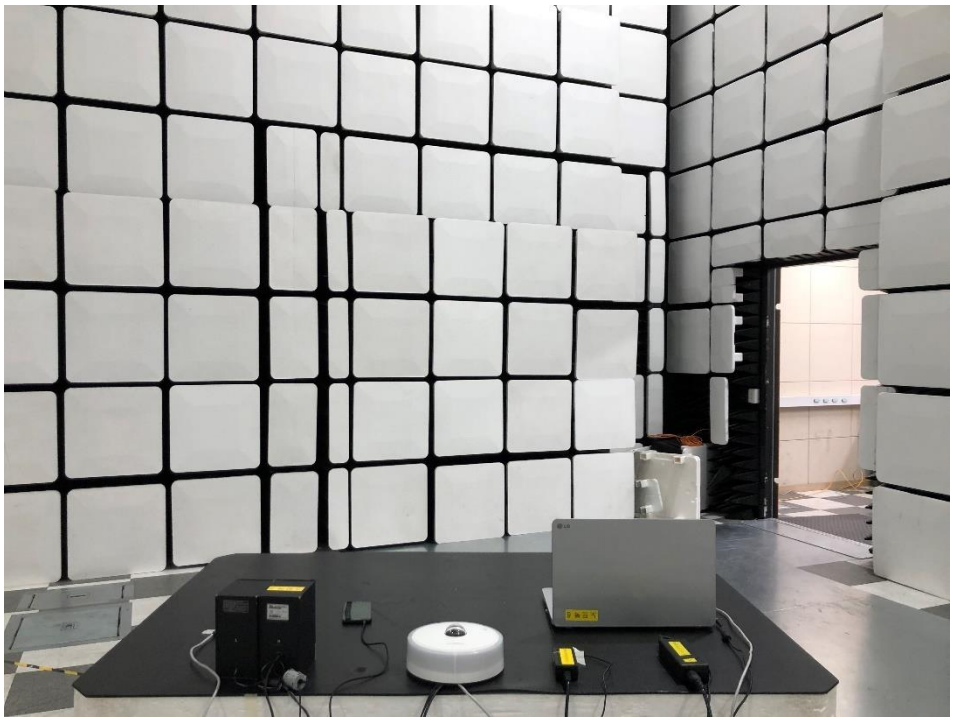

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

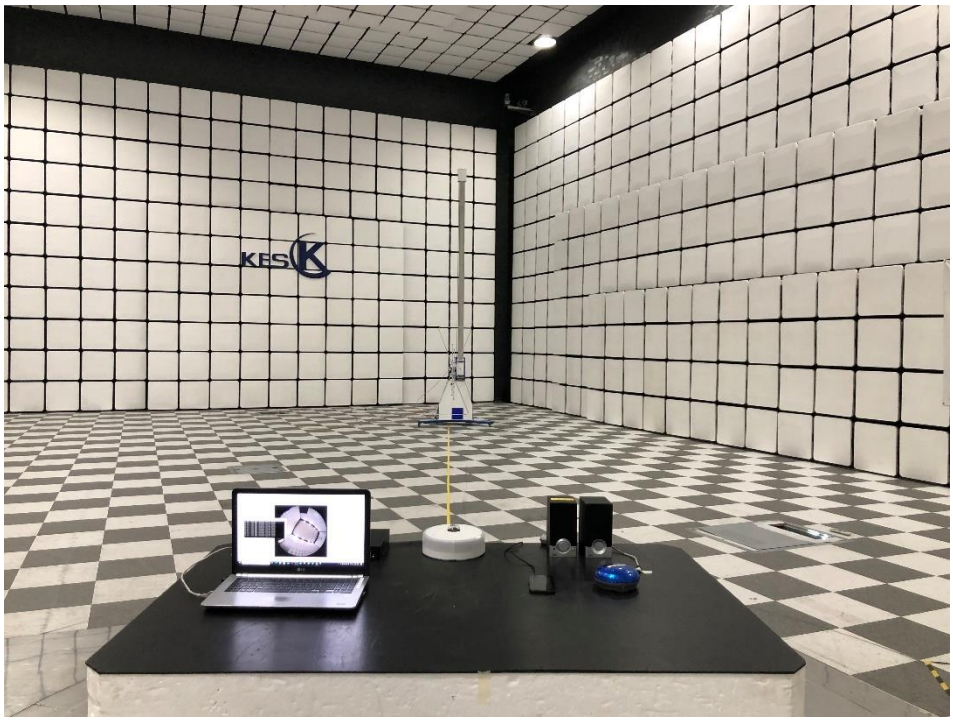


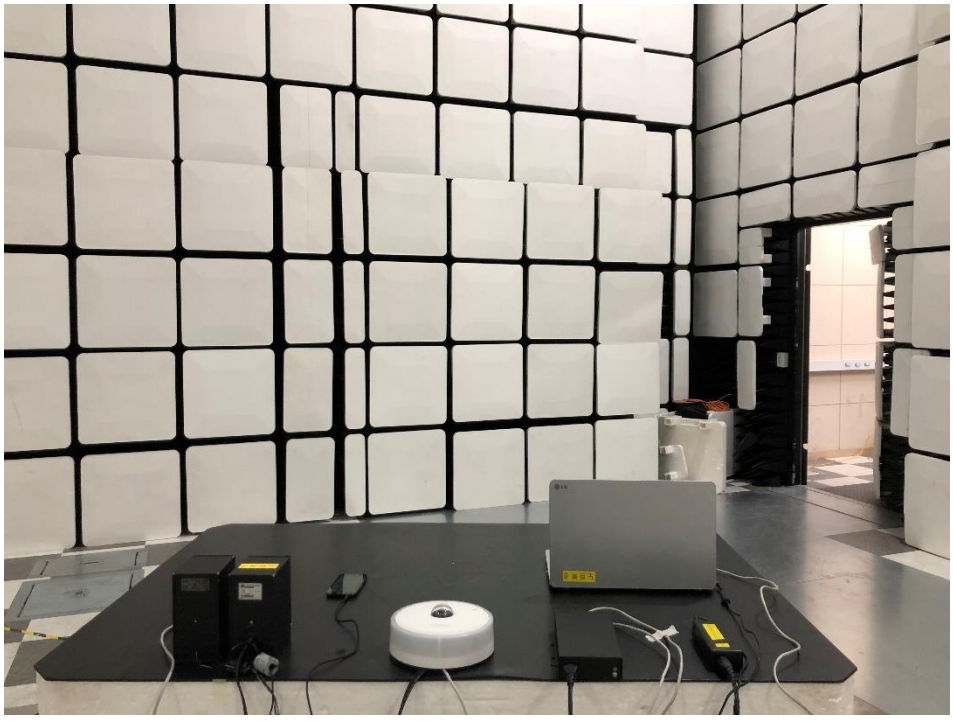


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 ㎓)


■ Adapter Mode

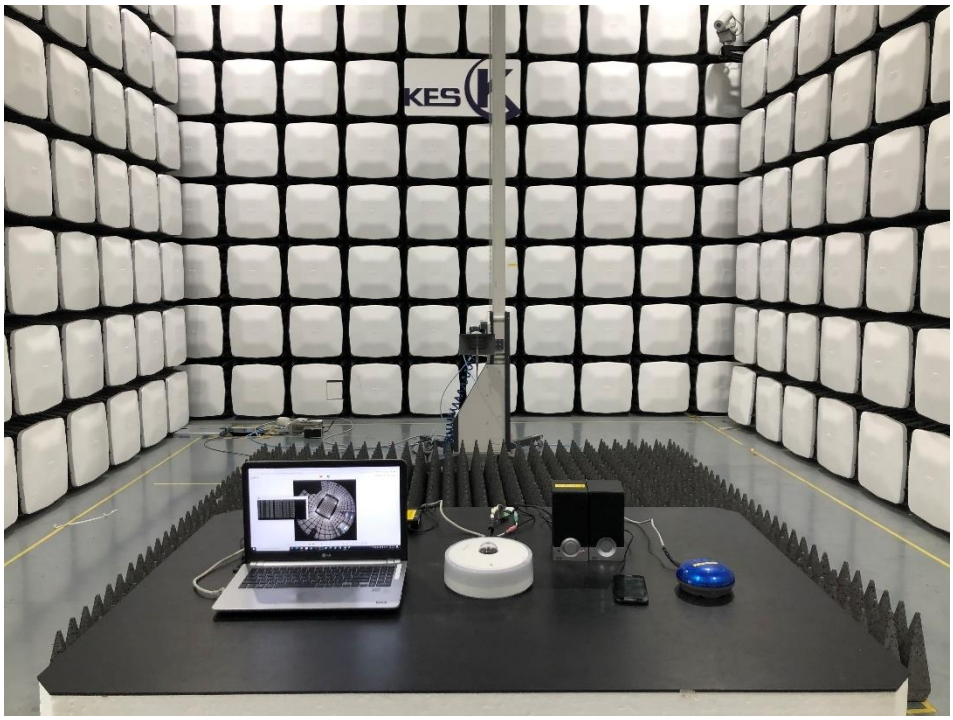


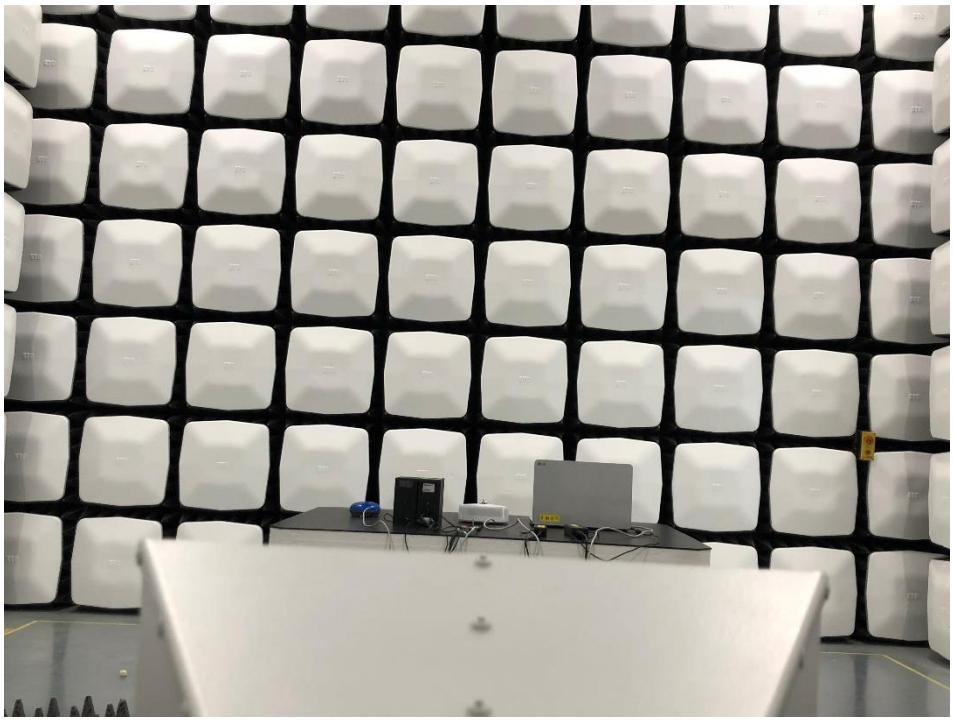

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

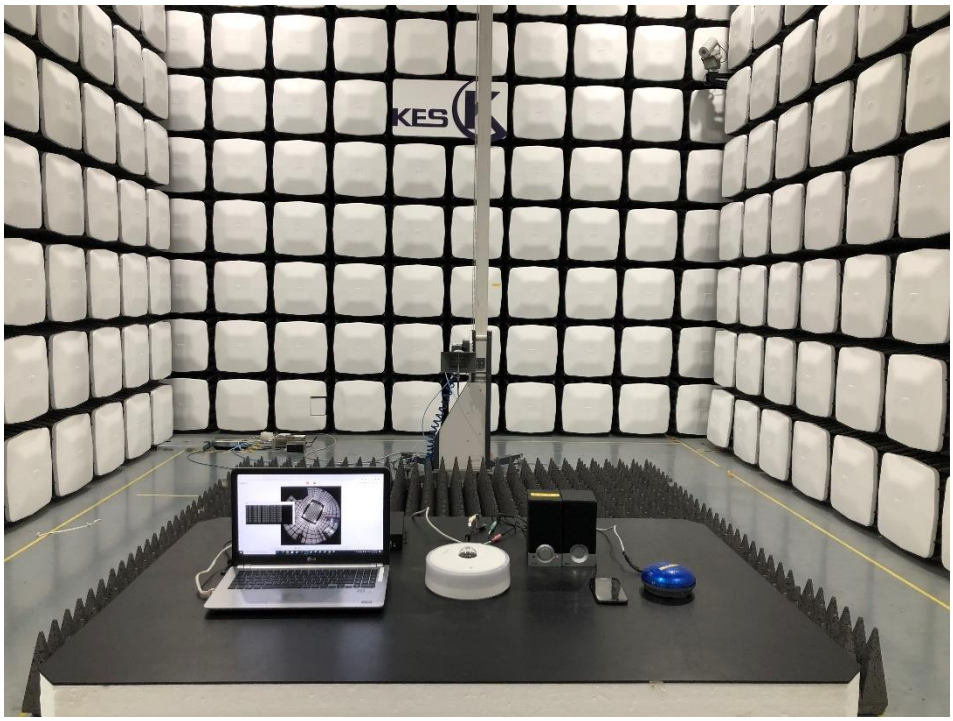


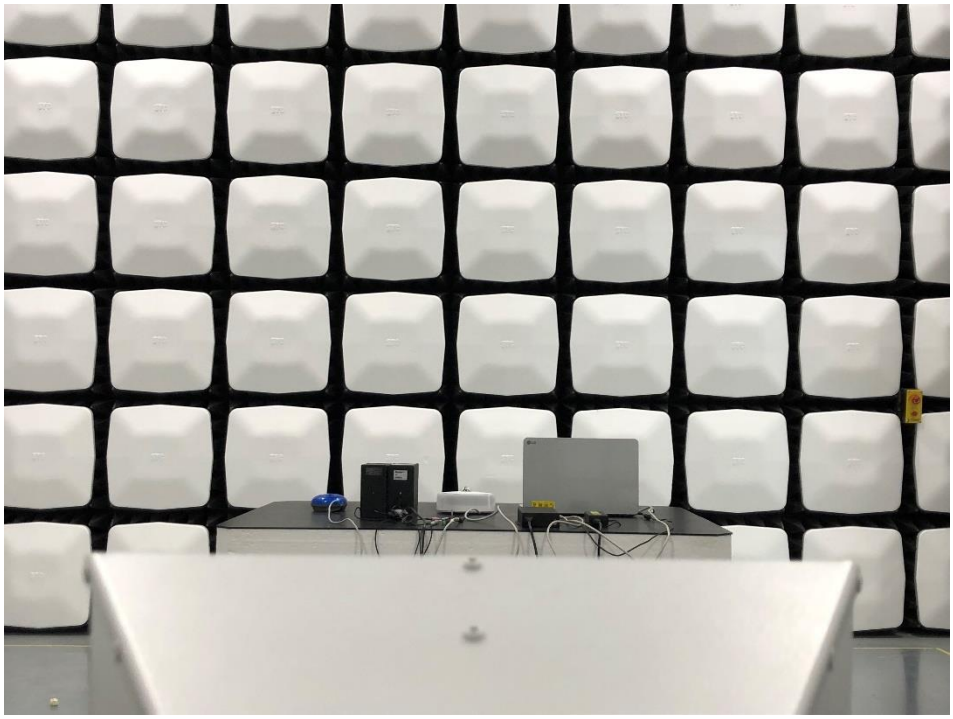


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)

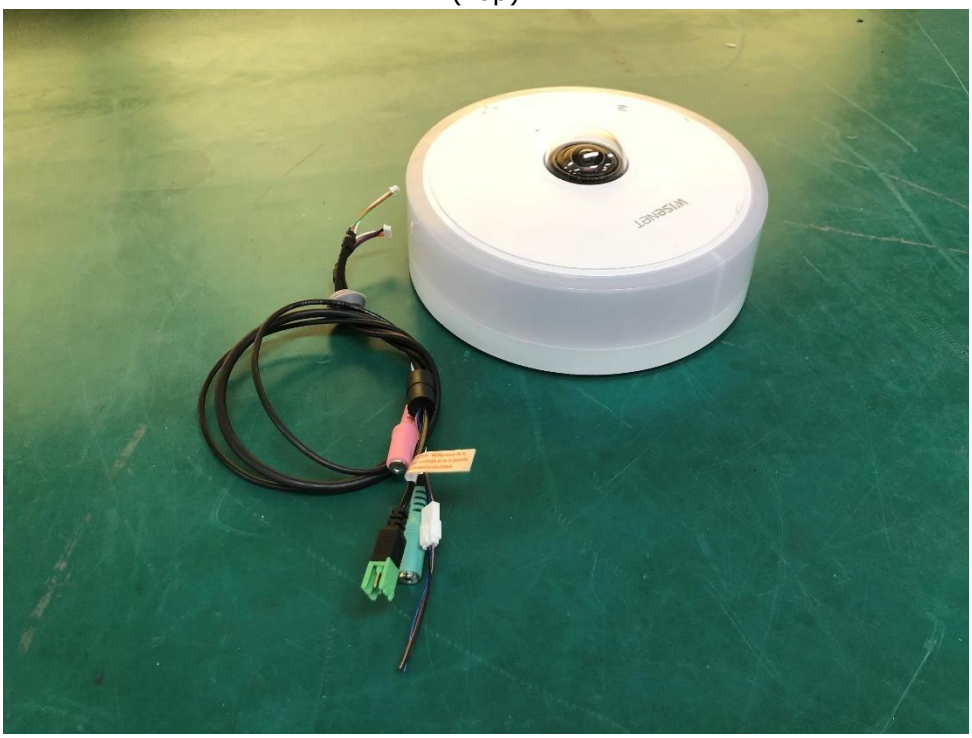


(Bottom)

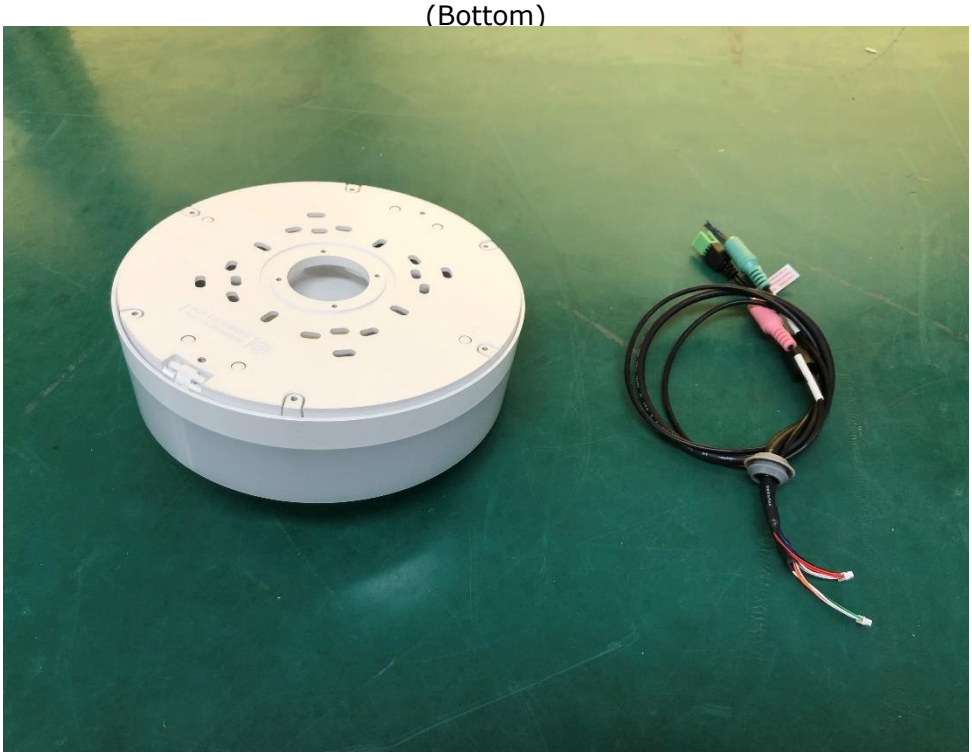

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs


(Internal View)

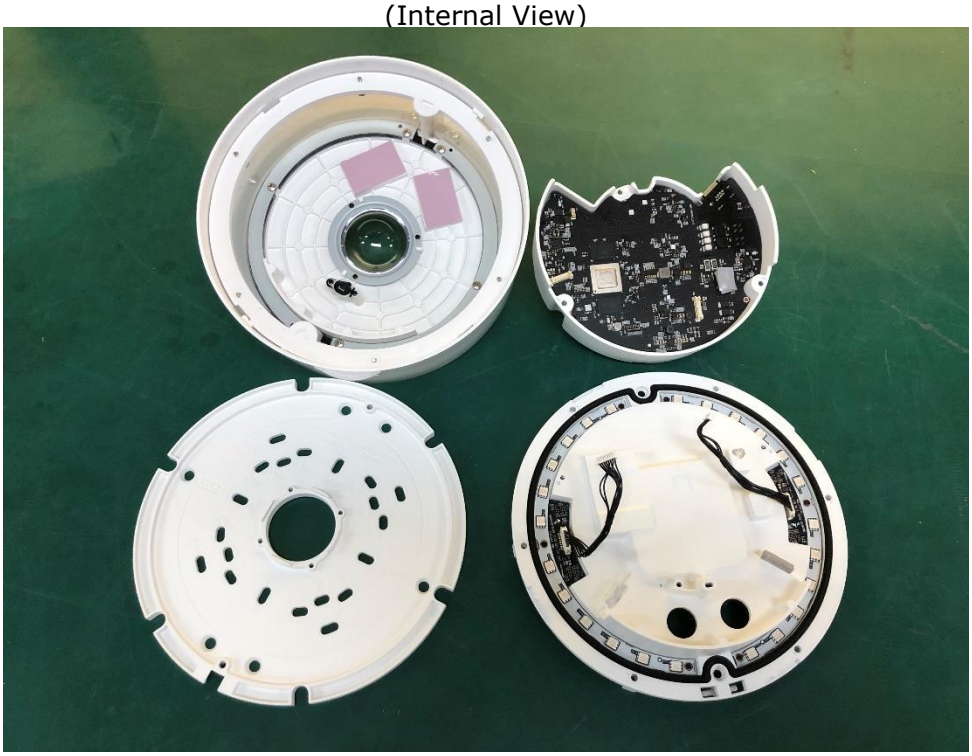


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Main Board

(Top)

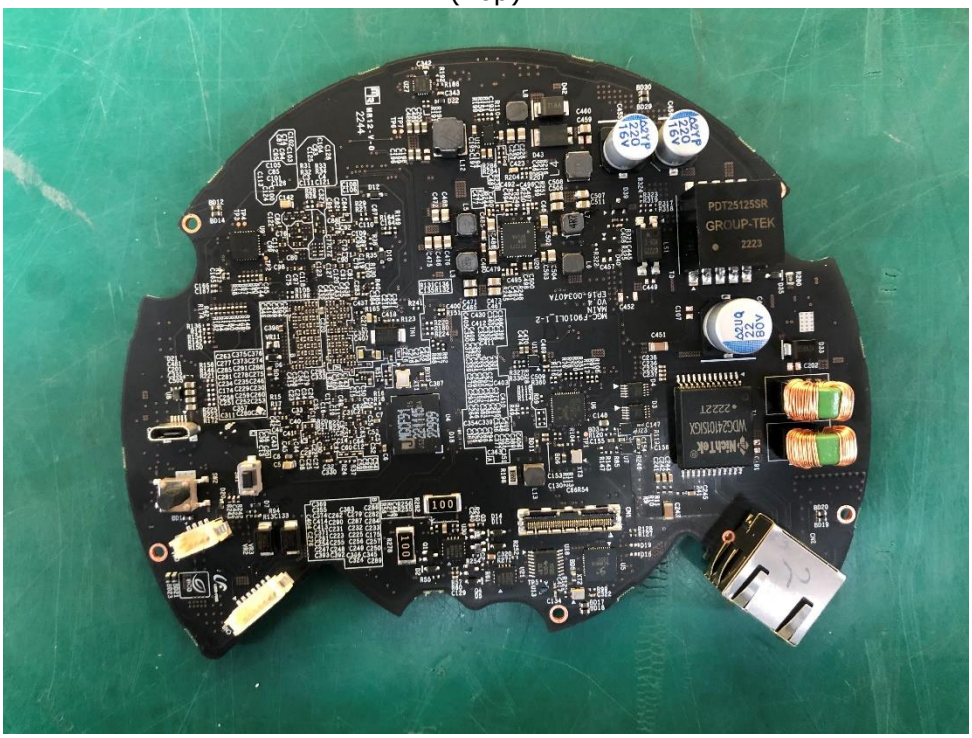


(Bottom)

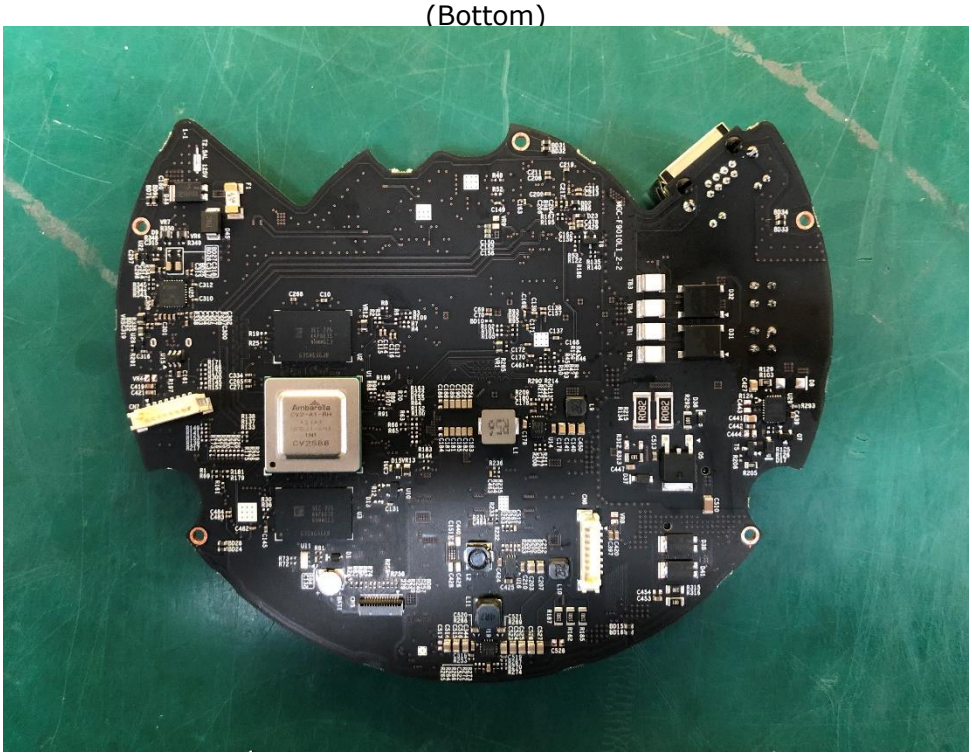


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board x2

(Top)

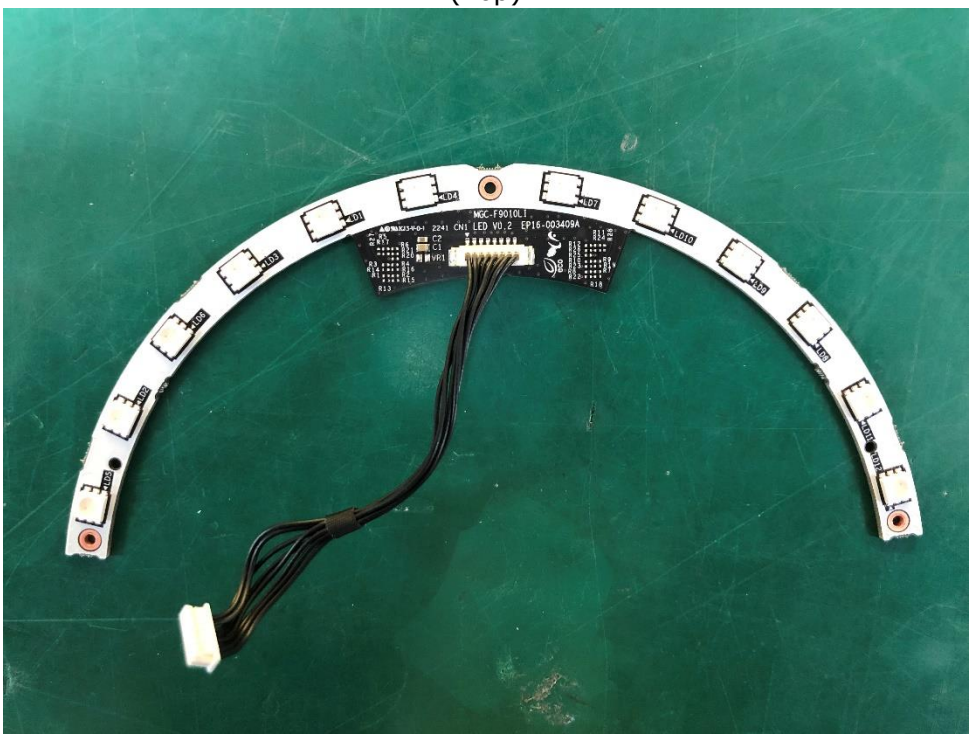

(Bottom)

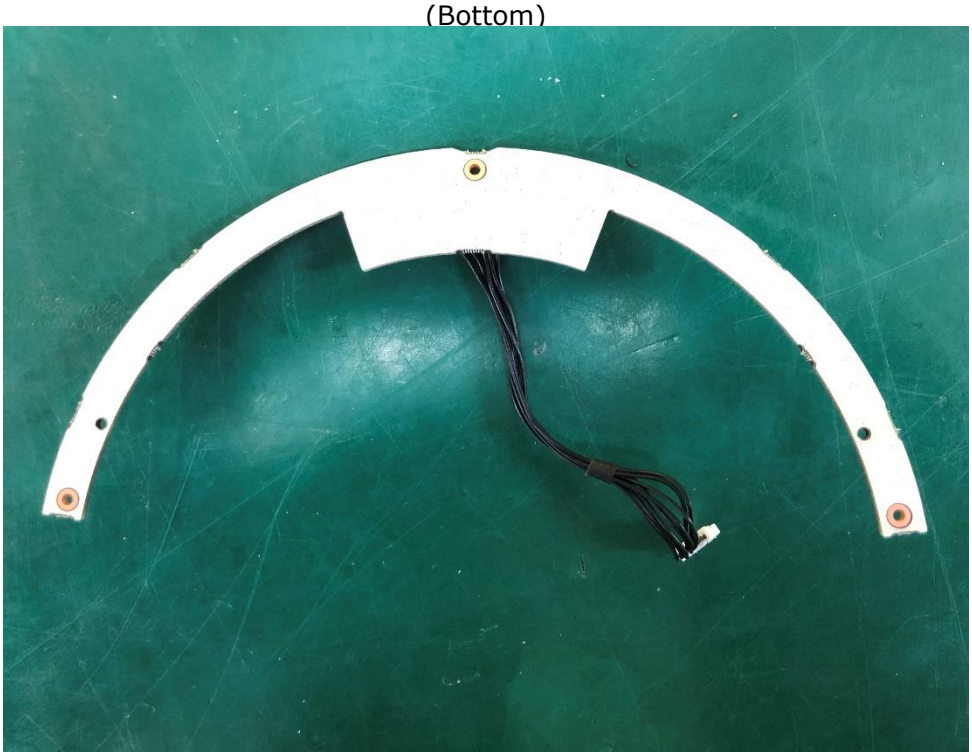

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

FCC Label

Hanwha Vision Co., Ltd

MGC-F9010LI

IC Label

CAN ICES-003(A) / NMB-003(A)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr