
EMC TEST REPORT For VCCI

Test Report No.	:	KES-EM-22T1011-R1
Date of Issue	:	Dec. 27, 2022
Product name	:	NETWORK CAMERA
Model/Type No.	:	MGC-F9010LI
Variant Model	:	-
Applicant	:	Hanwha Vision Co., Ltd
Applicant Address	:	6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Manufacturer	:	1. HANWHA VISION VIETNAM COMPANY LIMITED 2. D-TECH CO.,LTD.
Manufacturer Address	:	1. Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam 2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)
Date of Receipt	:	Nov. 08, 2022
Test date	:	Dec. 02, 2022
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Sung Keun, Park
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 27, 2022	KES-EM-22T1011-R1	Issued
Feb. 24, 2023	KES-EM-22T1011-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 10
1.2 Variant Model Differences 10
1.3 Device Modifications 10
1.4 Equipment Under Test 10
1.5 Support Equipments 10
1.6 External I/O Cabling 11
1.7 EUT Operating Mode(s) 11
1.8 Configuration 12
1.9 Remarks when standards applied 13
1.10 Calibration Details of Equipment Used for Measurement 13
1.11 Test Facility 13
1.12 Laboratory Accreditations and Listings ..... 오류! 책갈피가 정의되어 있지 않습니다.
2.0 Test Regulations 14
2.1 Conducted Emissions Mains Power Ports 15
2.2 Conducted Emissions at Telecommunication Ports 16
2.3 Radiated Electric Field Emissions(Below 1 ㎓) 17
2.4 Radiated Electric Field Emissions(Above 1 ㎓) 18
APPENDIX A – TEST DATA 19
Conducted Emissions at Mains Power Ports 19
Conducted Emissions at Telecommunication Ports 21
Radiated Electric Field Emissions(Below 1 ㎓) 23
Radiated Electric Field Emissions(Above 1 ㎓) 25
Test Setup Photos and Configuration 27
Conducted Emissions at Mains Power Ports 27
Conducted Emissions at Telecommunication Ports 28
Radiated Electric Field Emissions(Below 1 ㎓) 30
Radiated Electric Field Emissions(Above 1 ㎓) 32
EUT External Photographs 34
EUT Internal Photographs 35

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.0 General Product Description

Main Specifications of EUT are:

ITEM	MGC-F9010LI
SoC	CV2S88
Sensor	IMX226
Lens	1.29mm fixed focal
Video	
Imaging Device	1/1.7" 12MP CMOS(IMX226)
Resolution	Original view(1:1): 3008x3008, 2048x2048, 800x800 Dewarping View: 2048x1152, 640x360 ※1CH Original view, 2~3CH Dewarping View
Max. Framerate	H.265/H.264: Max. 20fps@3008x3008 MJPEG: Max. 20fps@3008x3008
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.32 Lux (F2.4, 1/30sec)
Video Out	USB: Micro USB Type B(800x800)
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	1.29mm fixed focal
Max. Aperture Ratio	F2.4
Angular Field of View	H: 190° / V: 190° / D: 190°
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	None
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Pan / Tilt / Rotate Range	Rotate : +/- 180°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(Electrical)
Backlight Compensation	BLC,DWDR,SSDR
Wide Dynamic Range	60dB
Digital Noise Reduction	WiseNR Ⅱ(Based on AI engine), SSNR Ⅴ
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, polygonal zones
Privacy Masking	6ea, rectangle zones - Color: Black/Gray/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	None
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec) Auto prefer shutter control based on AI engine
Digital PTZ	Support
Video Rotation	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Analytics	- Parking guidance and license plate recognition based on AI engine (1) Parking spot detection / Parking area occupancy detection / LPR · Parking spot detection: 6 cars(3 cars on each side) · Parking area occupancy detection: Occupied / Vacant · LPR: 6 cars(3 cars on each side) (2) LED · Color: Green, Red, Blue, Pink, Skyblue, Purple · LED Integrated(1ea)/Seprated(2ea) mode - Analytics events based on AI engine(NPU) : Object detection, Line crossing, IVA Area - Analytics events : Defocus detection, Motion detection, Tampering, Audio detection, Sound classification
Business Intelligence	None
Serial Interface	None
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	When alarm trigger occurred - File upload via FTP and e-mail - Notification via e-mail - Alarm output - Handover - Audio playback - LED control(Parking guidance only)
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	None
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None
Temperature detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000 BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(5ea area), WiseStream Ⅱ, WiseStream Ⅲ(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 3 profiles per each channel)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA, pre-installed) TPM 2.0 with FIPS 140-2 level2
Application Programming Interface	ONVIF Profile S/T/M SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	None
Memory	4096MB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-40°C ~ +55°C/ Less than 95% RH *Start up should be above at -35˚C
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 95% RH
Certification	IP66, IK08, NEMA 4X
Input Voltage	PoE+(IEEE802.3at), 12VDC
Power Consumption	PoE 53V : Max. 20.0W / Typ. 16.5W DC 12V : Max. 18.0W / Typ. 15.0W Power redundancy failover
Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL9003
Product dimensions / weight	Φ200mm * H80mm / 1550g
Conduit hole	None
Hanging mount(Dome)	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	36.3m(119.0ft)
Observe (63PPM/ 19PPF)	14.5m(47.6ft)
Recognize (125PPM/ 38PPF)	7.3m(23.8ft)
Identify (250PPM/ 76PPF)	3.6m(11.9ft)
Certifications & Standards	
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A , KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Environment	IEC/EN 63000 IEC/EN 60529 IP66, IEC/EN 62262 IK08 NEMA 250 type 4X

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	MGC-F9010LI	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	LG15N54	503NZWY038929	LG Electronics	-
Notebook Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
LED Alarm	-	-	-	-
Smartphone	SHV-E330S	-	SAMSUNG	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

■ Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.0	U
	Alarm	LED Alarm	Alarm	3.0	U
	Audio IN	Smarphone	3.5 mm	1.7	U
	Audio OUT	Speaker	3.5 mm	1.7	U
	DC Jack	Adapter	DC Jack	1.6	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.7	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.0	U
	Alarm	LED Alarm	Alarm	3.0	U
	Audio IN	Smarphone	3.5 mm	1.7	U
	Audio OUT	Speaker	3.5 mm	1.7	U
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45 (LAN)	3.5	U
	DC Jack	Notebook Adapter	DC Jack	1.7	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test Mode	operating
ADAPTER, PoE Mode	1. Check the camera video output on the laptop 2. Check if the network status is operating normally during PING TEST 3. Check if the 1KHz tone played by the smartphone is normally output from the speaker 4. check the normal operation of the LED Alarm.


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
□ DC Main

■ Adapter Mode

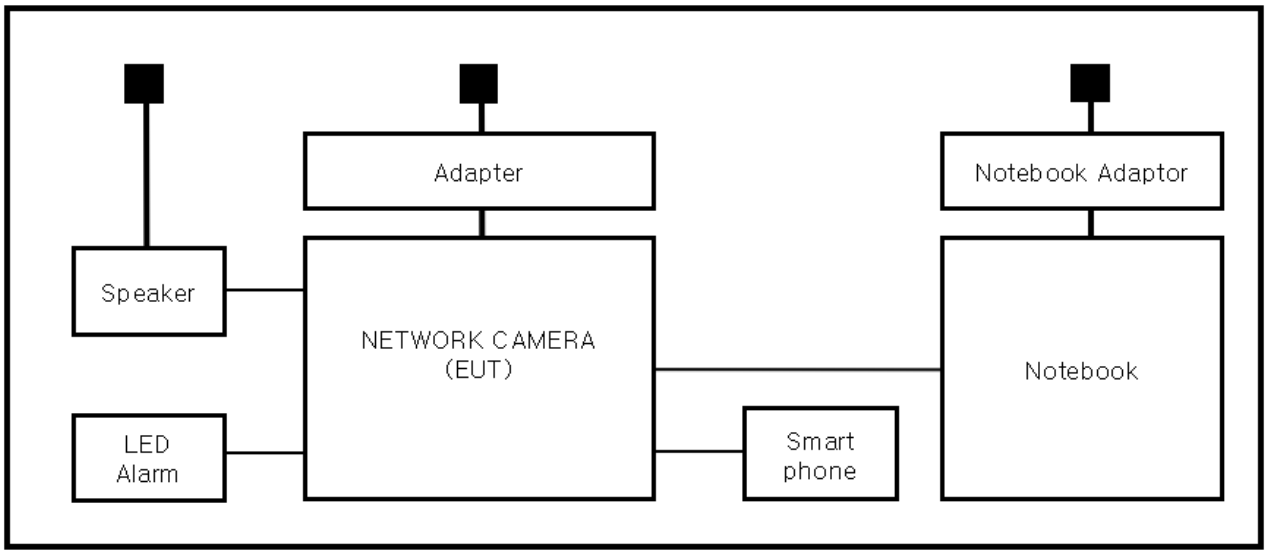

■ PoE Mode

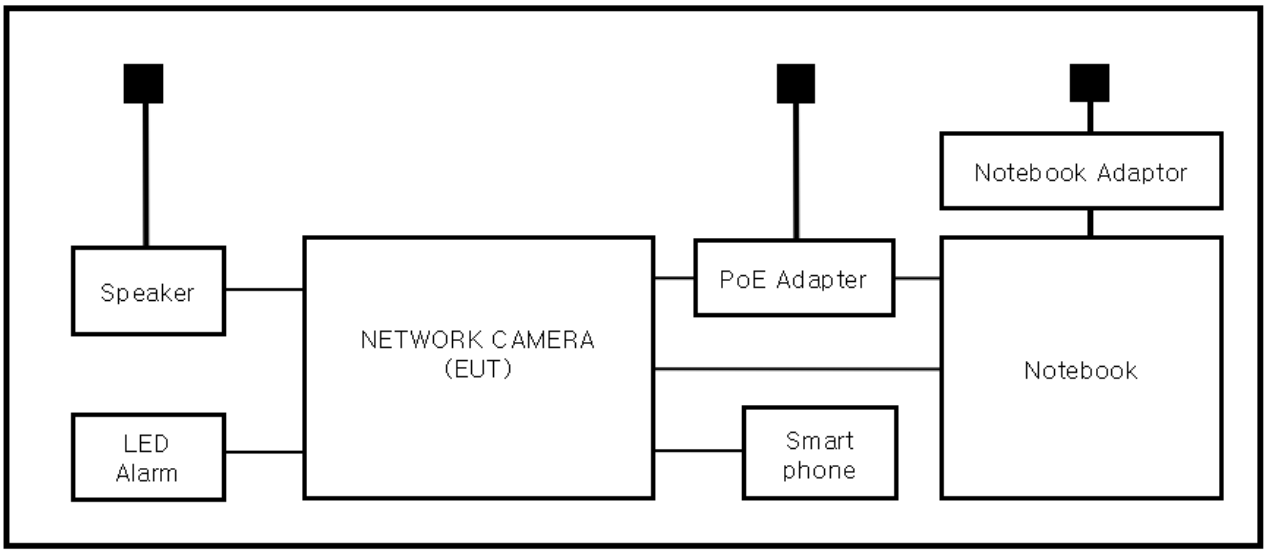

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.9 Remarks when standards applied

The USB port was excluded from the test as a Management port.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	**RRA**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
International	**KOLAS**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KT489
USA	**FCC**	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	KR0100
Canada	**ISED**	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	23298
JAPAN	**VCCI**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	C-20136, T-20137, R-20181, G-20176
Europe	**TÜV SÜD**	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016** ☒ Class A ☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date
Dec. 02, 2022

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Test Conditions
Temperature: (23,0 ± 0,1) ℃
Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date
Dec. 02, 2022

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	11, 22, 2023
☐	CDN	CDNS502A	TESEQ	40431	11, 10, 2023

Test Conditions
Temperature: (23,0 ± 0,1) ℃
Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.3 Radiated Electric Field Emissions(Below 1 ㎓)

Test Date
Dec. 02, 2022

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions
Temperature: (22,0 ± 0,1) ℃
Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement
30 ㎒ to 1 ㎓

Instrument Settings
IF Band Width: 120 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.4 Radiated Electric Field Emissions(Above 1 ㎓)

Test Date
Dec. 02, 2022

Test Location
SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 01, 2023
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 01, 2023
☒	ATTENUATOR	8491A	HP	35496	03, 08, 2023
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions
Temperature: (22,2 ± 0,1) ℃
Relative Humidity: (45,1 ± 0,1) % R.H.

Frequency Range of Measurement
1 ㎓ to 6 ㎓

Instrument Settings
IF Band Width: 1 ㎒

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ Adapter Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	L1
Mode:	ADAPTER
Operator Name:	KES

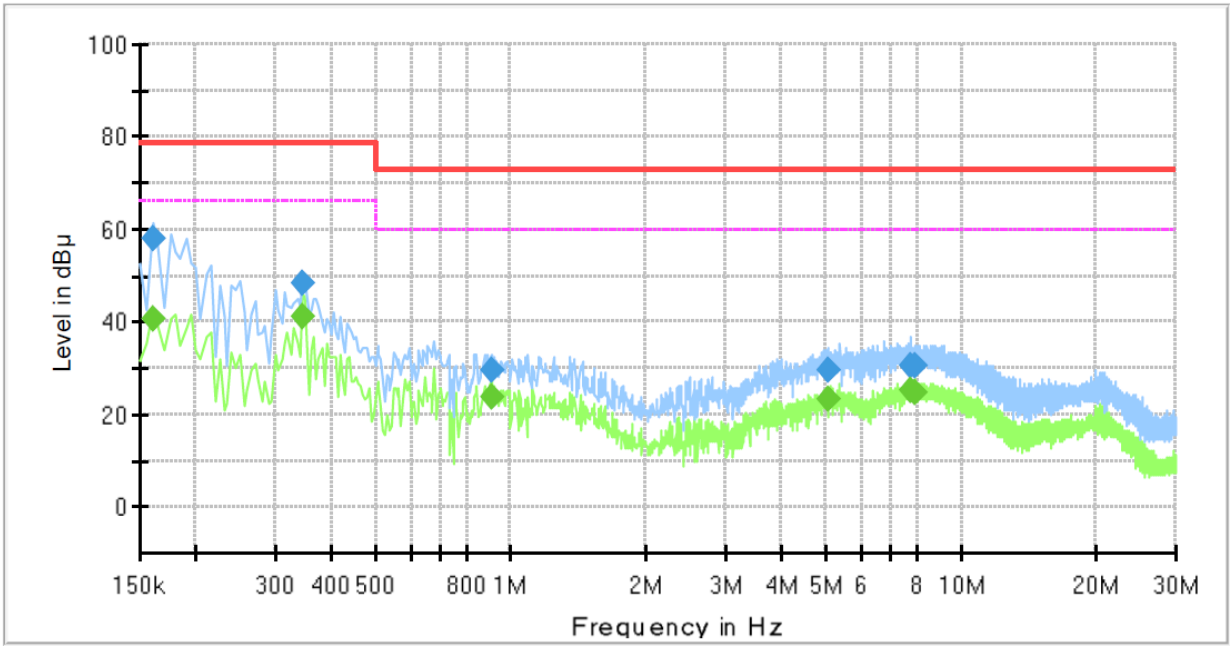

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	40.76	66.00	25.24	1000.0	9.000	L1	19.5
0.160000	58.15	---	79.00	20.85	1000.0	9.000	L1	19.5
0.345000	---	41.17	66.00	24.83	1000.0	9.000	L1	19.6
0.345000	48.49	---	79.00	30.51	1000.0	9.000	L1	19.6
0.905000	---	23.87	60.00	36.13	1000.0	9.000	L1	20.1
0.905000	29.68	---	73.00	43.32	1000.0	9.000	L1	20.1
5.050000	---	23.43	60.00	36.57	1000.0	9.000	L1	19.7
5.050000	29.78	---	73.00	43.22	1000.0	9.000	L1	19.7
7.765000	---	25.08	60.00	34.92	1000.0	9.000	L1	19.6
7.765000	30.76	---	73.00	42.24	1000.0	9.000	L1	19.6
7.940000	---	24.97	60.00	35.03	1000.0	9.000	L1	19.7
7.940000	30.62	---	73.00	42.38	1000.0	9.000	L1	19.7

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	MGC-F9010LI
Phase:	N
Mode:	ADAPTER
Operator Name:	KES

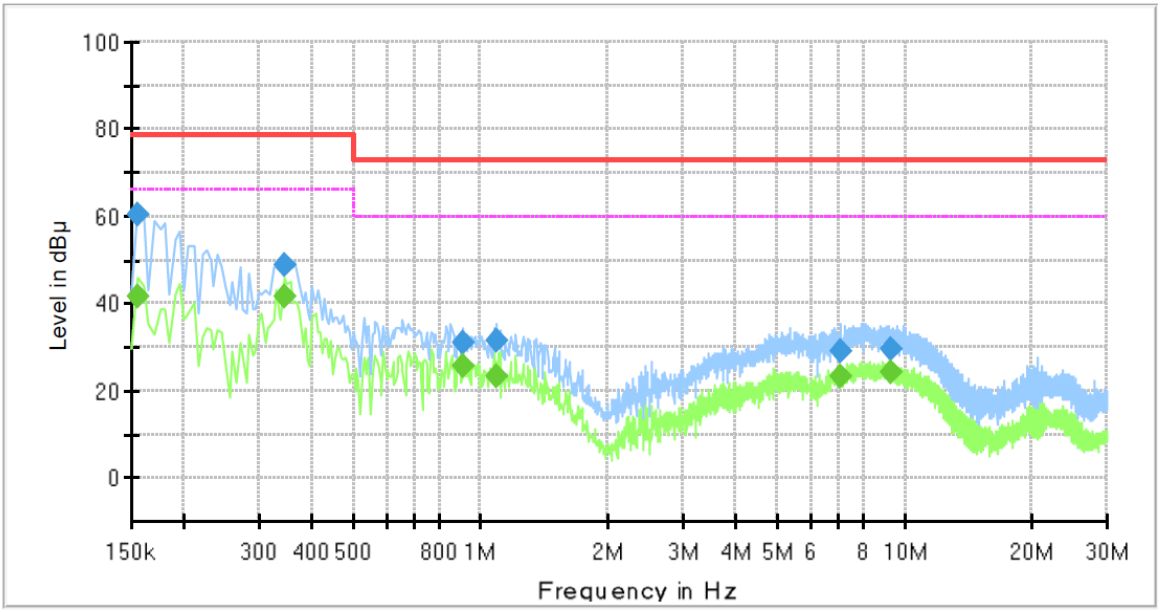

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	41.84	66.00	24.16	1000.0	9.000	N	19.4
0.155000	60.25	---	79.00	18.75	1000.0	9.000	N	19.4
0.345000	---	41.48	66.00	24.52	1000.0	9.000	N	19.6
0.345000	48.72	---	79.00	30.28	1000.0	9.000	N	19.6
0.910000	---	25.59	60.00	34.41	1000.0	9.000	N	20.1
0.910000	30.92	---	73.00	42.08	1000.0	9.000	N	20.1
1.090000	---	23.12	60.00	36.88	1000.0	9.000	N	20.1
1.090000	31.66	---	73.00	41.34	1000.0	9.000	N	20.1
7.090000	---	23.36	60.00	36.64	1000.0	9.000	N	19.6
7.090000	29.00	---	73.00	44.00	1000.0	9.000	N	19.6
9.280000	---	24.09	60.00	35.91	1000.0	9.000	N	19.8
9.280000	29.58	---	73.00	43.42	1000.0	9.000	N	19.8

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ Adapter Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	MGC-F9010LI
Mode :	ADAPTER
Speed :	1 000 Mbps
Operator Name:	KES

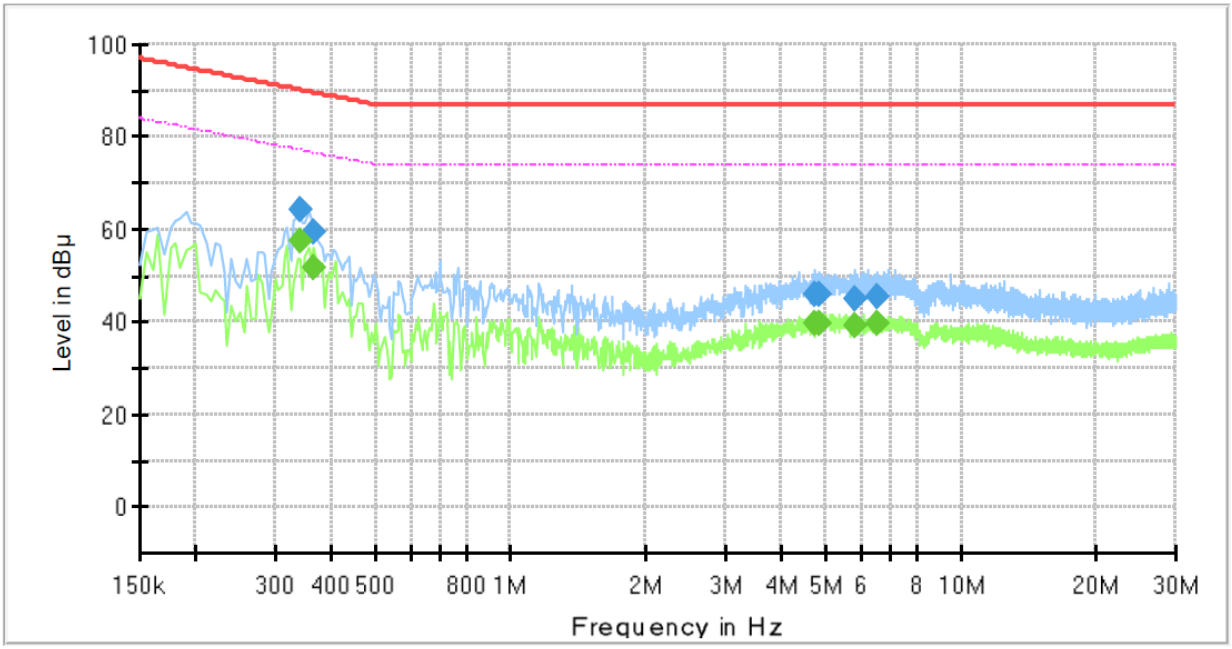

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.340000	---	57.44	77.20	19.76	1000.0	9.000	Single Line	19.7
0.340000	64.08	---	90.20	26.12	1000.0	9.000	Single Line	19.7
0.365000	---	51.78	76.61	24.83	1000.0	9.000	Single Line	19.7
0.365000	59.54	---	89.61	30.07	1000.0	9.000	Single Line	19.7
4.730000	---	39.87	74.00	34.13	1000.0	9.000	Single Line	19.5
4.730000	45.91	---	87.00	41.09	1000.0	9.000	Single Line	19.5
4.845000	---	39.85	74.00	34.15	1000.0	9.000	Single Line	19.4
4.845000	45.94	---	87.00	41.06	1000.0	9.000	Single Line	19.4
5.830000	---	39.15	74.00	34.85	1000.0	9.000	Single Line	19.3
5.830000	45.18	---	87.00	41.82	1000.0	9.000	Single Line	19.3
6.520000	---	39.73	74.00	34.27	1000.0	9.000	Single Line	19.3
6.520000	45.52	---	87.00	41.48	1000.0	9.000	Single Line	19.3


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	MGC-F9010LI
Mode :	PoE
Speed :	1 000 Mbps
Operator Name:	KES

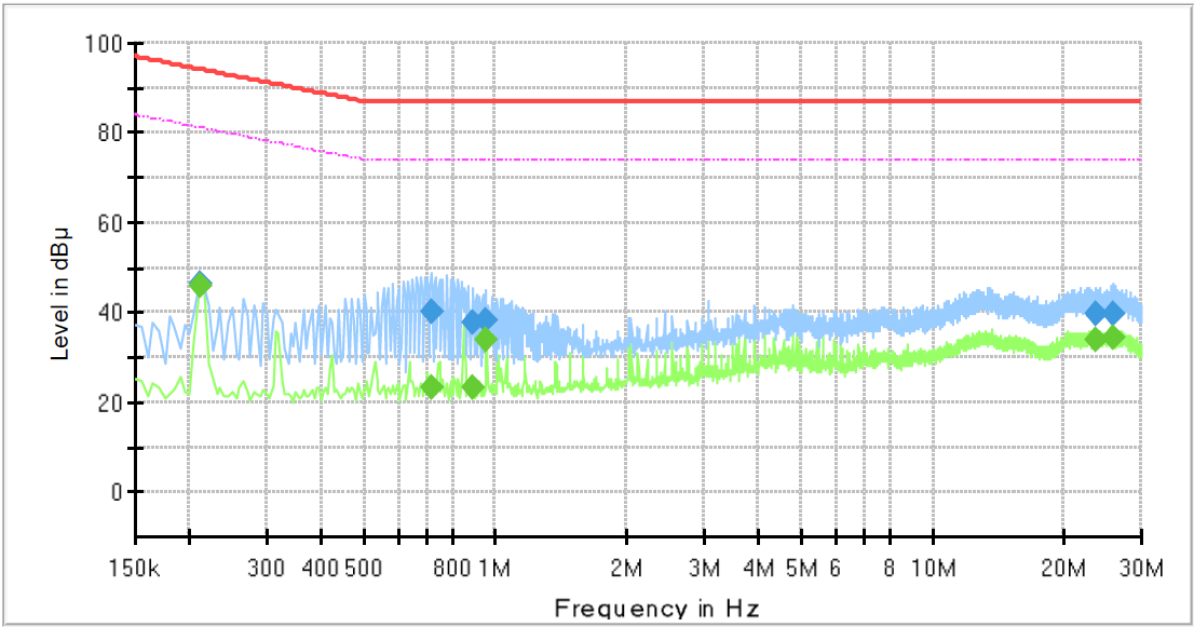

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	46.09	81.21	35.12	1000.0	9.000	Single Line	19.7
0.210000	46.40	---	94.21	47.81	1000.0	9.000	Single Line	19.7
0.715000	---	23.45	74.00	50.55	1000.0	9.000	Single Line	19.9
0.715000	40.35	---	87.00	46.65	1000.0	9.000	Single Line	19.9
0.890000	---	23.07	74.00	50.93	1000.0	9.000	Single Line	20.0
0.890000	37.66	---	87.00	49.34	1000.0	9.000	Single Line	20.0
0.955000	---	34.12	74.00	39.88	1000.0	9.000	Single Line	20.0
0.955000	38.03	---	87.00	48.97	1000.0	9.000	Single Line	20.0
23.575000	---	34.06	74.00	39.94	1000.0	9.000	Single Line	19.9
23.575000	39.69	---	87.00	47.31	1000.0	9.000	Single Line	19.9
25.800000	---	34.21	74.00	39.79	1000.0	9.000	Single Line	19.9
25.800000	39.83	---	87.00	47.17	1000.0	9.000	Single Line	19.9

♦ Calculation
QuasiPeak[㏈uV] / CAverage [㏈uV] = Reading Value[㏈uV] + Corr. [㏈]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 ㎓)

■ Adapter Mode

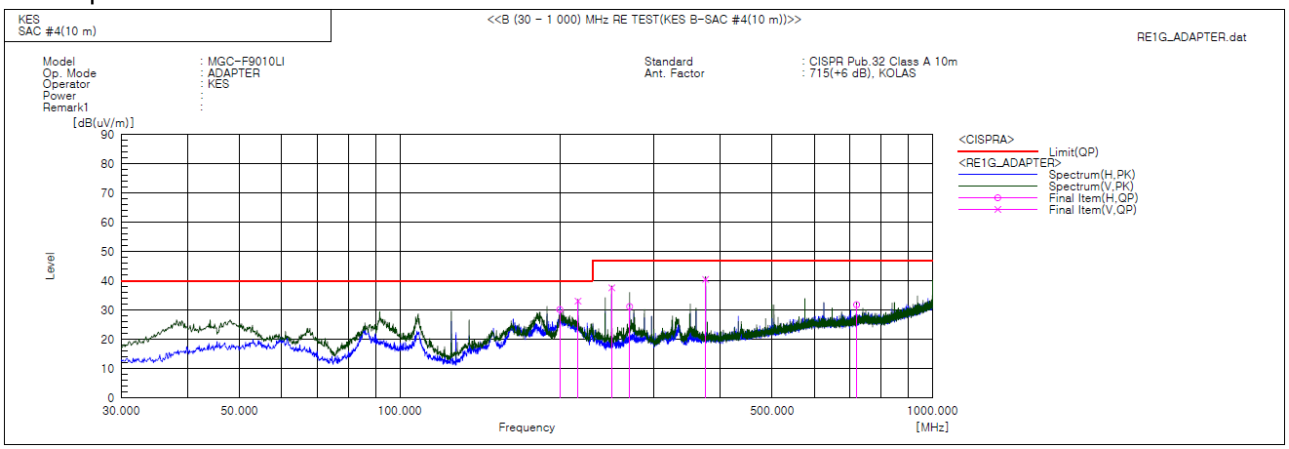


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	199.749	H	51.2	-21.0	30.2	40.0	9.8	219.0	180.0	
2	215.998	V	52.9	-19.8	33.1	40.0	6.9	278.0	124.0	
3	249.948	V	56.4	-18.8	37.6	47.0	9.4	201.0	217.0	
4	269.954	H	49.6	-18.4	31.2	47.0	15.8	336.0	318.0	
5	374.956	V	54.5	-14.0	40.5	47.0	6.5	342.0	90.0	
6	720.034	H	38.4	-6.6	31.8	47.0	15.2	179.0	269.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

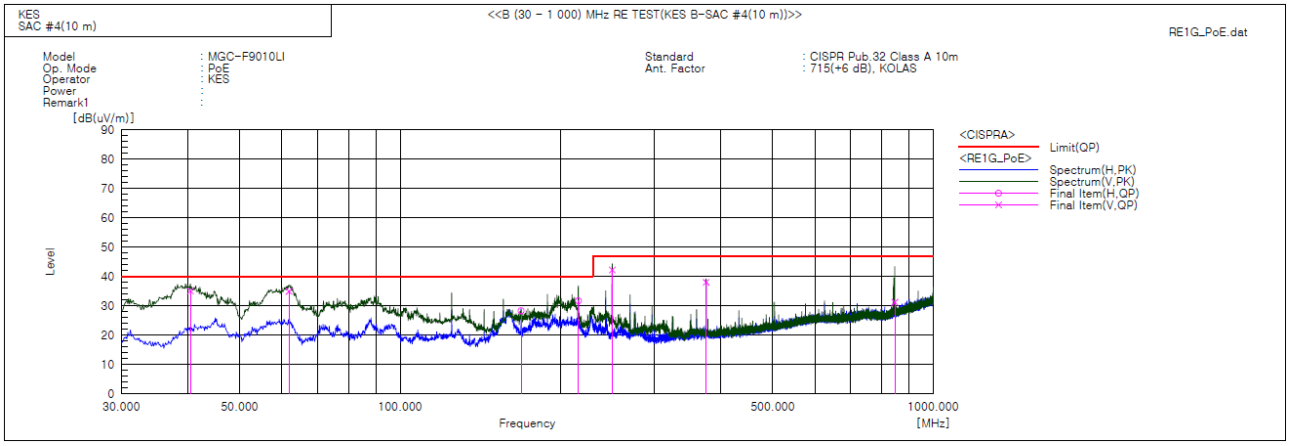

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	40.428	V	57.2	-22.1	35.1	40.0	4.9	100.0	348.0	
2	61.889	V	56.9	-22.0	34.9	40.0	5.1	125.0	88.0	
3	168.710	H	52.5	-24.2	28.3	40.0	11.7	389.0	176.0	
4	215.998	H	51.5	-19.8	31.7	40.0	8.3	291.0	105.0	
5	249.948	V	61.0	-18.8	42.2	47.0	4.8	234.0	50.0	
6	374.956	V	52.0	-14.0	38.0	47.0	9.0	185.0	241.0	
7	846.983	V	36.7	-5.5	31.2	47.0	15.8	217.0	80.0	

♦ Calculation
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 ㎓)

■ Adapter Mode

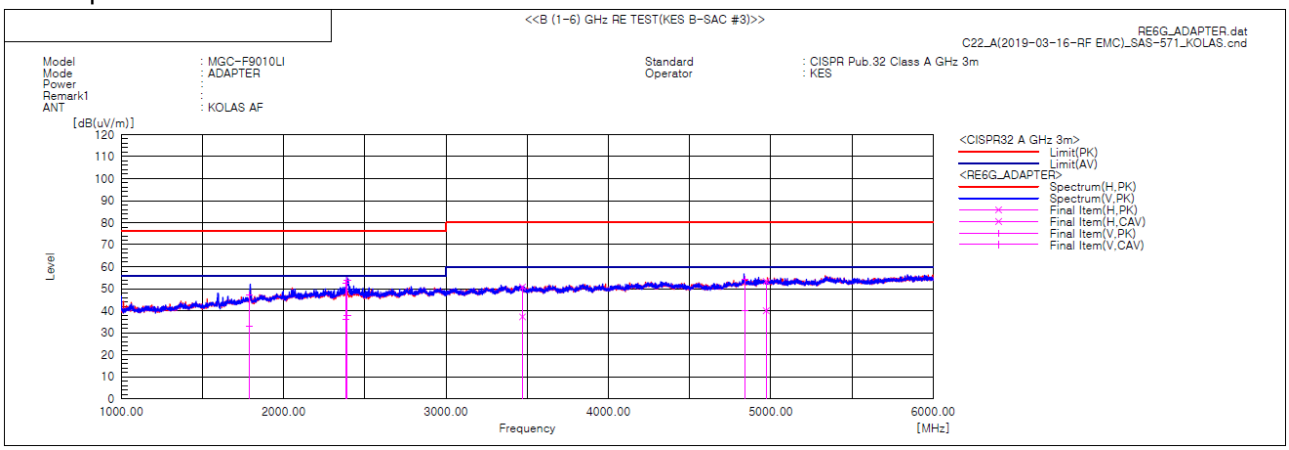


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1786.641	V	43.9	30.0	3.2	47.1	33.2	76.0	56.0	28.9	22.8	100.0	177.9	
2	2384.321	V	46.0	29.9	6.3	52.3	36.2	76.0	56.0	23.7	19.8	100.0	191.5	
3	2390.931	V	47.6	31.7	6.3	53.9	38.0	76.0	56.0	22.1	18.0	100.0	187.1	
4	3470.028	H	41.2	27.7	9.6	50.8	37.3	80.0	60.0	29.2	22.7	100.0	99.0	
5	4841.649	V	40.6	26.6	13.6	54.2	40.2	80.0	60.0	25.8	19.8	100.0	187.8	
6	4970.742	H	39.0	25.6	14.4	53.4	40.0	80.0	60.0	26.6	20.0	100.0	212.2	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

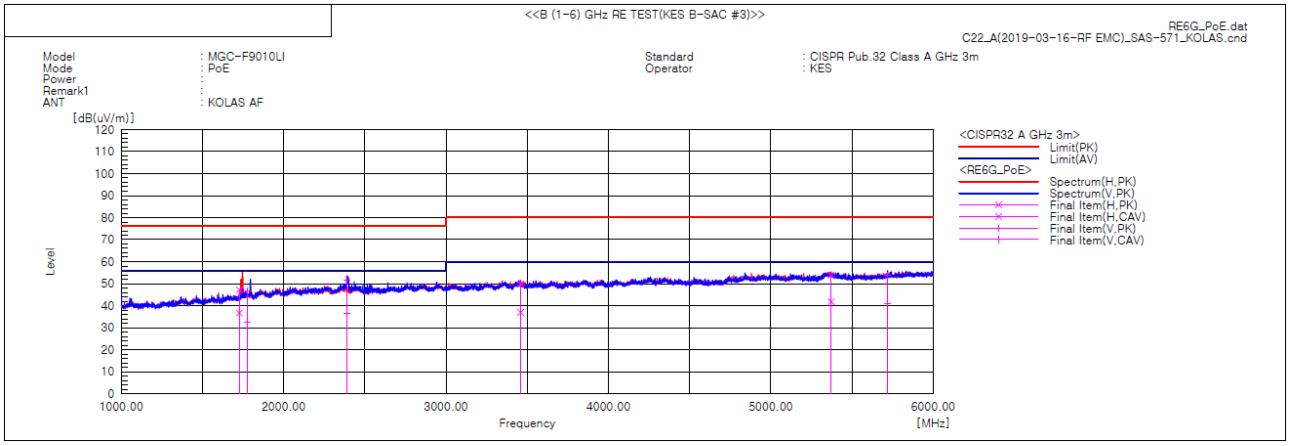

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1726.414	H	44.8	34.3	2.4	47.2	36.7	76.0	56.0	28.8	19.3	100.0	92.3	
2	1776.814	V	43.6	29.7	3.0	46.6	32.7	76.0	56.0	29.4	23.3	100.0	190.5	
3	2389.456	V	45.3	30.3	6.3	51.6	36.6	76.0	56.0	24.4	19.4	100.0	197.2	
4	3458.268	H	40.3	27.4	9.6	49.9	37.0	80.0	60.0	30.1	23.0	100.0	71.9	
5	5370.869	H	38.9	26.8	15.0	53.9	41.8	80.0	60.0	26.1	18.2	100.0	157.3	
6	5717.559	V	38.6	25.8	15.4	54.0	41.2	80.0	60.0	26.0	18.8	100.0	65.0	

♦ Calculation
Result(PK/CAV) [dB(㎶/m)] = (Reading(PK/CAV)[dB(㎶)] + c.f[dB(1/m)]
Margin(PK/CAV)[dB] = Limit[dB(㎶/m)] - Result(PK/CAV) [dB(㎶/m)]
Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value
Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ Adapter Mode



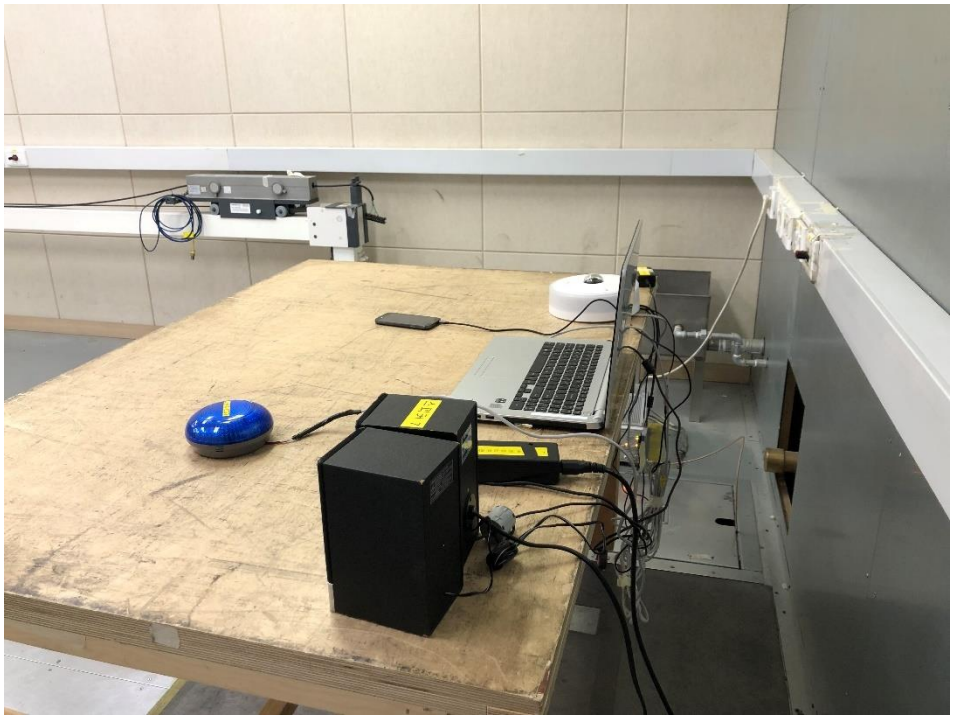

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ Adapter Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode







This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 ㎓)


■ Adapter Mode

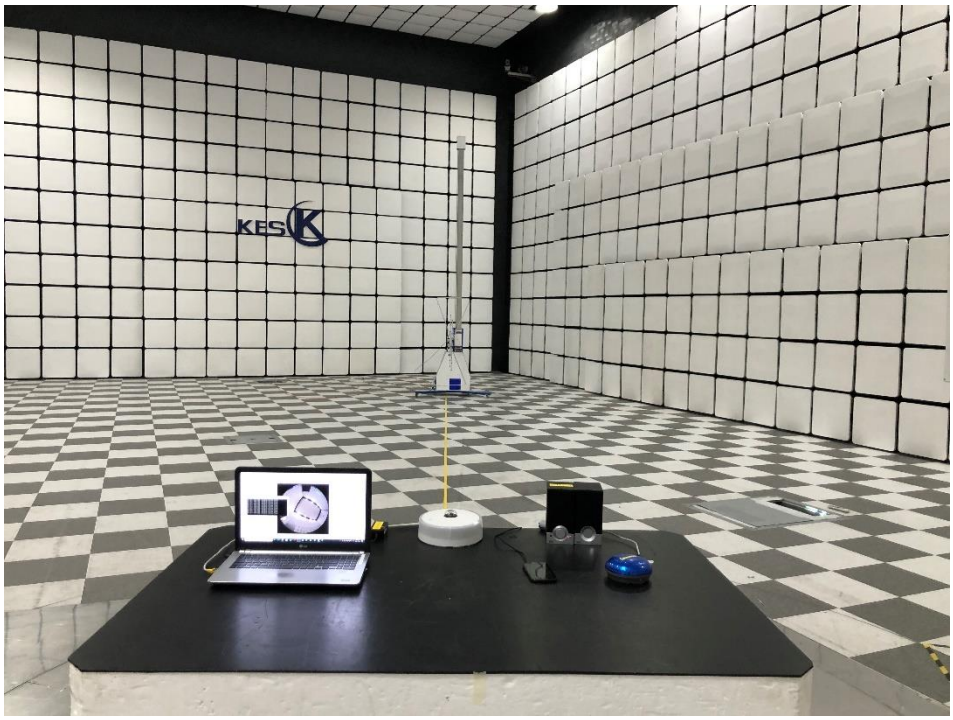


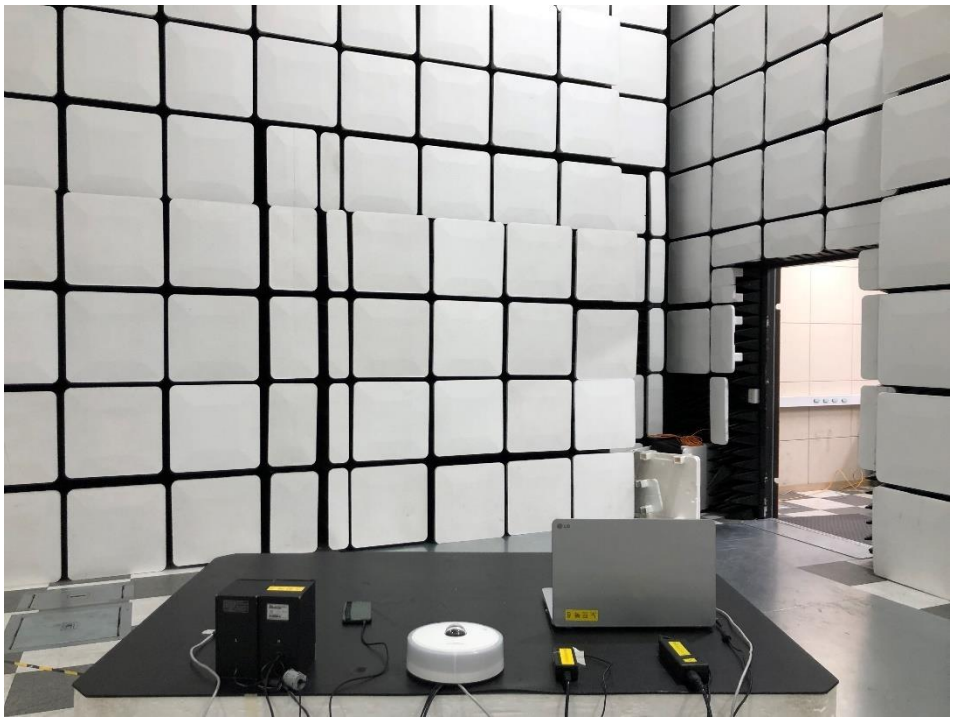

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

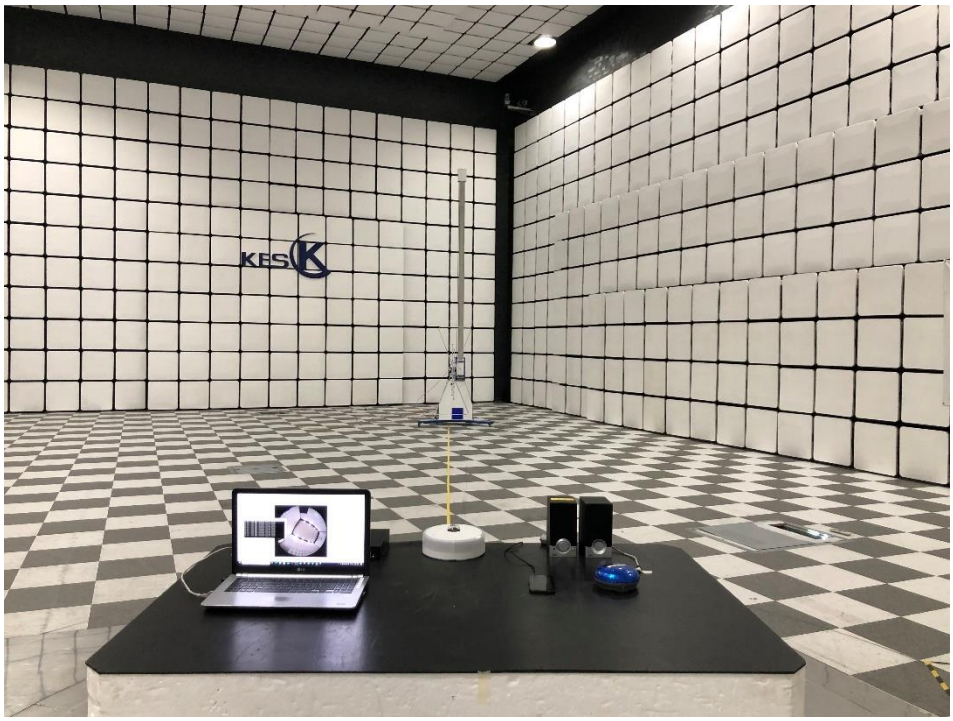


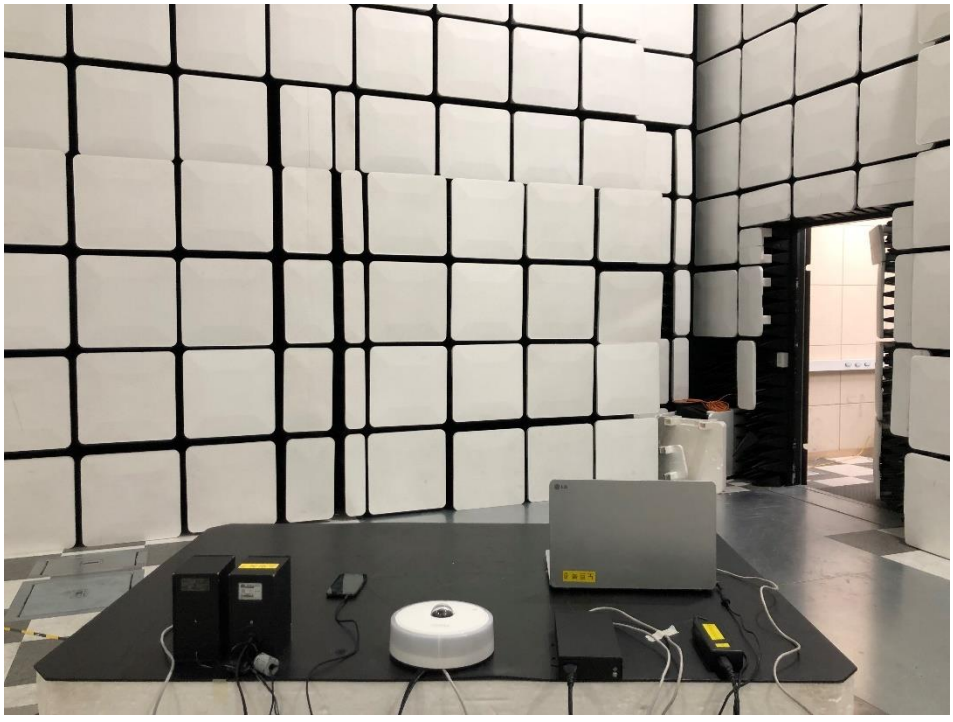


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 ㎓)


■ Adapter Mode

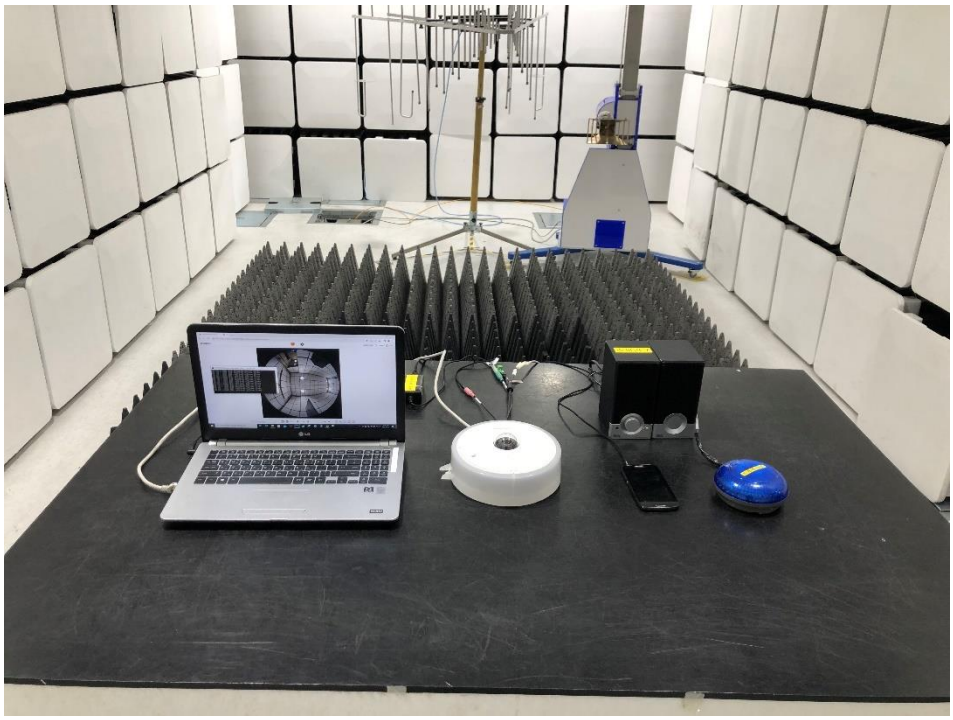


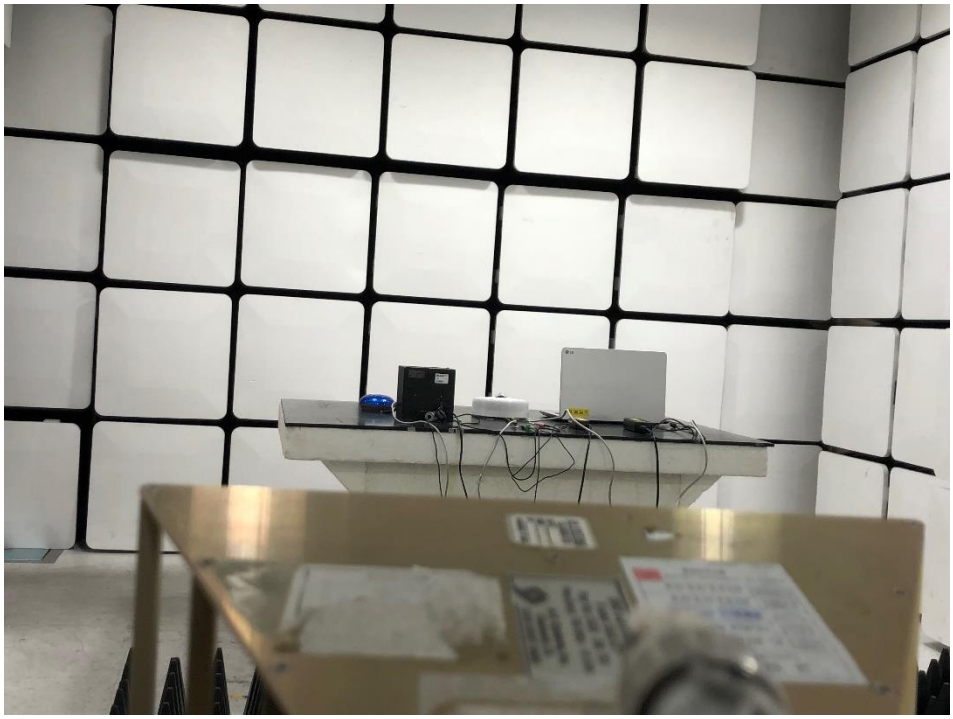

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

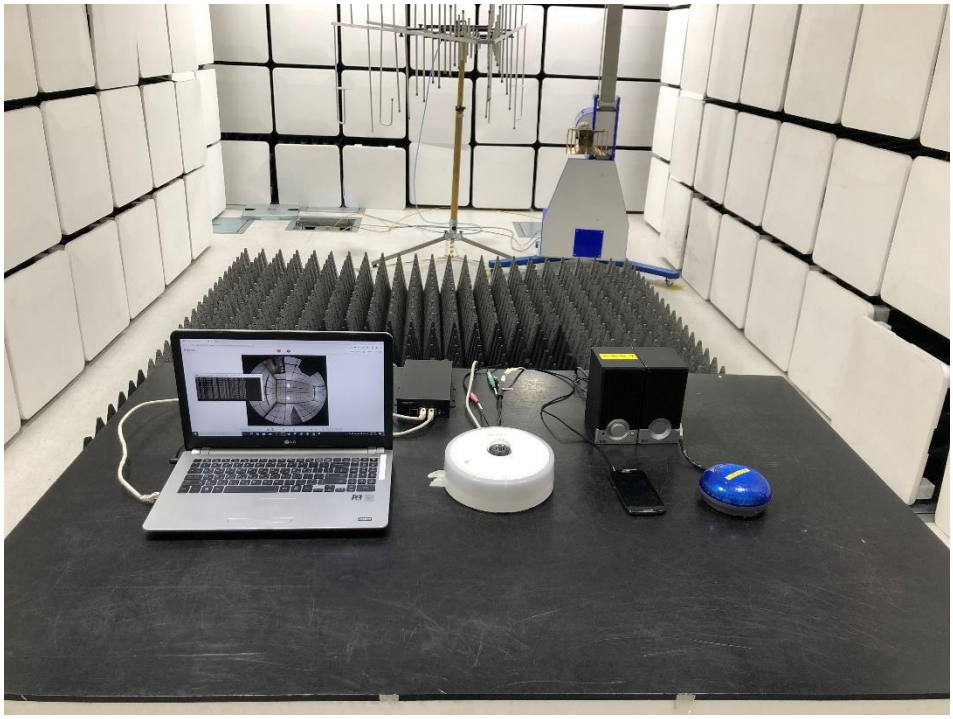


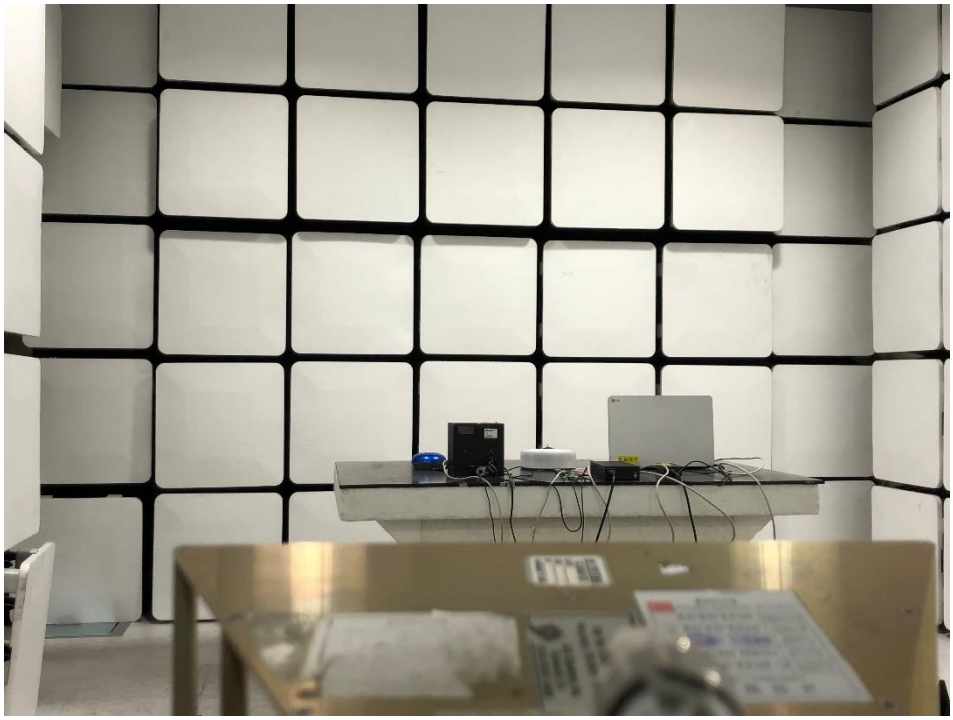


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)

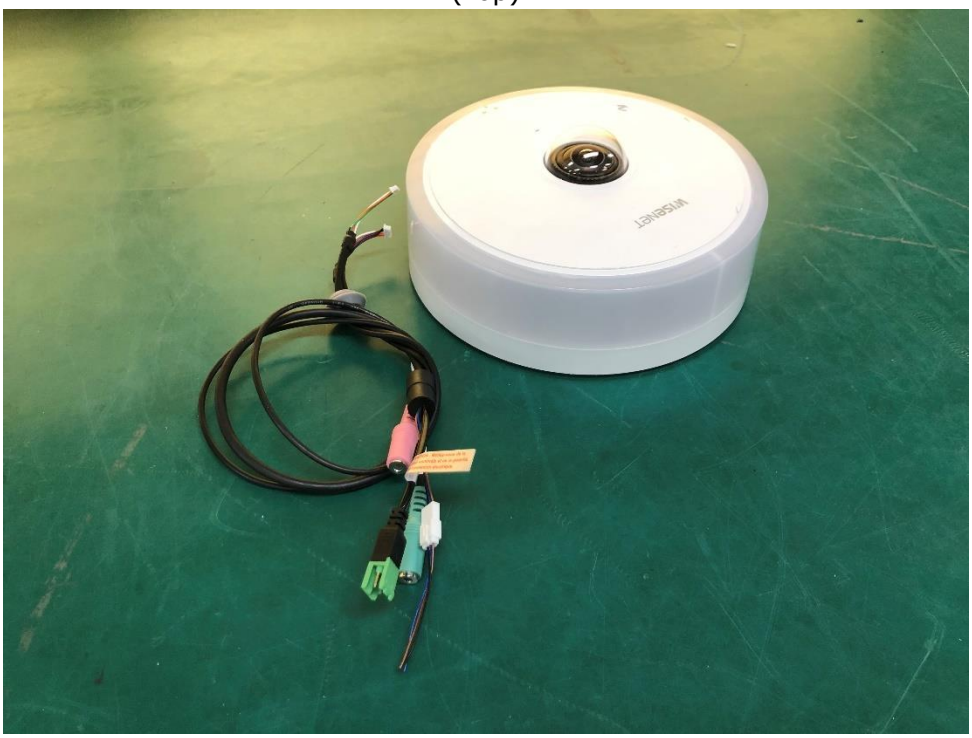


(Bottom)

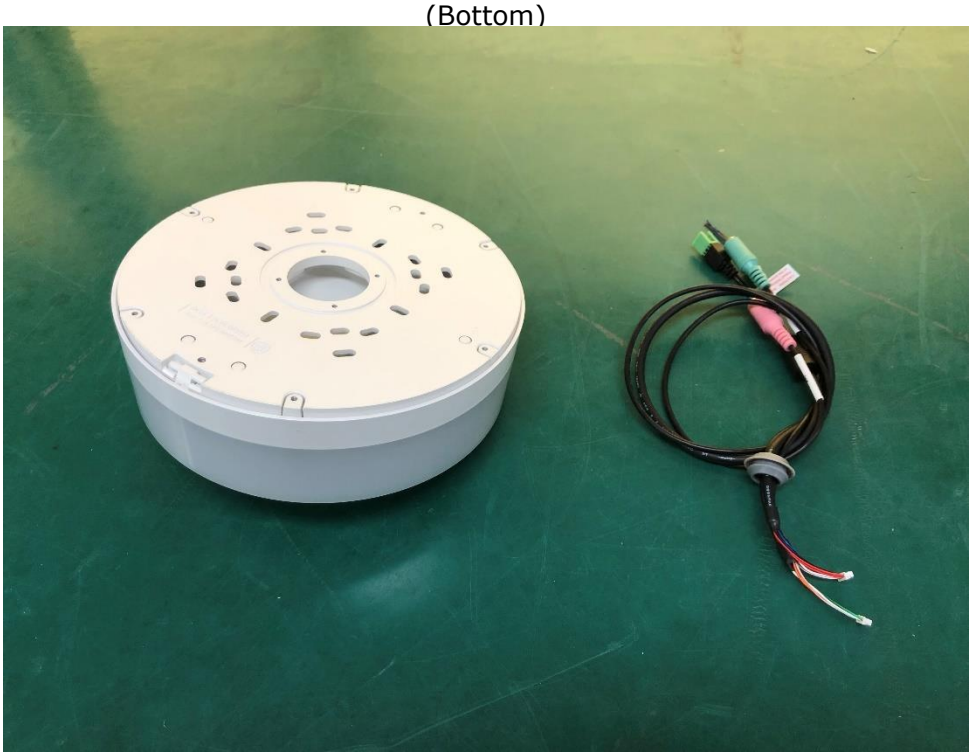

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs


(Internal View)

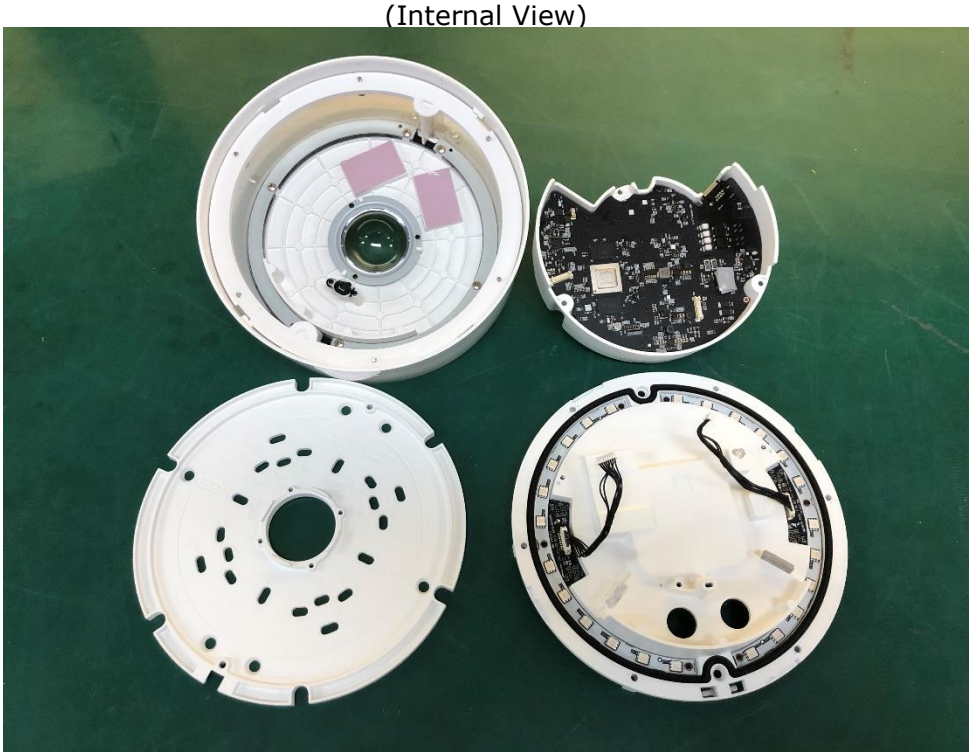


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Main Board

(Top)

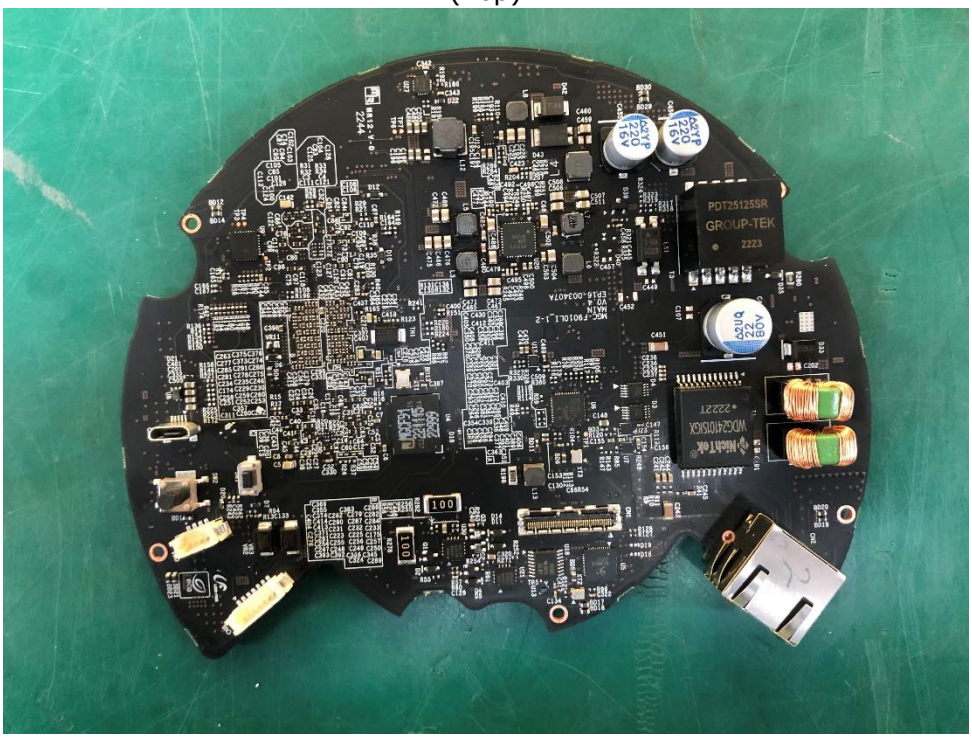


(Bottom)

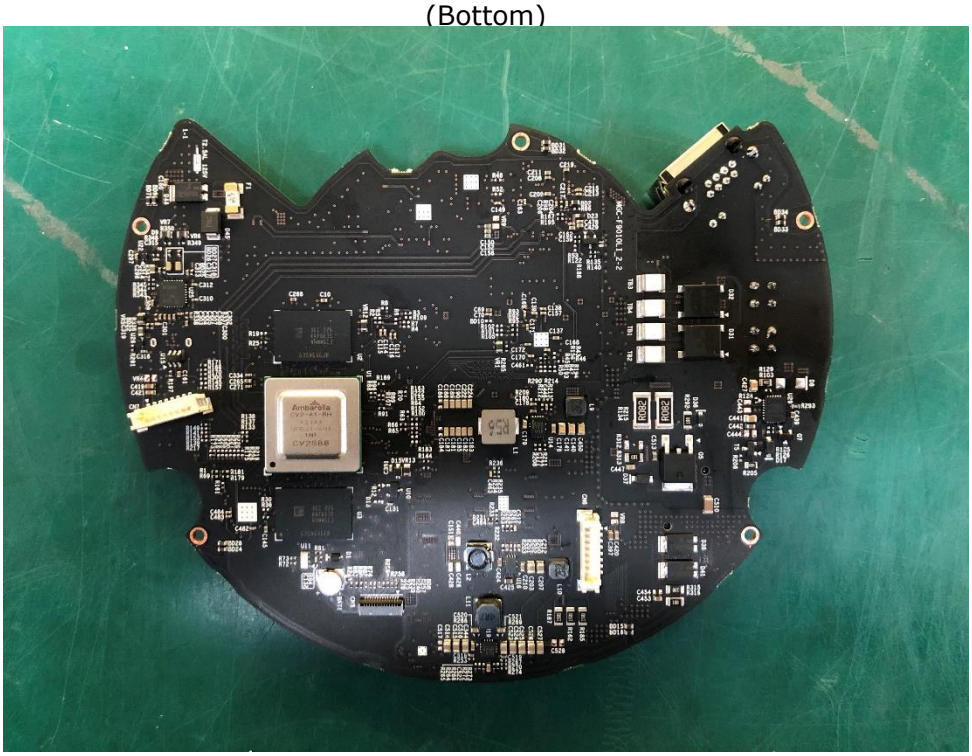


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board x2

(Top)

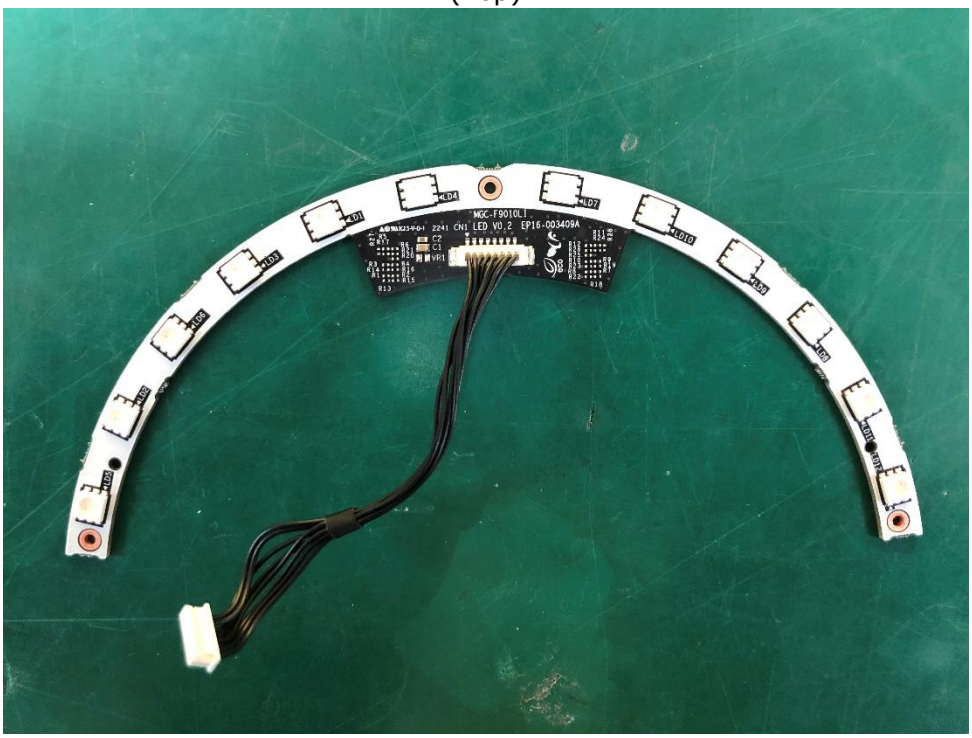

(Bottom)

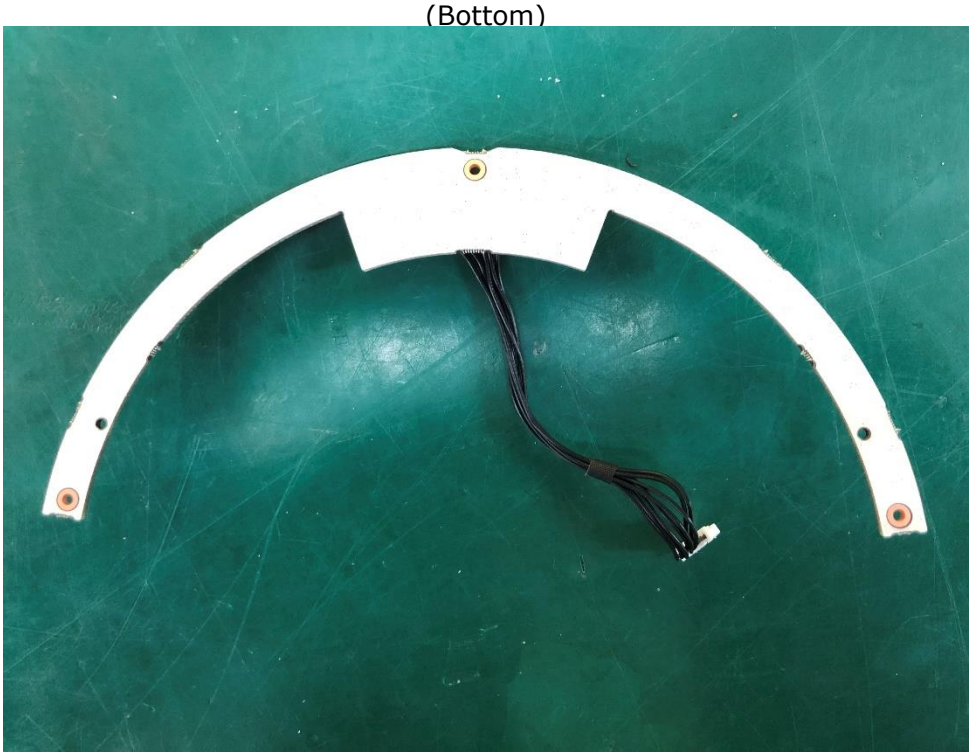

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

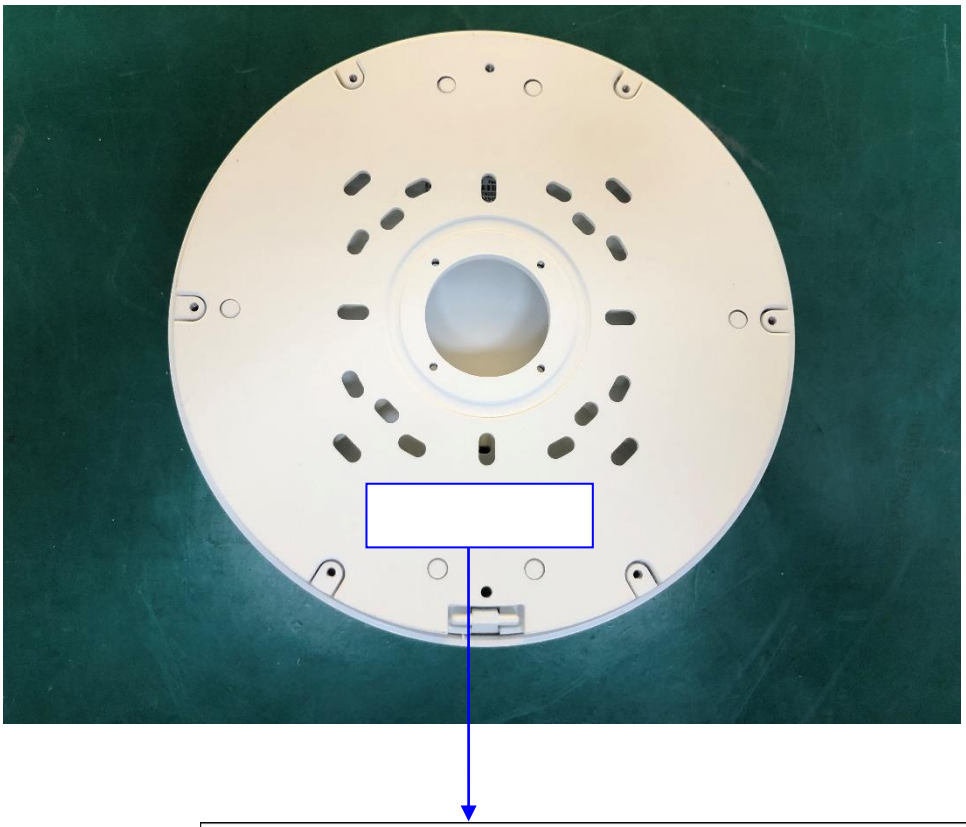

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI－A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr