

EMC TEST REPORT

Test Report No. : KES-EM-21T0175-R2

Date of Issue : Feb. 24, 2023

Product name : NETWORK CAMERA

Model/Type No. : PNB-A6001

Variant Model : -

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)

Date of Receipt : Jan. 28, 2021

Test date : Feb. 01, 2021 ~ Feb. 04, 2021

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0175-R2
Page (2) of (74)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 16, 2021	KES-EM-21T0175	Issued
Jun. 08, 2022	KES-EM-21T0175-R1	Test regulation addition on customer request.
Feb. 24, 2023	KES-EM-21T0175-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	오류! 책갈피가 정의되어 있지 않습니다.
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge.....	20
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	32
3.5	Conducted Disturbance	36
3.6	Voltage Dips and Short Interruptions	39
APPENDIX A – TEST DATA.....		41
Conducted Emissions at Mains Power Ports.....		41
Conducted Emissions at Telecommunication Ports		45
Radiated Electric Field Emissions(Below 1 GHz)		47
Radiated Electric Field Emissions(Above 1 GHz)		49
Harmonic Current Emissions and Voltage Fluctuations and Flicker		51
Test Setup Photos and Configuration		54
Conducted Emissions at Mains Power Ports.....		54
Conducted Emissions at Telecommunication Ports		55
Radiated Electric Field Emissions(Below 1 GHz)		57
Radiated Electric Field Emissions(Above 1 GHz)		59
Harmonic Current Emissions and Voltage Fluctuations and Flicker		61
Electrostatic Discharge		62
Radiated Electric Field Immunity		63
Electrical Fast Transients/Bursts		64
Surge Transients		65
Conducted Disturbance		66
Voltage Dips and Short Interruptions		67
EUT External Photographs		68
EUT Internal Photographs		69



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0175-R2
Page (4) of (74)

1.0 General Product Description

Main Specifications of EUT are:

PNB-A6001	
Video	
Imaging Device	1/2" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Frame Rate	H.265/H.264: Max. 60/50fps@50Hz/50Hz; AI analytics on: Max. 120/100fps@60Hz/50Hz; AI analytics off: Max. 120/100fps@60Hz/50Hz
MTBD	None
Pixel Size	None
Min. Illumination	Color: 0.007Lux@F1.2, 1/30sec, 30IRE) 8/W : 0.0007Lux@F1.2, 1/30sec, 30IRE), 30/25fps Color: 0.014Lux@F1.2, 1/60sec, 30IRE) 8/W : 0.0014Lux@F1.2, 1/60sec, 30IRE), 60/50fps Color: 0.028Lux@F1.2, 1/120sec, 30IRE) 8/W : 0.0028Lux@F1.2, 1/120sec, 30IRE), 120/100fps
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission	None
Lens	
Focal Length (Zoom)	None
Max. Aperture Ratio	None
Angular Field of View	None
Min. Object Distance	None
Focus Control	Simple focus
Auto Type	DC auto iris, P-iris, Manual, I-OS
Mount Type	C-mount, CS-mount
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SSOR
Wide Dynamic Range	120dB
Digital Noise Reduction	33NR, WiseNR II (using AI engine)
Digital Image Stabilization	Stabilization Support(built-in gyro sensor)
Defog	None
Motion Detection	Box, polygonal zones
Privacy Masking	Box, rectangle zones Color: Gray/Green/Red/Blue/Black/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5 ~ 1/12,000sec) Auto prefer shutter control based on AI engine
Digital PTZ	None
Video Rotation	Flip, Mirror, Halfway view(90°/270°)
Analytics	Classified object type: Person/Face/Vehicle/License plate with attributes, BestShot per object Analytics events based on AI engine: Object detection, Face mask detection, Directional detection, Digital auto tracking, Enter/Exit, Loitering, Virtual line, Social distancing detection Analytics events: Defocus detection, Motion detection, Appear/Disappear, Tampering, Audio detection, Sound classification, Shock detection
Business Intelligence	People counting, Queue management, Heatmap based on AI engine
Serial Interface	RS-485(Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell)
Alarm I/O	Input 1ea / Output 1ea / DC 12V Power(Max. 50mA) 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback
Audio In	Selectable(mic in/line in/built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max output level: TVM6
IR Viewable Length	None
IR Illuminator (Option)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radonmetry	
Temperature detect	None
Temperature accuracy	None
Temperature detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000 BASE-T)
Video Compression	H.265/H.264: Main/High, MPEG
Audio Compression	G.711 u-law/G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC: LC 48Kbps at 16KHz
Smart Codec	MemoAccess dual, WideStreamII, WideStreamIII(using AI engine)
Video Quality Adjust	H.264/H.265: Target bitrate level control MPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MPEG: VBR
Streaming	Unicast(5 users) / Multicast Multiple streaming(up to 5 profiles)
Protocol	IP4, IP6, TCP/IP, UDP/IP, RTP/UDP, RTP/RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/2, ONVIF, ZIGBEE, 2L, AR, DNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	HTTP(S) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(802.1X, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA) TPM with RPS 140-2 level2 Secure boot, Verify firmware integrity
Application Program	ONVIF Profile S/G/T SUNAPI(HTTP API) Webinet open platform
General	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slots 512GB
Memory	4096MB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	50°C ~ +55°C; 40% ~ +131°F / Less than 90% RH * Start up should be done at above -30°C
Storage Temperature / Humidity	50°C ~ +60°C; 58°F ~ +140°F / Less than 90% RH
Certification	None
Input Voltage	PoE+ IEEE802.3at, 12VDC
Power Consumption	PoE+ : Max 17.5W, Typ 13.7W 12VDC: Max 14W, Typ 10.6W
Mechanical	
Color / Material	Body: Black / Aluminum
SAL Code	None
Product Dimensions	816x165mm(3.19x2.64x4.8"), Weight: 0.88kg(1.94lb)
Conduit hole	None
Hanging mount(Dome)	None
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Switches	None
DORI (ONVIF 4 standard)	
Detect (25PPM/ 8PPM)	None
Obscure (63PPM/ 15PPM)	None
Recognize (125PPM)	None
Identify (250PPM/ 75PPM)	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNB-A6001	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (6) of (74)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
DC 12 V Adapter	OK-1671230	-	YANHUA	-
PoE Adapter	PT-PSE109GBROAH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Lens	-	-	Honeywell	-
Notebook	ProBook4430s	-	HP	-
Notebook Adapter	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Mic	CMK-303	-	CAMAC	-
SmartPhone	A1429	-	Apple	-
Button Alarm	-	-	-	-
Alarm	-	-	-	-
Alarm Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd	-
Micro SD Card	-	-	Sandisk	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Controller Adapter	RS-AB1000	-	Dongguan Jinhusheng Power Technology Co.,Ltd.	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (7) of (74)

1.6 External I/O Cabling

■ DC 12 V Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	4 Pin	Lens	4 Pin	0.1	S
	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.0	S
	3.5 mm (Speaker)	Speaker	3.5 mm	1.4	U
	3.5 mm (Mic)	Mic	3.5 mm	1.7	U
	2 Pin (Alarm In)	Botton Alarm	2 Pin	3.0	U
	2 Pin (Alarm Out)	Alarm	2 Pin	3.0	U
	4 Pin (RS-232)	Controller	4 Pin (RS-232)	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	3.5 mm	SmartPhone	3.5 mm	1.2	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



■ PoE Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	4 Pin	Lens	4 Pin	0.1	S
	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.0	S
	3.5 mm (Speaker)	Speaker	3.5 mm	1.4	U
	3.5 mm (Mic)	Mic	3.5 mm	1.7	U
	2 Pin (Alarm In)	Bottom Alarm	2 Pin	3.0	U
	2 Pin (Alarm Out)	Alarm	2 Pin	3.0	U
	4 Pin (RS-232)	Controller	4 Pin (RS-232)	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
PoE Adapter	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	1.8	U
Notebook	3.5 mm	SmartPhone	3.5 mm	1.2	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
DC 12 V Adapter	Tested by checking the operation status through the screen transmitted to the web viewer and Notebook and conducting a Ping test.
PoE Adapter	

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd


1.8 Configuration

■ AC Main
 □ DC Main

■ DC 12 V Adapter Mode

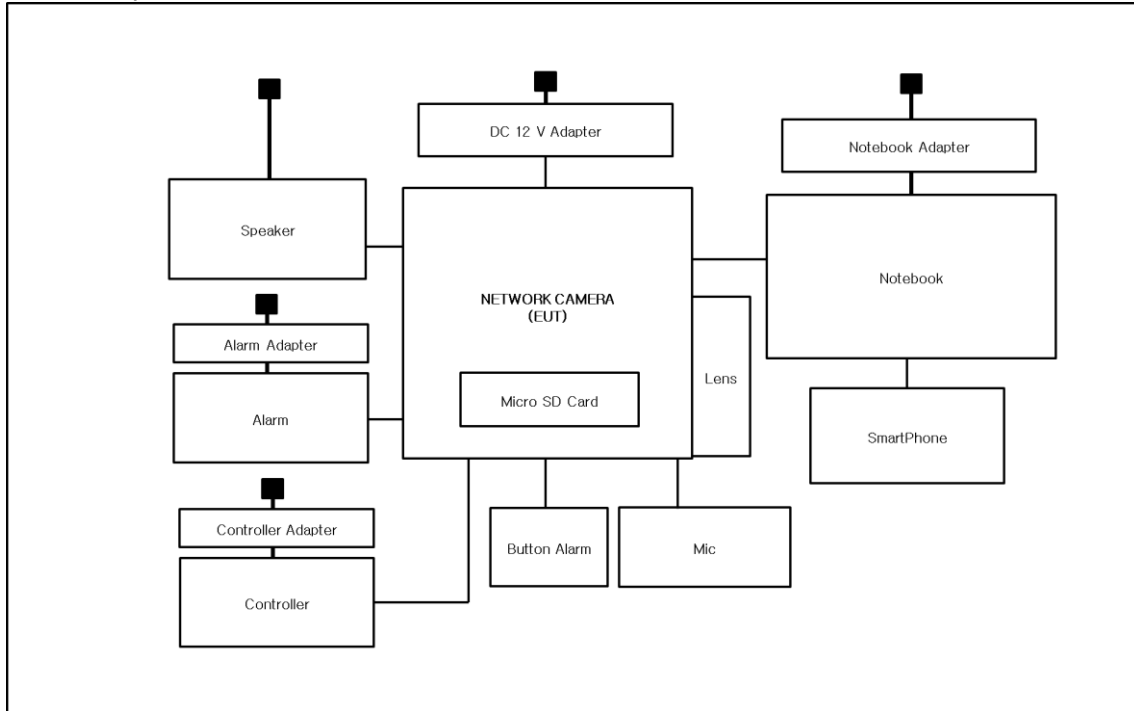

■ PoE Adapter Mode

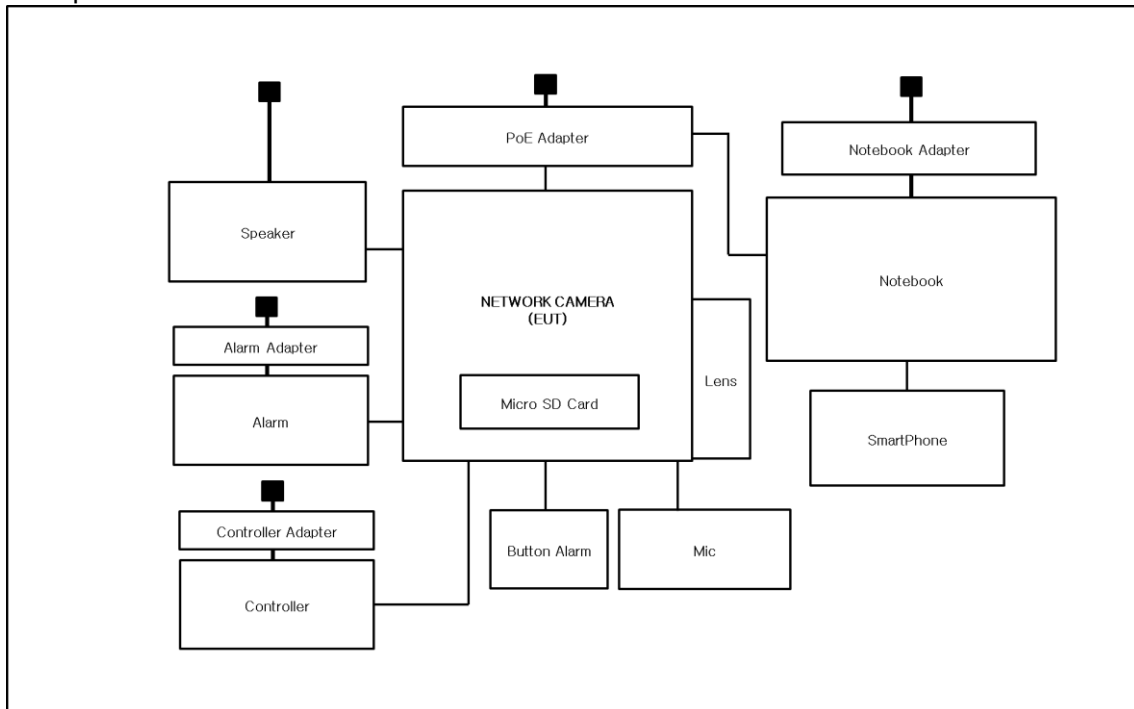

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (12) of (74)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Feb. 02, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 42,6 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (13) of (74)

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Feb. 02, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2022

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 42,6 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (14) of (74)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb. 02, 2021

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: 20,1 °C

Relative Humidity: 41,3 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 01, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
☒	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: 22,6 °C
Relative Humidity: 44,7 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

Equipment with a rated power of 75 W or less, Other than lighting equipment.



2.6 Voltage Fluctuations and Flicker

Test Date

Feb. 03, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 43,0 % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Feb. 04, 2021

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 01, 2022
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 45,7 % R.H.
Atmospheric Pressure: 100,9 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Location of Discharge:

Air
Contact





■ DC 12 V Adapter Mode

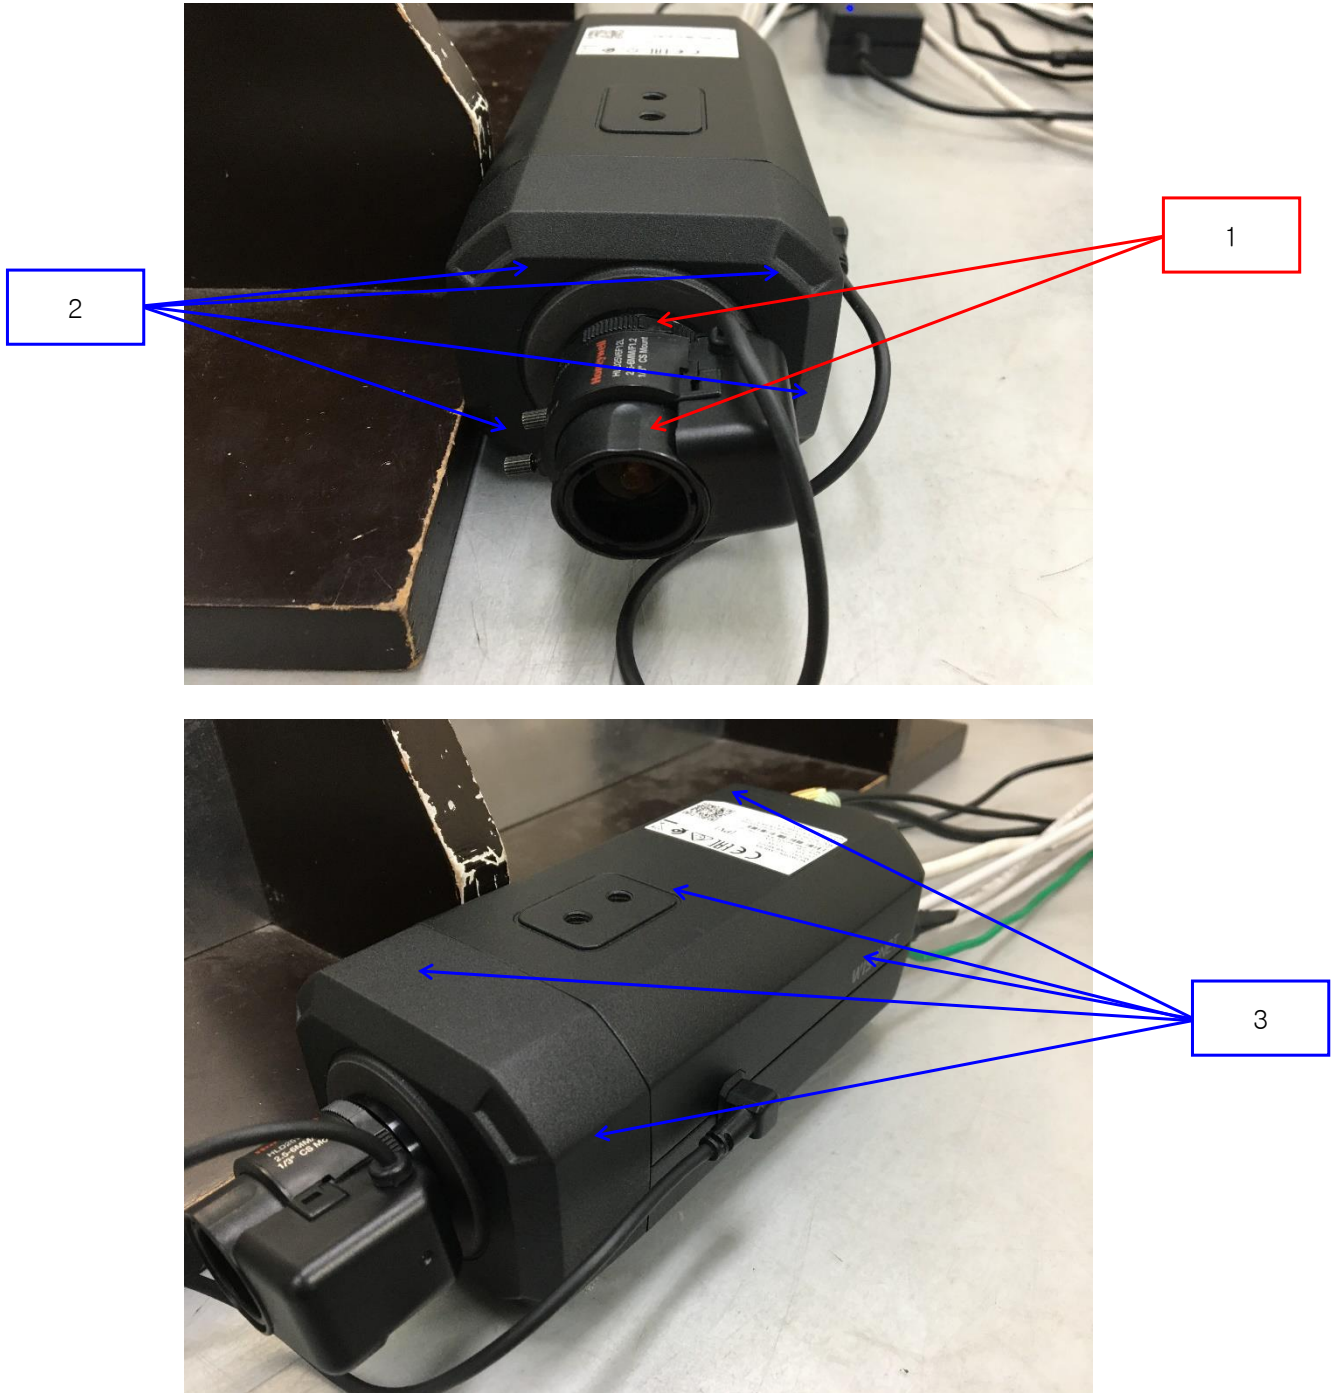

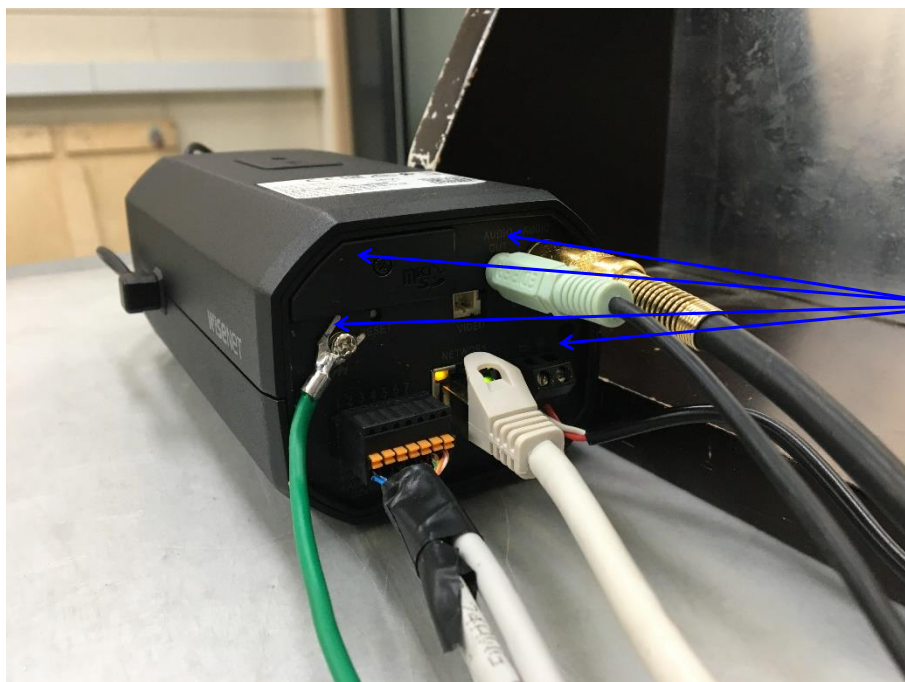

4

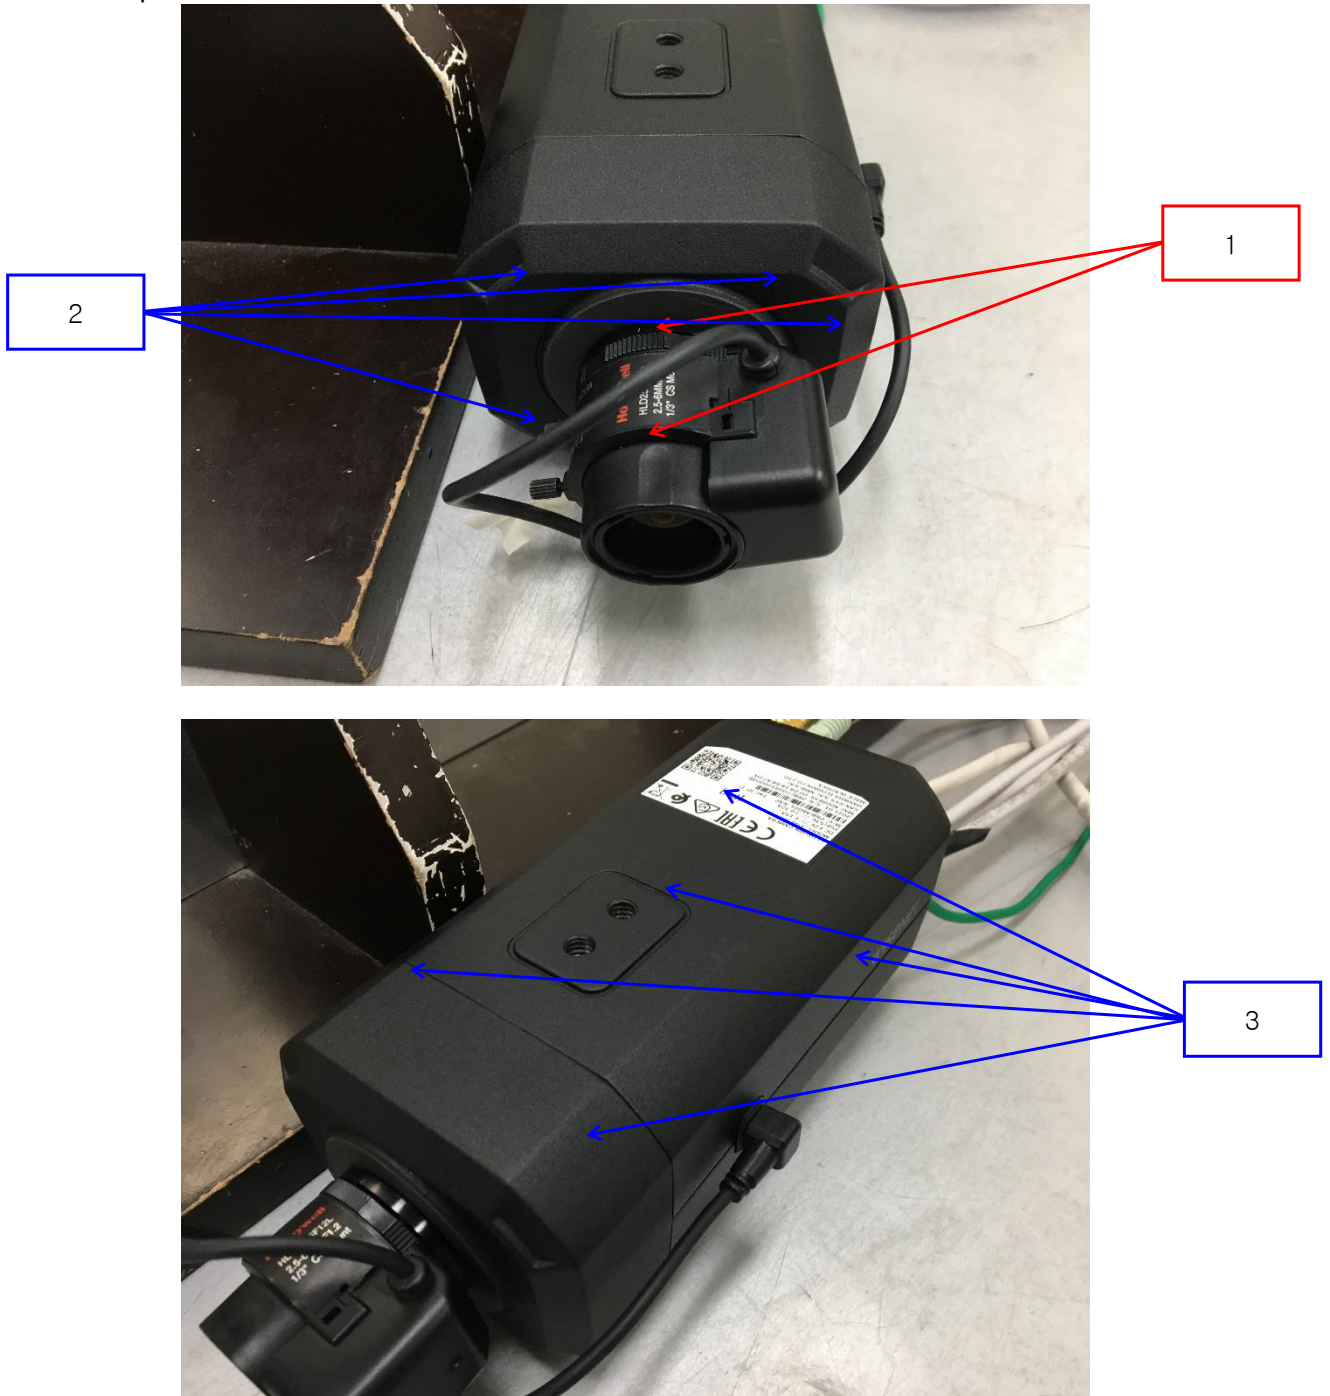■ PoE Adapter Mode

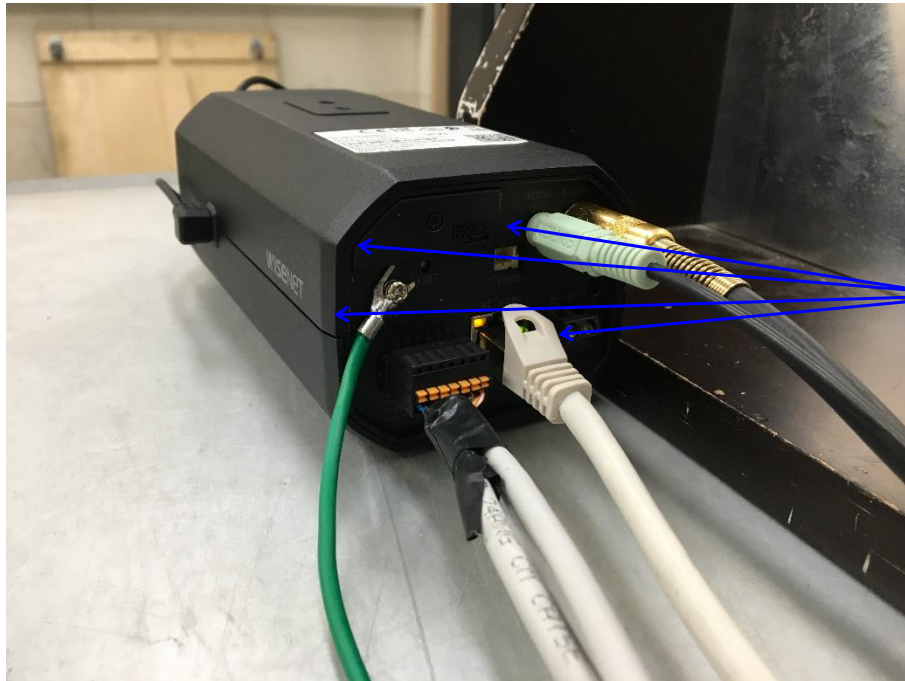

4

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (25) of (74)

Test Data**■ DC 12 V Adapter Mode**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Enclosure 1	Contact Discharge	Complied	-
3	Enclosure 2	Contact Discharge	Complied	-
4	Enclosure 3	Contact Discharge	Complied	-

■ PoE Adapter Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Enclosure 1	Contact Discharge	Complied	-
3	Enclosure 2	Contact Discharge	Complied	-
4	Enclosure 3	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (26) of (74)

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Feb. 01, 2021

Test LocationEMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	9.12.00	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 05, 2021
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	04, 20, 2021
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 20, 2021
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 20, 2021
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions

Temperature: 21,6 °C
Relative Humidity: 44,7 % R.H.
Atmospheric Pressure: 101,0 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (27) of (74)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (28) of (74)

Test Data**■ DC 12 V Adapter Mode**

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE Adapter Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Feb. 03, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2021

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 45,4 % R.H.
Atmospheric Pressure: 100,6 kPa

Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	☐ ± 1.0 kV ☐ ± 4.0 kV	☒ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV ☐ ± 2.0 kV	☒ ± 1.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	

Test Data

■ DC 12 V Adapter Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
2 Pin(Alarm In)	Complied	Complied
2 Pin(Alarm Out)	Complied	Complied
4 Pin(RS-232)	Complied	Complied

☒ PoE Adapter Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	-	-
N	-	-
PE	-	-
L – N	-	-
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
2 Pin(Alarm In)	Complied	Complied
2 Pin(Alarm Out)	Complied	Complied
4 Pin(RS-232)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (32) of (74)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Feb. 03, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2021

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 45,4 % R.H.
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (33) of (74)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (34) of (74)

Test Data

■ DC 12 V Adapter Mode

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (35) of (74)

☒ PoE Adapter Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria☐ NOT APPLICABLE**Remarks**PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Feb. 04, 2021

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 25, 2021
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43694	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43697	11, 25, 2021
☒	CDN	CDN ST08A	TESEQ	43886	11, 25, 2021
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 26, 2021

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 44,3 % R.H.
Atmospheric Pressure: 101,2 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

Test Data

■ DC 12 V Adapter Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N - PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
2 Pin(Alarm In)	Clamp	Complied
2 Pin(Alarm Out)	Clamp	Complied
4 Pin(RS-232)	Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (38) of (74)

■ PoE Adapter Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
2 Pin(Alarm In)	Clamp	Complied
2 Pin(Alarm Out)	Clamp	Complied
4 Pin(RS-232)	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (39) of (74)

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11:2020

Test Date

Feb. 03, 2021

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 45,4 % R.H.
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (40) of (74)

Test Specifications & Observations/Remarks

■ DC 12 V Adapter Mode

- Voltage Dips and Short Interruptions

Test Level	Duration [in period/ms (50 Hz)]	Results
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria
- ☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ DC 12 V Adapter Mode

[HOT]

Common Information

Test Description:

Conducted Emission

Model No.:

PNB-A6001


Phase:

Mode:

DC 12 V Adapter / CE

Operator Name:

KES

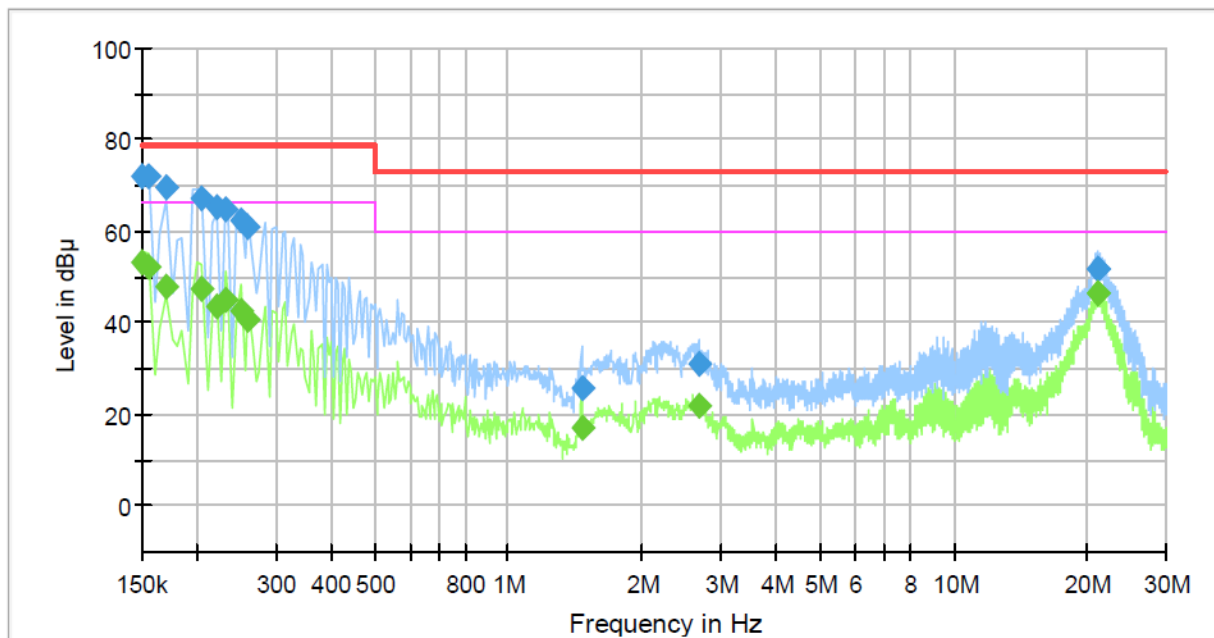



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0175-R2
Page (42) of (74)

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	71.93	---	79.00	7.07	1000.0	9.000	L1	19.4
0.150000	---	52.99	66.00	13.01	1000.0	9.000	L1	19.4
0.155000	72.14	---	79.00	6.86	1000.0	9.000	L1	19.4
0.155000	---	52.15	66.00	13.85	1000.0	9.000	L1	19.4
0.170000	69.81	---	79.00	9.19	1000.0	9.000	L1	19.4
0.170000	---	47.67	66.00	18.33	1000.0	9.000	L1	19.4
0.205000	---	47.55	66.00	18.45	1000.0	9.000	L1	19.4
0.205000	67.30	---	79.00	11.70	1000.0	9.000	L1	19.4
0.220000	65.29	---	79.00	13.71	1000.0	9.000	L1	19.4
0.220000	---	43.42	66.00	22.58	1000.0	9.000	L1	19.4
0.230000	---	44.81	66.00	21.19	1000.0	9.000	L1	19.4
0.230000	64.61	---	79.00	14.39	1000.0	9.000	L1	19.4
0.250000	---	42.82	66.00	23.18	1000.0	9.000	L1	19.5
0.250000	62.22	---	79.00	16.78	1000.0	9.000	L1	19.5
0.260000	---	40.51	66.00	25.49	1000.0	9.000	L1	19.5
0.260000	61.16	---	79.00	17.84	1000.0	9.000	L1	19.5
1.460000	25.49	---	73.00	47.51	1000.0	9.000	L1	20.1
1.460000	---	17.23	60.00	42.77	1000.0	9.000	L1	20.1
2.665000	---	22.08	60.00	37.92	1000.0	9.000	L1	20.1
2.665000	31.17	---	73.00	41.83	1000.0	9.000	L1	20.1
21.030000	51.70	---	73.00	21.30	1000.0	9.000	L1	20.2
21.030000	---	46.45	60.00	13.55	1000.0	9.000	L1	20.2
21.120000	---	46.48	60.00	13.52	1000.0	9.000	L1	20.2
21.120000	51.80	---	73.00	21.20	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (43) of (74)

[NEUTRAL]

Common Information

Test Description:

Model No.:

Phase:

Mode:


Operator Name:

Conducted Emission

PNB-A6001

DC 12 V Adapter / CE

KES

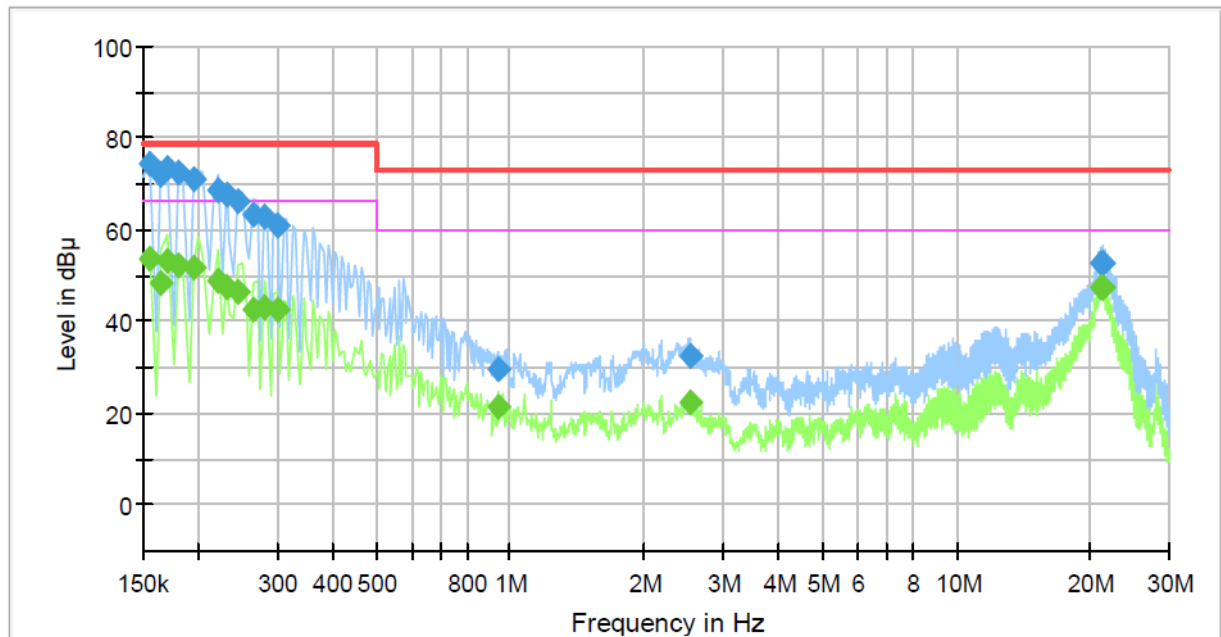

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0175-R2
Page (44) of (74)

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	74.35	---	79.00	4.65	1000.0	9.000	N	19.4
0.155000	---	53.91	66.00	12.09	1000.0	9.000	N	19.4
0.165000	---	48.47	66.00	17.53	1000.0	9.000	N	19.4
0.165000	72.04	---	79.00	6.96	1000.0	9.000	N	19.4
0.170000	73.42	---	79.00	5.58	1000.0	9.000	N	19.4
0.170000	---	53.43	66.00	12.57	1000.0	9.000	N	19.4
0.180000	---	52.01	66.00	13.99	1000.0	9.000	N	19.4
0.180000	72.52	---	79.00	6.48	1000.0	9.000	N	19.4
0.195000	---	51.63	66.00	14.37	1000.0	9.000	N	19.4
0.195000	71.27	---	79.00	7.73	1000.0	9.000	N	19.4
0.220000	---	48.96	66.00	17.04	1000.0	9.000	N	19.4
0.220000	68.58	---	79.00	10.42	1000.0	9.000	N	19.4
0.230000	67.61	---	79.00	11.39	1000.0	9.000	N	19.4
0.230000	---	47.55	66.00	18.45	1000.0	9.000	N	19.4
0.245000	66.16	---	79.00	12.84	1000.0	9.000	N	19.4
0.245000	---	46.56	66.00	19.44	1000.0	9.000	N	19.4
0.265000	---	42.42	66.00	23.58	1000.0	9.000	N	19.5
0.265000	63.49	---	79.00	15.51	1000.0	9.000	N	19.5
0.280000	62.84	---	79.00	16.16	1000.0	9.000	N	19.5
0.280000	---	43.16	66.00	22.84	1000.0	9.000	N	19.5
0.300000	---	42.61	66.00	23.39	1000.0	9.000	N	19.5
0.300000	60.96	---	79.00	18.04	1000.0	9.000	N	19.5
0.935000	29.65	---	73.00	43.35	1000.0	9.000	N	20.0
0.935000	---	21.25	60.00	38.75	1000.0	9.000	N	20.0
2.535000	---	22.43	60.00	37.57	1000.0	9.000	N	20.1
2.535000	32.57	---	73.00	40.43	1000.0	9.000	N	20.1
21.145000	52.68	---	73.00	20.32	1000.0	9.000	N	20.2
21.145000	---	47.52	60.00	12.48	1000.0	9.000	N	20.2
21.260000	52.72	---	73.00	20.28	1000.0	9.000	N	20.2
21.260000	---	47.38	60.00	12.62	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC 12 V Adapter Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNB-A6001
Mode :	DC 12 V Adapter / CE
Speed :	1 000 Mbps
Operator Name:	KES

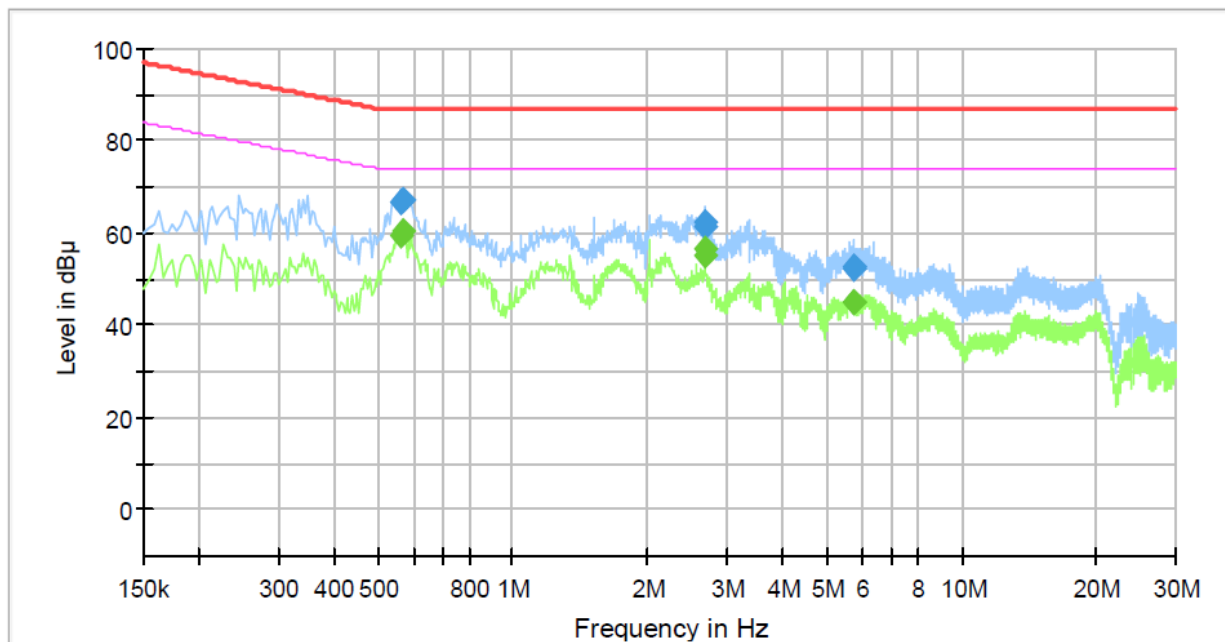

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.562000	---	59.65	74.00	14.35	1000.0	9.000	Single Line	19.8
0.562000	66.83	---	87.00	20.17	1000.0	9.000	Single Line	19.8
0.566000	---	60.47	74.00	13.53	1000.0	9.000	Single Line	19.8
0.566000	67.12	---	87.00	19.88	1000.0	9.000	Single Line	19.8
2.678000	---	56.72	74.00	17.28	1000.0	9.000	Single Line	20.0
2.678000	62.29	---	87.00	24.71	1000.0	9.000	Single Line	20.0
2.682000	---	55.12	74.00	18.88	1000.0	9.000	Single Line	20.0
2.682000	61.30	---	87.00	25.70	1000.0	9.000	Single Line	20.0
5.758000	---	45.19	74.00	28.81	1000.0	9.000	Single Line	19.5
5.758000	52.48	---	87.00	34.52	1000.0	9.000	Single Line	19.5
5.762000	---	45.19	74.00	28.81	1000.0	9.000	Single Line	19.5
5.762000	52.41	---	87.00	34.59	1000.0	9.000	Single Line	19.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ PoE Adapter Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNB-A6001
Mode :	PoE Adapter / CE
Speed :	1 000 Mbps
Operator Name:	KES

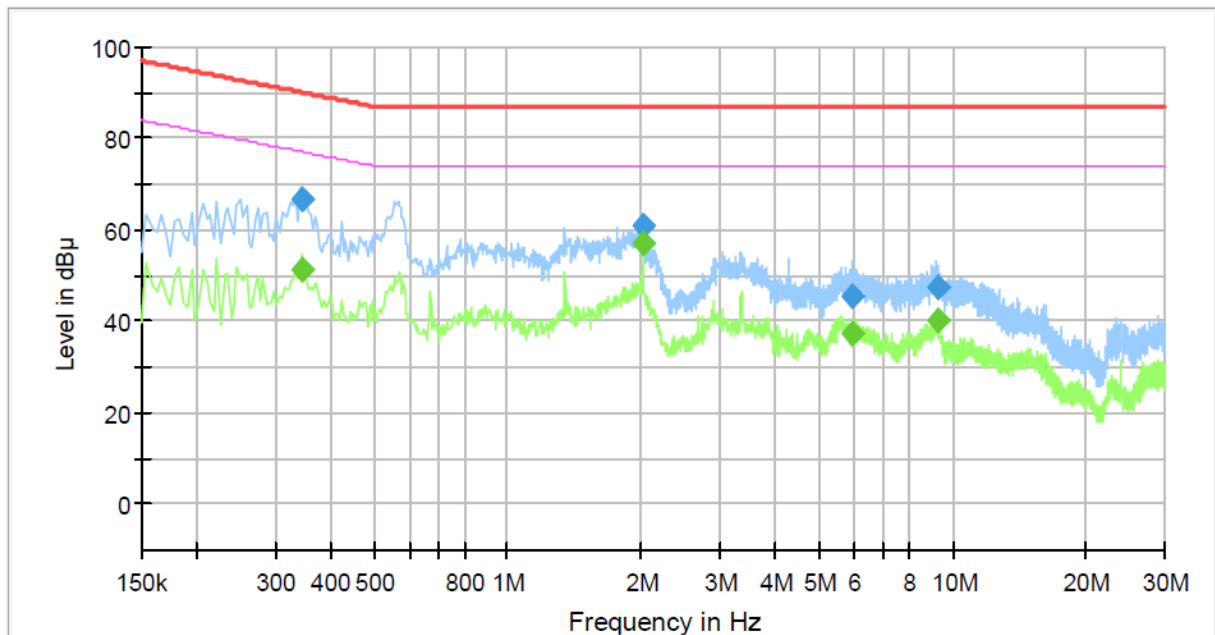

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.346000	---	51.37	77.06	25.69	1000.0	9.000	Single Line	19.6
0.346000	66.50	---	90.06	23.56	1000.0	9.000	Single Line	19.6
2.010000	---	57.03	74.00	16.97	1000.0	9.000	Single Line	20.2
2.010000	60.97	---	87.00	26.03	1000.0	9.000	Single Line	20.2
5.934000	---	37.20	74.00	36.80	1000.0	9.000	Single Line	19.4
5.934000	45.44	---	87.00	41.56	1000.0	9.000	Single Line	19.4
9.242000	---	39.99	74.00	34.01	1000.0	9.000	Single Line	19.7
9.242000	47.21	---	87.00	39.79	1000.0	9.000	Single Line	19.7

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-21T0175-R2

Page (47) of (74)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V Adapter Mode

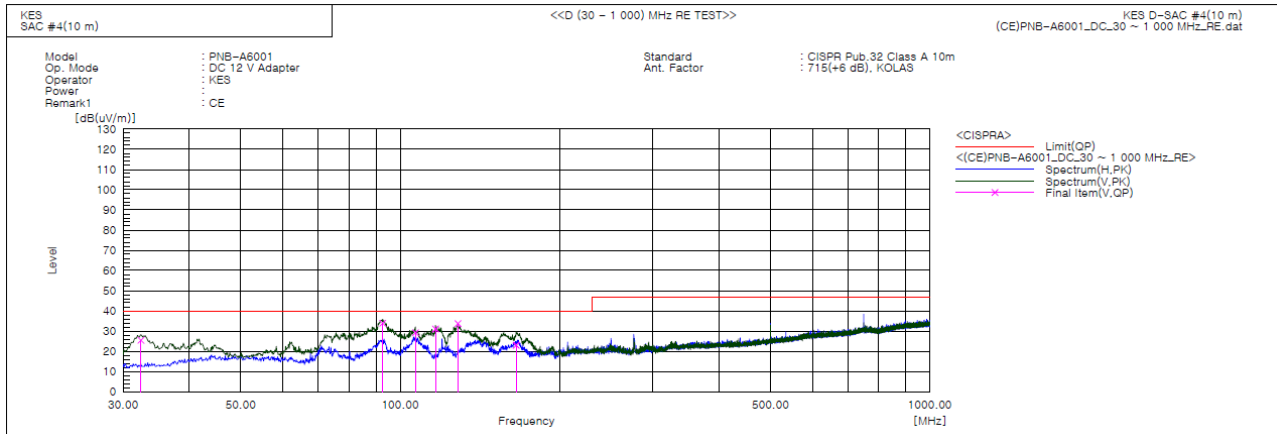

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	32.425	V	50.6	-25.1	25.5	40.0	14.5	100.0	255.0	
2	92.686	V	57.7	-23.8	33.9	40.0	6.1	100.0	8.0	
3	106.873	V	51.6	-22.4	29.2	40.0	10.8	120.0	248.0	
4	116.573	V	54.4	-23.3	31.1	40.0	8.9	100.0	352.0	
5	128.576	V	58.8	-25.1	33.7	40.0	6.3	110.0	331.0	
6	165.558	V	47.3	-24.3	23.0	40.0	17.0	100.0	340.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (48) of (74)

PoE Adapter Mode

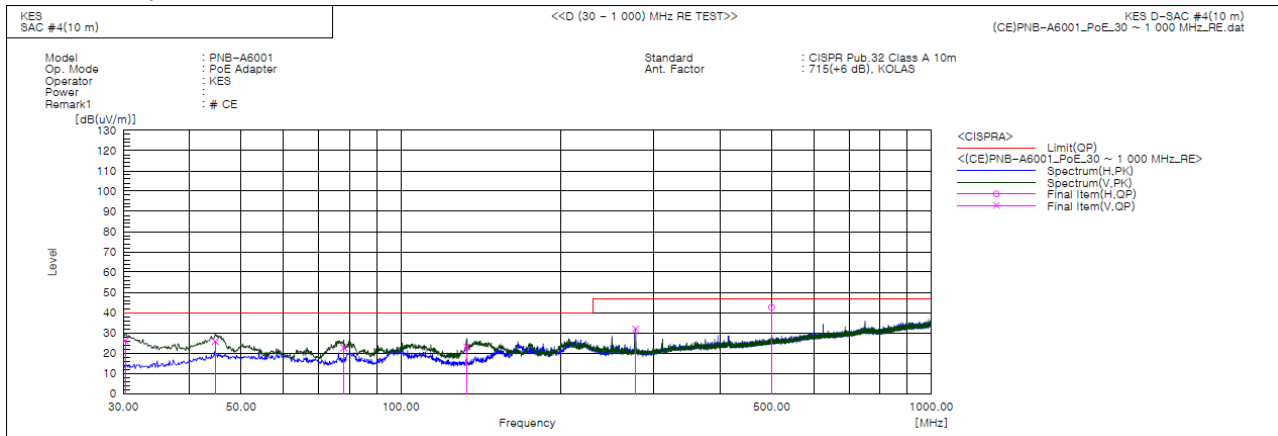

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.246	V	51.4	-25.3	26.1	40.0	13.9	100.0	166.0	
2	44.671	V	47.2	-21.5	25.7	40.0	14.3	140.0	165.0	
3	78.015	V	50.3	-27.6	22.7	40.0	17.3	150.0	277.0	
4	133.193	V	48.4	-25.3	23.1	40.0	16.9	100.0	253.0	
5	276.986	V	50.6	-18.6	32.0	47.0	15.0	150.0	179.0	
6	499.970	H	54.2	-11.6	42.6	47.0	4.4	200.0	96.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-21T0175-R2

Page (49) of (74)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V Adapter Mode

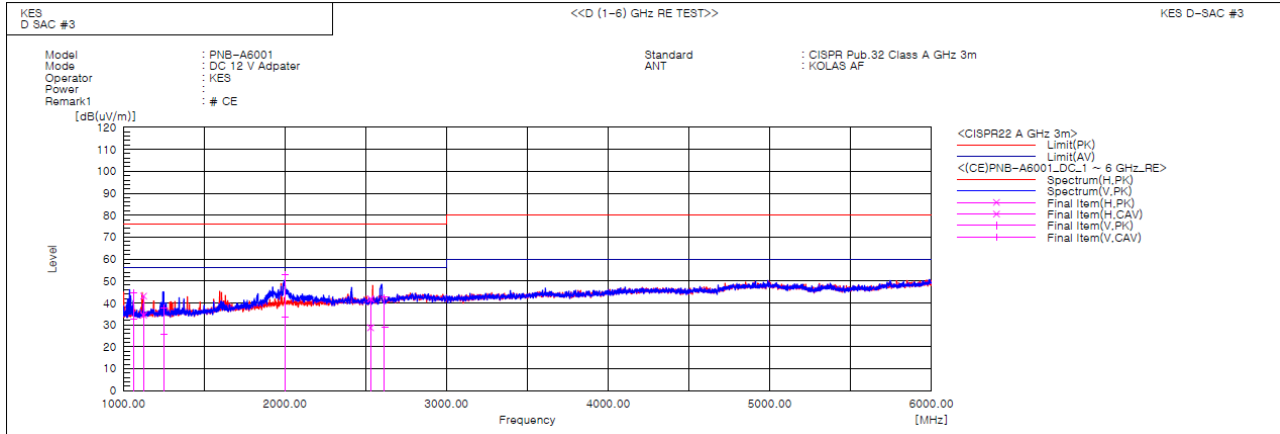

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1062.855	V	53.6	41.3	-8.9	44.7	32.4	76.0	56.0	31.3	23.6	100.0	154.8	
2	1124.818	H	51.8	43.0	-8.6	43.2	34.4	76.0	56.0	32.8	21.6	100.0	173.8	
3	1249.900	V	45.8	33.7	-7.9	37.9	25.8	76.0	56.0	38.1	30.2	100.0	52.5	
4	1999.920	V	54.2	35.0	-1.5	52.7	33.5	76.0	56.0	23.3	22.5	100.0	6.1	
5	2529.642	H	41.6	28.5	0.2	41.8	28.7	76.0	56.0	34.2	27.3	100.0	17.3	
6	2615.727	V	42.1	28.3	0.4	42.5	28.7	76.0	56.0	33.5	27.3	100.0	286.1	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (50) of (74)

PoE Adapter Mode

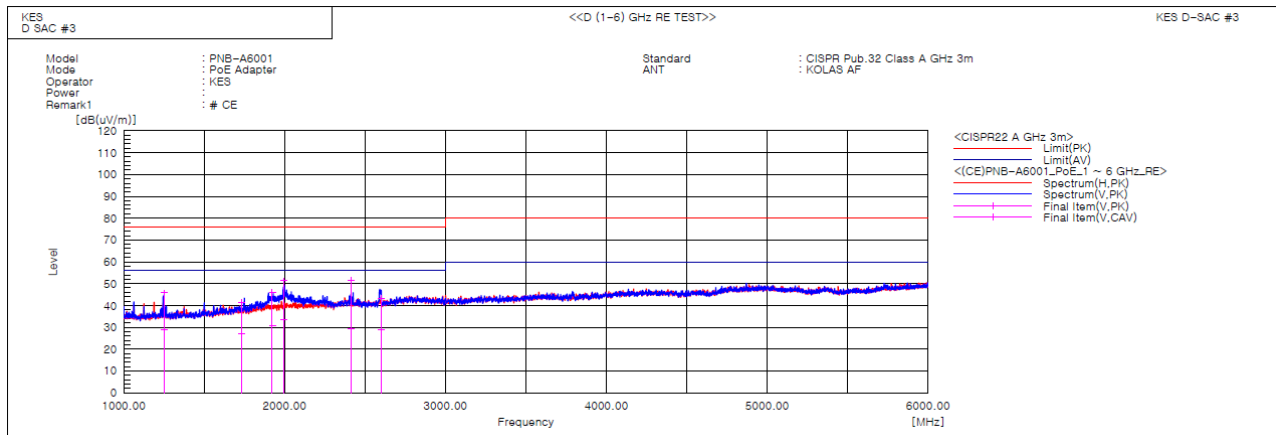

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1250.010	V	53.6	37.0	-7.9	45.7	29.1	76.0	56.0	30.3	26.9	100.0	234.7	
2	1734.793	V	45.6	31.2	-4.1	41.5	27.1	76.0	56.0	34.5	28.9	100.0	338.9	
3	1923.545	V	48.0	32.9	-2.1	45.9	30.8	76.0	56.0	30.1	25.2	100.0	349.6	
4	1994.490	V	52.9	35.2	-1.6	51.3	33.6	76.0	56.0	24.7	22.4	100.0	5.4	
5	2414.652	V	51.3	29.1	0.1	51.4	29.2	76.0	56.0	24.6	26.8	100.0	313.7	
6	2601.718	V	43.0	28.3	0.3	43.3	28.6	76.0	56.0	32.7	27.4	100.0	289.7	

Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0175-R2

Page (53) of (74)

Test Data - Voltage Fluctuations

Maximum Flicker results


Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports



■ DC 12 V Adapter Mode

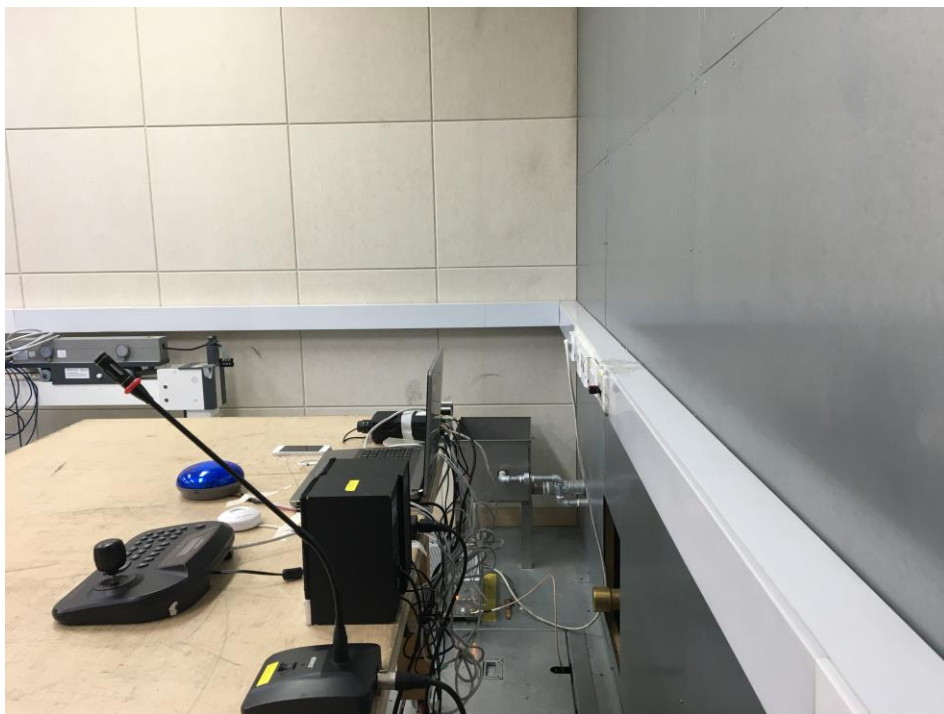



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC 12 V Adapter Mode

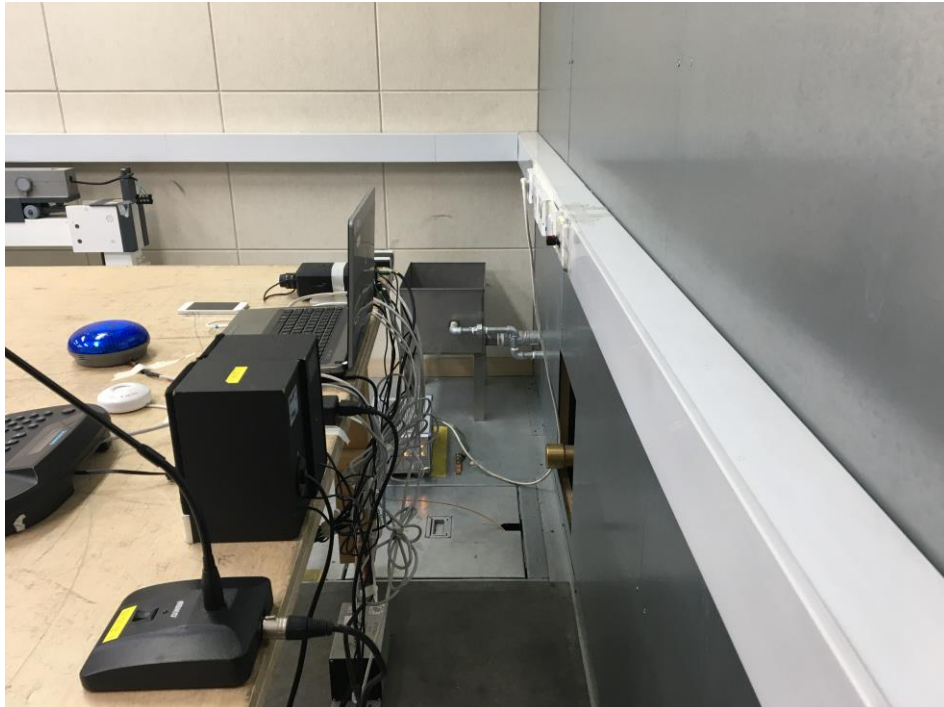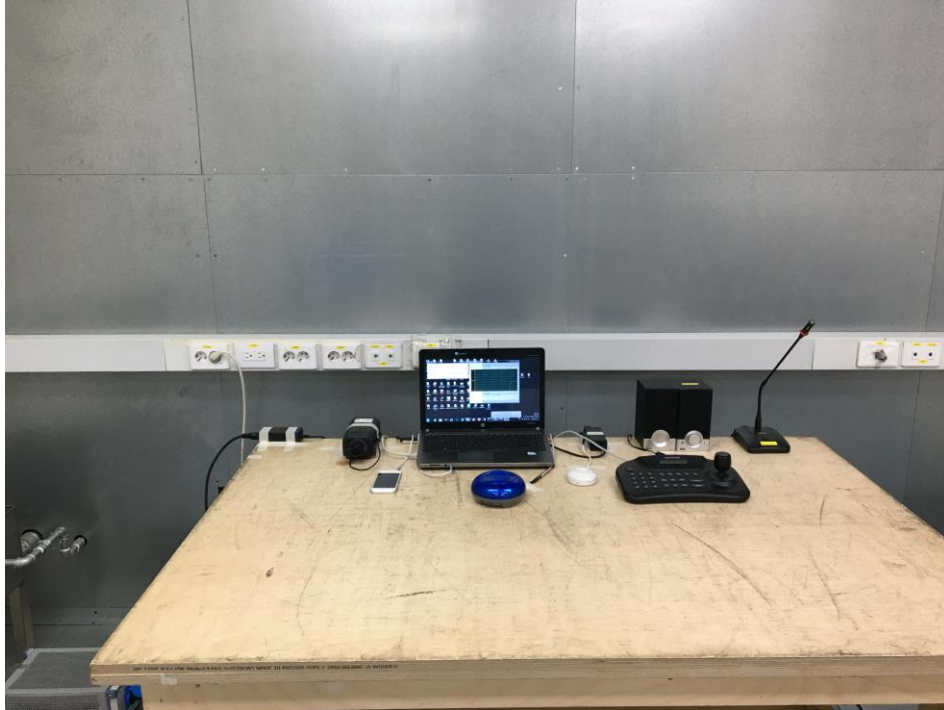

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

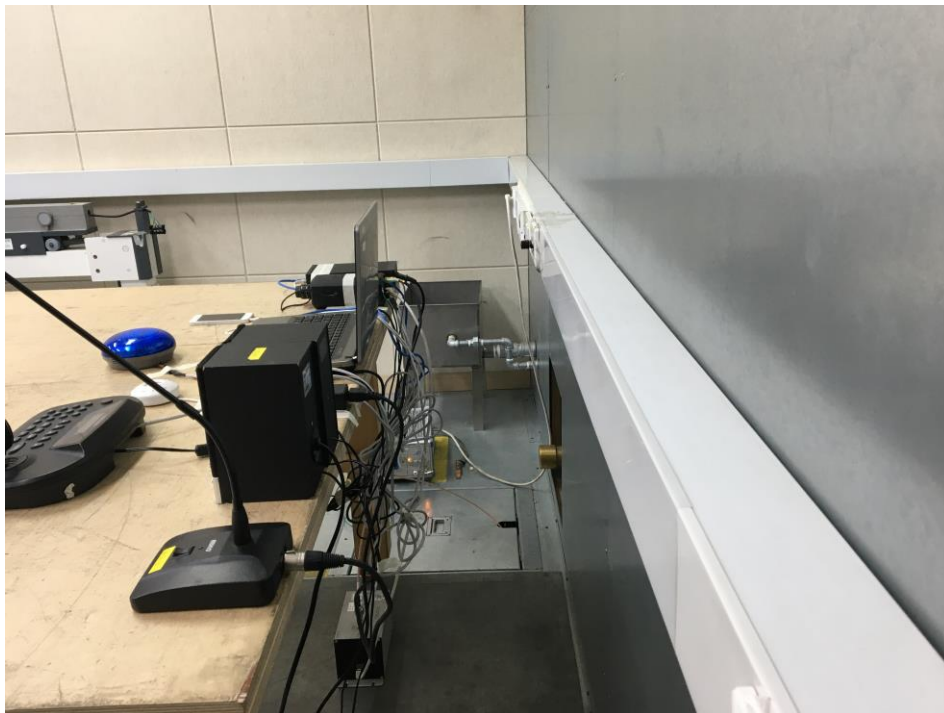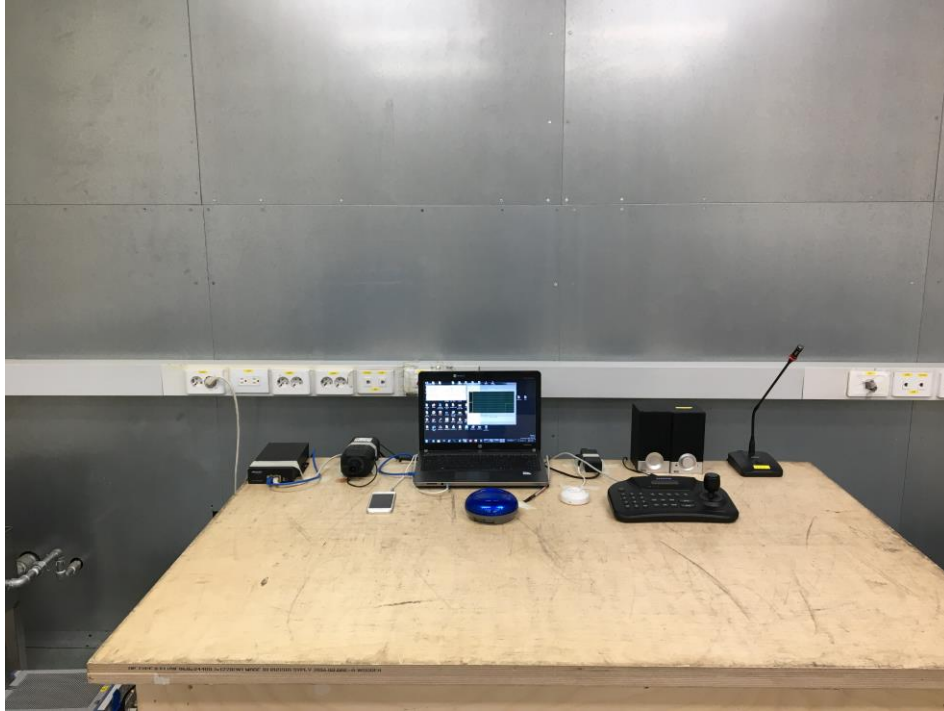
■ PoE Adapter Mode

Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V Adapter Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

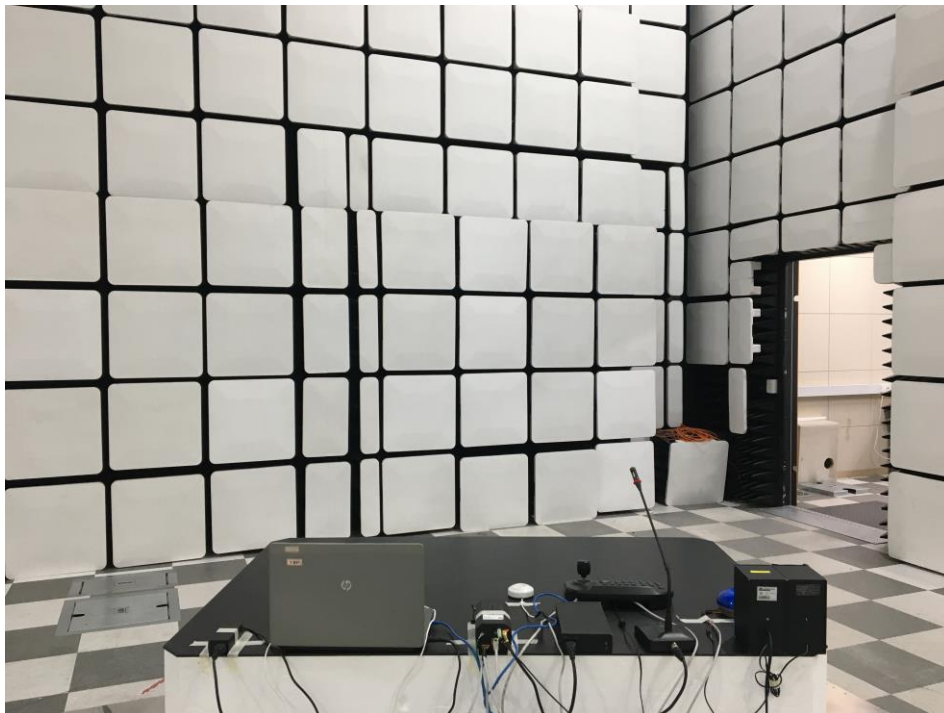■ PoE Adapter Mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V Adapter Mode

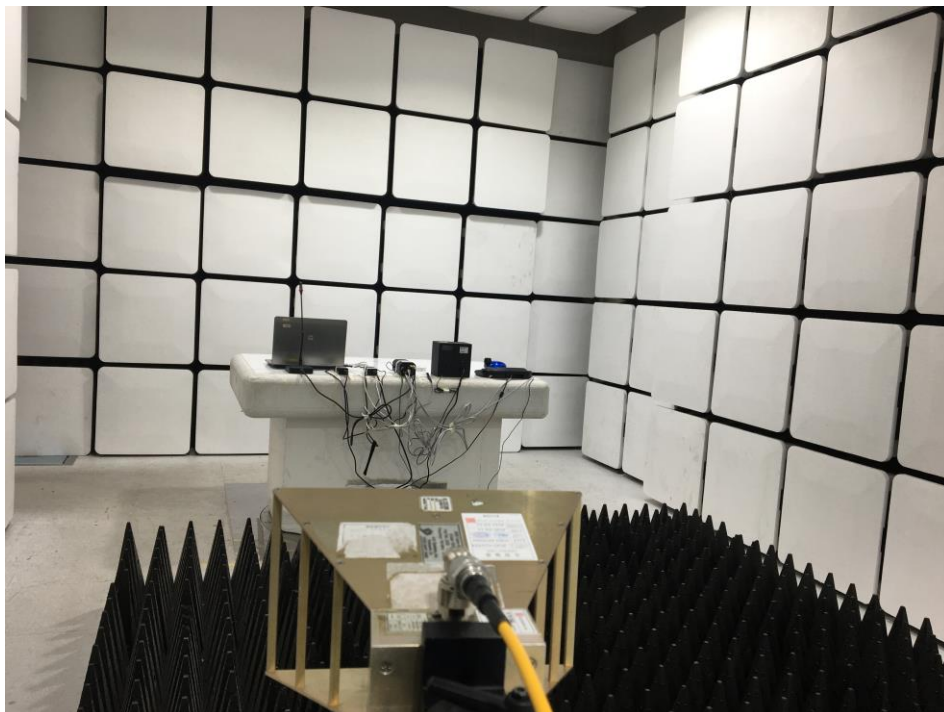

■ PoE Adapter Mode

Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ DC 12 V Adapter Mode



Electrostatic Discharge

■ DC 12 V Adapter Mode



■ PoE Adapter Mode



Radiated Electric Field Immunity

■ DC 12 V Adapter Mode



■ PoE Adapter Mode



Electrical Fast Transients/Bursts

■ DC 12 V Adapter Mode



■ PoE Adapter Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Surge Transients

■ DC 12 V Adapter Mode



■ PoE Adapter Mode




Conducted Disturbance

■ DC 12 V Adapter Mode



■ PoE Adapter Mode

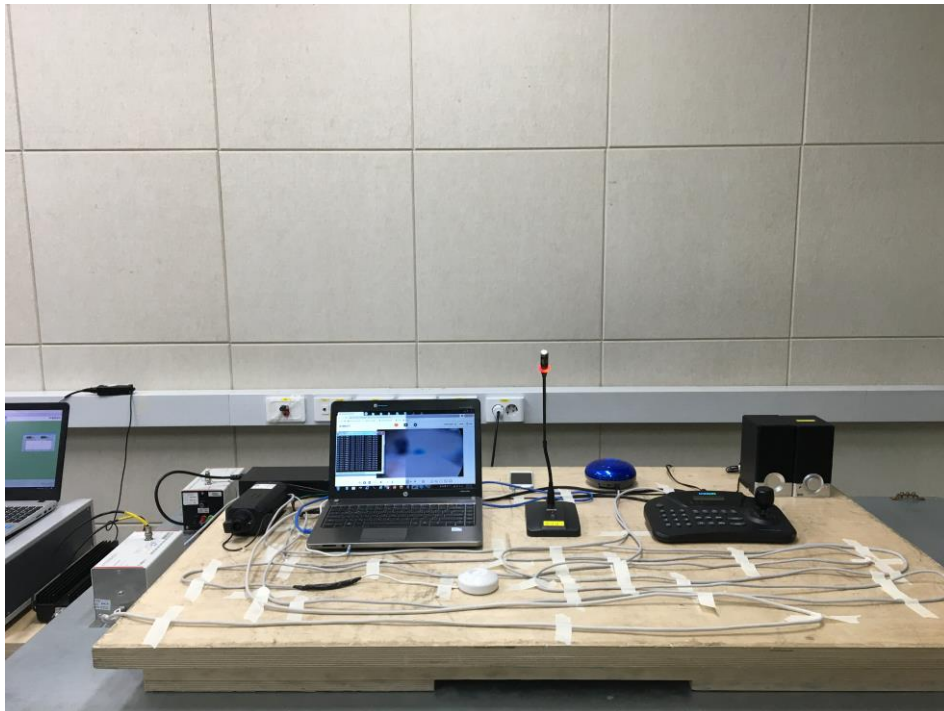

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Voltage Dips and Short Interruptions

■ DC 12 V Adapter Mode



EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)

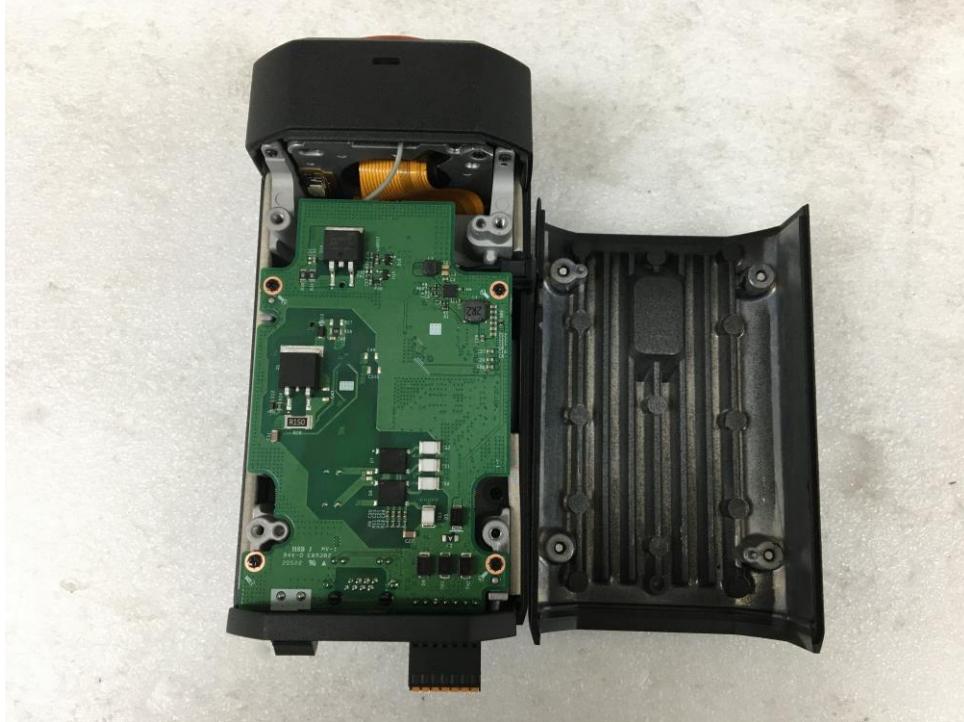


EUT Internal View – Board 1

(Top)

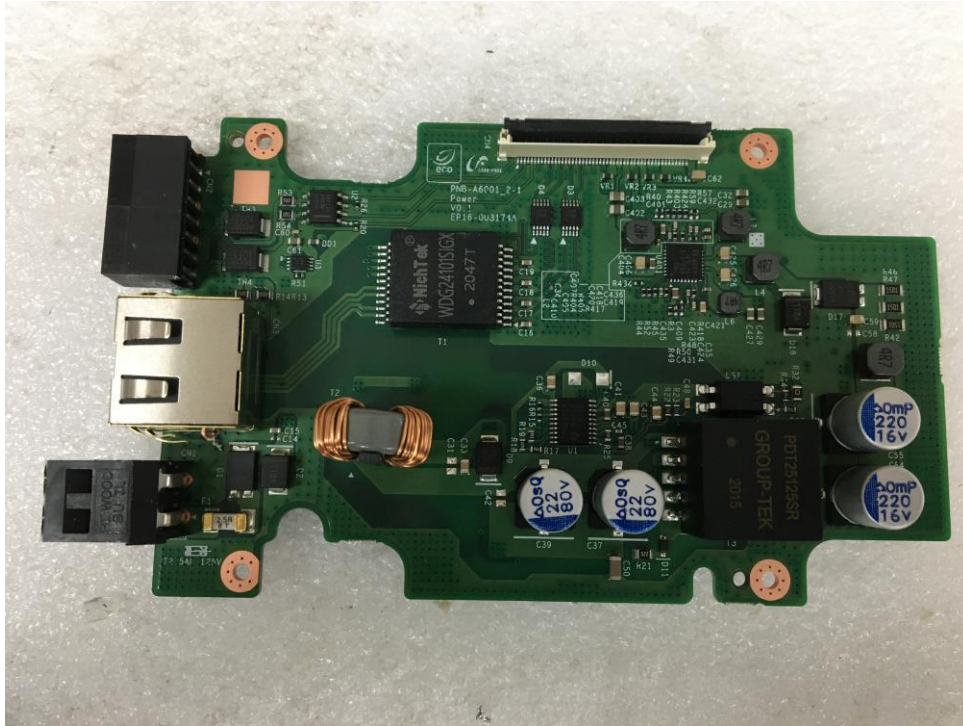

(Bottom)

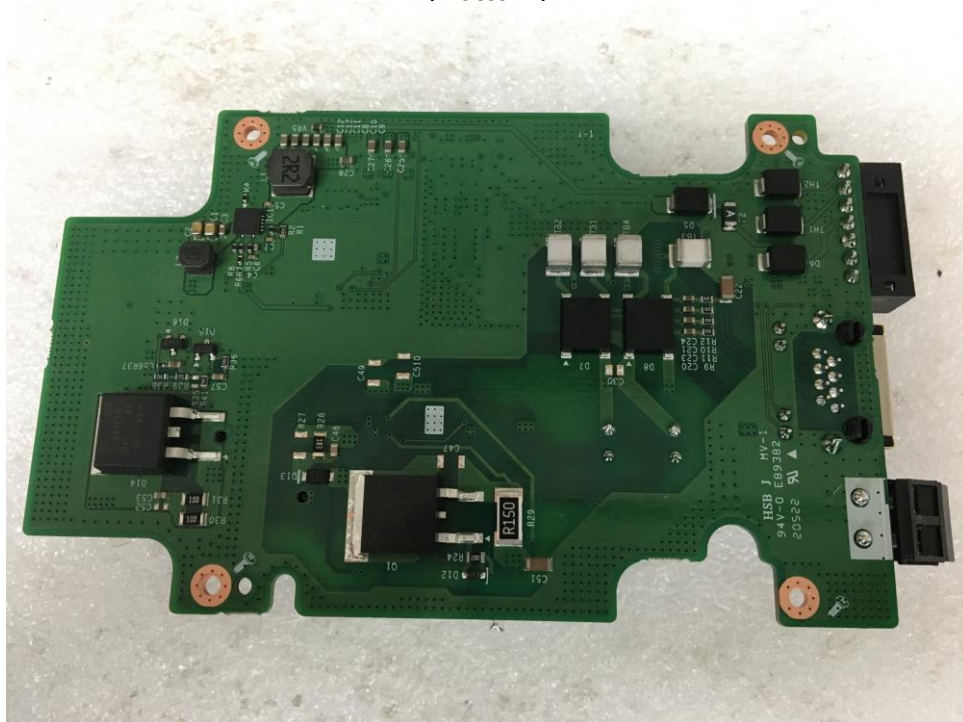


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)




(Bottom)

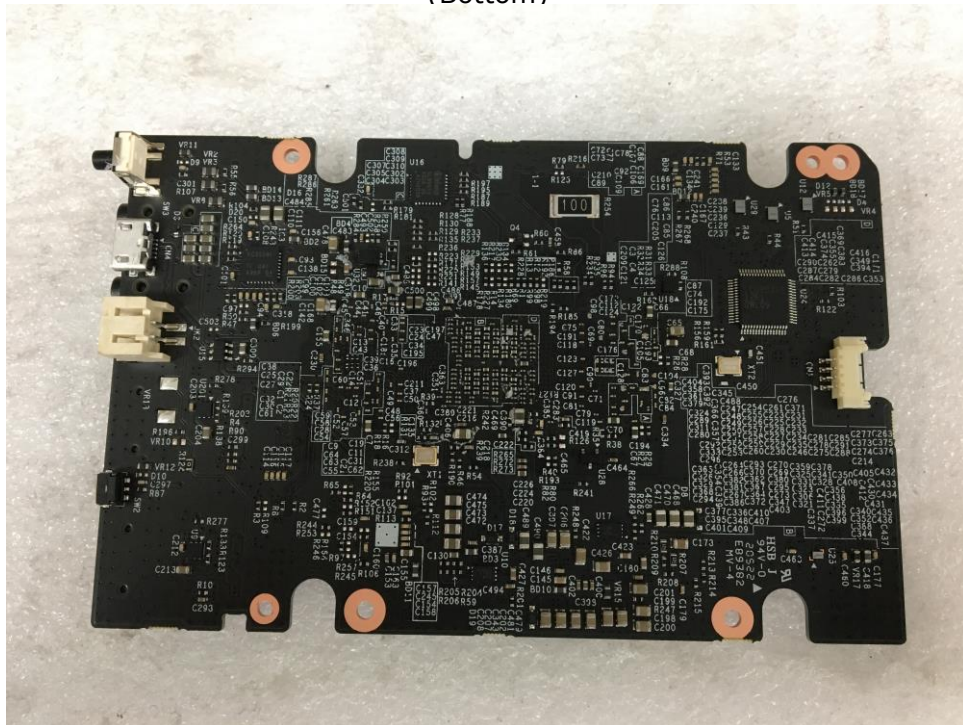


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)

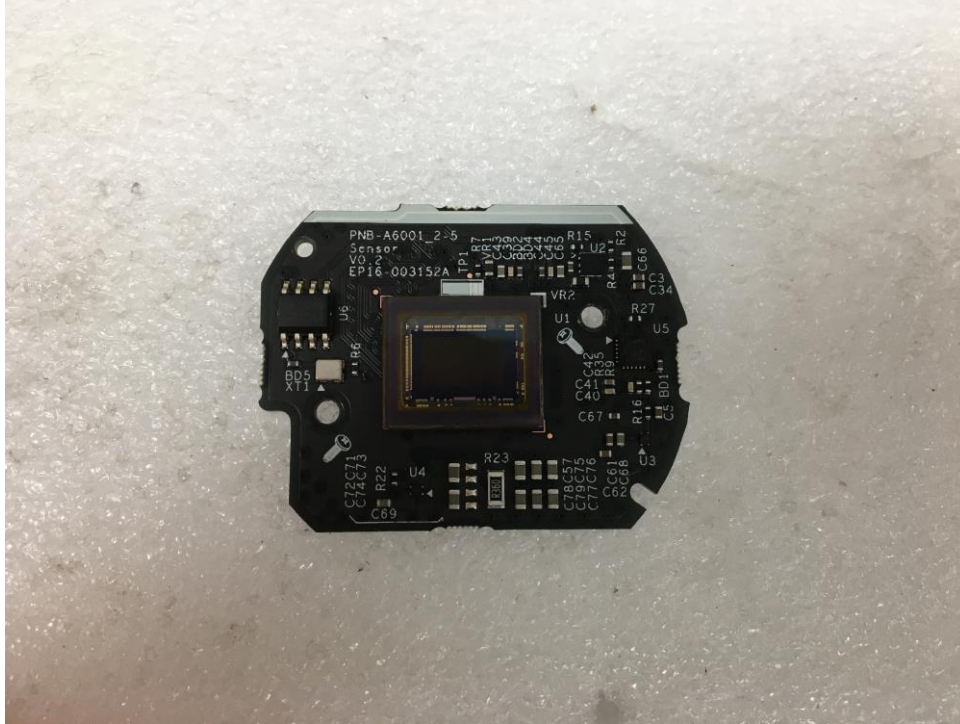

(Bottom)

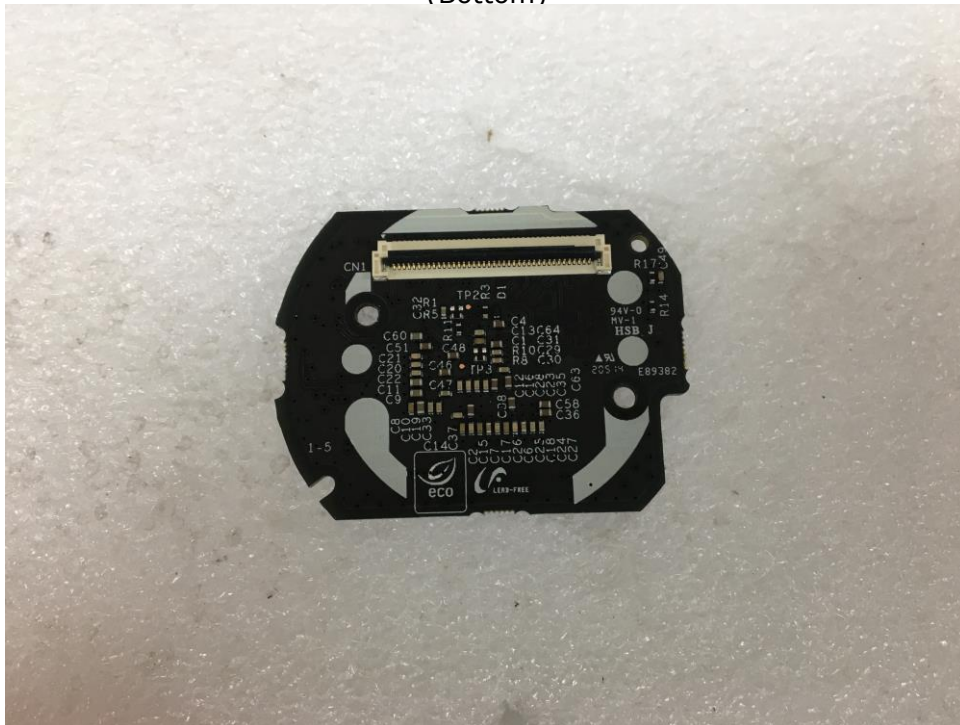

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location

**NETWORK CAMERA**

Model No : PNB-A6001

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

