



TEST REPORT



Report No. : KES-EM251555

Page 1 / 70

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

Applicant : Hanwha Vision Co., Ltd.

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : PND-A7082RV

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of Receipt : Apr. 28, 2025

4. Test date : May. 05, 2025 ~ May. 12, 2025

5. Date of Issue : May. 23, 2025

6. Test Results : In Compliance

Tested by

Reviewed by

Seong Jun, Park
EMC Test Engineer

Dong Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
May. 23, 2025	KES-EM251555	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications.....	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s).....	8
1.8	Configuration.....	9
1.9	Remarks when standards applied.....	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings.....	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports.....	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz).....	14
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge	20
3.2	Radiated Electric Field Immunity.....	23
3.3	Electrical Fast Transients/Bursts.....	26
3.4	Surge Transients	29
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions.....	35
APPENDIX A – TEST DATA		37
Conducted Emissions at Mains Power Ports		37
Conducted Emissions at Telecommunication Ports.....		39
Radiated Electric Field Emissions(Below 1 GHz).....		41
Radiated Electric Field Emissions(Above 1 GHz)		43
Harmonic Current Emissions and Voltage Fluctuations and Flicker		45
Test Setup Photos and Configuration		48
Conducted Emissions at Mains Power Ports		48
Conducted Emissions at Telecommunication Ports.....		49
Radiated Electric Field Emissions(Below 1 GHz).....		51
Radiated Electric Field Emissions(Above 1 GHz)		51
Harmonic Current Emissions and Voltage Fluctuations and Flicker		53
Electrostatic Discharge		56
Radiated Electric Field Immunity		56
Electrical Fast Transients/Bursts		57
Surge Transients.....		59
Conducted Disturbance.....		60
Voltage Dips and Short Interruptions		61
EUT External Photographs.....		61
EUT Internal Photographs.....		63



1.0 General Product Description

Main Specifications of EUT are:

Video		Gain Control	Off / Max Gain / Manual
Imaging Device	1/1.8" CMOS	White Balance	ATW / NarrowATW / AWC / Manual / Indoor / Outdoor
Resolution	2592x1520, 2560x1440, 1920x1080, 1600x1200, 1280x960, 1280x720, 1024x768, 800x600, 640x480, 640x360, 320x240, 320x180	LDC	Support(Fill/Stretch mode)
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps(@4MP Max. 5fps)	Electronic Shutter Speed	Minimum / Maximum / Anti flicker(2~1/30,000sec) Prefer shutter control(Based on AI engine)
NETD	None	Digital PTZ	None
Pixel Size	None	Video Rotation	Flip, mirror, hallway view(90°/270°)
Video Out	USB: Micro USB Type C for installation		Classified object type: Person/Face/VehicleType: car/bus/truck/motorcycle/bicycle/License plate Attributes: Person(Gender, Clothing top/bottom color, Bag), Face(Age, Gender, Mask, Glasses), Vehicle(Type: car/bus/truck/motorcycle/bicycle, Color)
Video Transmission Distance	None		Support BestShot Support Re-ID(Person)
Lens		Analytics	Analytics events based on AI engine - Motion detection, Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit/Appear/Disappear), Slip & fall detection, Face mask detection, Social distancing detection, Sound classification(To be released)
Focal Length (Zoom Ratio)	4.6~9.35mm(2.0x) motorized varifocal		Analytics events - Defocus detection, Tampering, Shock detection, Audio detection
Optical Zoom	None	Business Intelligence	Based on AI engine: People/Vehicle/Crowd counting, Queue management, Heatmap
Max. Aperture Ratio	F1.3(Wide)~F2.1(Tele)	Serial Interface	None
Angular Field of View	H: 105°(Wide)~47°(Tele) V: 58°(Wide)~27°(Tele) D: 128°(Wide)~55°(Tele)	Alarm I/O	2 configurable I/O ports, DC 12V output(Max. 50mA)
Min. Object Distance	1.5m(4.92ft)	Alarm Triggers	Analytics, Network disconnection, Alarm input, Time schedule, MQTT subscription, Day/Night, Storage disruption, Case tampering
Focus Control	Simple focus		When alarm trigger occurred - File upload(image): e-mail/FTP/SFTP - File upload(video clip): FTP/SFTP
Lens Type	P-iris(IR corrected)	Alarm Events	- Notification: e-mail - Recording: SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover: PTZ preset, send message by HTTP/HTTPS/TCP - Audio clip playback(WAV, MP3) - MQTT: publication
Mount Type	None	Audio Streaming	None
Optional Lens	None	Audio In	Selectable(mic in/line in/built-in 3mics)
Pan / Tilt / Rotate		Audio Out	Line out
Pan / Tilt / Rotate Range	0°~360° / 0°~85° / 0°~355°	Light Type	IR LED
Pan Range	None	Light Viewable Length	WiseIR 60m(196.85ft)
Pan Speed	None	IR Viewable Length	None
Tilt Range	None	IR Illuminator (Optional)	None
Tilt Speed	None	IR Radiation angle	None
Rotate Range	None	IR LED	None
Sequence	None	IR Wavelength	850nm
Preset Accuracy	None	IR Operation	None
Operational		Water Removal	None
Camera Title	Displayed up to 85 characters	Auto Tracking	None
Direction Indicator	None	Coaxial Protocol	None
Day & Night	Auto(ICR)	Color Palettes	None
Backlight Compensation	BLC, HLC, WDR, SDDR	Radiometry	
Wide Dynamic Range	120dB	Temperature Detect Range	None
Digital Noise Reduction	SSNRV, WiseNRII(Based on AI engine)	Temperature Accuracy	None
Digital Image Stabilization	Support	Temperature Detection	None
Defog	Support	Additional	None
Motion Detection	8ea, 8point polygonal zones 32ea, 8point polygonal zones - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic		
Privacy Masking	Dynamic Privacy Mask(Based on AI engine) - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic		



Network		Mechanical		
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)	Color / Material	White / Aluminum	
Video Compression	H.265/H.264: Main/Baseline/High MJPEG	Bubble: Hard-coated dome		
Audio Compression	G.711(PCM): 8kHz(64Kbps)	RAL Code	RAL9003	
	G.726(ADPCM): 8kHz(16/24/32/40Kbps)	Product Dimensions / Weight	ø160x125mm(ø6.30x4.92"), 1550g(3.42lb)	
	AAC-LC: 16kHz(48Kbps)	Compatible Conduit hole / Gar	12.7mm(1/2") (M20)	
	OPUS: 48kHz(64Kbps)		single, double, 4" octagon, 4" square	
Smart Codec	WiseStream(Based on AI engine)	Certifications & Standards		
Video Quality Adjustment	None	Network	None	
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A , KS C 9835	
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 5 profiles, 3 virtual channel support)			
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTCP(TCP), RTSP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP/SFTP, SMTP(StartTLS), ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), CDP, MQTT, Syslog			
SIP support (VoIP, Peer-to-peer)	None	Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471	
Security	None	Environment	IEC/EN 63000 IEC/EN 60529 IP52, IEC/EN 62262 IK10 IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78	
Application Programming Inter	ONVIF Profile S/G/T/M SUNAPI(HTTP API) Hanwha Vision Open Platform			
Security				
OS / Firmware Protect	Encrypted Firmware, Secure boot, Signed Firmware		Video	None
User authentication	Digest Authentication, Prevent brute-force attack	Compatible Models		
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)	Hanging Adaptor	SBP-160HMMW1	
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)	Back Box	SBV-180BW, SBV-180WW	
Access Control	IP-based access control, MAC-based access control, Auto logout	Ceiling Mount (Assy)	SBP-150CMI, SBP-300CMI, SBP-300CMW1, SBP-900CMW, SBP-300CMTW, SBP-300CMTS	
Data Protect	Encryption Credentials, Encrypt compress for live recording file export	Ceiling Mount (Single Unit)	SBP-180CMB, SBP-140CMB, SBP-180CMS, SBP-900CMP, SBP-300CMP, SBP-150CMP, SBP-C15P, SBP-C15H	
Audit	Access / System / Event Log management	Wall Mount	SBP-160WMW1, SBP-400WMW, SBP-250WMW, SBP-300WMW, SBP-300WMW1	
Device ID	Device Certificate(Hanwha vision Root CA)	Wall Mount Adaptor	None	
Secure Storage	Secure element, SDcard partition encrypt	Pole Mount	SBD-180PMW	
Security Certificate	ETSI EN 303 645, Secure element(FIPS 140-3 level3, CC EAL6+)	In-ceiling Mount	SHD-1372FPW	
General		Corner Mount	SBD-180KMA	
Webpage Language	English, Korean, Simplified Chinese, Traditional Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	Parapet Mount	SBP-156LMW1, SBP-300LMW	
Web Viewer	None	Tilt Mount	SBP-160TMW1	
Edge Storage	Micro SD/SDHC/SDXC 2slots 2TB(1TBx2)	Cabinet	SBP-150NBW, SBP-300NBW	
Memory	4GB RAM, 8GB eMMC	Housing	None	
Environmental & Electrical		Gang Plate	None	
Operating Temperature / Humidity	-25°C~+50°C(-13°F~+122°F) / 0~100% RH Humidity control /w AIR vent	Skin Cover	None	
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH	Weather Cap	SBV-161WCW	
Wind Load	None	Dome Cover	SPB-IND87W	
EPA(Effective Projected Area)	0.0148m²	Conduit Adaptor	None	
Certification	IP52, IK10	Power Module	None	
Input Voltage	PoE+(IEEE802.3at type2, Class4), 12VDC PoE: Max. 15.0W, typical 9.0W 12VDC: Max. 12.7W, typical 7.8W	Interface Box	SPM-4210	
Power Consumption	Support Wisepower - Power monitoring(Max./Current/Avg.) - Power Redundance Failover	Other Compatible Models	SBP-115PFA	
		DORI (EN62676-4 standard)		
		Detect (25PPM/ 8PPF)	Wide: 39.8m(130.51ft) / Tele: 119.2m(391.15ft)	
		Observe (63PPM/ 19PPF)	Wide: 15.9m(52.20ft) / Tele: 47.7m(156.46ft)	
	Recognize (125PPM/ 38PPF)	Wide: 8.0m(26.10ft) / Tele: 23.8m(78.23ft)		
	Identify (250PPM/ 76PPF)	Wide: 4.0m(13.05ft) / Tele: 11.9m(39.12ft)		



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PND-A7082RV	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adapter	FSP060-DIBAN2	-	FSP GROUP INC.	-
PoE Injector	PT-PSE106GBR-AH-S	-	Dongguan PROCET Network Technology Co., Ltd	-
Notebook	NT500R5W	-	Samsung Eelcotronics Co., Ltd.	-
Notebook Adapter	PA-1400-96	-	LITE-ON TECHNOLOGY CHANGZHOU CO.,LTD	-
Micro SD Card 1	-	-	SanDisk	-
Micro SD Card 2	-	-	SanDisk	-
LED Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Earphone	-	-	-	-
Smartphone	SM-N950N	-	Samsung Eelcotronics Co., Ltd.	-



1.6 External I/O Cabling

■mode 1

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	2 Pin	AC/DC Adapter	2 Pin	1.6	U
	Micro SD Card Slot	Micro SD Card 1	Micro SD Card Slot	-	-
	Micro SD Card Slot	Micro SD Card 2	Micro SD Card Slot	-	-
	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.1	U
	Alarm IN (2 PIN)	Button Alarm	Alarm OUT	3.1	U
	Alarm OUT (2 PIN)	LED Alarm	Alarm IN	3.1	U
	Audio IN	Smartphone	3.5 mm	1.0	U
	Audio OUT	Earphone	3.5 mm	1.4	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.6	U

* Unshielded=U, Shielded=S

■mode 2

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Injector	RJ-45 (PoE)	3.1	U
	Micro SD Card Slot	Micro SD Card 1	Micro SD Card Slot	-	-
	Micro SD Card Slot	Micro SD Card 2	Micro SD Card Slot	-	-
	Alarm IN (2 PIN)	Button Alarm	Alarm OUT	3.1	U
	Alarm OUT (2 PIN)	LED Alarm	Alarm IN	3.1	U
	Audio IN	Smartphone	3.5 mm	1.0	U
	Audio OUT	Earphone	3.5 mm	1.4	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.6	U

* Unshielded=U, Shielded=S



1.7 EUT Operating Mode(s)


Test mode		Normal operating
mode 1	AC/DC Adapter	- IP from the test equipment to the laptop was tested by Ping Test on the laptop. - The test was conducted by checking whether the camera image was output normally in the Web Viewer. - After the test, I checked whether the video was recorded normally on the Micro SD Card.
mode 2	PoE	

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	HANWHA VISION VIETNAM COMPANY LIMITED




1.8 Configuration

■mode 1

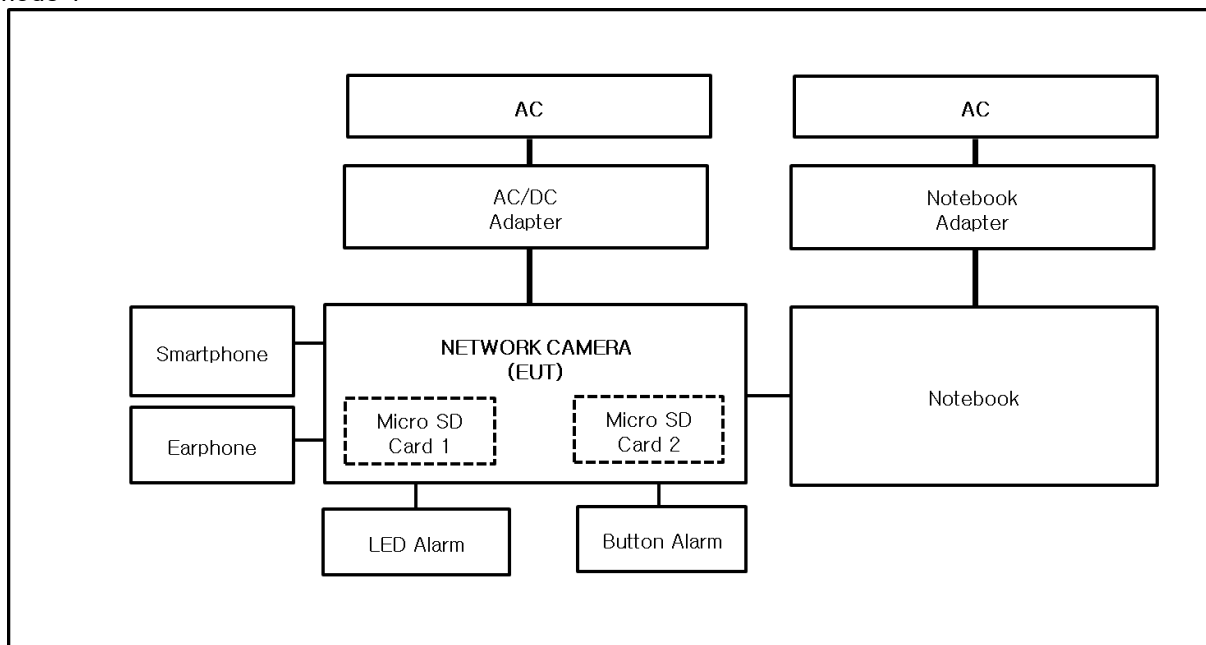

■mode 2

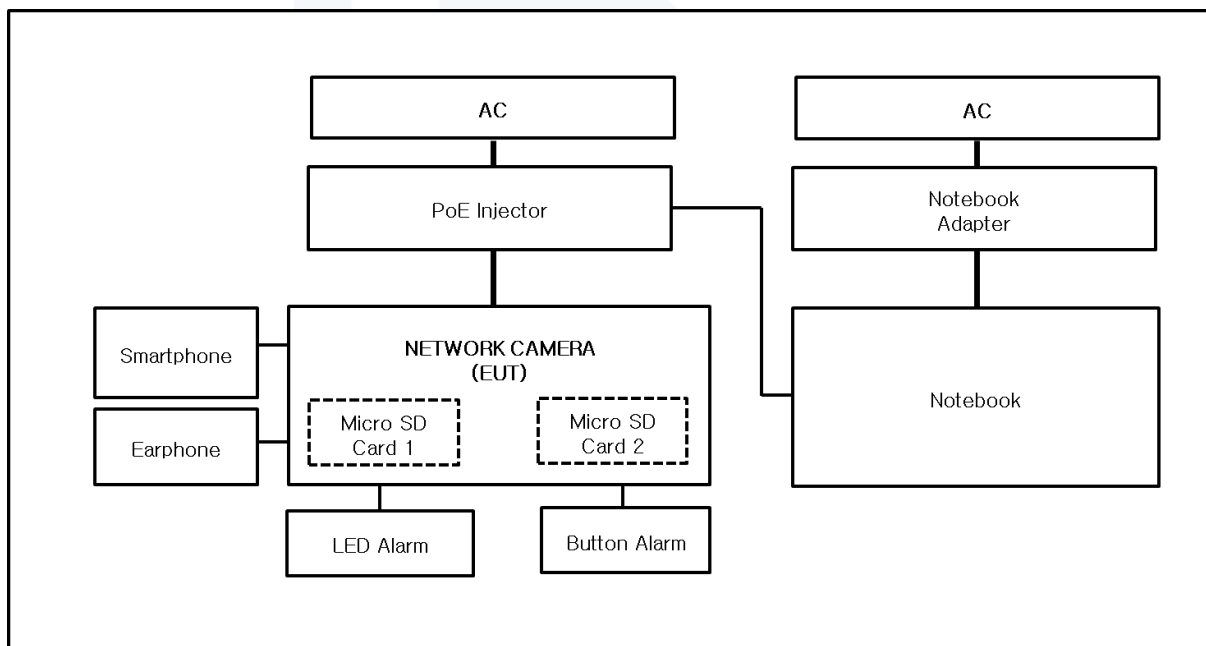

**1.9 Remarks when standards applied**

USB C Type ports are not used and have not been tested.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A1:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011/A1:2014

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A1:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011/A1:2014

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021



2.1 Conducted Emissions at Mains Power Ports

Test Date

May. 08, 2025

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☒	LISN	ENV216	R & S	101786	01, 09, 2026
☒	ARTIFICIAL MAINS NETWORK	ESH2-Z5	R & S	100450	11, 06, 2025
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025

Test Conditions

Temperature: (23,3 ± 0,1) °C

Relative Humidity: (46,7 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks- See Appendix A for test data.- The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 08, 2025

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☒	LISN	ENV216	R & S	101786	01, 09, 2026
☒	ARTIFICIAL MAINS NETWORK	ESH2-Z5	R & S	100450	11, 06, 2025
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025
☒	8-WIRE ISN CAT6	ENY81-CAT6	SCHWARZBECK	101666	02, 27, 2026

Test Conditions

Temperature: (23,3 ± 0,1) °C
Relative Humidity: (46,7 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 12, 2025

Test Location☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESW8	R & S	101319	03, 24, 2026
☒	AMPLIFIER	SCU 01	R & S	100603	11, 06, 2025
☒	BILOG ANTENNA	VULB 9168	SCHWARZBECK	9168-461	05, 09, 2026
☒	ATTENUATOR	6806.17.A	HUBER+SUHNER	-	02, 13, 2026

Test Conditions

Temperature: (23,3 ± 0,1) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 09, 2025

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	02, 13, 2026
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 04, 2025
☒	PREAMPLIFIER	8449B	HP	3008A00899	03, 05, 2026
☒	ATTENUATOR	8491B	HP	23094	02, 13, 2026

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (46,3 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.



2.5 Harmonic Current Emissions

Test Date

May. 07, 2025

Test Location

Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 31, 2026
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,4 ± 0,0) °C

Relative Humidity: (47,4 ± 0,0) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

May. 07, 2025

Test Location

Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 31, 2026
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (47,4 ± 0,1) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011/A1 :2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- (c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2

Test Date

May. 06, 2025

Test Location

EMS-ESD: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	01, 21, 2026
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (23,6 ± 0,0) °C
Relative Humidity: (46,3 ± 0,0) % R.H.
Atmospheric Pressure: (99,9 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge




Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied



Location of Discharge:

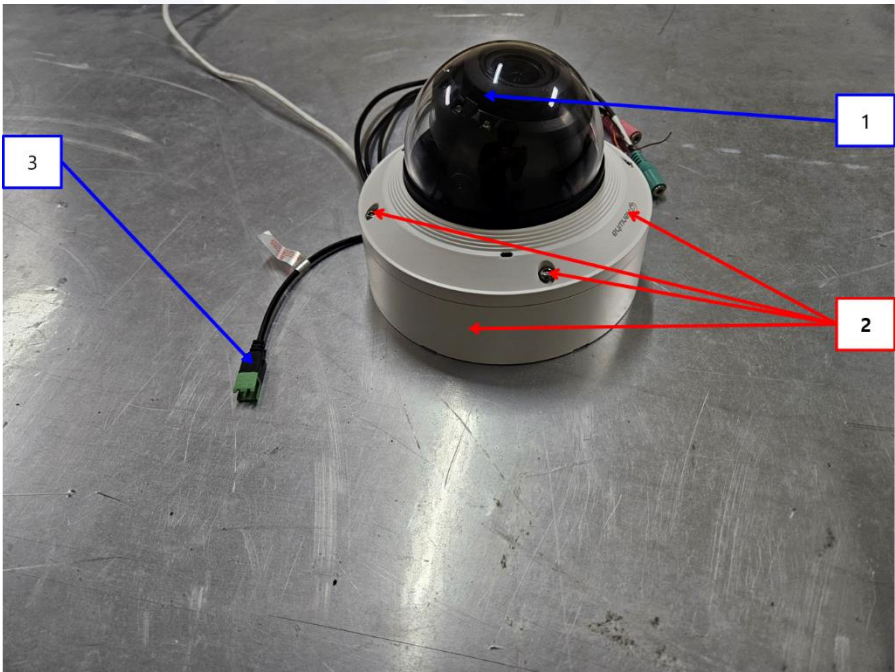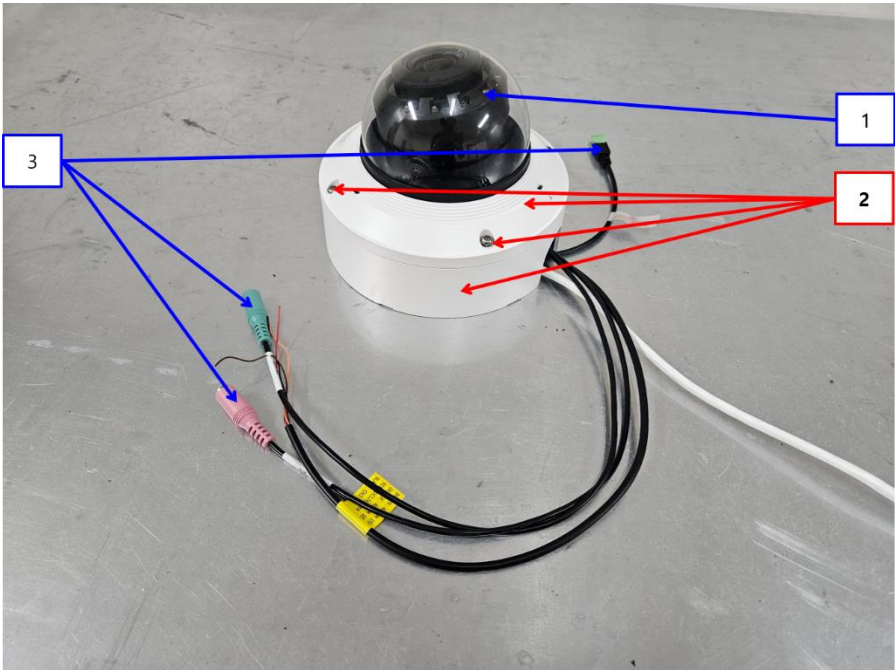

**Test Data**

■mode 1

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Air Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	-

■mode 2

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Air Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

- PASS Required Performance Criteria

- Do not test the surface and points of the product that can no longer be contacted after a fixed installation.



3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3

Test Date

May. 05, 2025

Test LocationEMS-RS: ☒ SEMI ANECHOIC CHAMBER #3☐ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	07, 29, 2025
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	02, 13, 2026
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	02, 13, 2026
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	02, 13, 2026
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 05, 2026

Test Conditions

Temperature: (22,8 ± 0,3) °C
Relative Humidity: (44,7 ± 0,3) % R.H.
Atmospheric Pressure: (99,7 ± 0,3) kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**Test Data**

■ mode 1

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ mode 2

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4

Test Date

May. 07, 2025

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 06, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 06, 2025

Test Conditions

Temperature: (23,4 ± 0,1) °C
Relative Humidity: (46,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity: ☐ ± 1.0 kV ☒ ± 2.0 kV
(AC Power Lines) ☐ ± 4.0 kV

Pulse Amplitude & Polarity: ☐ ± 0.5 kV ☒ ± 1.0 kV
(Other supply / Signal Lines) ☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 klz ☒ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**Test Data**

■ mode 1

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L - N	Complied	Complied
L –PE	Complied	Complied
N –PE	Complied	Complied
L –N - PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm IN	Complied	Complied
Alarm OUT	Complied	Complied



■ mode 2

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm IN	Complied	Complied
Alarm OUT	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.4 Surge Transients

Reference Standard

EN 61000-4-5

Test Date

May. 07, 2025

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 07, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 08, 2025

Test Conditions

Temperature: (23,4 ± 0,2) °C
Relative Humidity: (46,5 ± 0,2) % R.H.
Atmospheric Pressure: (100,1 ± 0,2) kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min

☒ 1 surge per 30 sec.

Required Performance Criteria:

☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min

☐ 1 surge per 30 sec.

Required Performance Criteria:

☒ Complied

**Test Data**

■ mode 1

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L - N	Complied	Complied
L - PE	Complied	Complied
N - PE	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

☒ mode 2☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6

Test Date

May. 11, 2025

Test Location

EMS-CS: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	8.0.0	-
☒	TEST SYSTEM FOR CONDUCTED AND RADIATED	NSG4070	TESEQ	65585	11, 18, 2025
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 06, 2025
☒	CDN	CDN M016	TESEQ	43694	11, 07, 2025
☒	CDN	CDN M016	TESEQ	43697	11, 07, 2025
☒	CDN	CDN T8RJ45	EM TEST	0909-09	07, 29, 2025
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 08, 2025

Test Conditions

Temperature: (23,6 ± 0,1) °C
Relative Humidity: (46,4 ± 0,1) % R.H.
Atmospheric Pressure: (100,0 ± 0,1) kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

**Test Data**

■ mode 1

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N– PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm IN	Clamp	Complied
Alarm OUT	Clamp	Complied

■ mode 2

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm IN	Clamp	Complied
Alarm OUT	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11

Test Date

May. 07, 2025

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 07, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025

Test Conditions

Temperature: (23,4 ± 0,1) °C
Relative Humidity: (46,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

**Test Specifications & Observations/Remarks**

■ mode 1

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

- During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered without operator's intervention.

- The LAN port is regarded as a wired communication network port and power-related ports are not tested.




APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■mode 1

[HOT]

Test Description: Conducted Emission
Job No.: KES-EM251555
Phase: L
Mode: mode 1
Operator Name: KES

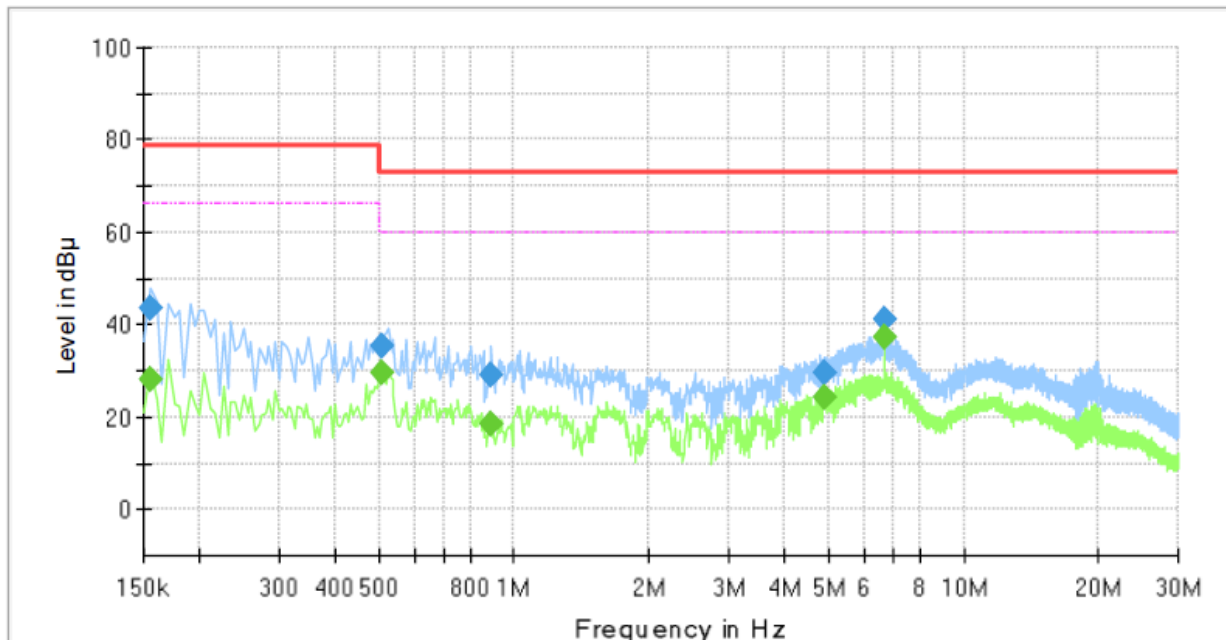


Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	28.35	66.00	37.65	1000.0	9.000	L1	19.5
0.155000	43.62	---	79.00	35.38	1000.0	9.000	L1	19.5
0.510000	---	29.52	60.00	30.48	1000.0	9.000	L1	19.6
0.510000	35.39	---	73.00	37.61	1000.0	9.000	L1	19.6
0.890000	---	18.55	60.00	41.45	1000.0	9.000	L1	19.6
0.890000	28.97	---	73.00	44.03	1000.0	9.000	L1	19.6
4.910000	---	24.04	60.00	35.96	1000.0	9.000	L1	19.9
4.910000	29.38	---	73.00	43.62	1000.0	9.000	L1	19.9
6.650000	---	37.51	60.00	22.49	1000.0	9.000	L1	20.0
6.650000	41.00	---	73.00	32.00	1000.0	9.000	L1	20.0

**[NEUTRAL]**

Test Description: Conducted Emission
Job No.: KES-EM251555
Phase: N
Mode: mode 1
Operator Name: KES

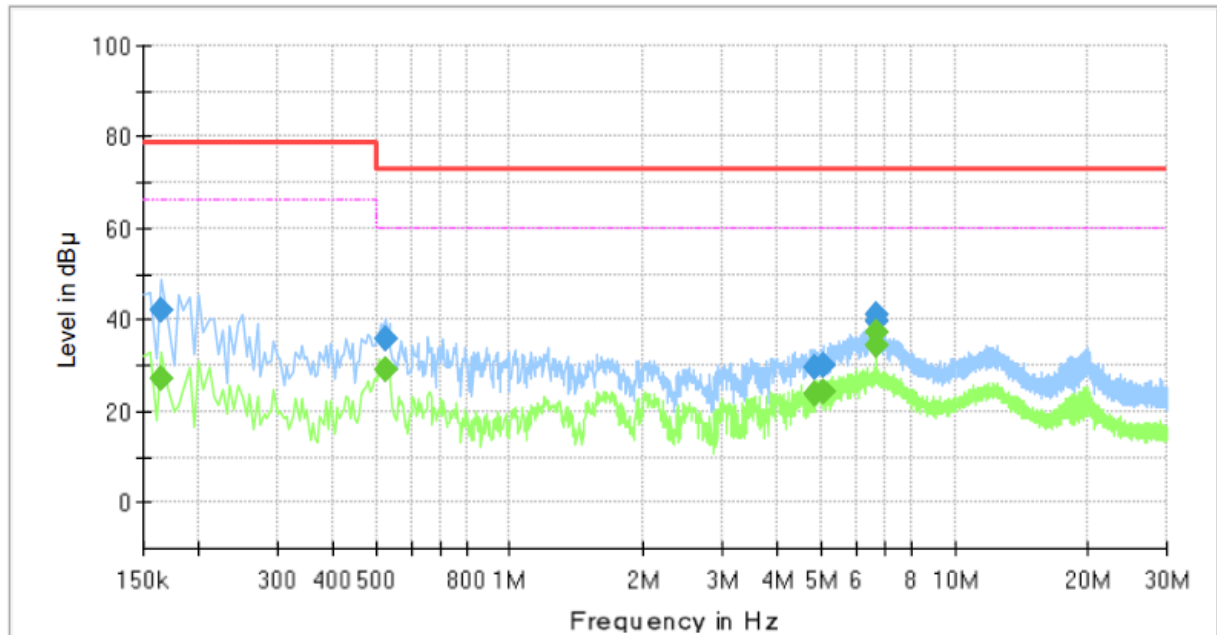**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	27.13	66.00	38.87	1000.0	9.000	N	19.5
0.165000	42.23	---	79.00	36.77	1000.0	9.000	N	19.5
0.525000	---	29.00	60.00	31.00	1000.0	9.000	N	19.5
0.525000	35.75	---	73.00	37.25	1000.0	9.000	N	19.5
4.850000	---	23.62	60.00	36.38	1000.0	9.000	N	19.9
4.850000	29.61	---	73.00	43.39	1000.0	9.000	N	19.9
5.080000	---	24.03	60.00	35.97	1000.0	9.000	N	19.9
5.080000	29.83	---	73.00	43.17	1000.0	9.000	N	19.9
6.655000	---	37.30	60.00	22.70	1000.0	9.000	N	19.9
6.655000	40.94	---	73.00	32.06	1000.0	9.000	N	19.9
6.660000	---	34.43	60.00	25.57	1000.0	9.000	N	19.9
6.660000	39.82	---	73.00	33.18	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Conducted Emissions at Telecommunication Ports**

■ mode 1

[1 000 Mbps]

Test Description: Telecommunication Emission
Job No.: KES-EM251555
Mode : mode 1
Speed : 1 000
Operator Name: KES

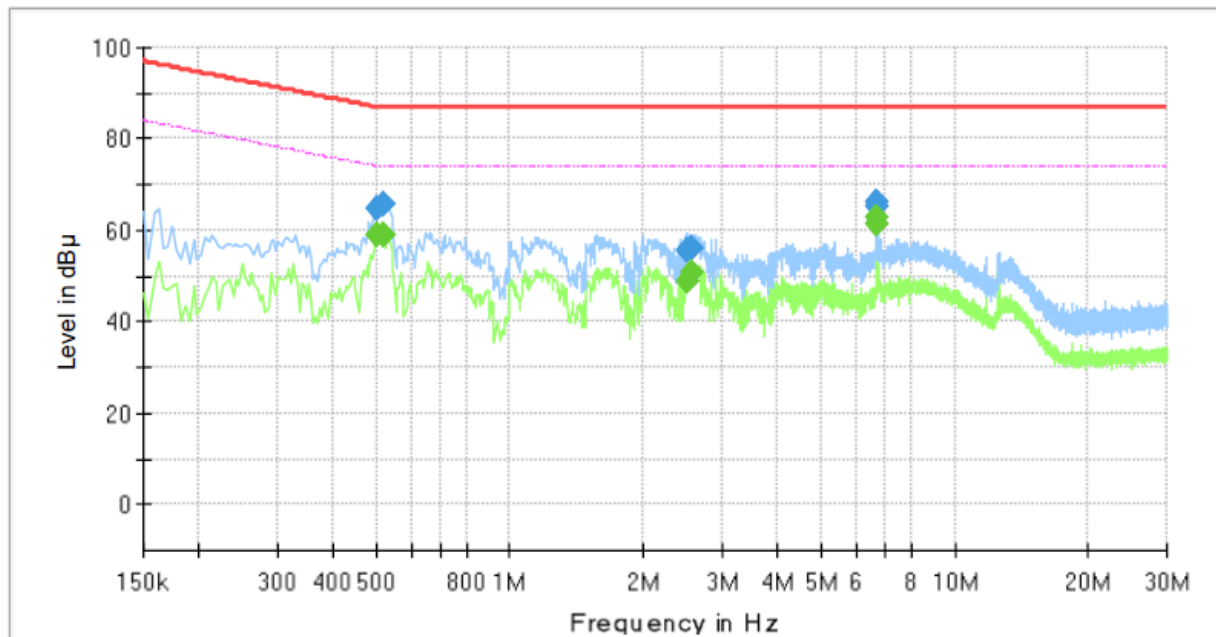**Final Result**


Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.502000	---	59.05	74.00	14.95	1000.0	9.000	Single Line	19.4
0.502000	64.66	---	87.00	22.34	1000.0	9.000	Single Line	19.4
0.522000	---	59.11	74.00	14.89	1000.0	9.000	Single Line	19.4
0.522000	65.91	---	87.00	21.09	1000.0	9.000	Single Line	19.4
2.490000	---	49.04	74.00	24.96	1000.0	9.000	Single Line	19.4
2.490000	55.47	---	87.00	31.53	1000.0	9.000	Single Line	19.4
2.558000	---	51.02	74.00	22.98	1000.0	9.000	Single Line	19.4
2.558000	56.24	---	87.00	30.76	1000.0	9.000	Single Line	19.4
6.674000	---	62.79	74.00	11.21	1000.0	9.000	Single Line	19.7
6.674000	66.12	---	87.00	20.88	1000.0	9.000	Single Line	19.7
6.678000	---	61.38	74.00	12.62	1000.0	9.000	Single Line	19.7
6.678000	65.38	---	87.00	21.62	1000.0	9.000	Single Line	19.7



■ mode 2

[1 000 Mbps]

Test Description: Telecommunication Emission
Job No.: KES-EM251555
Mode : mode 2
Speed : 1 000
Operator Name: KES

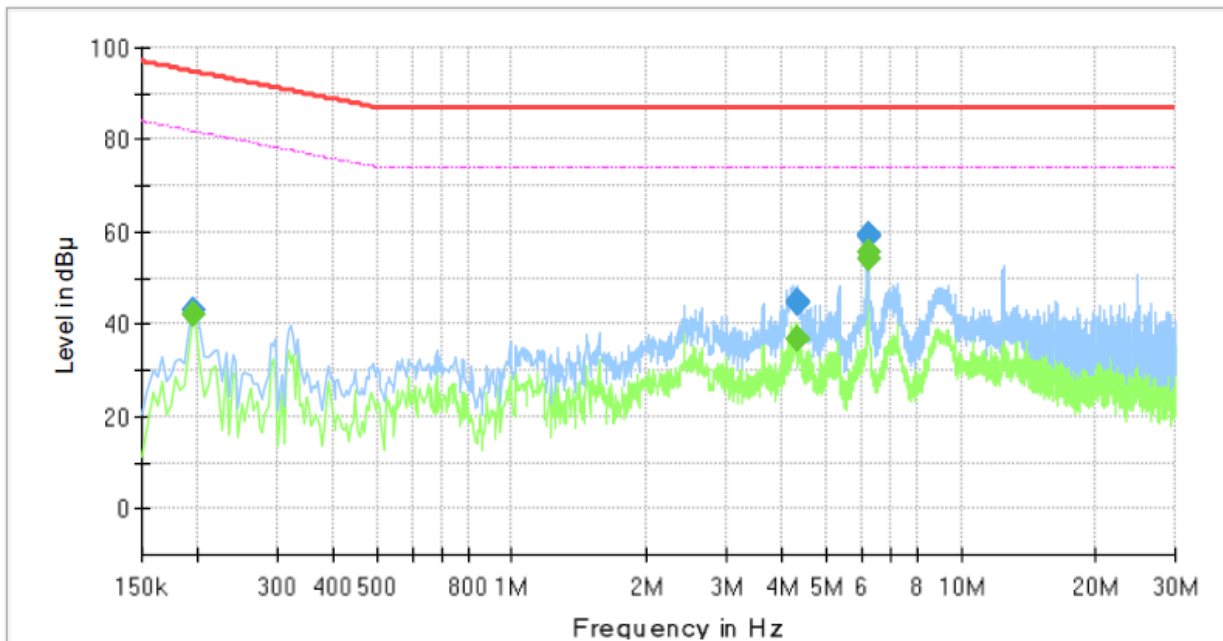

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Limit (dB μV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.194000	---	41.95	81.86	39.91	1000.0	9.000	Single Line	19.4
0.194000	43.12	---	94.86	51.74	1000.0	9.000	Single Line	19.4
4.310000	---	36.70	74.00	37.30	1000.0	9.000	Single Line	19.6
4.310000	44.86	---	87.00	42.14	1000.0	9.000	Single Line	19.6
4.318000	---	36.60	74.00	37.40	1000.0	9.000	Single Line	19.6
4.318000	44.63	---	87.00	42.37	1000.0	9.000	Single Line	19.6
6.202000	---	55.65	74.00	18.35	1000.0	9.000	Single Line	19.7
6.202000	59.69	---	87.00	27.31	1000.0	9.000	Single Line	19.7
6.206000	---	54.15	74.00	19.85	1000.0	9.000	Single Line	19.7
6.206000	58.91	---	87.00	28.09	1000.0	9.000	Single Line	19.7

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Radiated Electric Field Emissions(Below 1 GHz)**


■mode 1

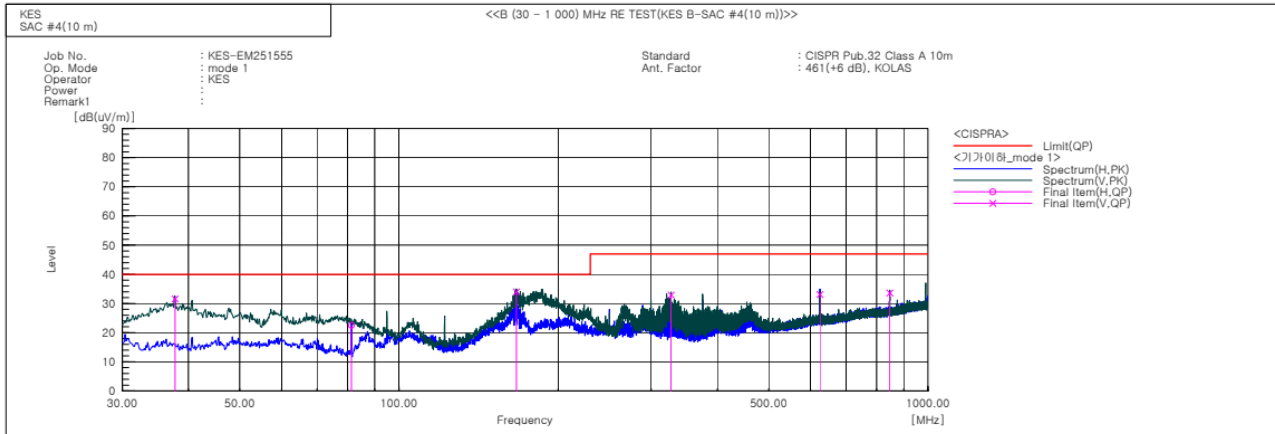**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	37.760	V	53.6	-22.0	31.6	40.0	8.4	177.0	279.0	
2	81.289	H	48.2	-25.7	22.5	40.0	17.5	322.0	311.0	
3	166.770	V	53.8	-19.8	34.0	40.0	6.0	178.0	279.0	
4	326.820	V	49.0	-16.1	32.9	47.0	14.1	187.0	6.0	
5	624.974	V	39.6	-6.5	33.1	47.0	13.9	196.0	6.0	
6	846.861	V	36.4	-2.8	33.6	47.0	13.4	186.0	6.0	



mode 2

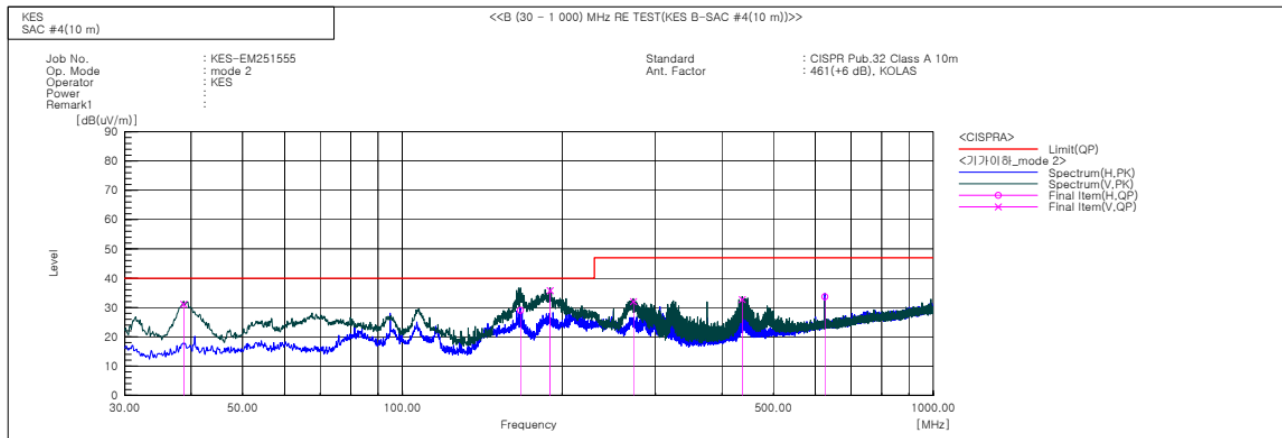

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.730	V	53.0	-21.9	31.1	40.0	8.9	179.0	308.0	
2	166.891	H	48.8	-19.8	29.0	40.0	11.0	382.0	324.0	
3	189.929	V	57.4	-21.6	35.8	40.0	4.2	197.0	339.0	
4	272.379	V	50.2	-18.2	32.0	47.0	15.0	137.0	347.0	
5	436.673	V	44.7	-12.0	32.7	47.0	14.3	169.0	33.0	
6	625.095	H	40.2	-6.5	33.7	47.0	13.3	303.0	265.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])


Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

**Radiated Electric Field Emissions(Above 1 GHz)**


mode 1

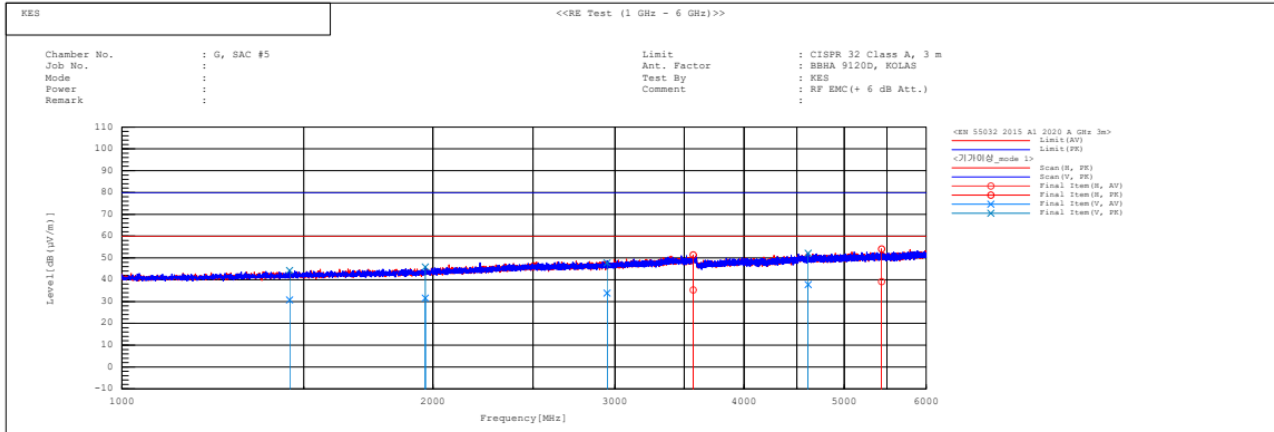**Final Result**

No.	Frequency	Pol	Reading	Reading	c.f	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		AV	PK		PK	AV	PK	AV	PK	[cm]	[deg]	
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]			
1	1453.000	V	29.3	42.8	1.4	44.2	60.0	80.0	29.3	35.8	100.0	4.9	
2	1966.253	V	28.5	42.7	3.1	45.8	60.0	80.0	28.4	34.2	100.0	359.3	
3	2948.136	V	27.8	41.6	6.1	47.7	60.0	80.0	26.1	32.3	100.0	158.7	
4	3571.055	H	27.7	43.8	7.6	51.4	60.0	80.0	24.7	28.6	100.0	249.5	
5	4615.121	V	27.0	41.3	10.8	52.1	60.0	80.0	22.2	27.9	100.0	164.2	
6	5433.880	H	26.9	41.9	12.2	54.1	60.0	80.0	20.9	25.9	100.0	255.0	



mode 2

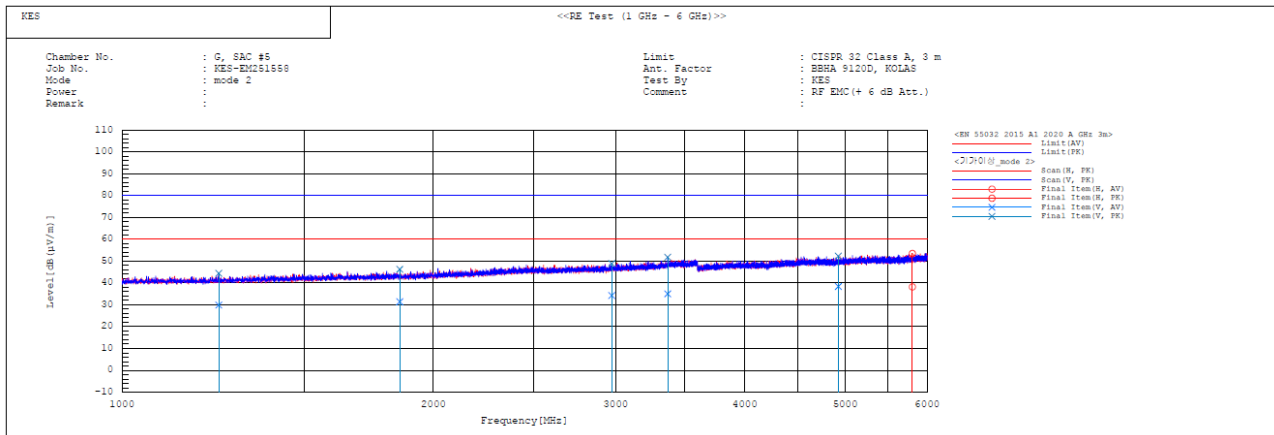

No.	Frequency	Pol	Reading	Reading	c.f	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		AV	PK		PK	AV	PK	AV	PK	[cm]	[deg]	
1	1240.500	V	29.5	44.0	0.4	44.4	60.0	80.0	30.1	35.6	100.0	200.3	
2	1856.404	V	28.7	43.6	2.7	46.3	60.0	80.0	28.6	33.7	100.0	67.9	
3	2974.212	V	28.0	42.7	6.2	48.9	60.0	80.0	25.8	31.1	100.0	145.8	
4	3369.221	V	27.9	44.7	7.1	51.8	60.0	80.0	25.0	28.2	100.0	119.6	
5	4925.217	V	27.1	41.0	11.3	52.3	60.0	80.0	21.6	27.7	100.0	228.8	
6	5807.459	H	25.2	40.5	13.0	53.5	60.0	80.0	21.8	26.5	100.0	307.5	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

**Harmonic Current Emissions and Voltage Fluctuations and Flicker**

■ mode 1

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.056			
2	0.004	0.354	1.080	n/a
3	0.050	2.153	2.300	PASS
4	0.004	0.932	0.430	n/a
5	0.048	4.229	1.140	PASS
6	0.005	1.658	0.300	n/a
7	0.047	6.148	0.770	PASS
8	0.004	1.710	0.230	n/a
9	0.047	11.688	0.400	PASS
10	0.004	1.961	0.184	n/a
11	0.045	13.717	0.330	PASS
12	0.004	2.407	0.153	n/a
13	0.043	20.572	0.210	PASS
14	0.004	2.855	0.131	n/a
15	0.041	27.277	0.150	PASS
16	0.004	3.155	0.115	n/a
17	0.039	29.223	0.132	PASS
18	0.004	3.453	0.102	n/a
19	0.036	30.807	0.118	PASS
20	0.003	3.588	0.092	n/a
21	0.034	21.073	0.161	PASS
22	0.003	3.889	0.084	n/a
23	0.031	21.424	0.147	PASS
24	0.003	3.969	0.077	n/a
25	0.029	21.390	0.135	PASS
26	0.003	3.864	0.071	n/a
27	0.026	20.936	0.125	PASS
28	0.003	4.063	0.066	n/a
29	0.024	20.294	0.116	PASS
30	0.002	3.923	0.061	n/a
31	0.021	19.149	0.109	PASS
32	0.002	3.870	0.058	n/a
33	0.018	17.867	0.102	PASS
34	0.002	3.798	0.054	n/a
35	0.016	16.455	0.096	PASS
36	0.002	3.350	0.051	n/a
37	0.013	14.597	0.091	PASS
38	0.002	3.331	0.048	n/a
39	0.011	12.898	0.087	PASS
40	0.001	2.942	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.057			
2	0.004	0.277	1.620	n/a
3	0.050	1.451	3.450	PASS
4	0.005	0.727	0.645	n/a
5	0.049	2.869	1.710	PASS
6	0.006	1.254	0.450	PASS
7	0.048	4.168	1.155	PASS
8	0.005	1.330	0.345	n/a
9	0.047	7.880	0.600	PASS
10	0.004	1.542	0.276	n/a
11	0.046	9.259	0.495	PASS
12	0.004	1.881	0.230	n/a
13	0.044	13.877	0.315	PASS
14	0.004	2.215	0.197	n/a
15	0.041	18.417	0.225	PASS
16	0.004	2.440	0.173	n/a
17	0.039	19.834	0.199	PASS
18	0.004	2.655	0.153	n/a
19	0.037	20.795	0.178	PASS
20	0.004	2.776	0.138	n/a
21	0.034	21.295	0.161	PASS
22	0.004	2.987	0.125	n/a
23	0.032	21.650	0.147	PASS
24	0.004	3.053	0.115	n/a
25	0.029	21.623	0.135	PASS
26	0.003	3.062	0.106	n/a
27	0.026	21.152	0.125	PASS
28	0.003	3.141	0.099	n/a
29	0.024	20.515	0.116	PASS
30	0.003	3.073	0.092	n/a
31	0.021	19.315	0.109	PASS
32	0.003	3.006	0.086	n/a
33	0.018	18.016	0.102	PASS
34	0.002	2.951	0.081	n/a
35	0.016	16.587	0.096	PASS
36	0.002	2.733	0.077	n/a
37	0.013	14.759	0.091	PASS
38	0.002	2.659	0.073	n/a
39	0.011	13.060	0.087	PASS
40	0.002	2.510	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Report No. : KES-EM251555

Page 47 / 70

Test Data - Voltage Fluctuations

■mode 1

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS





Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports


■mode 1






Conducted Emissions at Telecommunication Ports

■ mode 1

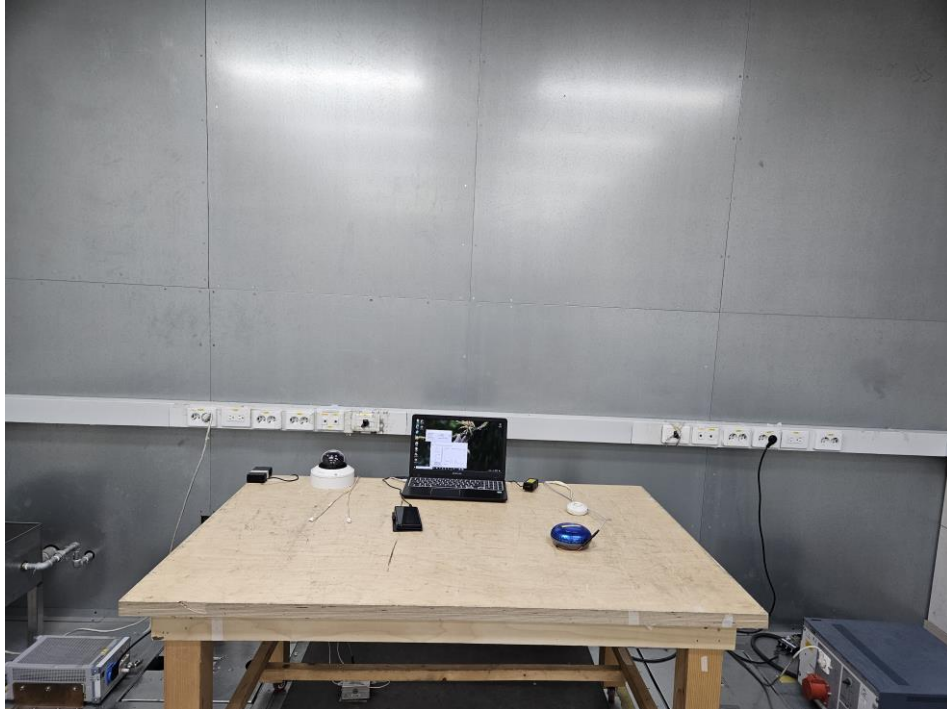




■mode 2

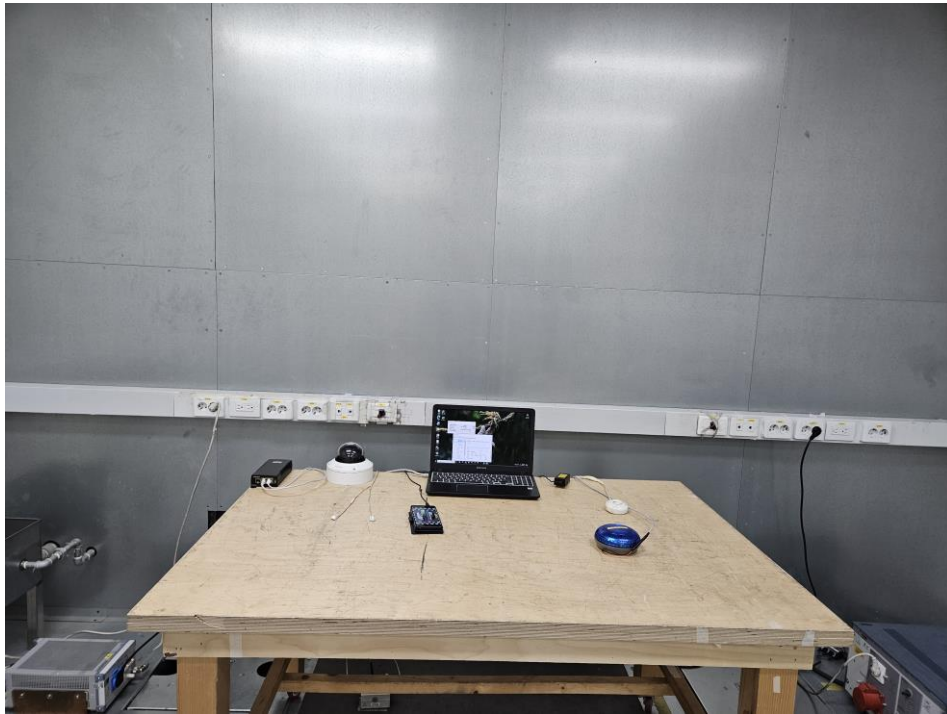





Radiated Electric Field Emissions(Below 1 GHz)

■mode 1

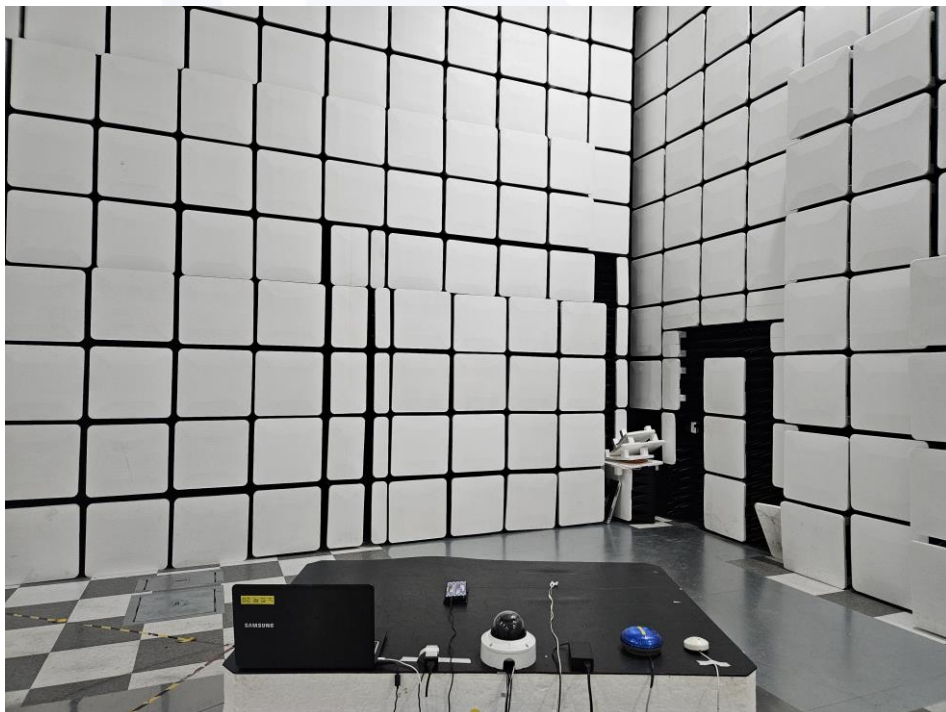





■mode 2

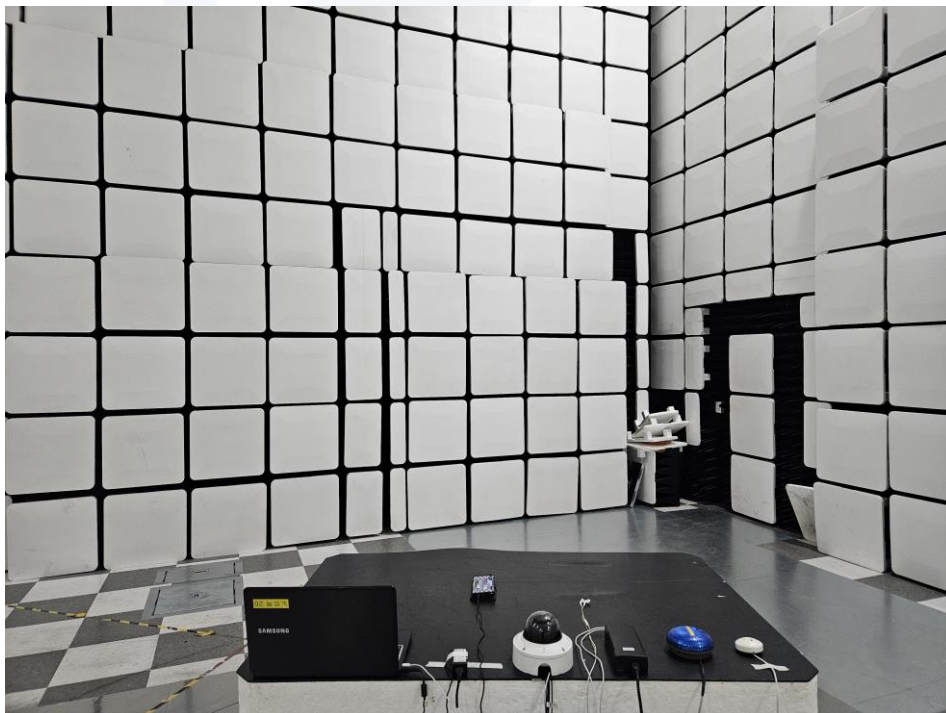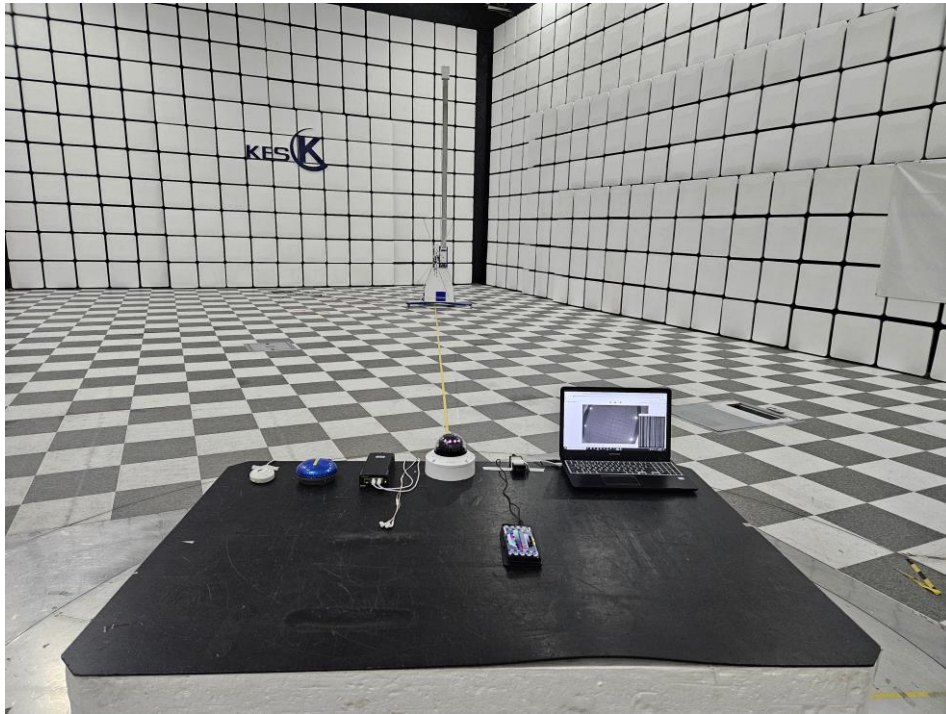





Radiated Electric Field Emissions(Above 1 GHz)

■mode 1

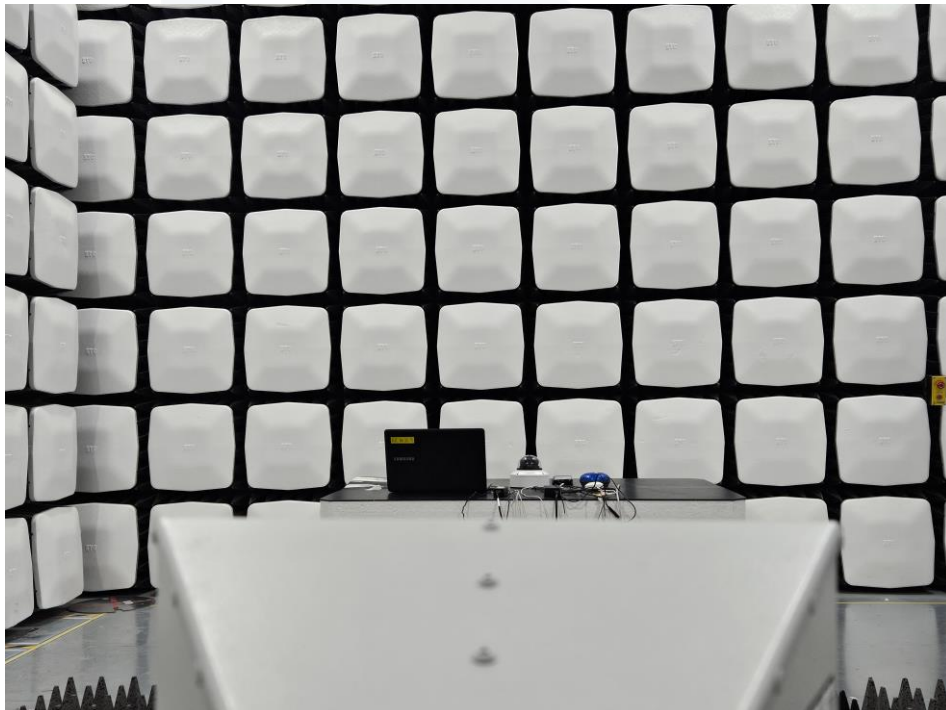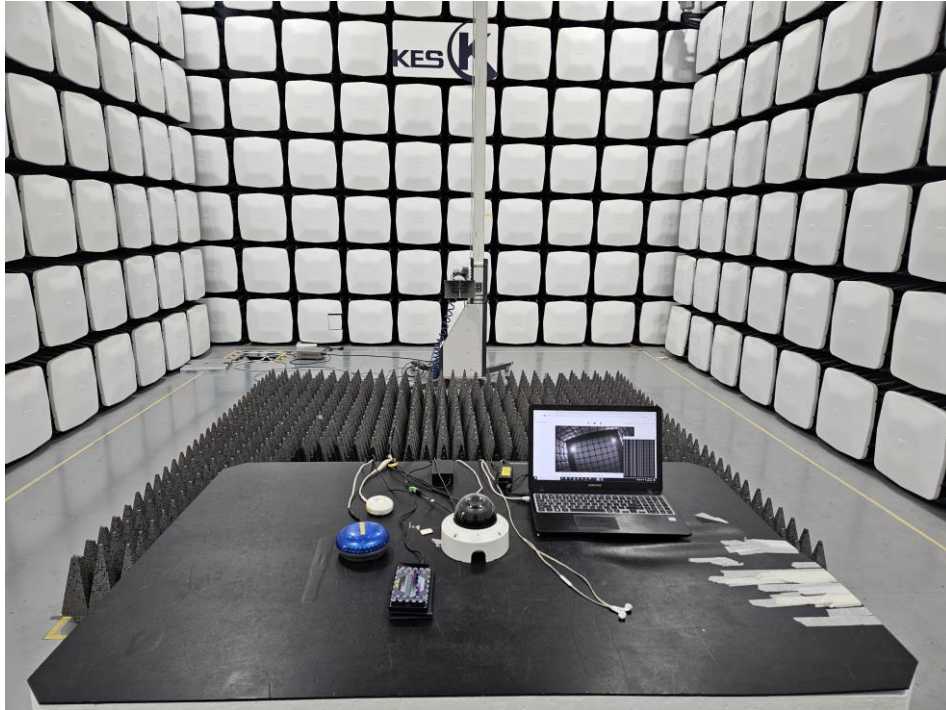



■mode 2

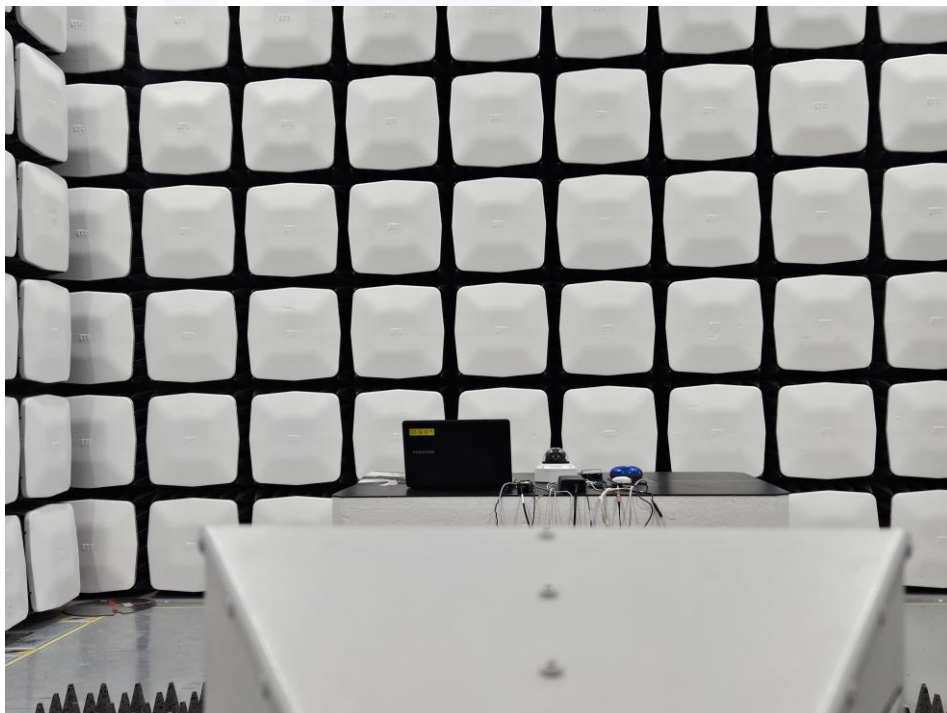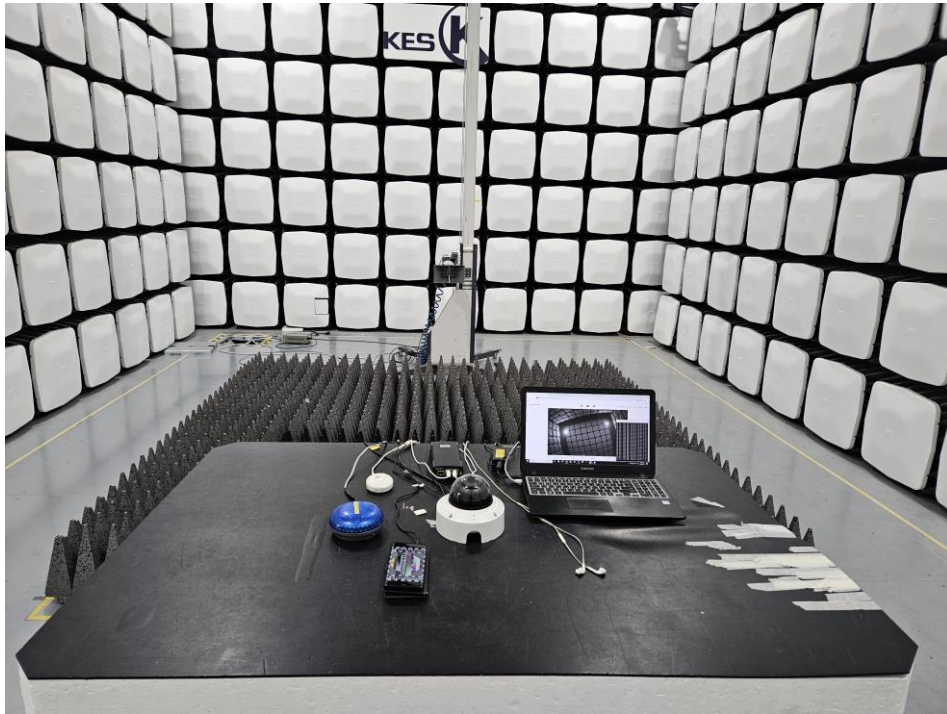



Harmonic Current Emissions and Voltage Fluctuations and Flicker


■ mode 1






Electrostatic Discharge

■mode 1

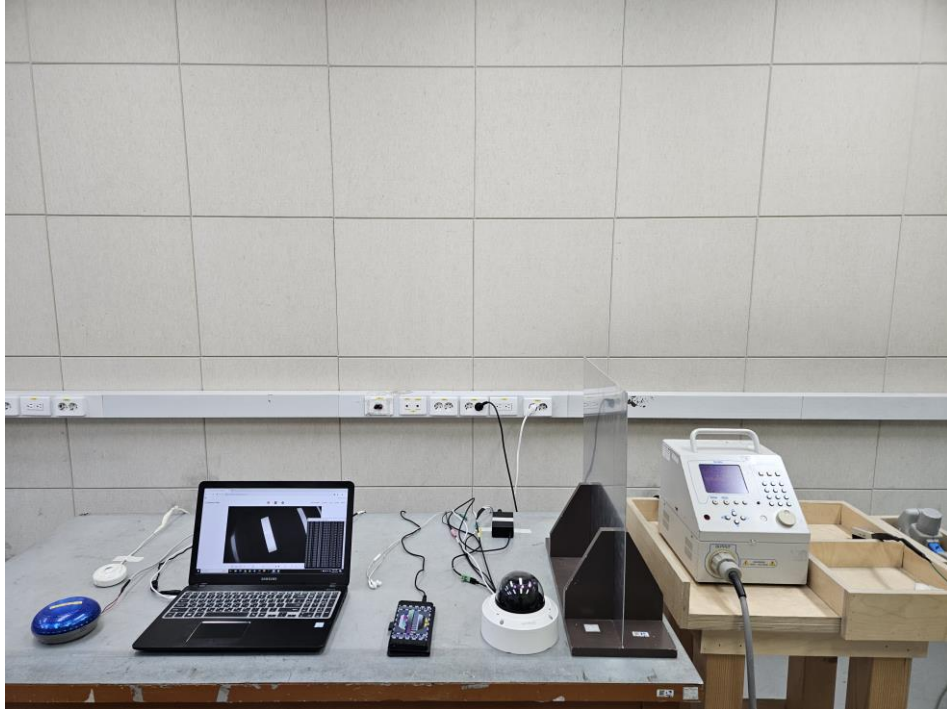

■mode 2

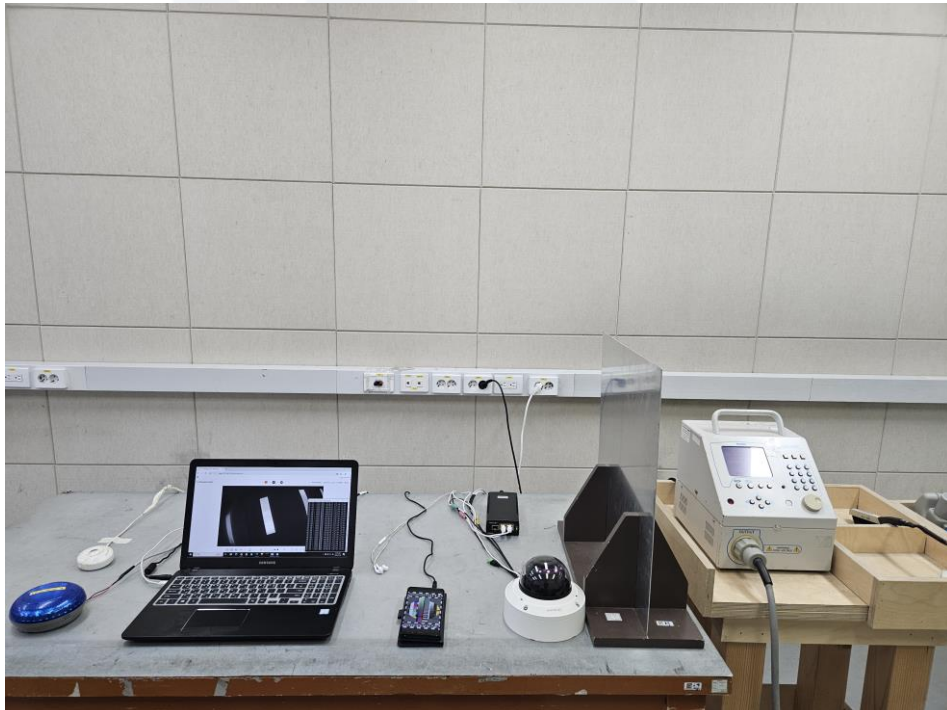




Radiated Electric Field Immunity

■mode 1




■mode 2

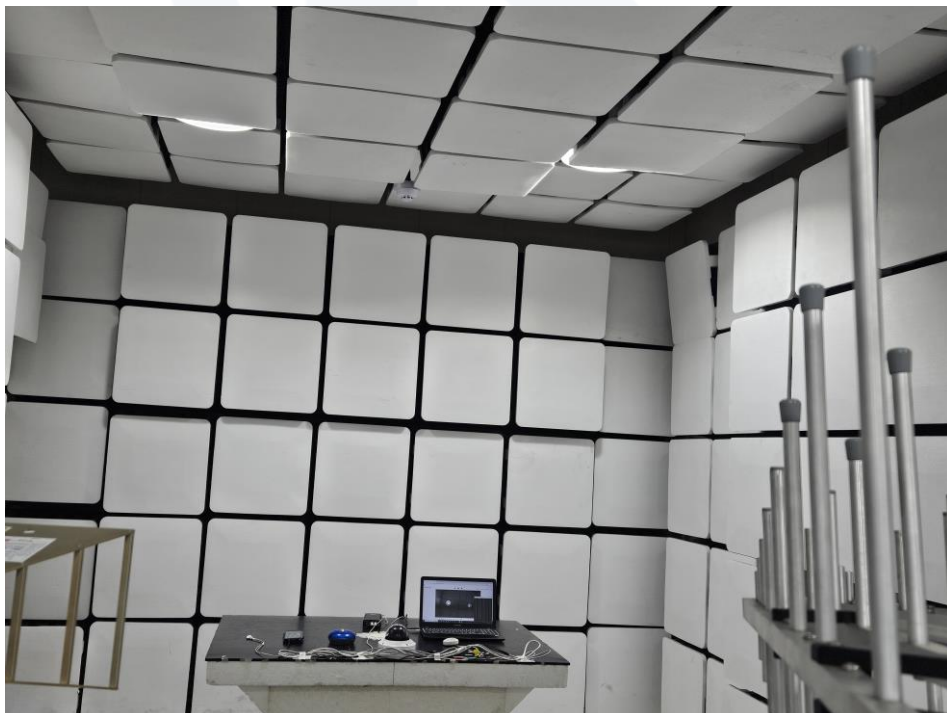



Electrical Fast Transients/Bursts

■mode 1

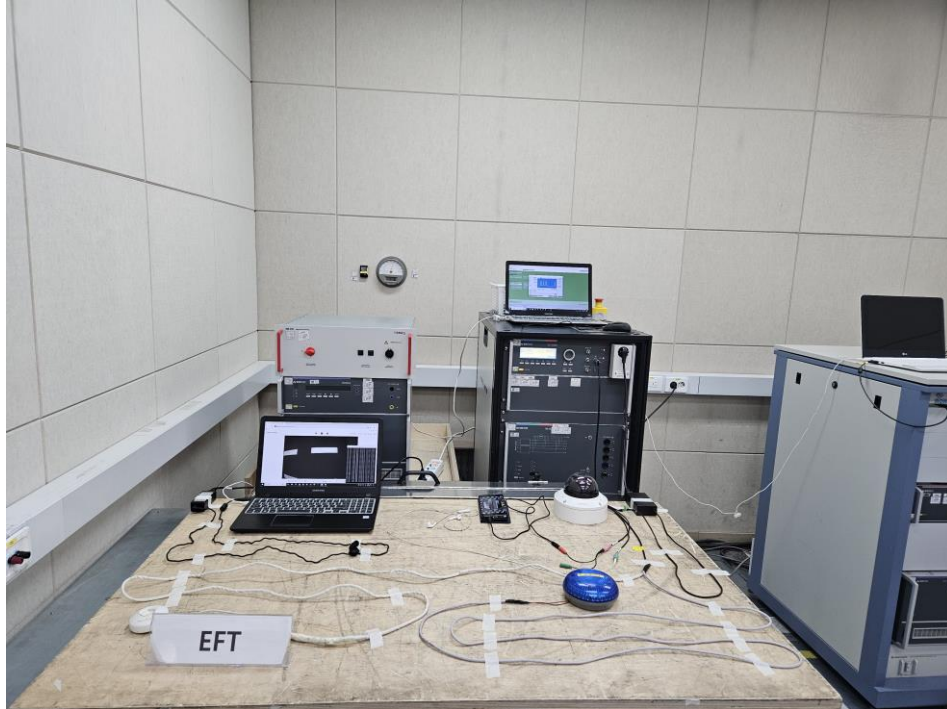

■mode 2





Surge Transients

■mode 1



■mode 2





Conducted Disturbance

■ mode 1




■ mode 2





Voltage Dips and Short Interruptions

■ mode 1

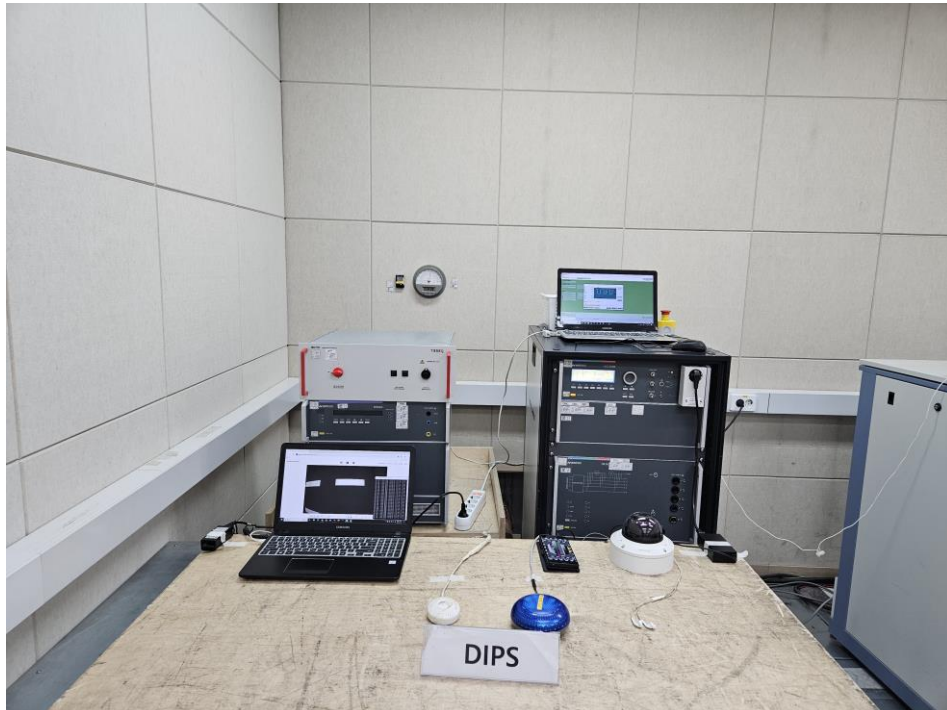




EUT External Photographs

(Top)



(Bottom)

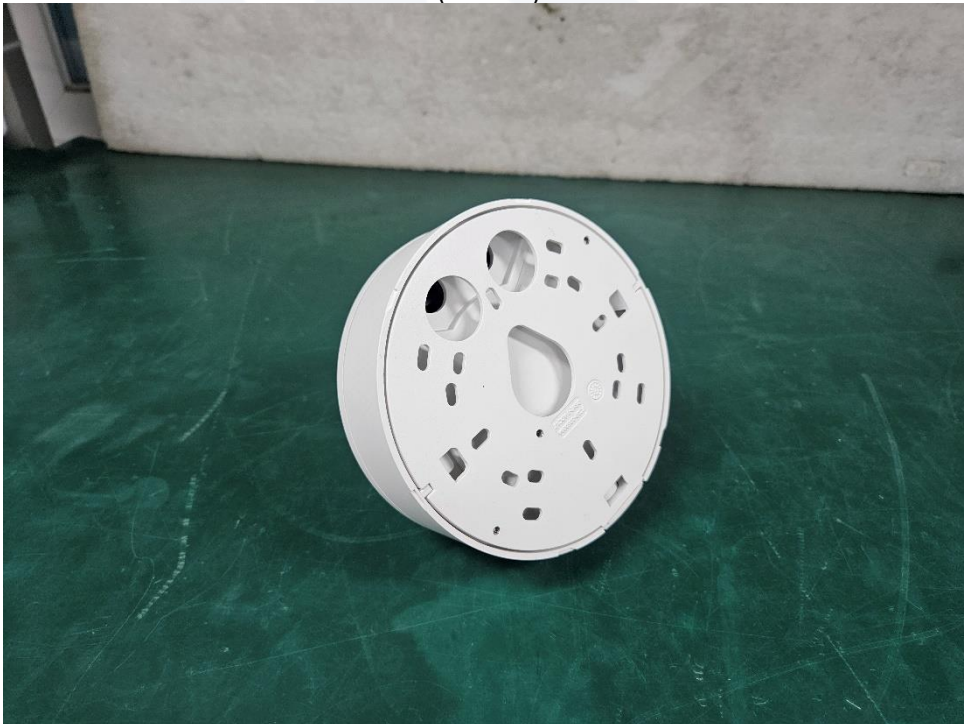



EUT Internal Photographs

(Internal View)





EUT Internal View – Board 1

(Top)




(Bottom)






EUT Internal View – Board 2

(Top)

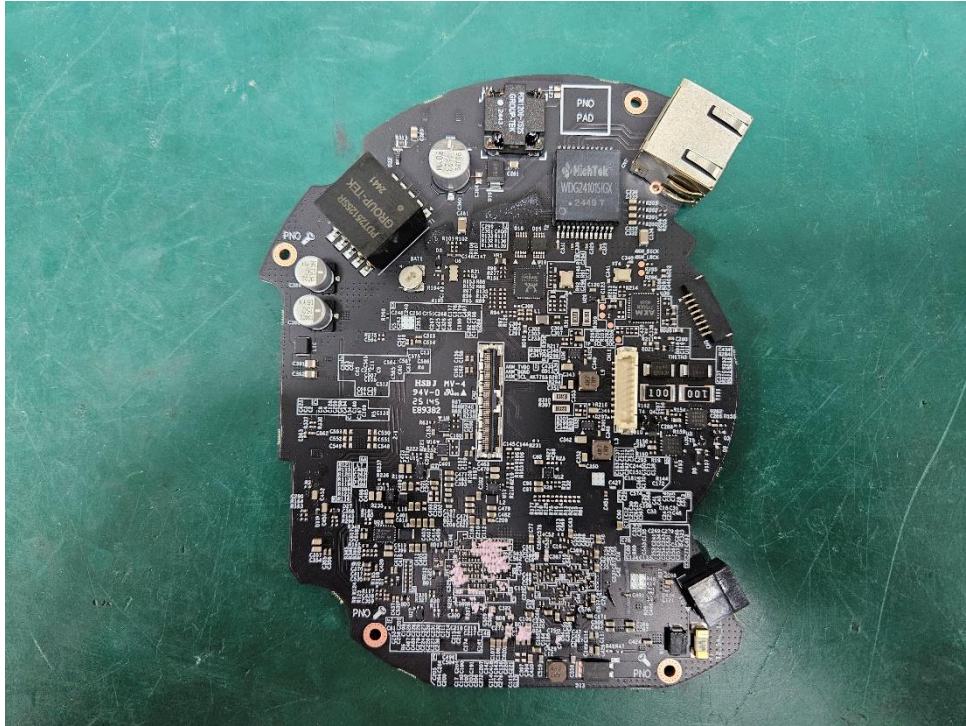


(Bottom)

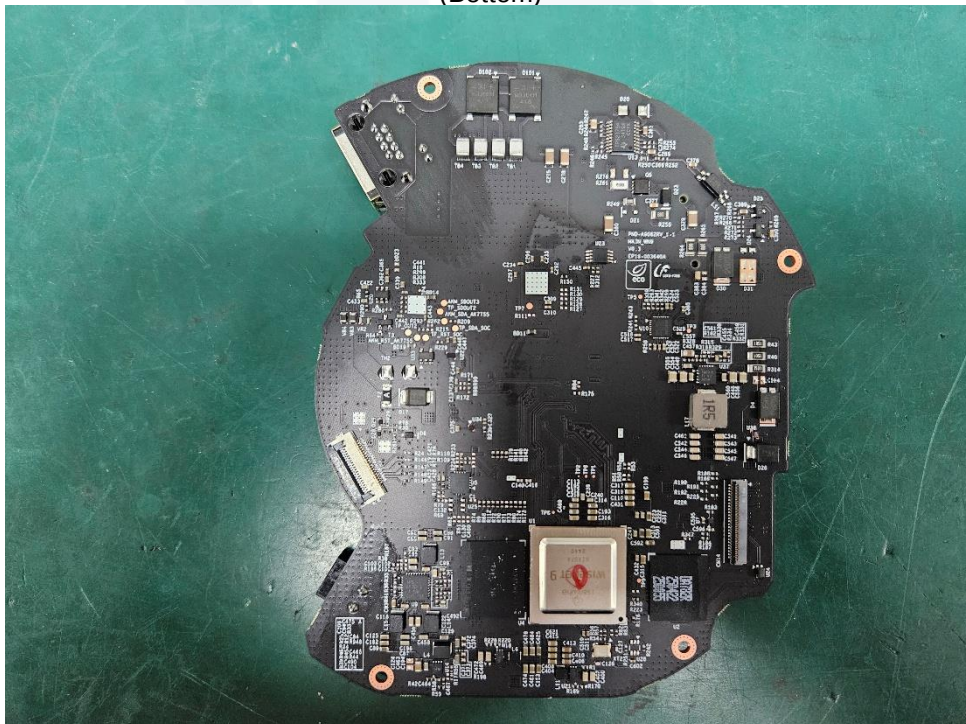



EUT Internal View – Board 3

(Top)

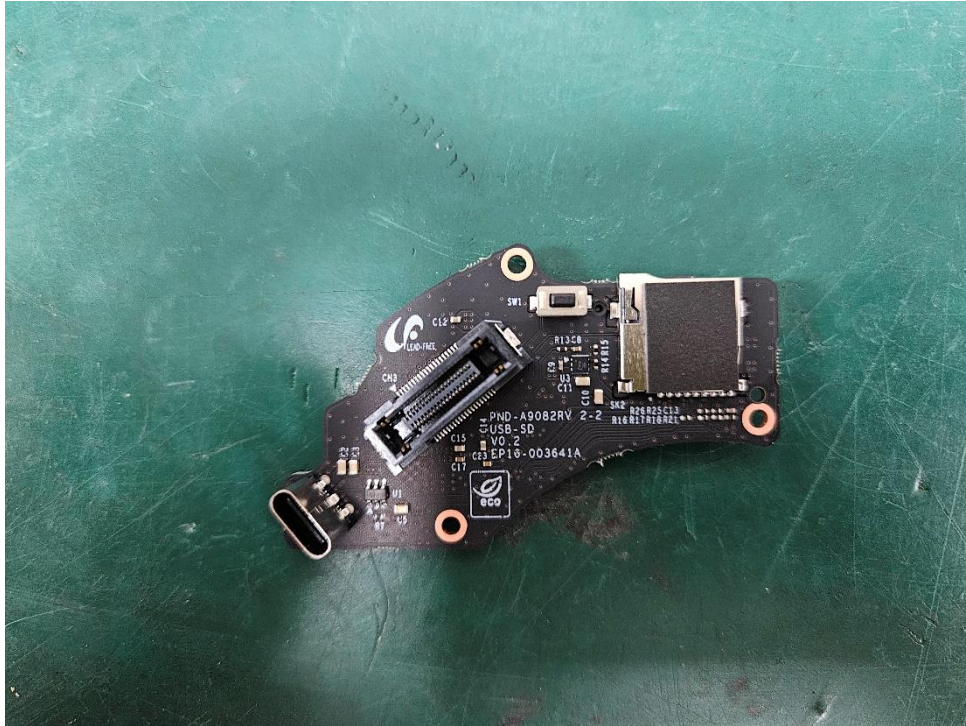

(Bottom)





EUT Internal View – Board 5

(Top)




(Bottom)





EUT Internal View – Camera

(Top)

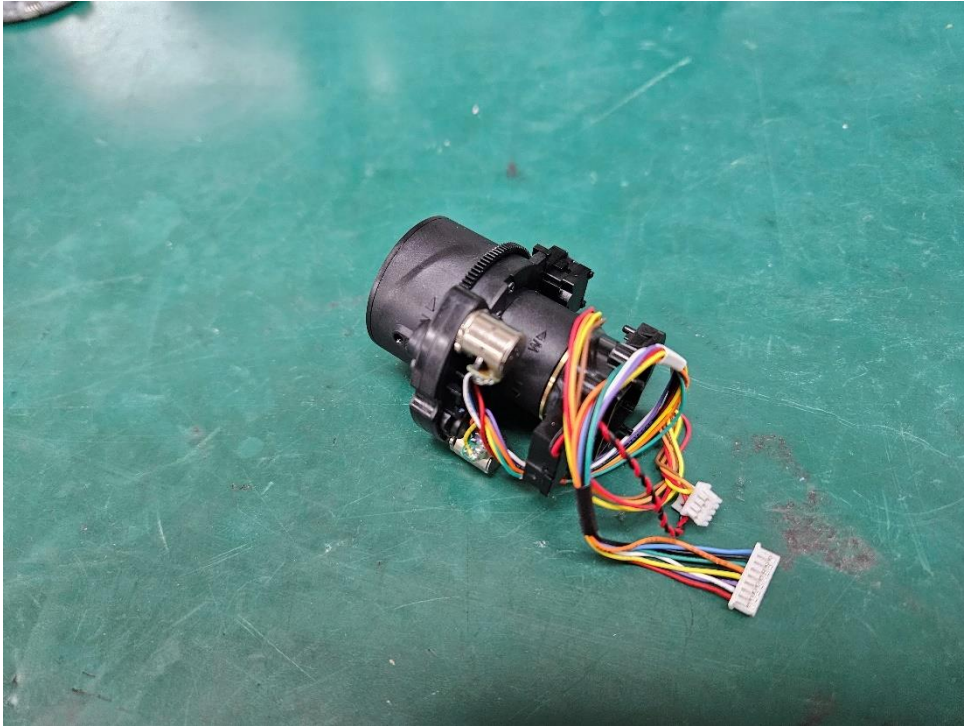


(Bottom)





Label and Location

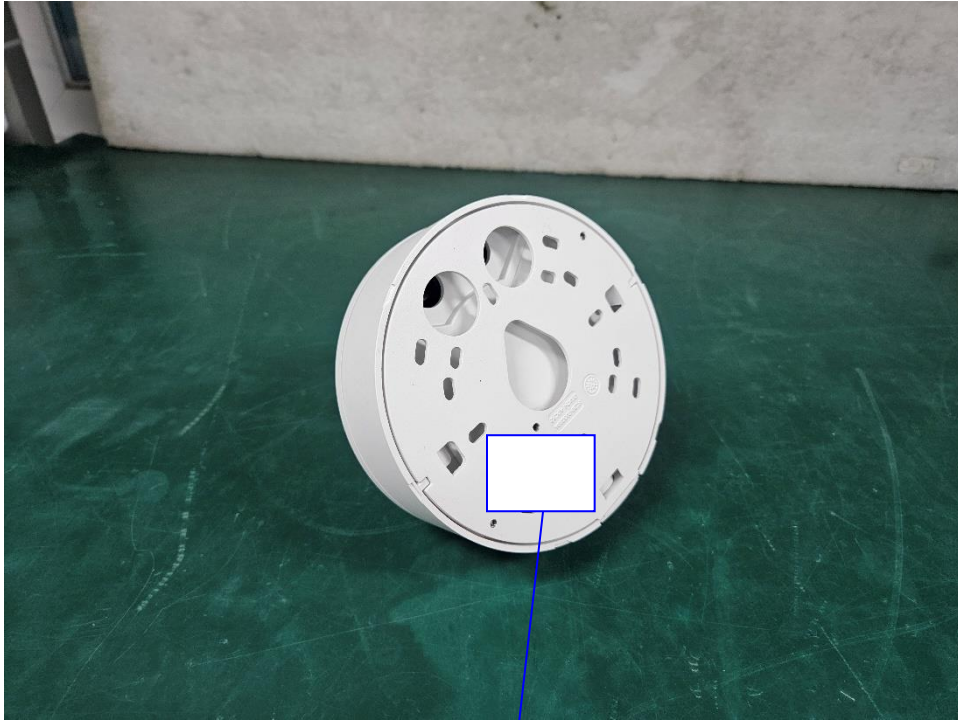

NETWORK CAMERA

Model No : PND-A7082RV

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam



The End.