

EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0295-R1

Date of Issue : May. 15, 2019

Product name : NETWORK CAMERA
7

Model/Type No. : PNF-9010RVM

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Jun. 15, 2016

Test date : Jun. 25, 2016 – Jul. 02, 2016

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (2) of (76)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jul. 05, 2016	KES-E1-16T0295	Issued
May. 15, 2019	KES-E1-16T0295-R1	Re-issue due to manufacturer change

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	E.U.T Operating Mode(s)	7
1.8	Configuration	8
1.9	Calibration Details of Equipment Used for Measurement	9
1.10	Test Facility	9
1.11	Laboratory Accreditations and Listings	9
2.0	Test Regulations	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance	18
3.1	Electrostatic Discharge	20
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	30
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions	36
APPENDIX A	– TEST DATA	38
	Conducted Emissions at Mains Power Ports	38
	Conducted Emissions at Telecommunication Ports	40
	Radiated Electric Field Emissions(Below 1 GHz)	44
	Radiated Electric Field Emissions(Above 1 GHz)	45
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	53
	Test Setup Photos and Configuration	56
	Conducted Voltage Emissions	56
	Conducted Telecommunication Emissions	57
	Radiated Electric Field Emissions(Below 1 GHz)	59
	Radiated Electric Field Emissions(Above 1 GHz)	61
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	63
	Electrostatic Discharge	64
	Radiated Electric Field Immunity	65
	Electrical Fast Transients/Bursts	66
	Surge Transients	67
	Conducted Disturbance	68
	Voltage Dips and Short Interruptions	69
	EUT External Photographs	70
	EUT Internal Photographs	71



1.0 General Product Description

Main Specifications of E.U.T are:

PNF-9010RVM	
Video	
Imaging Device	1/1.7"
Total Pixels	4168x3062
Effective Pixels	2992x2992
Scanning System	Progressive
Min. Illumination	Color : 0.7Lux(F2.8, 30IRE) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0Vpp DIP connector type
Lens	
Focal Length (Zoom Ratio)	1.98mm
Max. Aperture Ratio	F2.8
Angular Field of View	H : 180° / V : 180° / D : 180°
Min. Object Distance	0.3m ~ Infinity
Focus Control	ABF
Lens Type	Fixed Lens
Mount Type	Board Type (M12)
Operational	
Viewable Length	15m
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	True D&N
Backlight Compensation	BLC / WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	DNR(2D+3D Noise Filter), Function Name : SSNR
Digital Image Stabilization	Not support
Defog	Support
Motion Detection	Off / On (8ea Polygonal zones)
Privacy Masking	Off / On (16ea Polygonal zones)
People counting	In/Out counting support (overhead), Statistic report support
Heatmap	Color histogram, Statistic report support
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (Included Mercury)
Electronic Shutter Speed	2 ~ 1/12,000 sec
Digital Zoom	16x, Digital PTZ(Preset, Group)
Flip / Mirror	Off / On
Intelligent Video Analytics	Tampering(Scene Change), People counting, Heatmap, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection
Alarm I/O	Input 1ea / Output 1ea
Audio In	Line in/out Built-in Mic
Audio out	Line out
Alarm Triggers	Motion detection, Tampering, Audio Detection, Alarm input, Network-Disconnection, Defocus detection
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, TCP and HTTP local storage(SD/SDHC/SDXC) or NAS recording at Event (Alarm Triggers) External output
View Composition	<Camera Side> 360 source view 180° Panorama 360° Panorama Double Panorama 360+4 PTZ view 180+4 PTZ view Quad PTZ view View 1/2/3/4 360+8 PTZ view

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (5) of (76)

Network	
Ethernet	M12 cable
Video Compression Format	H.265 / H.264 (MPEG-4 Part 10/AVC), Motion JPEG
Resolution	Original View
	Max 12MP TBD
Dewarped View	Max 9M
Max. Frame Rate	H.265
	12M 20fps, 9M 25fps
	H.264
	12M 20fps, 9M 25fps
MPEG	Max 15fps at all resolutions
Smart Codec	WiseStream
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MPEG : Quality Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 profiles)
Audio Compression Format	G.711 u-law / G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, SIP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	micro SD/SDHC/SDXC (128GB) - motion Images recorded in the SDX/SDHC/SD memory card can be downloaded. NAS(Network Attached Storage) Local PC
Application Programming Interface	ONVIF Profile S/G SUNAPI(HTTP API) v2.0 Samsung techwin open platform
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Portuguese, Turkish, Polish, Czech, Dutch, Hungary, Greek
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11, Mozilla Firefox 43, Apple Safari 9 * Mac OS X only
Central Management Software	SSM, Smart Viewer
Pixel counter	support (plug-in viewer only)
Environmental	
Operating Temperature / Humidity	SNF-9010RVM : -40°C ~ +55°C(+14°F ~ +131°F) / Less than 90% RH TBD * Startup should be done at above -20°C
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	IK10
Standard Certification	SNV-L6014RM과 동일
Electrical	
Input Voltage / Current	DC12V±10%, PoE(IEEE802.3af, Class3)
Power Consumption	DC12V: TBD, PoE: TBD
Mechanical	
Color / Material	Ivory/Metal
Dimension (WxHxD)	TBD
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☐ 240 Vac ☒ PoE ☒ 12 Vdc

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNF-9010RVM	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	RP-PEG048I	-	REPOTEC	-
Notebook	HP ProBook 4430s	CNU2084CVW	HP	-
Notebook Adapter	Series PPP00H	F12921201063695	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Monitor	SMT-2232	C95V67VF900038B	Weiha Daewoo Electronics Co., Ltd.	-
Speaker	BR10000A CUVE	SN128458950887	BEIJING EDIFIER HI-TECH GROUP.	-
Alarm Jig	-	-	-	-
Mobile Phone	A1688	-	Apple	-

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45(LAN)	Notebook	RJ-45(LAN)	3.0	U
	BNC	Monitor	BNC	4.0	S
	Audio In	Mobile Phone	Audio Out	1.7	U
	Audio Out	Speaker	Audio In	1.6	U
	Alarm	Alarm Jig	Alarm	3.0	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45(PoE)	PoE Adapter	RJ-45(PoE)	3.5	U
PoE Adapter	RJ-45(LAN)	Notebook	RJ-45(LAN)	1.7	U
NETWORK CAMERA (E.U.T)	BNC	Monitor	BNC	4.0	S
	Audio In	Mobile Phone	Audio Out	1.7	U
	Audio Out	Speaker	Audio In	1.6	U
	Alarm	Alarm Jig	Alarm	3.0	U

* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:


Test mode	Normal operating
OP	MONITORING PING TEST

- Input power condition during the measurements was 12 V (dc) , PoE


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

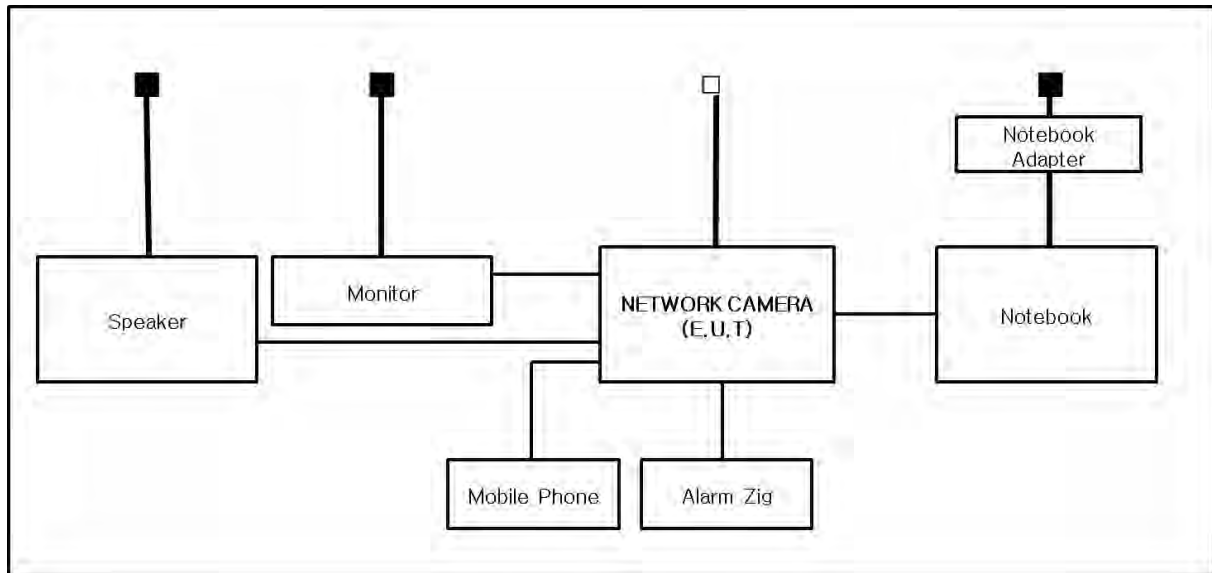

- PoE Mode

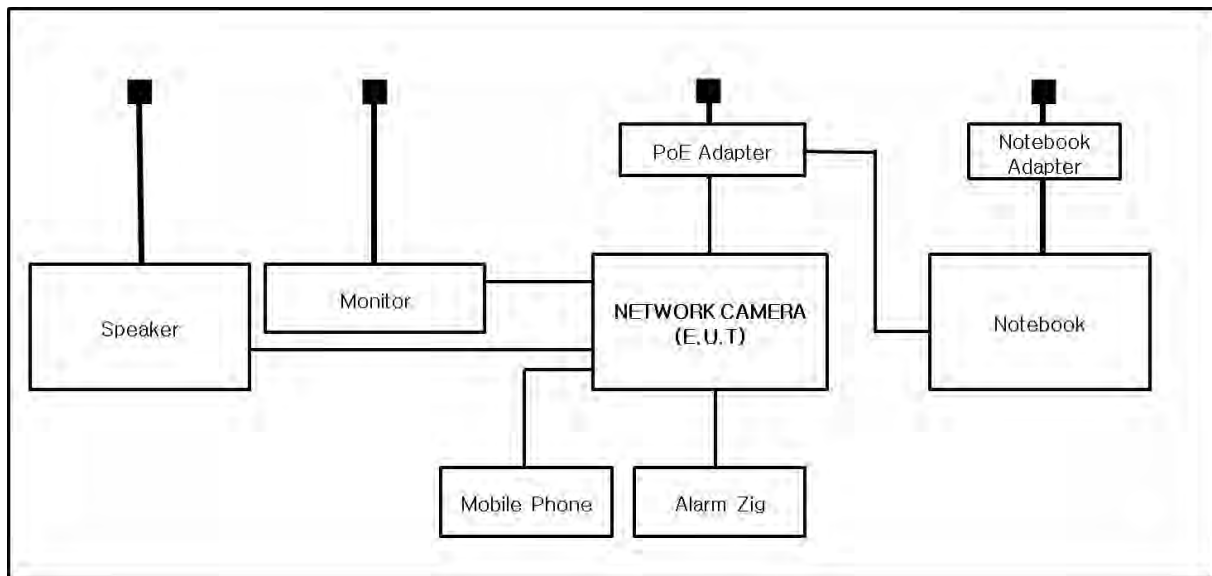

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



☐ **VCCI V-3 / 2015.04**

☐ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☐	LISN	ENV216	R&S	101137	02, 04, 2017
☐	LISN	ENV216	R&S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: °C

Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Because the E.U.T power is 12 V (dc) power and PoE, limits are not specified.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jun. 29, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 14, 2016
☒	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 23,8 °C

Relative Humidity: 49,2 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 30, 2016

Test Location☐ Open Area Test Site #1☒ Open Area Test Site #2**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9163-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 30,1 °C

Relative Humidity: 54,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jul. 01, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 23, 2016
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	Semi Anchoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 23,7 °C
Relative Humidity: 53,4 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 13, 2016
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

Because the E.U.T power is less than 75 W, limits are not specified.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 13, 2016
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Because the E.U.T power is 12 V (dc) power and PoE.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Jun. 27, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 24,9 °C
Relative Humidity: 42,1 %
Atmospheric Pressure: 99,0 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane



Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Location of Discharge:

- DC 12 V, PoE Mode

Air
Contact

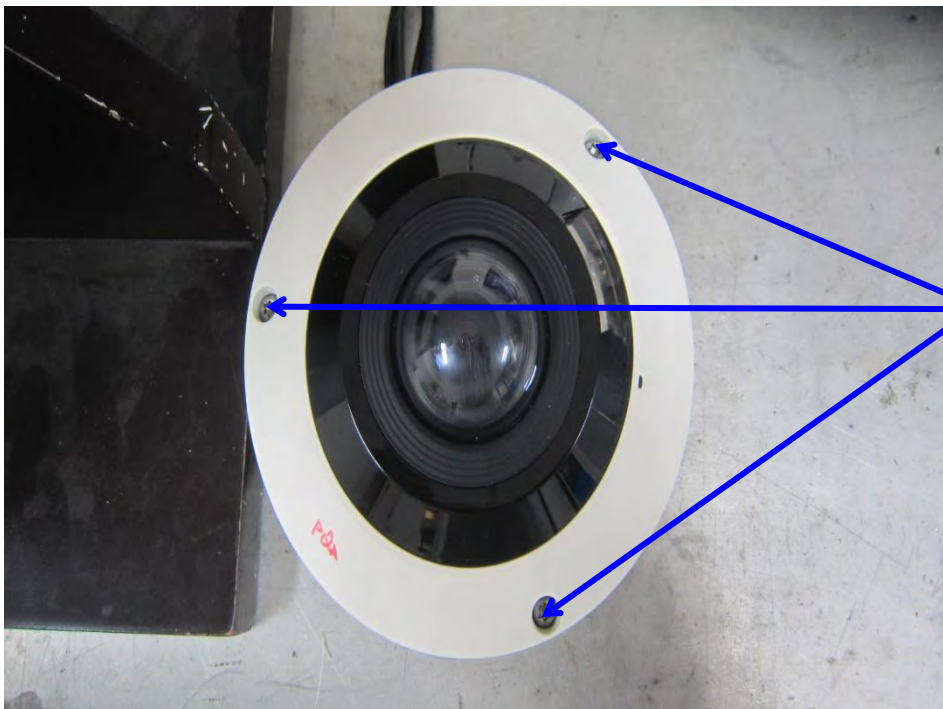

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

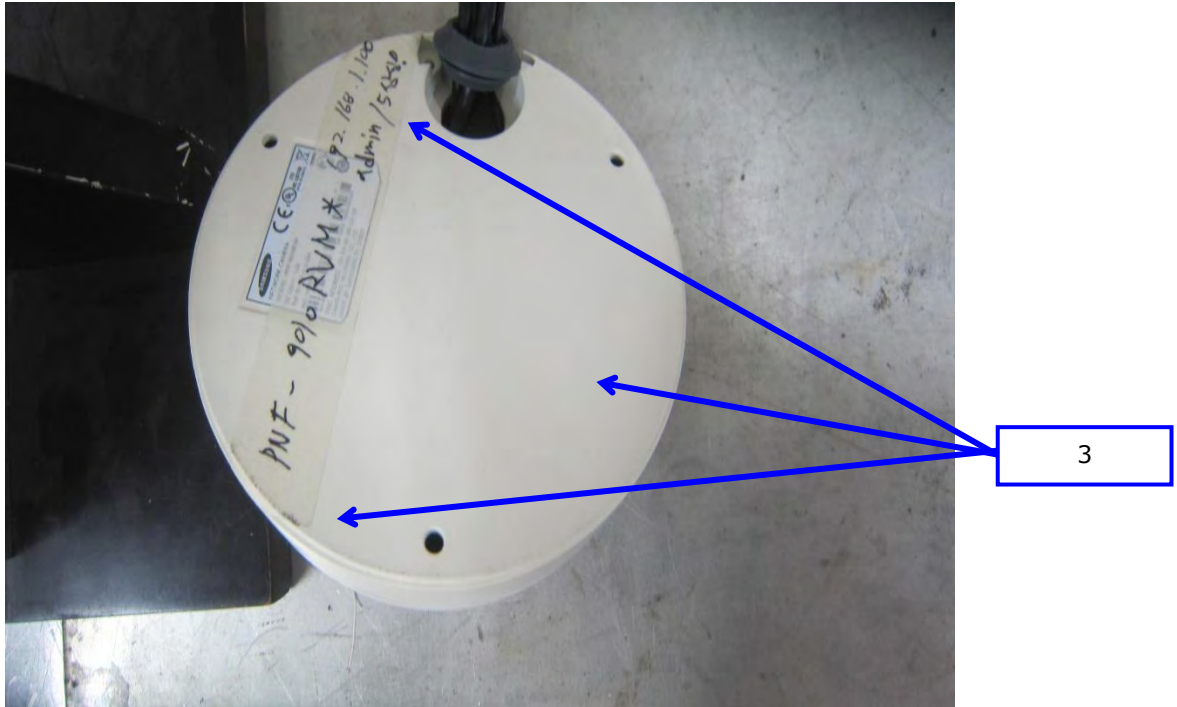

**Test Data****- DC 12 V Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	Enclosure 1	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-
3	Enclosure 2	Contact Discharge	Complied	-

- PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	Enclosure 1	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-
3	Enclosure 2	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Jul. 02, 2016

Test Location

EMS-RS: ☐ Semi Anchoic Chamber #1

☒ Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	SIGNAL GENERATOR	SMB 100A	R&S	108252	08, 13, 2016
☒	BROADBAND AMPLIFIER	BBA100	R&S	101239	08, 13, 2016
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 13, 2016
☒	POWER METER	NRP2	R&S	103475	08, 13, 2016
☒	AVG POWER SENSOR	NRP-Z91	R&S	102526	08, 13, 2016
☒	AVG POWER SENSOR	NRP-Z91	R&S	102527	08, 13, 2016
☒	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KyTelecom Co., Ltd.	KY150001	09, 25, 2016
☒	Semi Anchoic Chamber #2		SEMITEC	-	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (25) of (76)

Test Conditions

Temperature: 21,6 °C
Relative Humidity: 43,3 %
Atmospheric Pressure: 98,6 kPa

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % stepDwell Time: ☒ 1 s ☐ 3 s# of Sides Radiated: ☒ 4Required Performance Criteria: ☒ Complied**Test Data**

- DC 12 V Mode

Side Exposed	Observation	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (26) of (76)

- PoE Mode

Side Exposed	Observation	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Jun. 29, 2016

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Transient Test System	TRA3000F-S-D-V	EMC PARTNER AG	1524	03, 25, 2017
☒	MotorVariac	VAR-EXT1000	EMC PARTNER AG	1507	03, 25, 2017
☒	Capacitive Coupling Clamp	CN-EFT1000	EMC PARTNER AG	1528	03, 25, 2017

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 48,4 %
Atmospheric Pressure: 99,2 kPa

Test Specifications

Pulse Amplitude & Polarity: (Power Lines)	☒ ± 1.0 kV ☐ ± 4.0 kV	☐ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV	☒ ± 1.0 kV ☐ ± 2.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	



Test Data

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
BNC	Complied	Complied
Alarm	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (29) of (76)

- PoE Mode☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (PoE)	Complied	Complied
BNC	Complied	Complied
Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Jul. 01, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 504N	EM TEST	V0936105121	03, 25, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 27, 2017
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017

Test Conditions

Temperature: 23,7 °C
Relative Humidity: 53,4 %
Atmospheric Pressure: 99,7 kPa

Test Specifications
Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode
☐ (0,5 / 1,0 / 2,0) kV

Differential Mode
☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied



Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude: Common Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 Surges

Polarity: ☒ Positive & Negative

Repetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Test Data

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45 (LAN)	Complied	Complied
BNC	Complied	Complied
Alarm	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (32) of (76)

- PoE Mode☐ Line to Line – Differential Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45 (PoE)	Complied	Complied
BNC	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Jun. 25, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	09, 25, 2016
☒	6dB Attenuator	ATT6	EM TEST	1208-34	08, 13, 2016
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 13, 2016
☐	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 13, 2016
☐	CDN	CDN-T4	EM TEST	0909-08	08, 13, 2016
☐	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 13, 2016
☐	CDN	CDN-AF2	EM TEST	0909-10	08, 13, 2016
☐	CDN	CDN-AF4	EM TEST	0909-11	08, 13, 2016
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017

Test Conditions

Temperature: 24,2 °C

Relative Humidity: 45,5 %

Atmospheric Pressure: 98,3 kPa

Test Specifications

- Frequency range: ☒ 150 kHz to 100 MHz ☐ 10 kHz to 30 MHz
☐ 150 kHz to 230 MHz ☐ 10 kHz to 100 MHz
- Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms
- Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: ☒ 1 % step
- Dwell Time: ☒ 1 s ☐ 3 s
- Required Performance Criteria: ☒ Complied

Test Data

- DC 12 V Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
L1 – L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observation
RJ-45 (LAN)	EM Injection Clamp	Complied
BNC	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

- PoE Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observation
RJ-45 (PoE)	EM Injection Clamp	Complied
BNC	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	Transient Test System	TRA3000F-S-D-V	EMC PARTNER AG	1524	03, 25, 2017
☐	MotorVariac	VAR-EXT1000	EMC PARTNER AG	1507	03, 25, 2017

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (37) of (76)

Test Specifications & Observations/Remarks

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☐ 20 % dip	☐ 250 /10	_____
☐ 30 % dip	☐ 25 /10	_____
☐ 60 % dip	☐ 10 /10	_____
☐ 100 % dip	☐ 250 /10	_____

- Voltage variations

☐ Unom + 10 %	☐ 253 V (ac)	_____
☐ Unom - 15 %	☐ 195.5 V (ac)	_____

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (38) of (76)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (39) of (76)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNF-9010RVMP
Mode	DC 12 V_10 Mbps
Operator Name:	KES

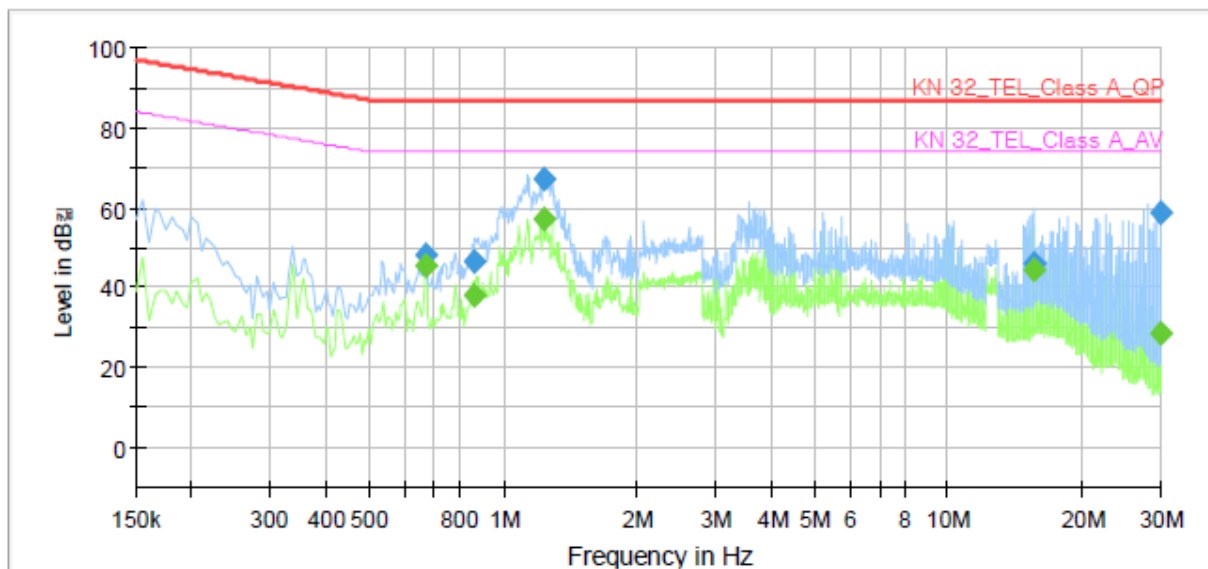


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	45.44	74.00	28.56	1000.0	9.000	Single Line	9.9
0.670000	48.12	---	87.00	38.88	1000.0	9.000	Single Line	9.9
0.865000	---	38.11	74.00	35.89	1000.0	9.000	Single Line	9.9
0.865000	46.52	---	87.00	40.48	1000.0	9.000	Single Line	9.9
1.230000	---	57.35	74.00	16.65	1000.0	9.000	Single Line	9.8
1.230000	67.08	---	87.00	19.92	1000.0	9.000	Single Line	9.8
15.555000	---	44.40	74.00	29.60	1000.0	9.000	Single Line	10.1
15.555000	46.07	---	87.00	40.93	1000.0	9.000	Single Line	10.1
29.980000	---	28.51	74.00	45.49	1000.0	9.000	Single Line	10.0
29.980000	58.54	---	87.00	28.46	1000.0	9.000	Single Line	10.0

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNF-9010RVMP
Mode	DC 12 V_100 Mbps
Operator Name:	KES

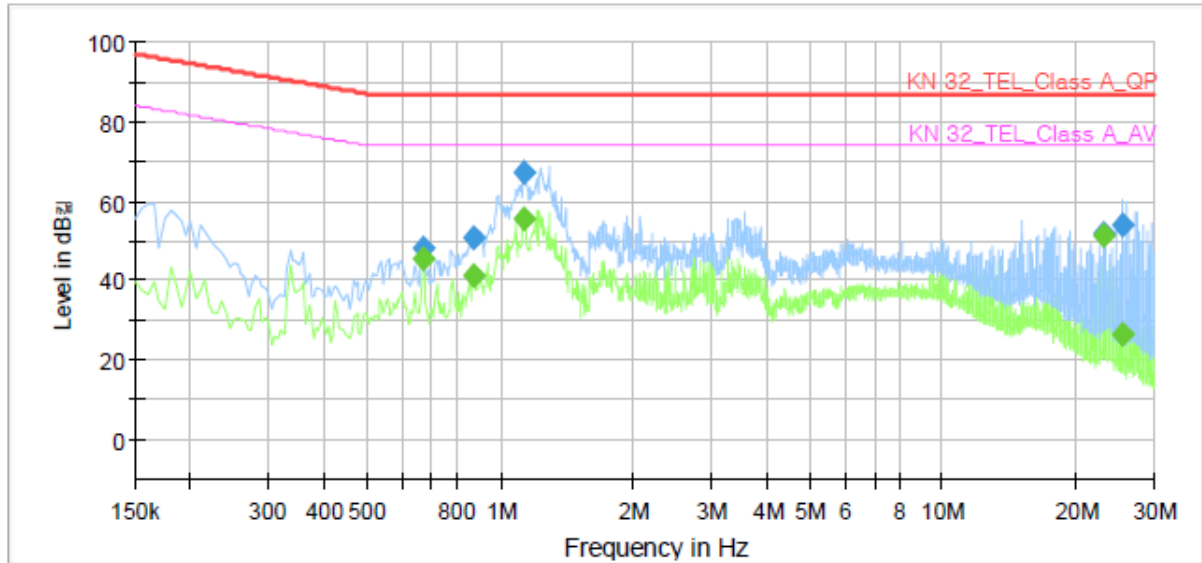

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	45.41	74.00	28.59	1000.0	9.000	Single Line	9.4
0.670000	48.05	---	87.00	38.95	1000.0	9.000	Single Line	9.4
0.875000	---	41.51	74.00	32.49	1000.0	9.000	Single Line	9.4
0.875000	50.57	---	87.00	36.43	1000.0	9.000	Single Line	9.4
1.130000	---	55.78	74.00	18.22	1000.0	9.000	Single Line	9.4
1.130000	67.35	---	87.00	19.65	1000.0	9.000	Single Line	9.4
23.130000	---	51.23	74.00	22.77	1000.0	9.000	Single Line	9.5
23.130000	52.01	---	87.00	34.99	1000.0	9.000	Single Line	9.5
25.340000	---	26.31	74.00	47.69	1000.0	9.000	Single Line	9.4
25.340000	54.22	---	87.00	32.78	1000.0	9.000	Single Line	9.4

- PoE Mode

[10 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


PNF-9010RVMP

Mode

PoE 10 Mbps

Operator Name:

KES

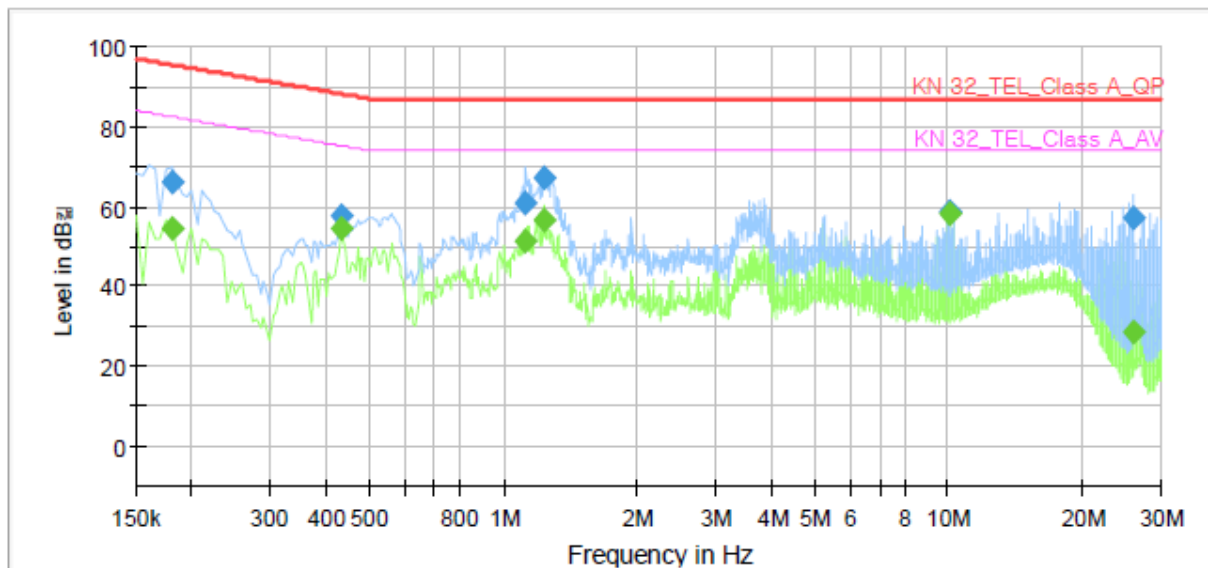

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.180000	---	54.71	82.49	27.78	1000.0	9.000	Single Line	10.1
0.180000	65.94	---	95.49	29.55	1000.0	9.000	Single Line	10.1
0.435000	---	54.40	75.16	20.76	1000.0	9.000	Single Line	10.0
0.435000	57.67	---	88.16	30.49	1000.0	9.000	Single Line	10.0
1.125000	---	51.60	74.00	22.40	1000.0	9.000	Single Line	9.9
1.125000	60.91	---	87.00	26.09	1000.0	9.000	Single Line	9.9
1.230000	---	56.70	74.00	17.30	1000.0	9.000	Single Line	9.8
1.230000	67.45	---	87.00	19.55	1000.0	9.000	Single Line	9.8
10.060000	---	58.13	74.00	15.87	1000.0	9.000	Single Line	10.1
10.060000	58.82	---	87.00	28.18	1000.0	9.000	Single Line	10.1
25.955000	---	28.69	74.00	45.31	1000.0	9.000	Single Line	10.0
25.955000	57.08	---	87.00	29.92	1000.0	9.000	Single Line	10.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNF-9010RVMP
Mode	PoE 100 Mbps
Operator Name:	KES

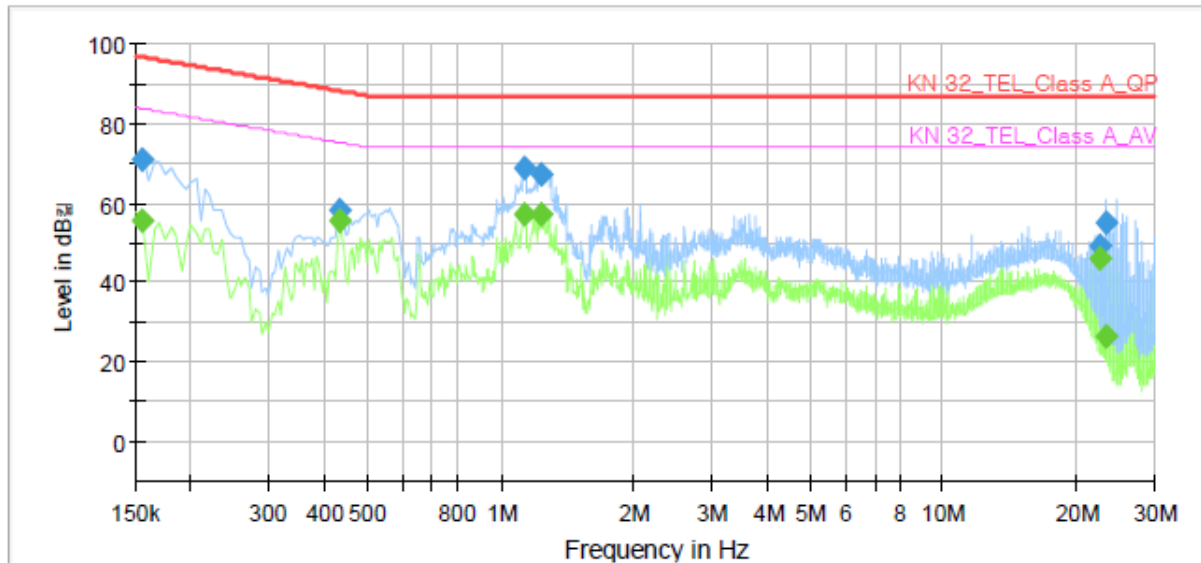

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	55.42	83.73	28.31	1000.0	9.000	Single Line	9.6
0.155000	71.11	---	96.73	25.62	1000.0	9.000	Single Line	9.6
0.435000	---	55.51	75.16	19.65	1000.0	9.000	Single Line	9.5
0.435000	58.45	---	88.16	29.71	1000.0	9.000	Single Line	9.5
1.130000	---	57.02	74.00	16.98	1000.0	9.000	Single Line	9.4
1.130000	68.88	---	87.00	18.12	1000.0	9.000	Single Line	9.4
1.235000	---	57.32	74.00	16.68	1000.0	9.000	Single Line	9.3
1.235000	67.44	---	87.00	19.56	1000.0	9.000	Single Line	9.3
22.605000	---	46.00	74.00	28.00	1000.0	9.000	Single Line	9.5
22.605000	49.41	---	87.00	37.59	1000.0	9.000	Single Line	9.5
23.325000	---	26.63	74.00	47.37	1000.0	9.000	Single Line	9.5
23.325000	55.00	---	87.00	32.00	1000.0	9.000	Single Line	9.5

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT.	Correction Factor		Corrected	Applicable	Margin
[MHz]	[dB μ V]	Polar. (H/V)	Height [m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	Limit [dB μ V/m]	
155.03	19.20	V	1.00	8.38	2.80	30.38	40.00	9.62
275.36	17.63	H	4.00	12.90	4.01	34.54	47.00	12.46
360.70	20.67	H	4.00	14.79	4.74	40.20	47.00	6.80
450.82	14.72	H	3.40	16.41	5.40	36.53	47.00	10.47
504.01	18.21	H	3.00	17.19	5.77	41.17	47.00	5.83
648.69	14.70	H	2.90	19.49	6.77	40.96	47.00	6.04

* H : Horizontal, V : Vertical


- PoE Mode

Frequency	Amplitude	ANT	ANT.	Correction Factor		Corrected	Applicable	Margin
[MHz]	[dB μ V]	Polar. (H/V)	Height [m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	Limit [dB μ V/m]	
50.23	12.31	V	1.00	13.92	1.46	27.69	40.00	12.31
62.00	11.42	V	1.00	12.09	1.64	25.15	40.00	14.85
360.64	20.27	V	1.00	14.79	4.74	39.80	47.00	7.20
400.49	14.98	H	3.90	15.71	5.04	35.73	47.00	11.27
504.01	18.85	H	3.00	17.19	5.77	41.81	47.00	5.19
648.80	14.61	H	3.80	19.50	6.77	40.88	47.00	6.12
675.09	13.52	H	2.60	19.60	7.02	40.14	47.00	6.86
725.37	12.26	H	1.90	19.98	7.35	39.59	47.00	7.41

* H : Horizontal, V : Vertical

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

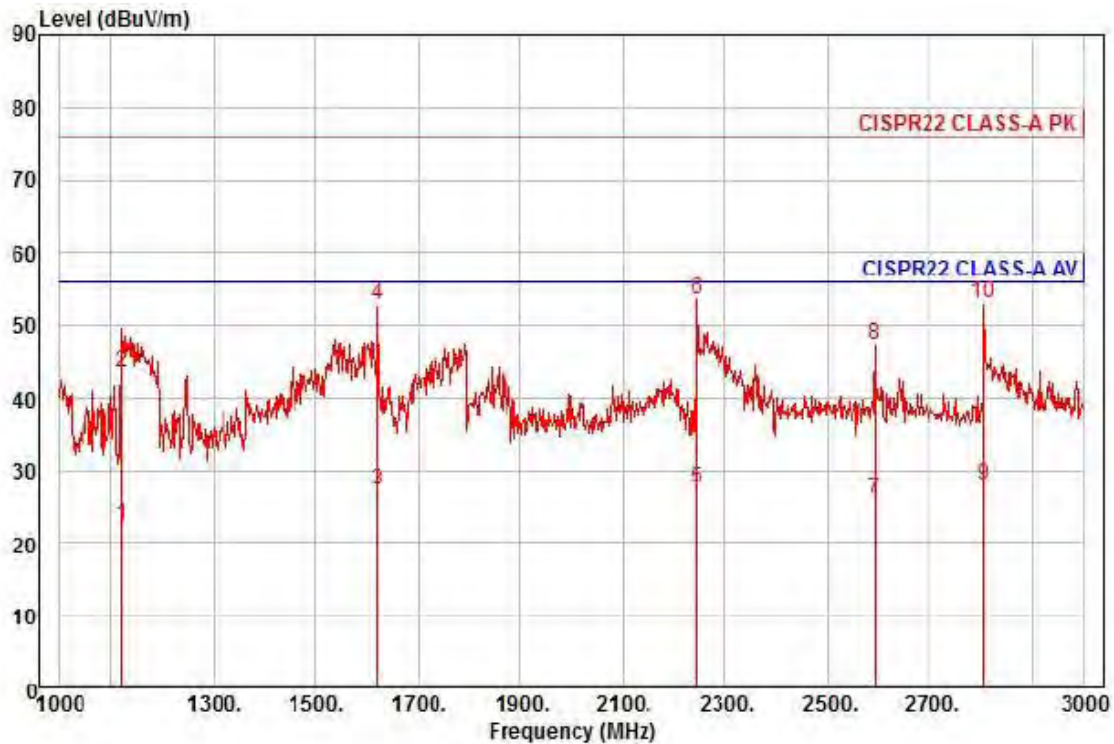

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : DC 12 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1120.00	31.17	24.39	6.86	40.06	321	56.00	-33.64	horizontal	Average
2	1120.00	52.21	24.39	6.86	40.06	321	76.00	-32.60	horizontal	Peak
3	1622.00	32.27	26.38	8.31	39.82	341	56.00	-28.86	horizontal	Average
4	1622.00	57.91	26.38	8.31	39.82	341	76.00	-23.22	horizontal	Peak
5	2244.00	29.00	28.48	9.72	39.77	59	56.00	-28.57	horizontal	Average
6 pp	2244.00	55.13	28.48	9.72	39.77	59	76.00	-22.44	horizontal	Peak
7	2594.00	26.40	29.34	10.26	39.97	229	56.00	-29.97	horizontal	Average
8	2594.00	47.65	29.34	10.26	39.97	229	76.00	-28.72	horizontal	Peak
9 av	2804.00	27.39	29.85	10.75	40.10	335	56.00	-28.11	horizontal	Average
10	2804.00	52.40	29.85	10.75	40.10	335	76.00	-23.10	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (46) of (76)

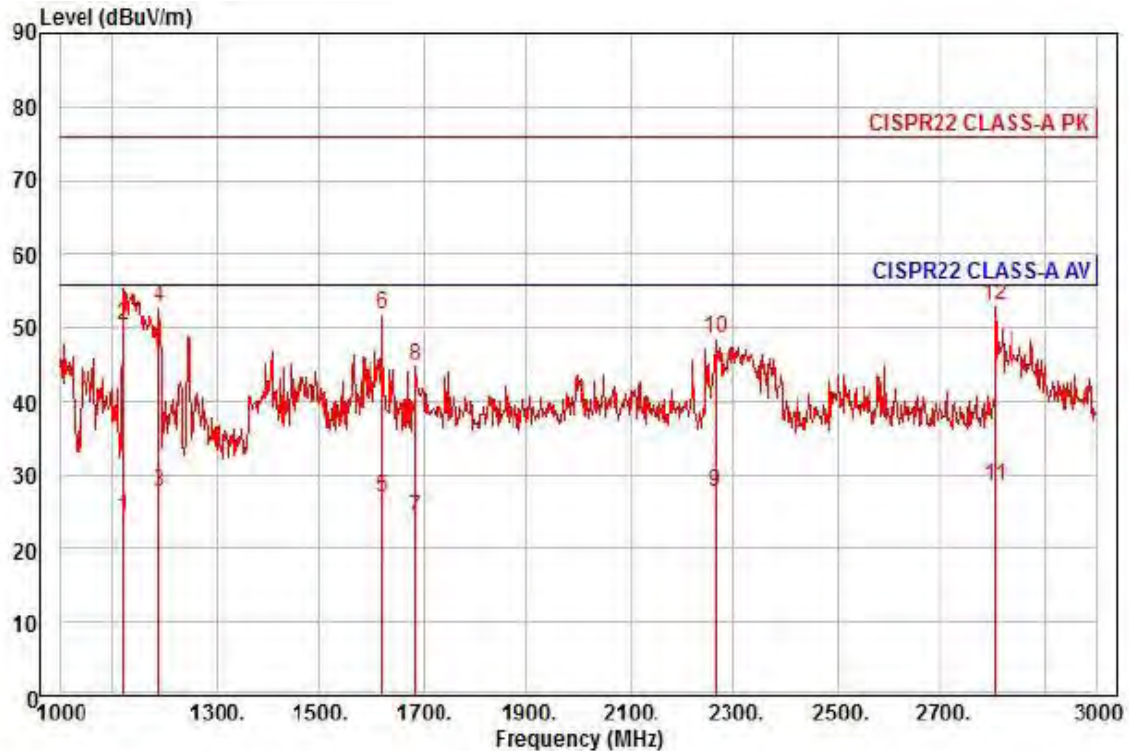

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : DC 12 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1120.00	33.03	24.39	6.86	40.06	356	56.00	-31.78	vertical	Average
2	1120.00	58.96	24.39	6.86	40.06	356	76.00	-25.85	vertical	Peak
3	1190.00	35.98	24.66	7.06	40.03	351	56.00	-28.33	vertical	Average
4	1190.00	61.15	24.66	7.06	40.03	351	76.00	-23.16	vertical	Peak
5	1622.00	32.22	26.38	8.31	39.82	325	56.00	-28.91	vertical	Average
6	1622.00	56.80	26.38	8.31	39.82	325	76.00	-24.33	vertical	Peak
7	1684.00	29.05	26.63	8.48	39.78	8	56.00	-31.62	vertical	Average
8	1684.00	49.55	26.63	8.48	39.78	8	76.00	-31.12	vertical	Peak
9	2264.00	29.24	28.53	9.75	39.78	356	56.00	-28.26	vertical	Average
10	2264.00	50.07	28.53	9.75	39.78	356	76.00	-27.43	vertical	Peak
11 av	2804.00	27.99	29.85	10.75	40.10	8	56.00	-27.51	vertical	Average
12 pp	2804.00	52.49	29.85	10.75	40.10	8	76.00	-23.01	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (47) of (76)

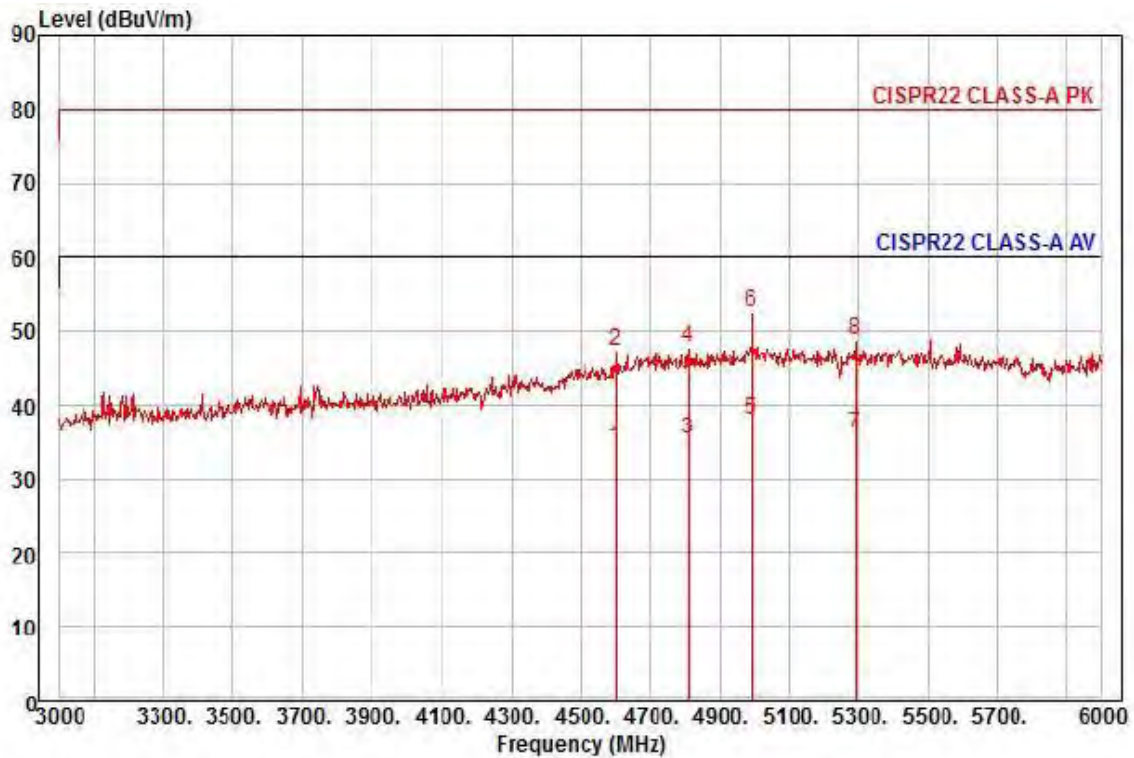

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4602.00	24.55	35.45	14.61	40.41	149	60.00	-25.80	horizontal	Average
2	4602.00	37.73	35.45	14.61	40.41	149	80.00	-32.62	horizontal	Peak
3	4812.00	24.12	36.65	14.99	40.41	109	60.00	-24.65	horizontal	Average
4	4812.00	36.68	36.65	14.99	40.41	109	80.00	-32.09	horizontal	Peak
5 pp	4995.00	25.29	37.69	15.32	40.41	121	60.00	-22.11	horizontal	Average
6 pk	4995.00	39.99	37.69	15.32	40.41	121	80.00	-27.41	horizontal	Peak
7	5292.00	23.52	37.13	15.67	40.37	174	60.00	-24.05	horizontal	Average
8	5292.00	36.26	37.13	15.67	40.37	174	80.00	-31.31	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (48) of (76)

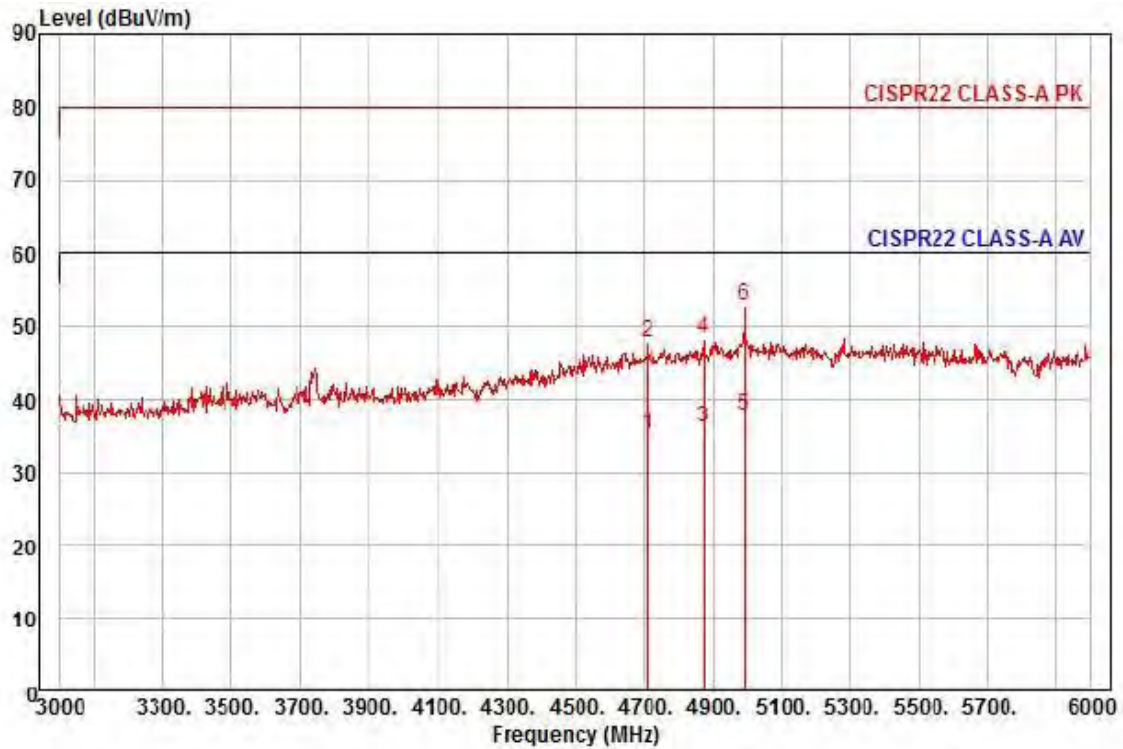

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4710.00	24.62	36.06	14.81	40.41	119	60.00	-24.92	vertical	Average
2	4710.00	37.40	36.06	14.81	40.41	119	80.00	-32.14	vertical	Peak
3	4875.00	24.23	37.01	15.10	40.41	233	60.00	-24.07	vertical	Average
4	4875.00	36.71	37.01	15.10	40.41	233	80.00	-31.59	vertical	Peak
5 pp	4995.00	25.12	37.69	15.32	40.41	76	60.00	-22.28	vertical	Average
6 pk	4995.00	40.21	37.69	15.32	40.41	76	80.00	-27.19	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (49) of (76)


- PoE Mode

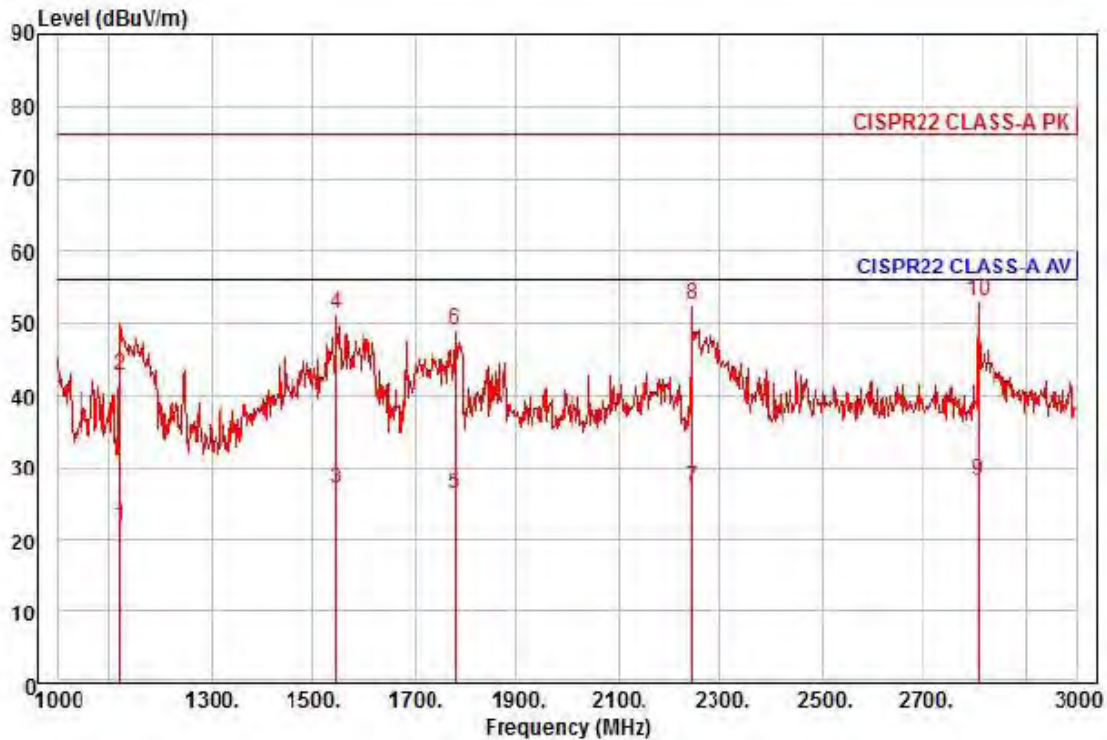

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : PoE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1120.00	30.63	24.39	6.86	40.06	330	56.00	-34.18	horizontal	Average
2	1120.00	51.44	24.39	6.86	40.06	330	76.00	-33.37	horizontal	Peak
3	1546.00	32.72	26.08	8.09	39.85	287	56.00	-28.96	horizontal	Average
4	1546.00	56.96	26.08	8.09	39.85	287	76.00	-24.72	horizontal	Peak
5	1780.00	30.30	27.01	8.74	39.74	0	56.00	-29.69	horizontal	Average
6	1780.00	53.03	27.01	8.74	39.74	0	76.00	-26.96	horizontal	Peak
7	2244.00	28.80	28.48	9.72	39.77	56	56.00	-28.77	horizontal	Average
8	2244.00	53.98	28.48	9.72	39.77	56	76.00	-23.59	horizontal	Peak
9 av	2806.00	27.68	29.85	10.76	40.10	56	56.00	-27.81	horizontal	Average
10 pp	2806.00	52.37	29.85	10.76	40.10	56	76.00	-23.12	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

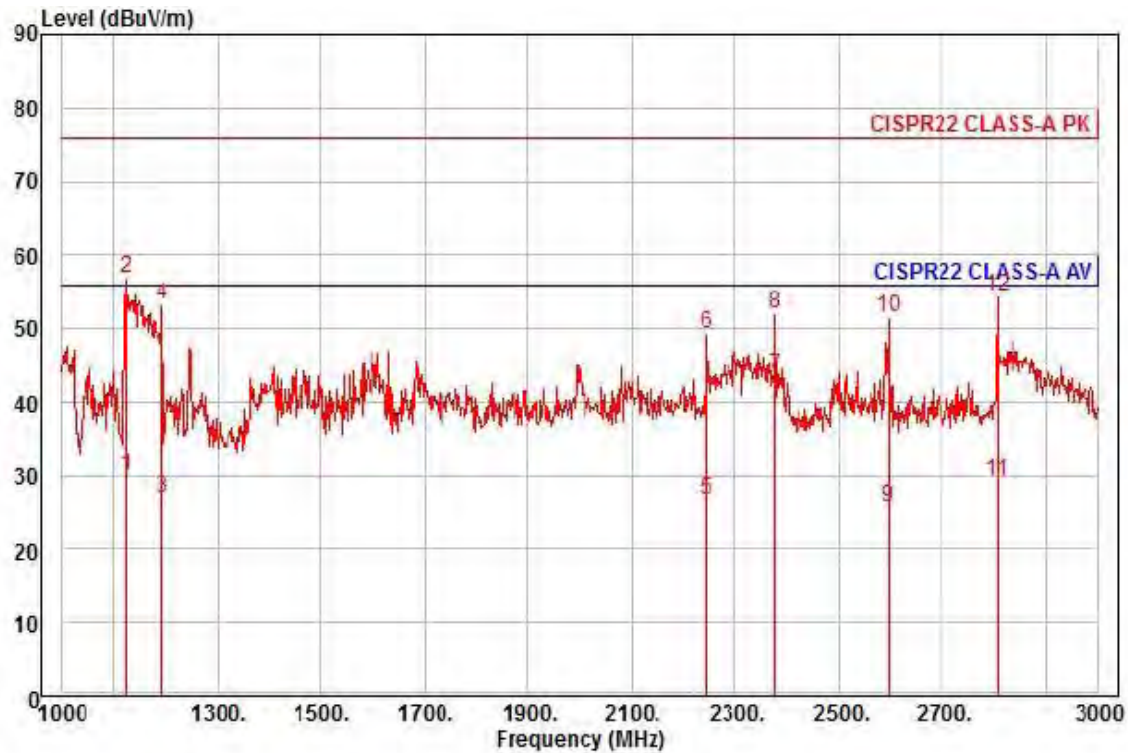

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : PoE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1124.00	38.75	24.40	6.87	40.06	353	56.00	-26.04	vertical	Average
2 pk	1124.00	65.73	24.40	6.87	40.06	353	76.00	-19.06	vertical	Peak
3	1194.00	35.33	24.68	7.07	40.02	351	56.00	-28.94	vertical	Average
4	1194.00	61.56	24.68	7.07	40.02	351	76.00	-22.71	vertical	Peak
5	2244.00	28.34	28.48	9.72	39.77	1	56.00	-29.23	vertical	Average
6	2244.00	50.74	28.48	9.72	39.77	1	76.00	-26.83	vertical	Peak
7 pp	2376.00	44.73	28.80	9.93	39.85	200	56.00	-12.39	vertical	Average
8	2376.00	53.09	28.80	9.93	39.85	200	76.00	-24.03	vertical	Peak
9	2598.00	26.12	29.35	10.27	39.98	168	56.00	-30.24	vertical	Average
10	2598.00	51.76	29.35	10.27	39.98	168	76.00	-24.60	vertical	Peak
11	2806.00	28.73	29.85	10.76	40.10	15	56.00	-26.76	vertical	Average
12	2806.00	53.93	29.85	10.76	40.10	15	76.00	-21.56	vertical	Peak




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1


Page (51) of (76)

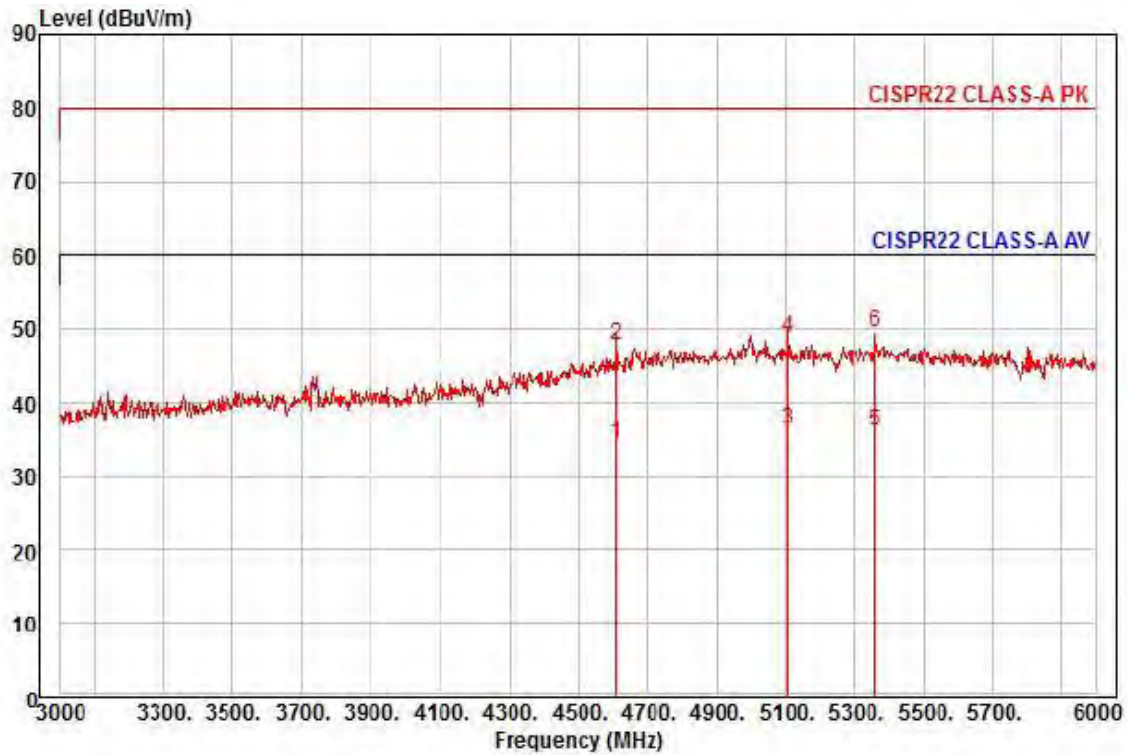

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : PNF-9010RVMP
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4611.00	24.71	35.50	14.63	40.41	90	60.00	-25.57	horizontal	Average
2	4611.00	38.07	35.50	14.63	40.41	90	80.00	-32.21	horizontal	Peak
3 pp	5106.00	23.62	37.51	15.46	40.40	247	60.00	-23.81	horizontal	Average
4	5106.00	36.12	37.51	15.46	40.40	247	80.00	-31.31	horizontal	Peak
5	5361.00	23.76	36.99	15.76	40.36	284	60.00	-23.85	horizontal	Average
6 pk	5361.00	37.09	36.99	15.76	40.36	284	80.00	-30.52	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

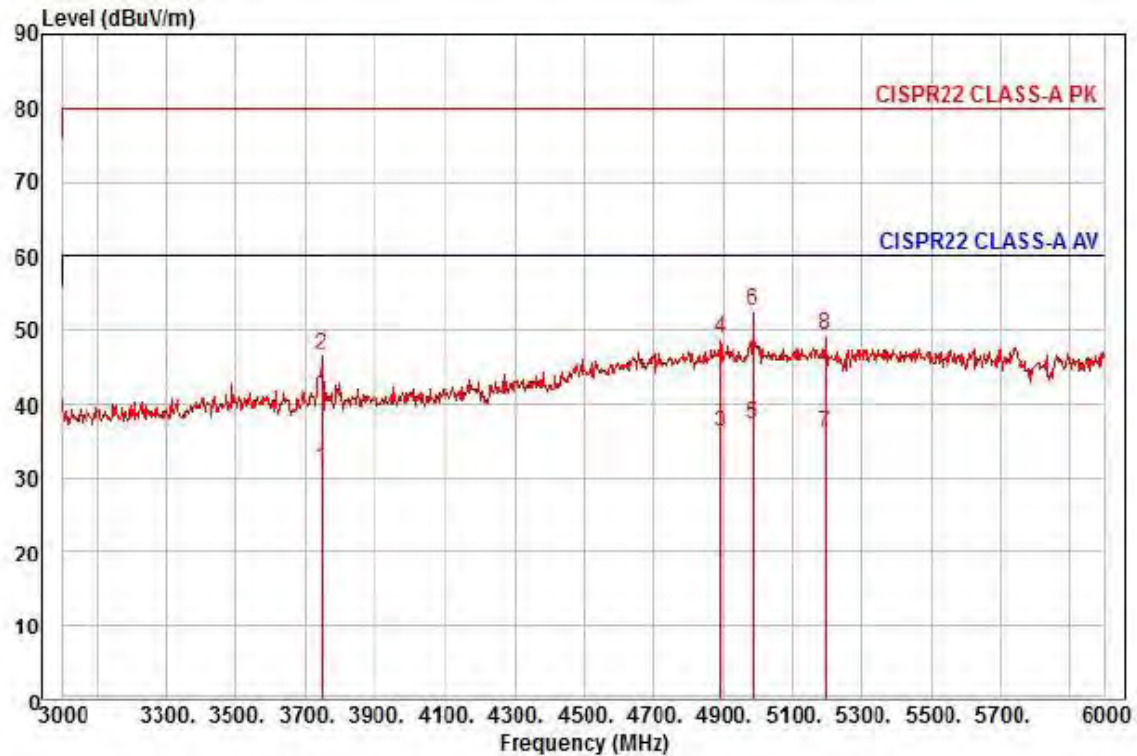

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project : NETWORK CAMERA

Model : PNF-9010RVMP

Mode : PoE

Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3747.00	27.04	31.58	13.00	40.36	135	60.00	-28.74	vertical	Average
2	3747.00	42.28	31.58	13.00	40.36	135	80.00	-33.50	vertical	Peak
3	4893.00	24.20	37.11	15.14	40.41	100	60.00	-23.96	vertical	Average
4	4893.00	37.06	37.11	15.14	40.41	100	80.00	-31.10	vertical	Peak
5 pp	4989.00	24.84	37.66	15.31	40.41	72	60.00	-22.60	vertical	Average
6 pk	4989.00	39.96	37.66	15.31	40.41	72	80.00	-27.48	vertical	Peak
7	5199.00	23.64	37.32	15.56	40.38	205	60.00	-23.86	vertical	Average
8	5199.00	36.85	37.32	15.56	40.38	205	80.00	-30.65	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	N/A			
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (54) of (76)

Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	N/A			
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (55) of (76)

Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (56) of (76)

Test Setup Photos and Configuration

Conducted Voltage Emissions


N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Telecommunication Emissions

- DC 12 V Mode

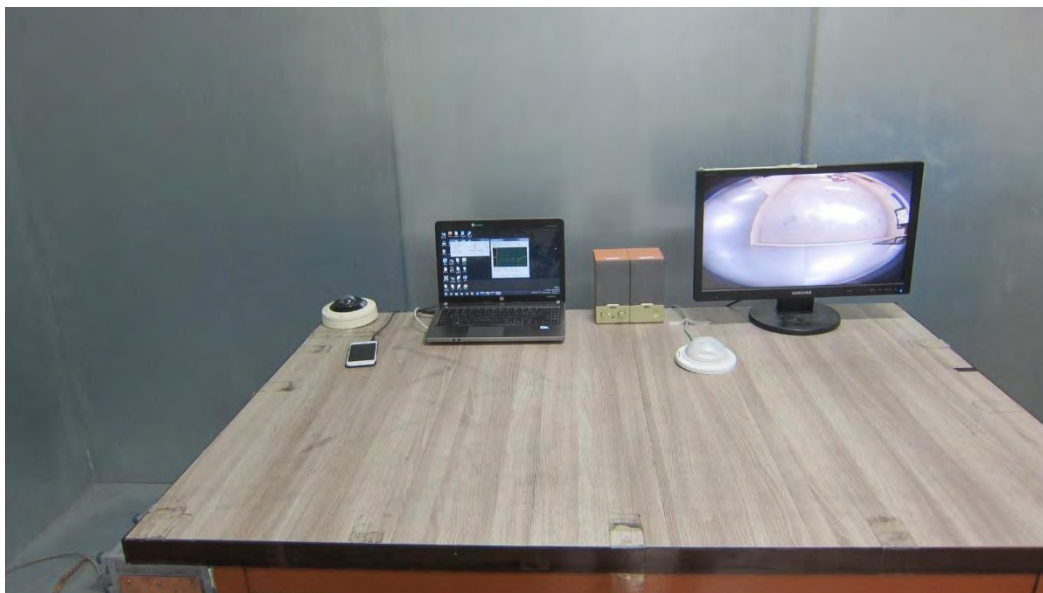

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode

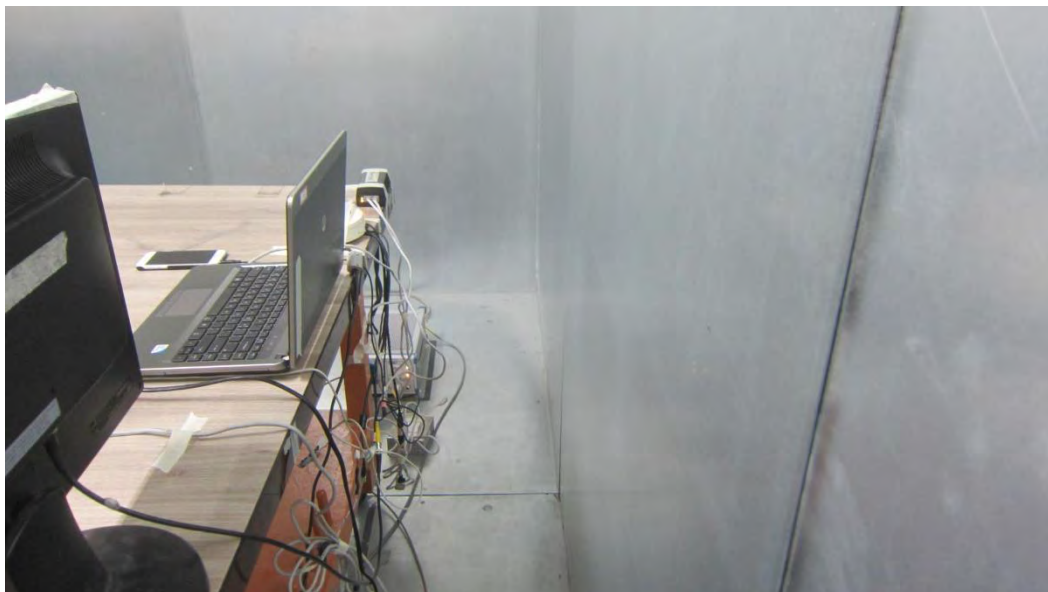

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0295-R1

Page (63) of (76)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge

- DC 12 V Mode



- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Immunity

- DC 12 V Mode



- PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts

- DC 12 V Mode




- PoE Mode

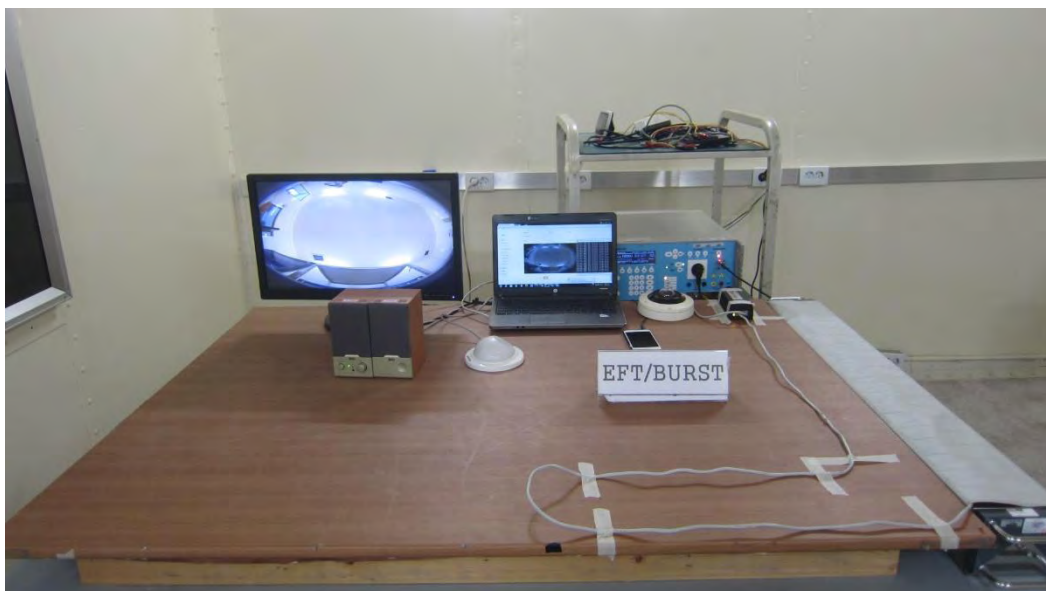


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Surge Transients

- DC 12 V Mode

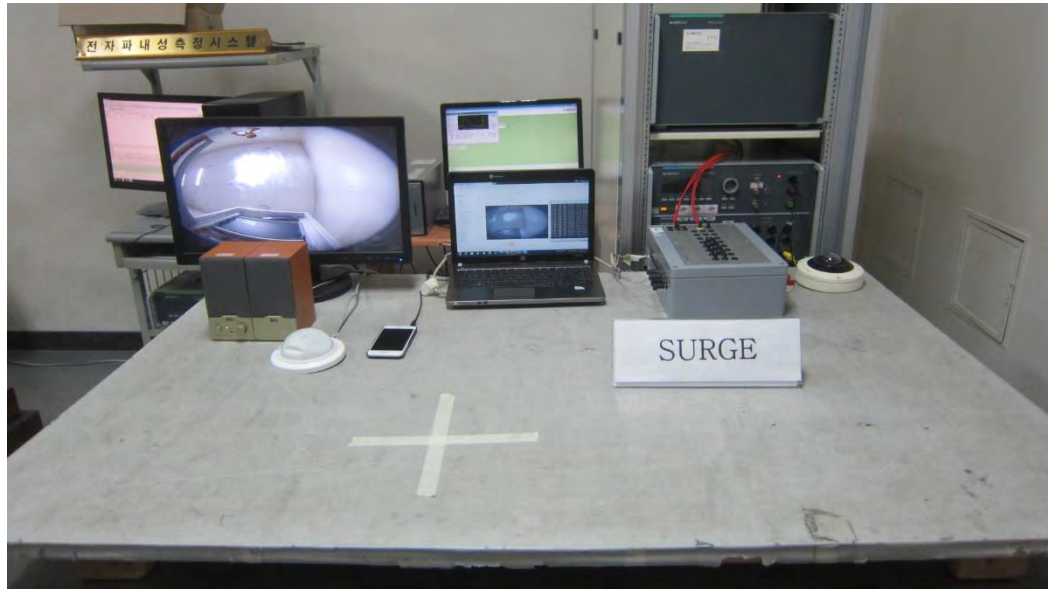

- PoE Mode

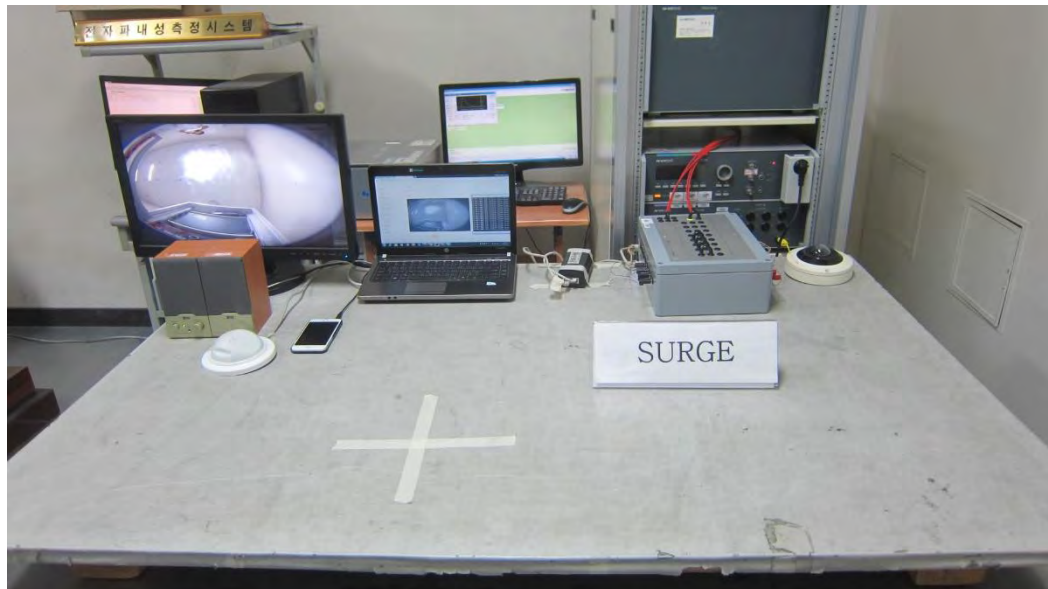

Conducted Disturbance

- DC 12 V Mode



- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0295-R1
Page (69) of (76)

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



EUT Internal Photographs

(Internal View)



EUT Internal View – Main Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Sub Board

(Top)



(Bottom)




EUT Internal View – IR Board

(Top)



(Bottom)

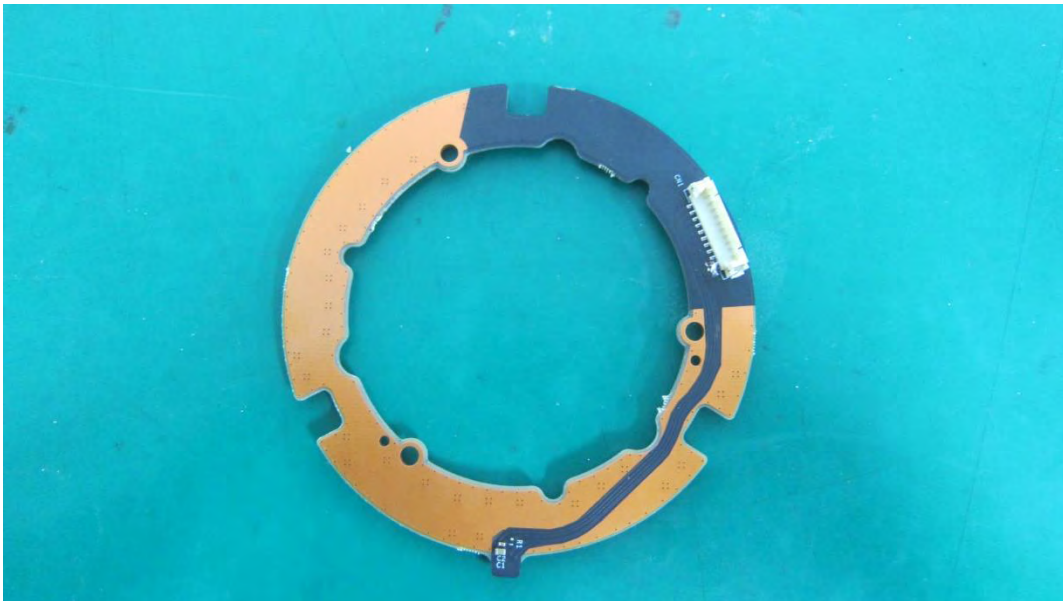

Label and Location



NETWORK CAMERA

Model No : PNF-9010RVM

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

