EMC TEST REPORT For CE

Test Report No.	:	KES-E1-17T0366-R1
Date of Issue	:	Sep. 27, 2017
Product name	:	NETWORK CAMERA
Model/Type No.	:	PNM-9081VQP
Variant Model	:	-
Applicant	:	Hanwha Techwin Co., Ltd.
Applicant Address	:	1204, Changwon-daero, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
Manufacturer	:	Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address	:	No.11 Weiliu Rd,Micro-Electronic Industrial Park,TEDA,Tianjin,300385,People's Republic of China.
Date of Receipt	:	May. 19, 2017
Test date	:	Jun. 07, 2017 – Jun. 08, 2017
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 09, 2017	KES-E1-17T0366	Issued
Sep. 27, 2017	KES-E1-17T0366-R1	Standard Revision

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 7
1.2 Variant Model Differences 7
1.3 Device Modifications 7
1.4 Equipment Under Test 7
1.5 Support Equipments 7
1.6 External I/O Cabling 8
1.7 E.U.T Operating Mode(s) 8
1.8 Configuration 9
1.9 Calibration Details of Equipment Used for Measurement 10
1.10 Test Facility 10
1.11 Laboratory Accreditations and Listings 10
2.0 Test Regulations 11
2.1 Conducted Emissions at Mains Power Ports 13
2.2 Conducted Emissions at Telecommunication Ports 14
2.3 Radiated Electric Field Emissions(Below 1 ㎓) 15
2.4 Radiated Electric Field Emissions(Above 1 ㎓) 16
2.5 Harmonic Current Emissions 17
2.6 Voltage Fluctuations and Flicker 18
3.0 Criteria for compliance 19
3.1 Electrostatic Discharge 21
3.2 Radiated Electric Field Immunity 25
3.3 Electrical Fast Transients/Bursts 28
3.4 Surge Transients 31
3.5 Conducted Disturbance 35
3.6 Voltage Dips and Short Interruptions 39
APPENDIX A – TEST DATA 41
Conducted Emissions at Mains Power Ports 41
Conducted Emissions at Telecommunication Ports 43
Radiated Electric Field Emissions(Below 1 ㎓) 47
Radiated Electric Field Emissions(Above 1 ㎓) 49
Harmonic Current Emissions and Voltage Fluctuations and Flicker 51
Test Setup Photos and Configuration 54
Conducted Voltage Emissions 54
Conducted Telecommunication Emissions 55
Radiated Electric Field Emissions(Below 1 ㎓) 56
Radiated Electric Field Emissions(Above 1 ㎓) 57
Harmonic Current Emissions and Voltage Fluctuations and Flicker 58
Electrostatic Discharge 59
Radiated Electric Field Immunity 59
Electrical Fast Transients/Bursts 60
Surge Transients 61
Conducted Disturbance 62
Voltage Dips and Short Interruptions 63
EUT External Photographs 64
EUT Internal Photographs 65

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	1/1.8" 6M CMOS x4
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.09 lux(F1.2, 1/30sec)(30IRE) B/W : 0.009 lux(F1.2, 1/30sec)(30IRE)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation (selectable CVBS per Channel)
Lens	
Focal Length (Zoom Ratio)	3.6~9.4mm(2.6x) motorized varifocal
Max. Aperture Ratio	F1.2
Angular Field of View	H: 102.5˚, V: 74.2˚, D: 135.5˚ H: 38.7˚, V: 29.0˚, D: 48.6˚
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network(Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0˚ ~ 360˚ / 0˚ ~ 90˚ / +-90˚
Operational	
Viewable Length	-

Video	
Imaging Device	1/1.8" 6M CMOS x4
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.09 lux(F1.2, 1/30sec)(30IRE) B/W : 0.009 lux(F1.2, 1/30sec)(30IRE)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation (selectable CVBS per Channel)
Lens	
Focal Length (Zoom Ratio)	3.6~9.4mm(2.6x) motorized varifocal
Max. Aperture Ratio	F1.2
Angular Field of View	H: 102.5˚, V: 74.2˚, D: 135.5˚ H: 38.7˚, V: 29.0˚, D: 48.6˚
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network(Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0˚ ~ 360˚ / 0˚ ~ 90˚ / +-90˚
Operational	
Viewable Length	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) at Event Triggers External output
Audio In	-
Audio out	-
Pixel Counter	Support (support by each channel)
Network	
Ethernet	RJ-45 (10/100/1000BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Min: 4 Profiles per Channel)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Audio Compression Format	-
Audio Communication	-
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 4slot (1slot per Channel - 1slot per up to 256GB) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungary, Greek
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.10. 10.11 10.12 **Non-plugin Webviewer** Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49 , Apple Safari 9 (Mac OS X only) **Plug-in Webviewer** Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Software	SmartViewer
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	12VDC ± 10%, HPoE
Power Consumption	Max 32W
Mechanical	
Color / Material	Ivory / Aluminum (Dome Cover : Clear)
Dimension (WxHxD)	Φ 314 x 152mm
Weight	4.7 Kg

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-9081VQP	-	Hanwha Techwin (Tianjin) Co.,Ltd	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	RV518	HTK991NC600187E	Samsung Electronics Co., Ltd.	-
Notebook Adaptor	ADP-60ZH	AD-6019R	DELTA ELECTRONICS, INC.	-
POE Adaptor	PD-9501GR	-	Microsemi	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	**I/O Port**	**Description**	**I/O Port**	**Length**	**Shield**
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3 Pin	Alarm	3 Pin	3.0	U

* Unshielded=U, Shielded=S

- POE Mode

Start		END		Cable Spec.	
Description	**I/O Port**	**Description**	**I/O Port**	**Length**	**Shield**
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adaptor	RJ-45 (POE)	3.0	U
	3 Pin	Alarm	3 Pin	3.0	U
Notebook	RJ-45 (DATA)	POE Adaptor	RJ-45 (DATA)	3.0	U

* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)

Test mode	operating
DC 12 V	E.U.T Monitoring, Ping Test
POE	E.U.T Monitoring, Ping Test


E.U.T Test operating S/W		
Name	**Version**	**Manufacture Company**
WebViewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


1.8 Configuration

■ AC Main
□ DC Main

- DC 12 V Mode

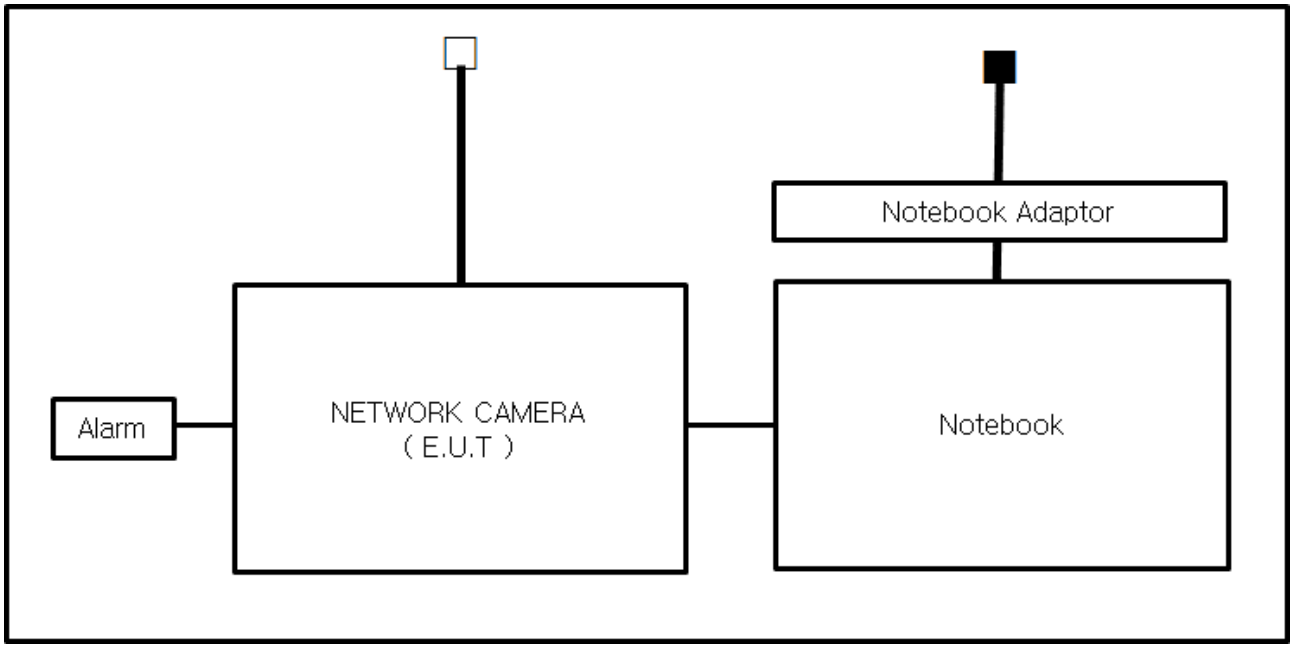

- POE Mode

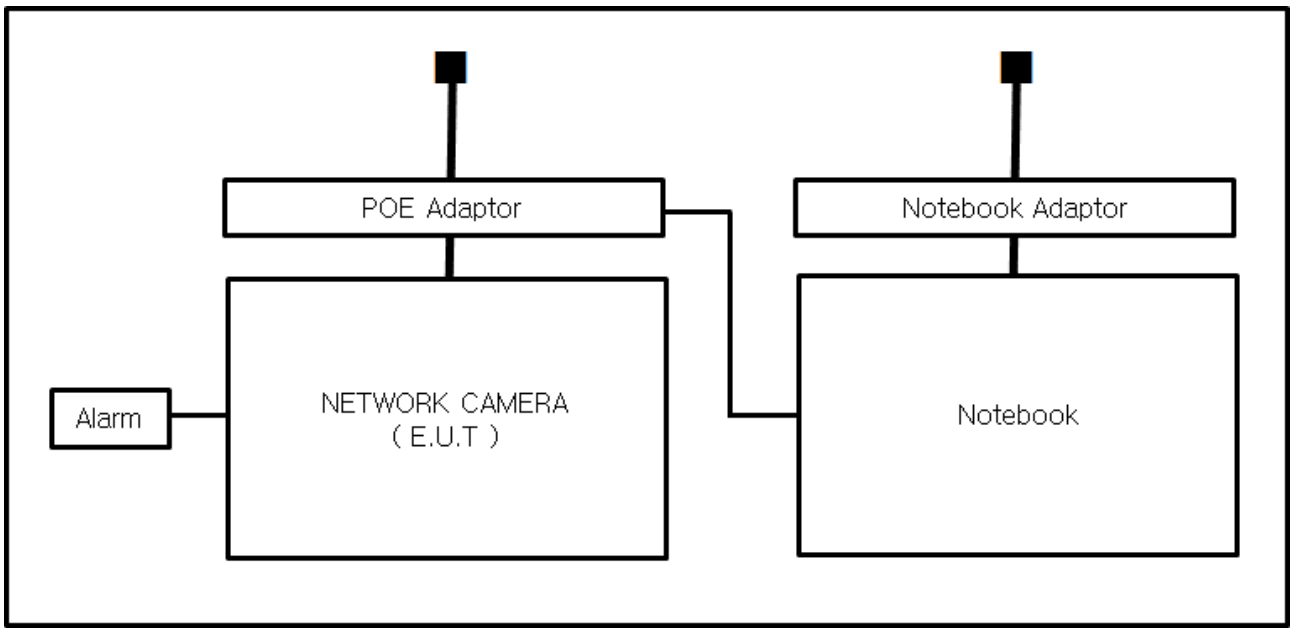

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	**FCC**	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	**VCCI**	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	R-4308, C-4798, T-2311, G-914
KOREA	**MSIP**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
Canada	**IC**	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1
Europe	**CE**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	**KOLAS**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KOREA LABORATORY ACCREDITATION SCHEME KOLAS TESTING NO. 489

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011		
☐ EN 61000-6-1:2007		
☐ EN 61000-6-4:2007 +A1:2011		
☐ EN 61000-6-2:2005		
☐ EN 55011:2007 +A1:2010	☐ Group 1 ☐ Class A	☐ Group 2 ☐ Class B
☐ EN 55014-1:2006 +A2:2011		
☐ EN 55014-2:1997 +A2:2008		
☐ EN 55015:2013		
☐ EN 61547:2009		
☒ EN 55032:2012	☒ Class A	☐ Class B
☐ EN 55024:2010 +A1:2015		
☒ EN 50130-4:2011		
☐ EN 61000-3-2:2014		
☐ EN 61000-3-3:2013		
☐ EN 61326-1:2013		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

☐ **VCCI V-3 / 2015.04** ☐ Class A ☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010** ☐ Class A ☐ Class B

☐ **47 CFR Part 15, Subpart B**

- ☐ CISPR 22:2009 +A1:2010 ☐ Class A ☐ Class B
- ☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

- ☐ CAN/CSA CISPR 22-10 ☐ Class A ☐ Class B
- ☐ ANSI C63.4-2014

☐ **RE– Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.1 Conducted Emissions at Mains Power Ports

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☐	LISN	ENV216	R & S	101137	02, 03, 2018
☐	LISN	ENV216	R & S	101786	04, 27, 2018
☐	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017

Test Conditions
Temperature: ℃
Relative Humidity: %

.

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.2 Conducted Emissions at Telecommunication Ports

Test Date
Jun. 07, 2017

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 11, 2018
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 11, 2018

Test Conditions
Temperature: 24,1 ℃
Relative Humidity: 36,2 %

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.3 Radiated Electric Field Emissions(Below 1 ㎓)

Test Date
Jun. 07, 2017

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions
Temperature: 23,7 ℃
Relative Humidity: 56,9 %

Frequency Range of Measurement
30 ㎒ to 1 ㎓

Instrument Settings
IF Band Width: 120 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.4 Radiated Electric Field Emissions(Above 1 ㎓)

Test Date
Jun. 07, 2017

Test Location
SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 08, 2017
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions
Temperature: 23,7 ℃
Relative Humidity: 57,9 %

Frequency Range of Measurement
1 ㎓ to 6 ㎓

Instrument Settings
IF Band Width: 1 ㎒

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.5 Harmonic Current Emissions

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.8.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2017
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	08, 08, 2017

Test Conditions
℃
Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions
☐ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.6 Voltage Fluctuations and Flicker

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.8.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2017
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	08, 08, 2017

Test Conditions

℃

Relative Humidity: %

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,

and no such flickering of indicators oeuvres at U = 130 dBμV.

For component of CCTV systems, where the status is monitored by observing the TV picture,

then deterioration of the picture is allowed at U = 140 dBμV, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at U = 130 dBμV, any deterioration of the picture is so minor that the system could

still be used; and

(c) there in no observable deterioration of the picture at U = 120 dBμV.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.1 Electrostatic Discharge

Reference Standard
EN 61000-4-2:2009

Test Date
Jun. 08, 2017

Test Location
EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	-	-	-	-
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2018
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature:	20,5 ℃
Relative Humidity:	51,1 %
Atmospheric Pressure:	99,3 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Location of Discharge:

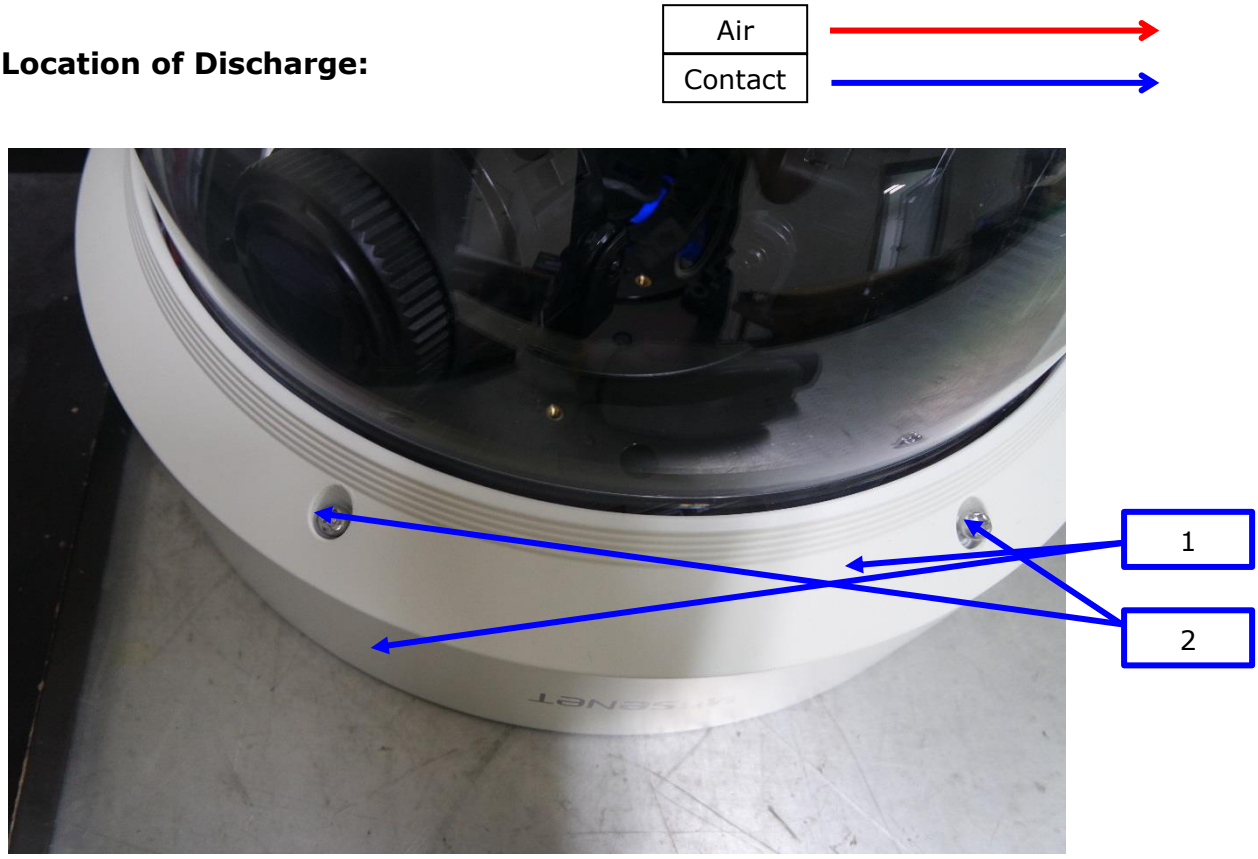

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

- POE Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.2 Radiated Electric Field Immunity

Reference Standard
EN 61000-4-3:2006 +A2:2010

Test Date
Jun. 06, 2017

Test Location
EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	SEMI ANECHOIC CHAMBER #3	-	DYMSTEC	-	-
☒	EMS Test S/W	EMC32	R & S	10.10.02	08, 08, 2017
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 08, 2017
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 08, 2017
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 08, 2017
☒	POWER METER	NRP2	R & S	103475	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 08, 2017
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	–

Test Conditions

Temperature: 24,7 ℃
Relative Humidity: 47,2 %
Atmospheric Pressure: 99,4 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- POE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.3 Electrical Fast Transients/Bursts

Reference Standard
EN 61000-4-4:2012

Test Date
Jun. 07, 2017

Test Location
EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 27, 2017

Test Conditions

Temperature:	20,5 ℃
Relative Humidity:	51,1 %
Atmospheric Pressure:	99,3 ㎪

Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	☐ ± 1.0 ㎸ ☐ ± 4.0 ㎸	☐ ± 2.0 ㎸
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 ㎸ ☐ ± 2.0 ㎸	☒ ± 1.0 ㎸
Burst Period:	☒ 300 ㎳	☐ 2 s
Repetition Rate:	☐ 5 ㎑	☒ 100 ㎑
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
L – N	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
RJ–45	Complied	Complied
3Pin (Alarm)	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
RJ–45	Complied	Complied
3Pin (Alarm)	Complied	Complied

Note: "Blank" = Not performed
Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.4 Surge Transients

Reference Standard
EN 61000-4-5:2014

Test Date
Jun. 08, 2017

Test Location
EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 26, 2018
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 26, 2018

Test Conditions

Temperature:	20,5 ℃
Relative Humidity:	51,1 %
Atmospheric Pressure:	99,3 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude : Common Mode
☐ (0,5 / 1,0 / 2,0) kV
Differential Mode
☐ (0,5 / 1,0) kV

Number of Surges: ☐ 5 surges per angle

Angle: ☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode
Surge Amplitude: Common Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 Surges

Polarity: ☒ Positive & Negative

Repetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L – N	-	-
L – PE	-	-
N - PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
RJ–45	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L – N	-	-
L – PE	-	-
N - PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
RJ–45	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.5 Conducted Disturbance

Reference Standard
EN 61000-4-6:2014

Test Date
Jun. 08, 2017

Test Location
EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 28, 2017
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 28, 2017
☒	CDN	CDN M016	TESEQ	43694	11, 28, 2017
☒	CDN	CDN T800	TESEQ	42800	11, 28, 2017
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 30, 2017
☐	MICROPHONE	MP201	BSWA	520963	11, 11, 2017
☐	SOUND ACOUSTIC TESTER	TST-1000	TESTEK	150045	11, 08, 2017

Test Conditions

Temperature:	22,9 ℃
Relative Humidity:	37,6 %
Atmospheric Pressure:	100,0 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

Frequency range:	☒ 150 ㎑ to 100 ㎒	☐ 150 ㎑ to 80 ㎒
Voltage Level:	☐ 1 Vrms ☒ 10 Vrms	☐ 3 Vrms
Modulation:	☒ AM, 80 %, 1 ㎑ sine wave ☒ PM, 1 ㎐ (0,5 s ON : 0,5 s OFF)	
Frequency step:	☒ 1 % step	
Dwell Time:	☒ 1 s	☐ 3 s
Required Performance Criteria:	☒ Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ–45	CDN T800	Complied
3Pin (Alarm)	EM Injection Clamp	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ–45	CDN T800	Complied
3Pin (Alarm)	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.6 Voltage Dips and Short Interruptions

Reference Standard
EN 61000-4-11:2004

Test Date
N/A

Test Location
EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-
☐	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☐	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017

Test Conditions
Temperature: ℃
Relative Humidity: %
Atmospheric Pressure: kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications & Observations/Remarks

(Test Voltage : 50 ㎐)

Test Level	Duration [in period/ms (50 ㎐)]	Results
☐ 20 % dip	☐ 250 / 5000	_____
☐ 30 % dip	☐ 25 / 500	_____
☐ 60 % dip	☐ 10 / 200	_____
☐ 100 % dip	☐ 250 / 5000	_____

- Voltage cariations

☐ Unom + 10 %	☐ 253.0 V (ac)	_____
☐ Unom - 15 %	☐ 195.5 V (ac)	_____

Observations:
Complied – No degradation of function

Test Results

☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

Remarks

-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[NEUTRAL]

N/A

♦ Calculation
QuasiPeak[㏈uV] / CAverage [㏈uV] = Reading Value[㏈uV] + Corr. [㏈]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9081VQP
Mode	DC_10 M
Operator Name:	KES

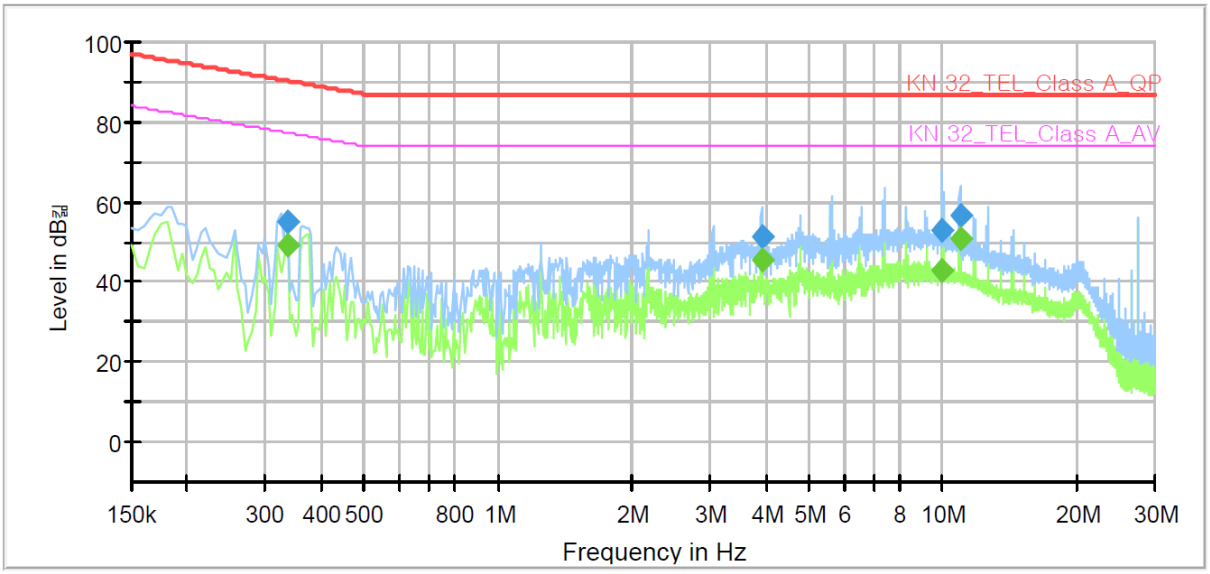

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.335000	---	49.04	77.33	28.29	1000.0	9.000	Single Line	20.7
0.335000	54.84	---	90.33	35.49	1000.0	9.000	Single Line	20.7
3.915000	---	45.51	74.00	28.49	1000.0	9.000	Single Line	19.4
3.915000	51.53	---	87.00	35.47	1000.0	9.000	Single Line	19.4
9.980000	---	42.75	74.00	31.25	1000.0	9.000	Single Line	19.7
9.980000	53.16	---	87.00	33.84	1000.0	9.000	Single Line	19.7
10.925000	---	50.96	74.00	23.04	1000.0	9.000	Single Line	19.8
10.925000	56.88	---	87.00	30.12	1000.0	9.000	Single Line	19.8


♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9081VQP
Mode	DC_100 M
Operator Name:	KES

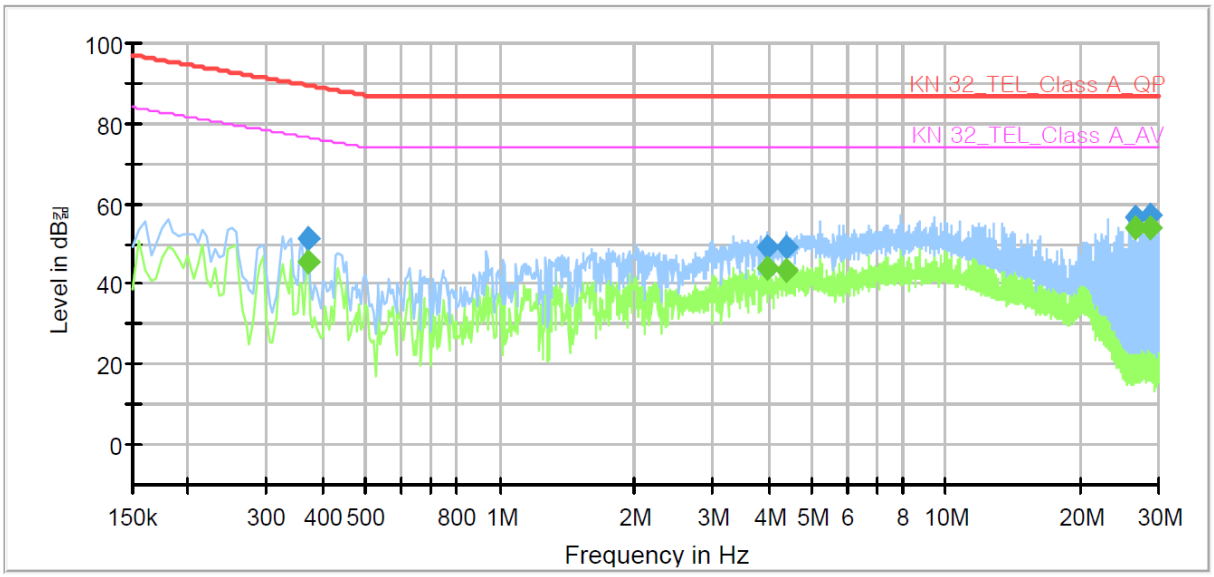

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.370000	---	45.33	76.50	31.17	1000.0	9.000	Single Line	20.9
0.370000	51.42	---	89.50	38.08	1000.0	9.000	Single Line	20.9
3.955000	---	43.86	74.00	30.14	1000.0	9.000	Single Line	19.7
3.955000	49.08	---	87.00	37.92	1000.0	9.000	Single Line	19.7
4.410000	---	43.34	74.00	30.66	1000.0	9.000	Single Line	19.7
4.410000	49.06	---	87.00	37.94	1000.0	9.000	Single Line	19.7
26.485000	---	53.78	74.00	20.22	1000.0	9.000	Single Line	20.7
26.485000	56.87	---	87.00	30.13	1000.0	9.000	Single Line	20.7
28.685000	---	53.75	74.00	20.25	1000.0	9.000	Single Line	20.8
28.685000	57.19	---	87.00	29.81	1000.0	9.000	Single Line	20.8

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9081VQP
Mode	POE_10 M
Operator Name:	KES

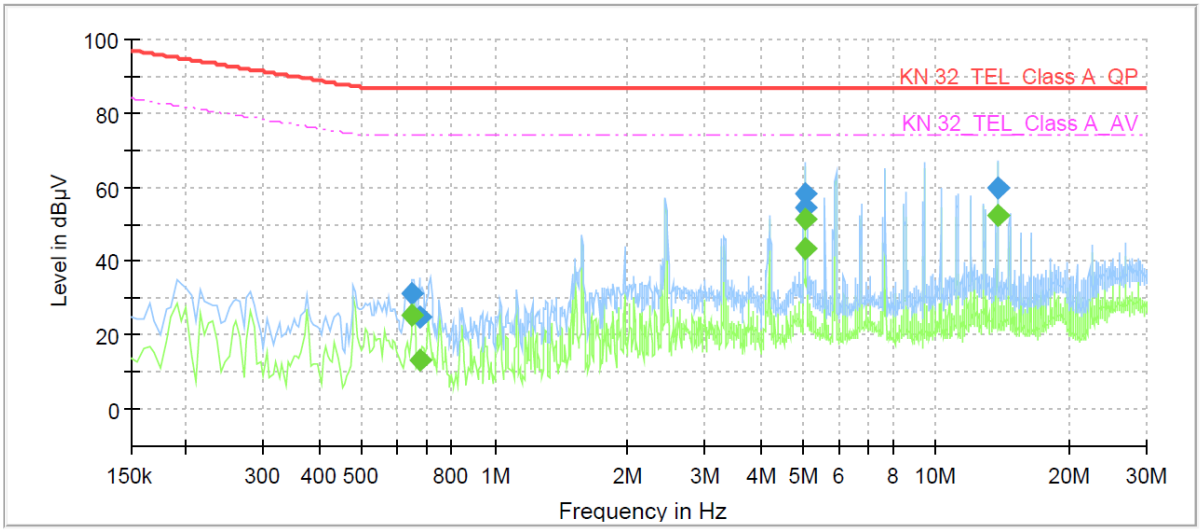

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.650000	---	25.35	74.00	48.65	1000.0	9.000	Single Line	20.2
0.650000	31.11	---	87.00	55.89	1000.0	9.000	Single Line	20.2
0.675000	---	13.43	74.00	60.57	1000.0	9.000	Single Line	20.2
0.675000	24.98	---	87.00	62.02	1000.0	9.000	Single Line	20.2
5.055000	---	51.11	74.00	22.89	1000.0	9.000	Single Line	19.5
5.055000	58.43	---	87.00	28.57	1000.0	9.000	Single Line	19.5
5.060000	---	43.19	74.00	30.81	1000.0	9.000	Single Line	19.5
5.060000	54.66	---	87.00	32.34	1000.0	9.000	Single Line	19.5
13.750000	---	52.22	74.00	21.78	1000.0	9.000	Single Line	19.9
13.750000	59.84	---	87.00	27.16	1000.0	9.000	Single Line	19.9


♦ Calculation
QuasiPeak[㏈uV] / CAverage [㏈uV] = Reading Value[㏈uV] + Corr. [㏈]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9081VQP
Mode	POE_100 M
Operator Name:	KES

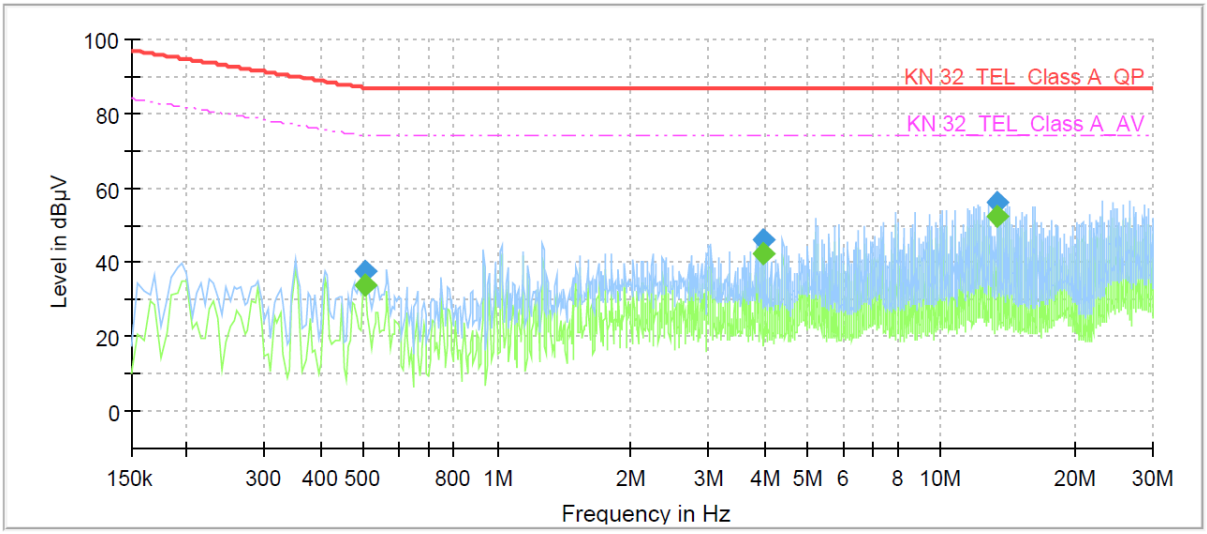

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.505000	---	34.11	74.00	39.89	1000.0	9.000	Single Line	20.7
0.505000	37.65	---	87.00	49.35	1000.0	9.000	Single Line	20.7
3.955000	---	42.53	74.00	31.47	1000.0	9.000	Single Line	19.7
3.955000	46.27	---	87.00	40.73	1000.0	9.000	Single Line	19.7
13.420000	---	52.58	74.00	21.42	1000.0	9.000	Single Line	20.1
13.420000	56.24	---	87.00	30.76	1000.0	9.000	Single Line	20.1

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 ㎓)

- DC 12 V Mode

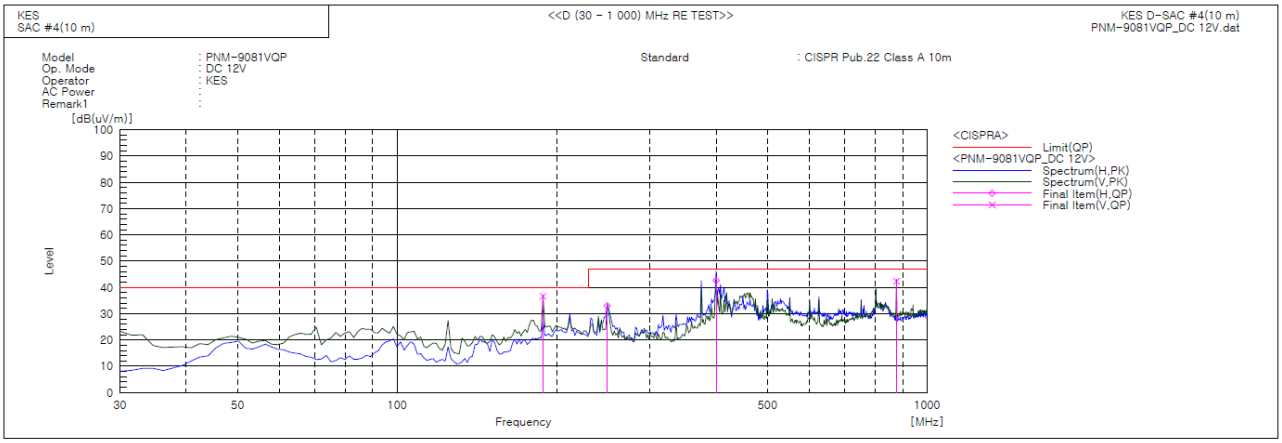


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	188.558	V	65.3	-28.7	36.6	40.0	3.4	150.0	230.0	
2	400.030	H	64.0	-21.3	42.7	47.0	4.3	159.0	217.0	
3	875.641	V	54.0	-11.6	42.4	47.0	4.6	150.0	129.0	
4	249.183	H	59.1	-26.1	33.0	47.0	14.0	400.0	237.0	

♦ Calculation
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

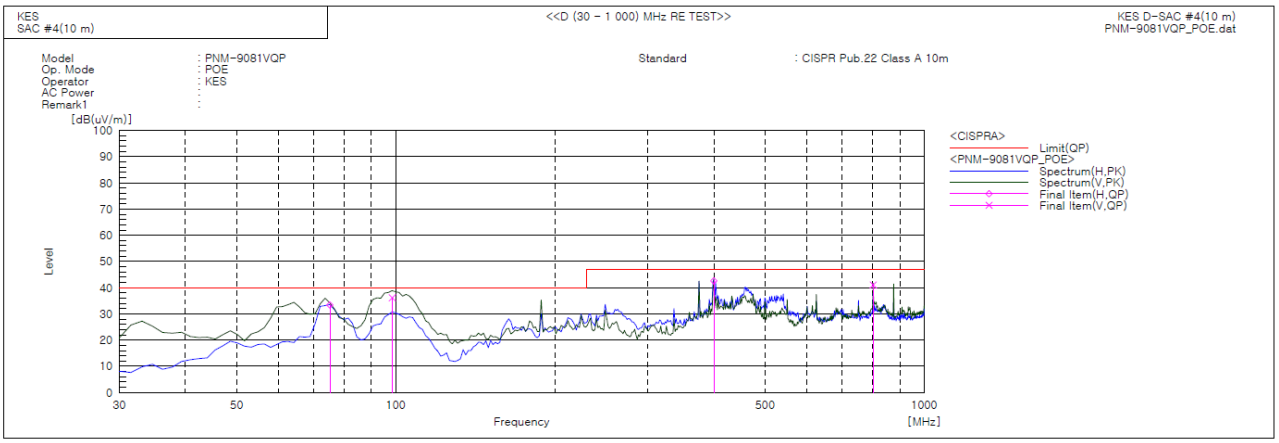

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	75.080	H	67.0	-33.6	33.4	40.0	6.6	400.0	180.0	
2	98.491	V	65.1	-28.9	36.2	40.0	3.8	128.0	175.0	
3	399.968	H	63.9	-21.3	42.6	47.0	4.4	200.0	211.0	
4	801.026	V	54.7	-13.6	41.1	47.0	5.9	150.0	130.0	

♦ Calculation
Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)

- DC 12 V mode

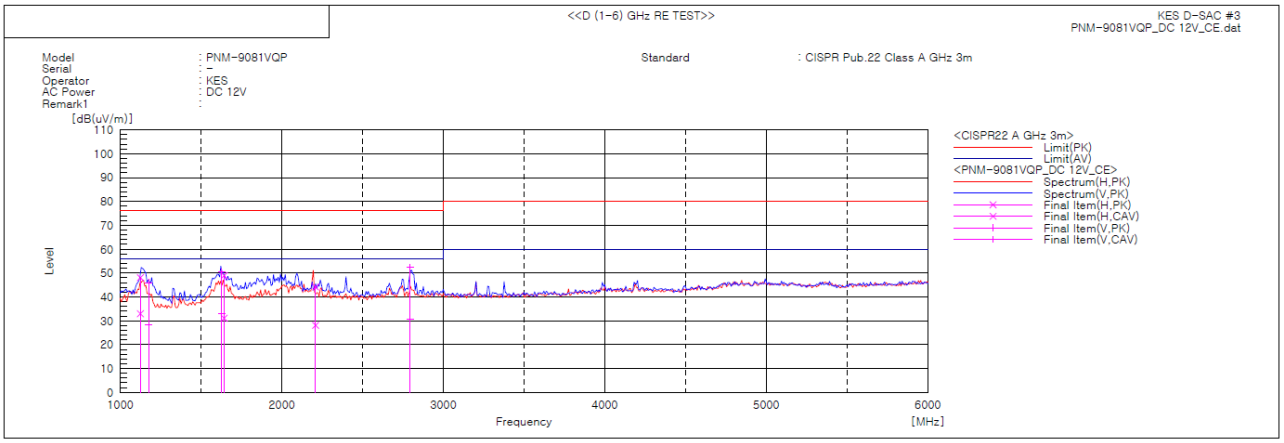

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1125.515	H	58.8	43.7	-10.7	48.1	33.0	76.0	56.0	27.9	23.0	100.0	4.9	
2	1175.990	V	56.4	38.7	-10.4	46.0	28.3	76.0	56.0	30.0	27.7	100.0	10.1	
3	1643.521	H	56.0	38.2	-7.1	48.9	31.1	76.0	56.0	27.1	24.9	100.0	140.7	
4	1629.628	V	57.7	40.2	-7.2	50.5	33.0	76.0	56.0	25.5	23.0	100.0	300.6	
5	2209.762	H	47.2	31.1	-3.0	44.2	28.1	76.0	56.0	31.8	27.9	100.0	183.2	
6	2794.869	V	53.4	31.8	-1.0	52.4	30.8	76.0	56.0	23.6	25.2	100.0	4.3	

♦ Calculation
Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] – Preamp Factor [㏈]) – Limit Line[㏈uV]
Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

♦ Calculation
Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] – Preamp Factor [㏈]) – Limit Line[㏈uV]
Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

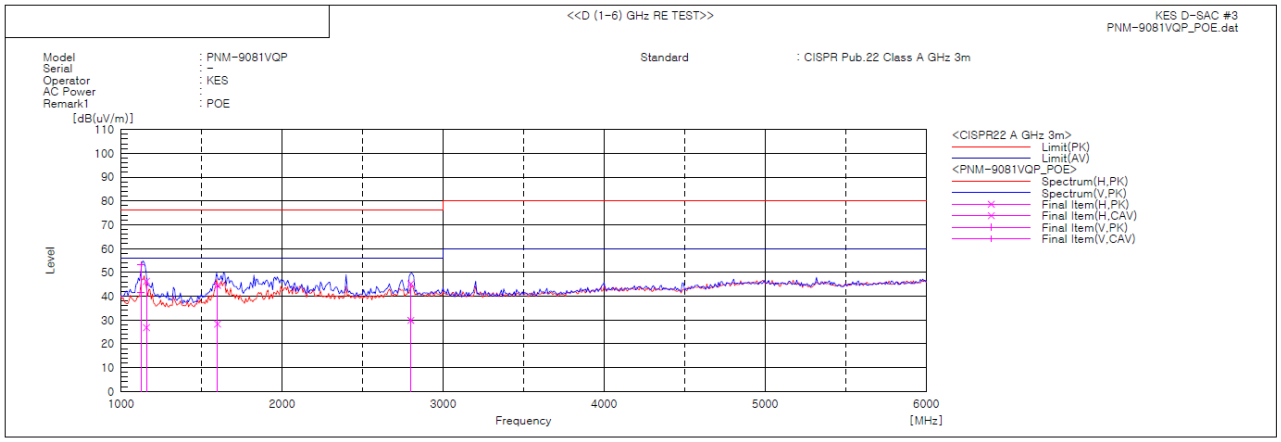

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1158.737	H	56.7	37.3	-10.5	46.2	26.8	76.0	56.0	29.8	29.2	100.0	29.1	
2	1125.235	V	63.8	52.4	-10.7	53.1	41.7	76.0	56.0	22.9	14.3	100.0	9.5	
3	1600.136	H	51.9	35.7	-7.4	44.5	28.3	76.0	56.0	31.5	27.7	100.0	155.4	
4	2799.934	H	46.1	30.7	-0.9	45.2	29.8	76.0	56.0	30.8	26.2	100.0	202.7	

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
		N/A		

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
		N/A		

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration


Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Telecommunication Emissions

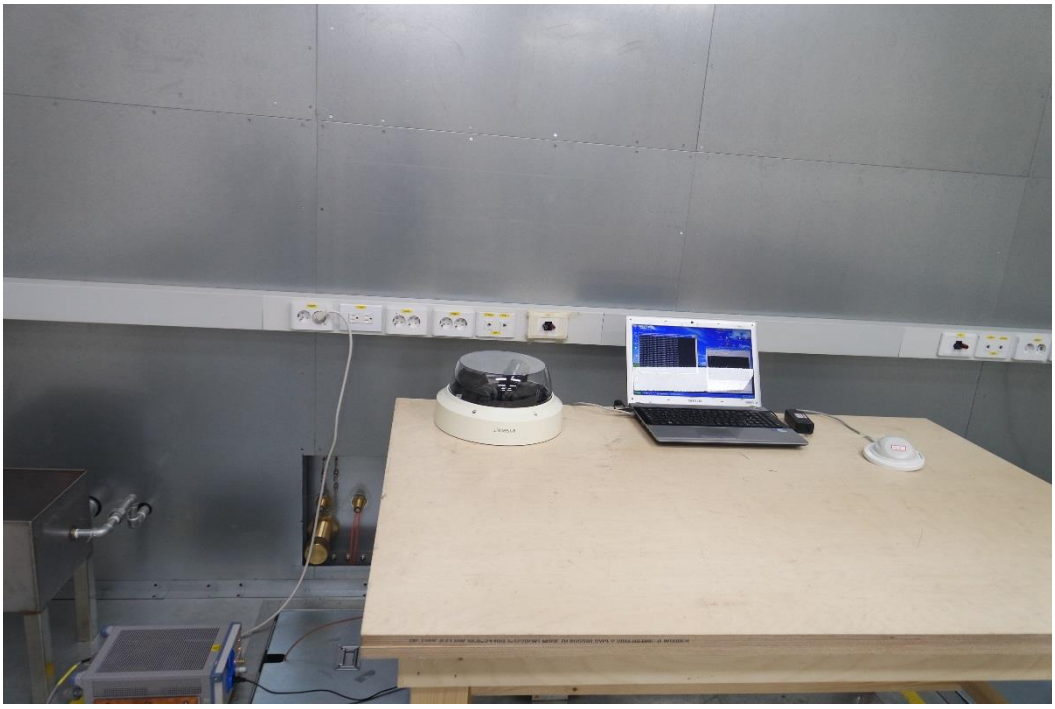




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Below 1 ㎓)

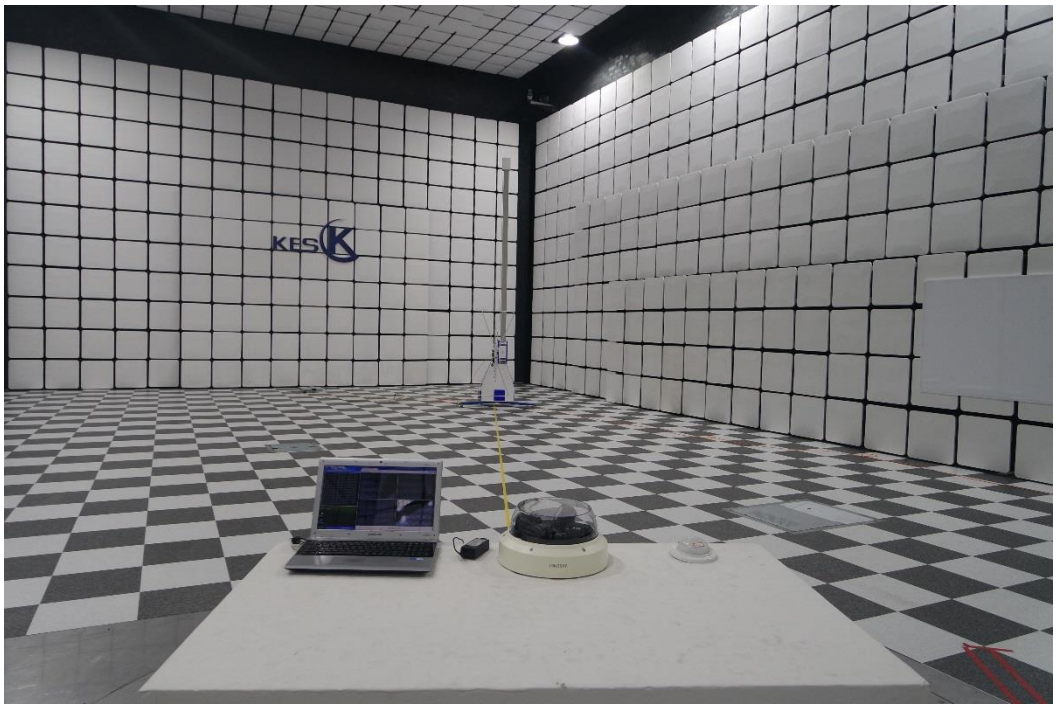

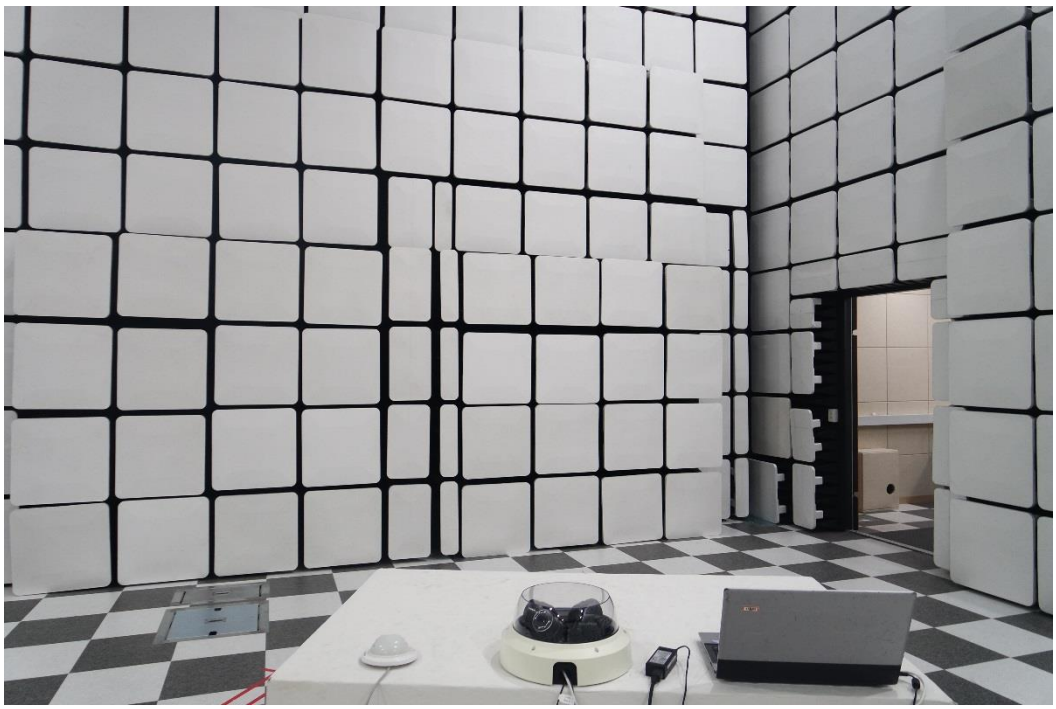

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)

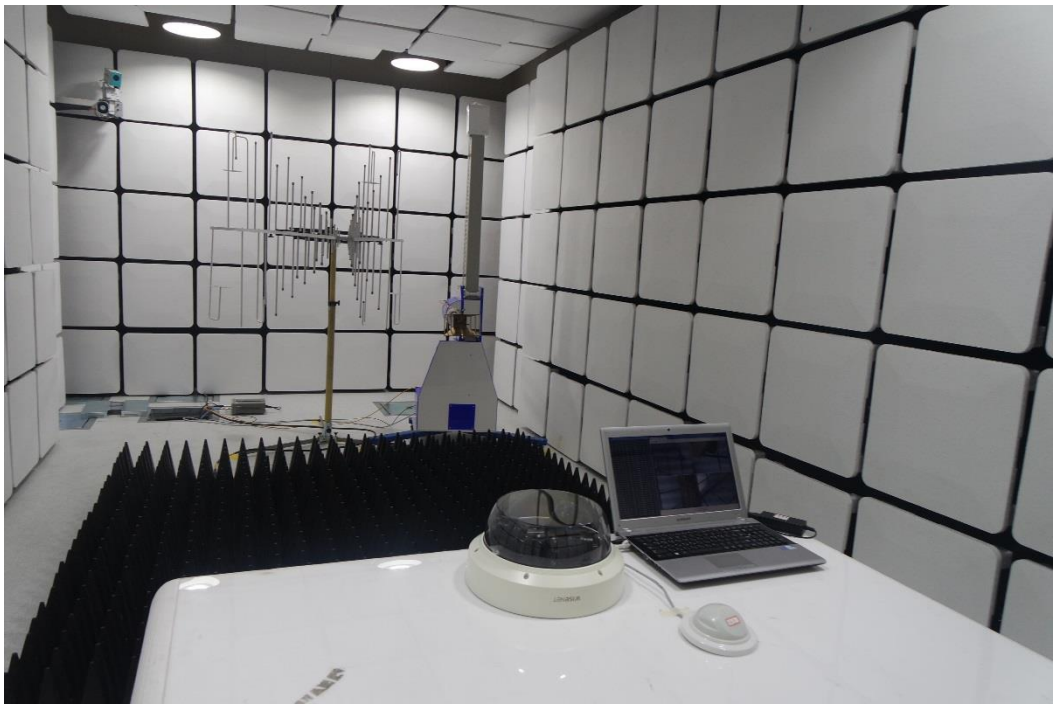



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge




Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Electrical Fast Transients/Bursts



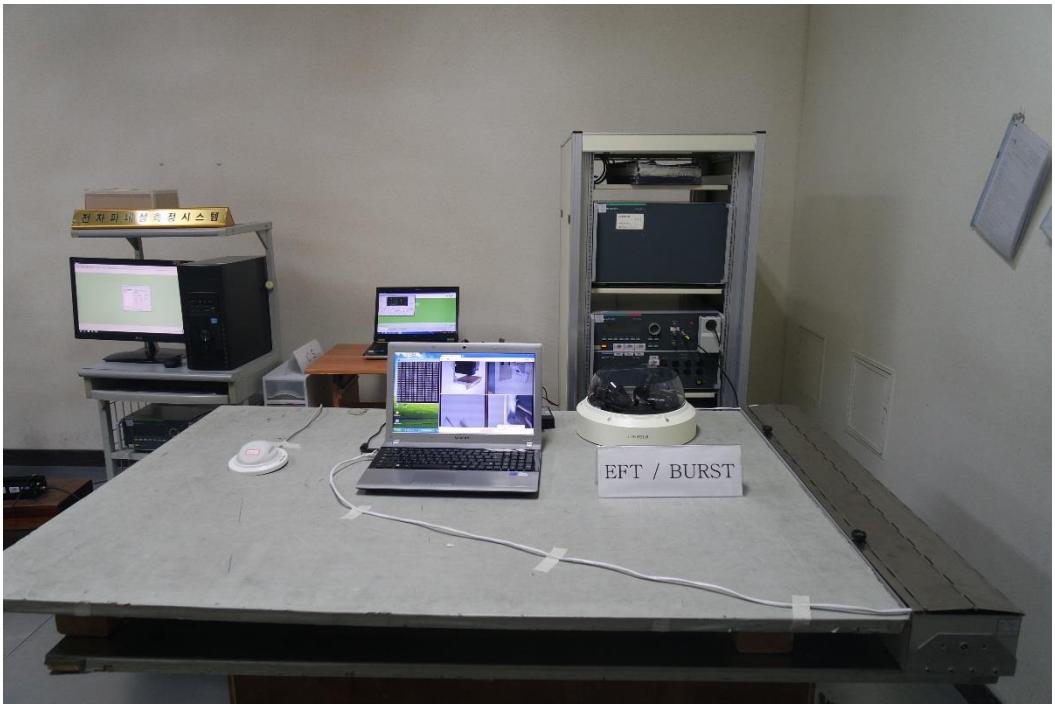


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Surge Transients

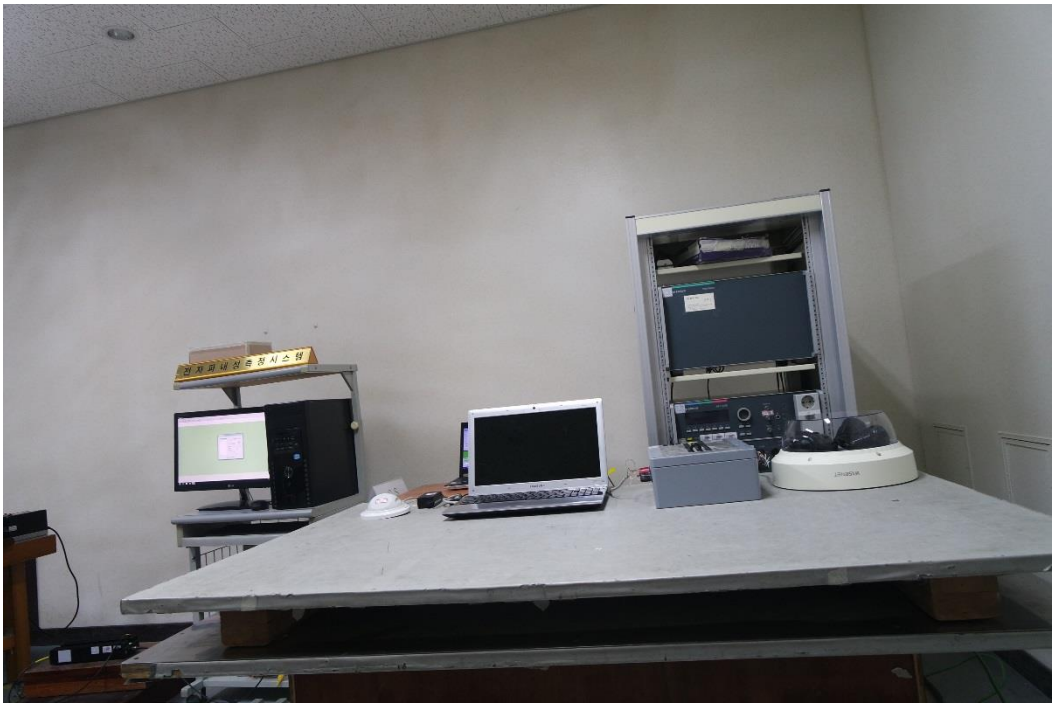

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Disturbance

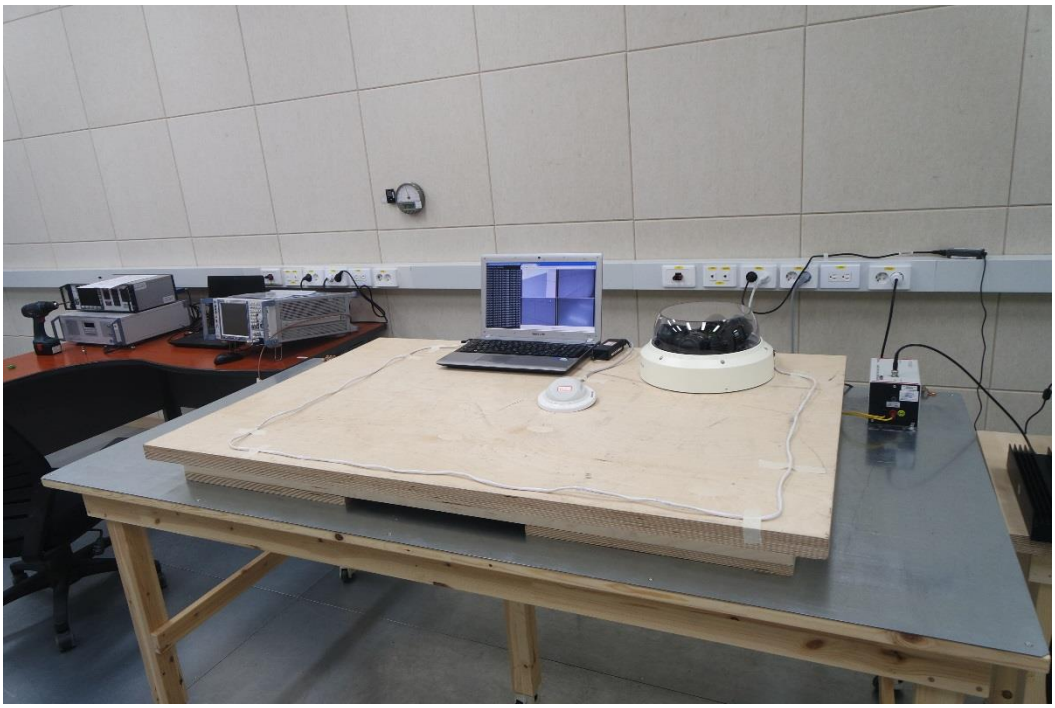



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)

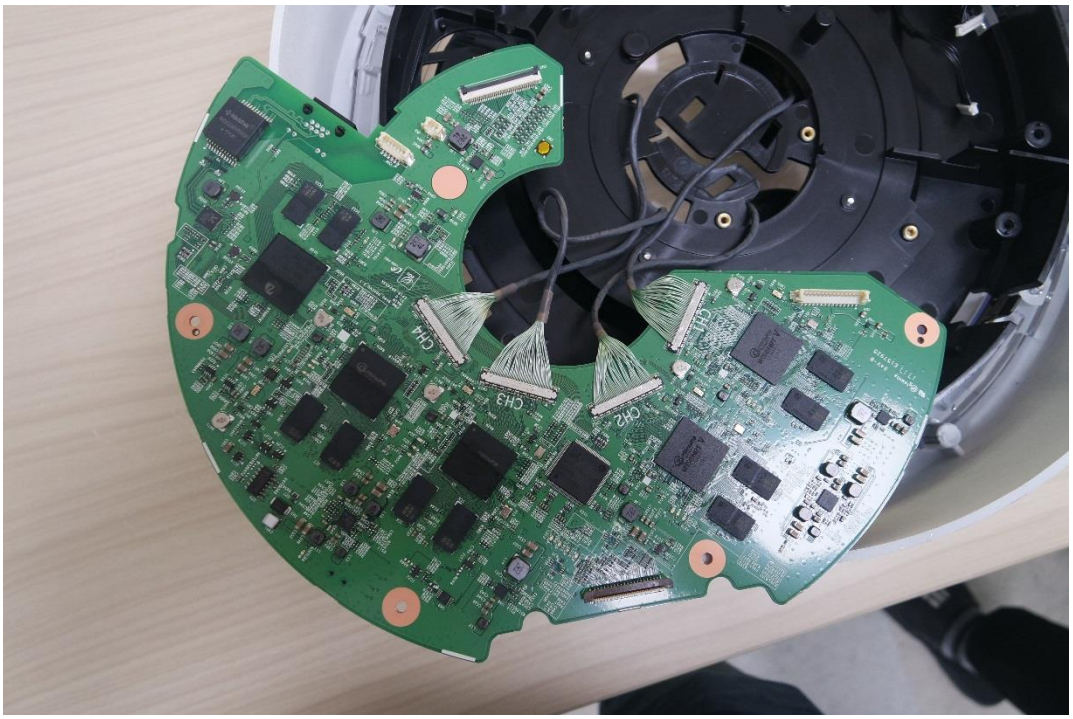


(Bottom)

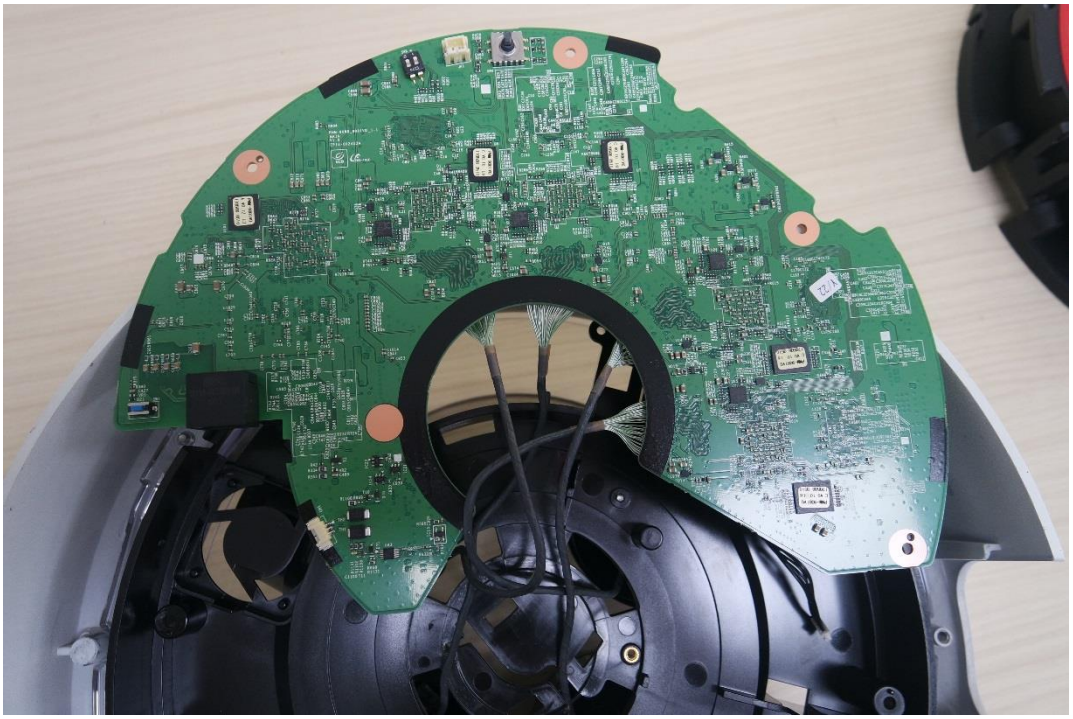

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Sub Board

(Top)

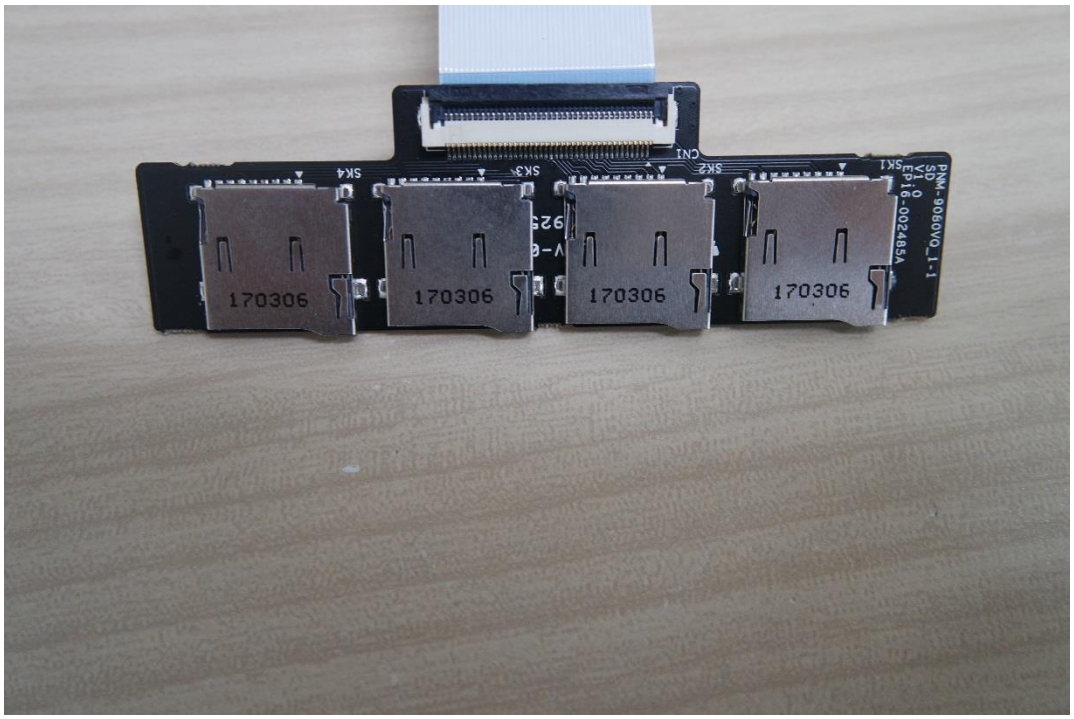


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Power Board

(Top)

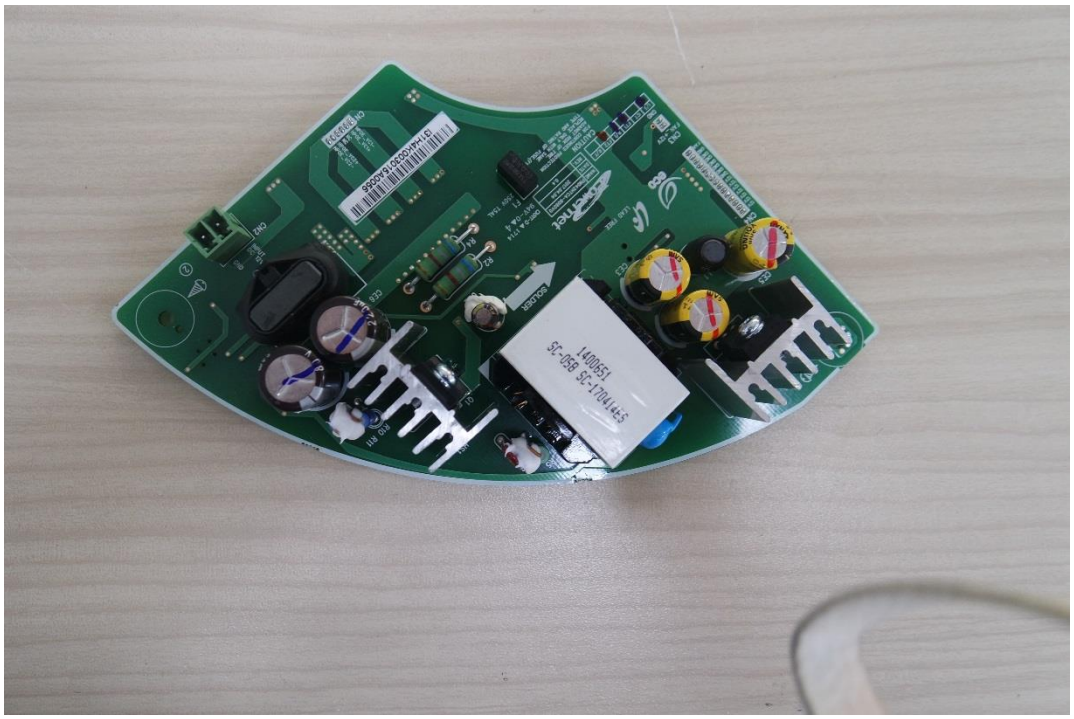


(Bottom)

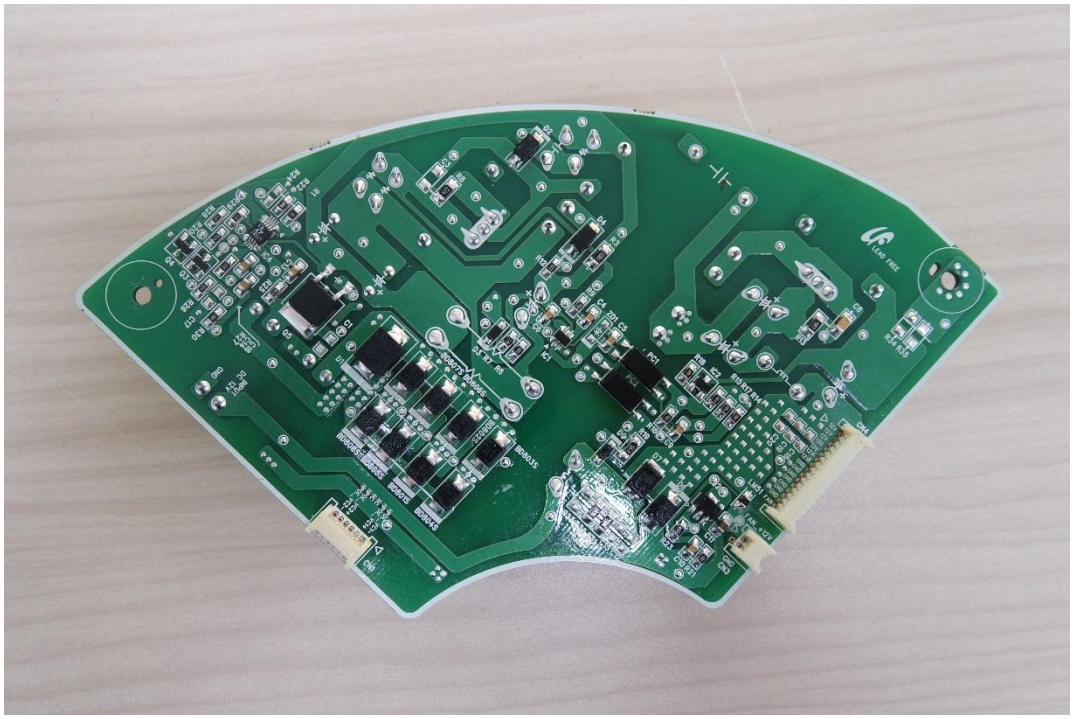


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Lens Board

(Top)

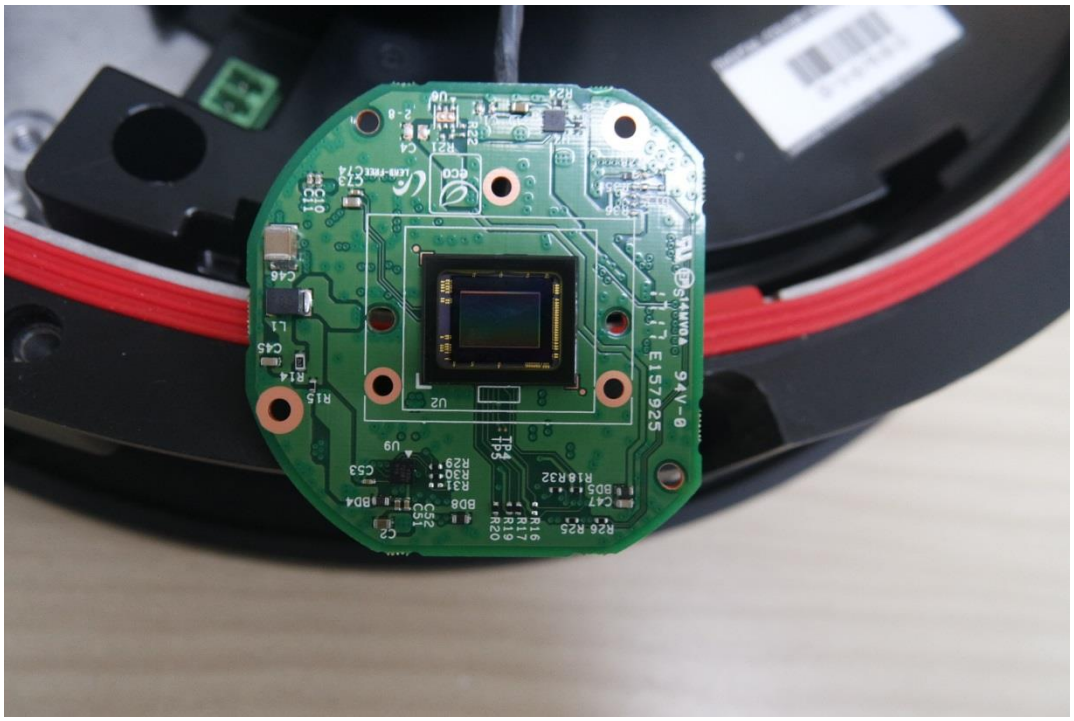

(Bottom)

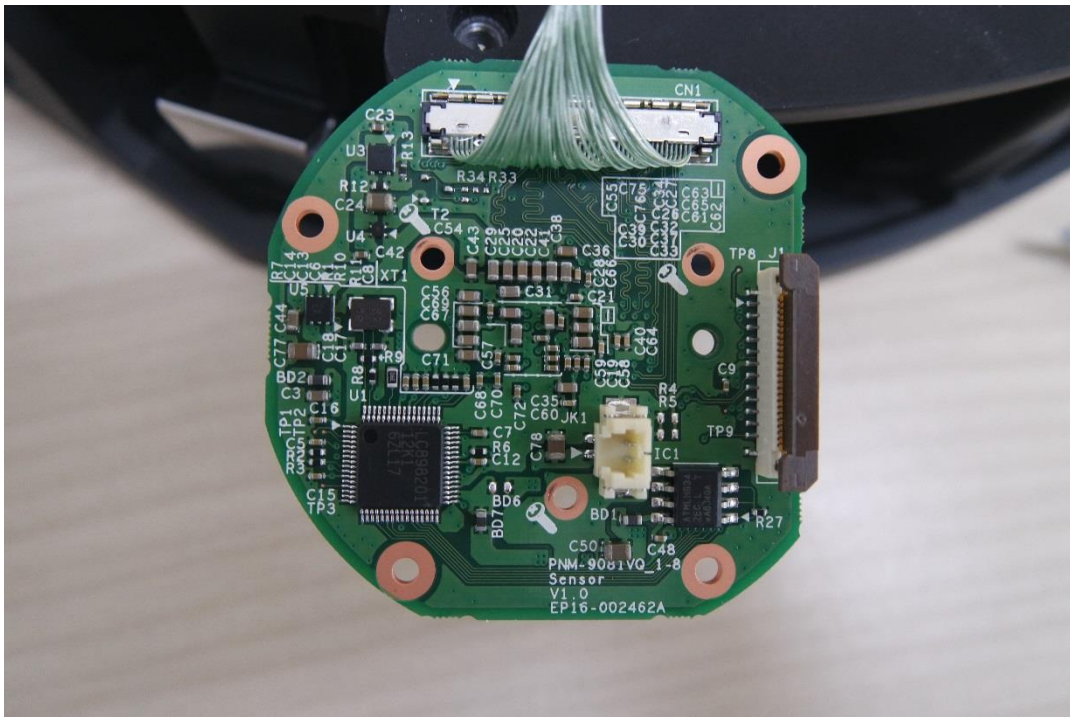

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LED Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location



NETWORK CAMERA

Model No : PNM-9081VQP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in of China

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.