



EMC TEST REPORT For VCCI

Test Report No. : KES-EM-22T0017-R2
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : PNM-9084RQZ
Variant Model : PNM-9084RQZ1
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Dec. 22, 2021
Test date : Dec. 24, 2021 ~ Dec. 25, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Eun Gu, Jeon
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (2) of (44)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 05, 2022	KES-EM-22T0017	Issued
Feb. 17, 2022	KES-EM-22T0017-R1	Re-issue due to variant model addition
Feb. 24, 2023	KES-EM-22T0017-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	오류! 책갈피가 정의되어 있지 않습니다.
2.0	Test Regulations.....	12
2.1	Conducted Emissions Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Conducted Emissions at Telecommunication Ports		21
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		25
Test Setup Photos and Configuration		27
Conducted Emissions at Mains Power Ports.....		27
Conducted Emissions at Telecommunication Ports		29
Radiated Electric Field Emissions(Below 1 GHz)		31
Radiated Electric Field Emissions(Above 1 GHz).....		33
EUT External Photographs.....		35
EUT Internal Photographs		36



1.0 General Product Description

Main Specifications of EUT are:

	PNM-9084RQZ
Video	
Imaging Device	1/2.8" 2MP CMOS: each CH
Effective Pixels	1945(H)x1097(V): each CH
Min. Illumination	Color: 0.05lux(F1.6,30 IRE) BW: 0Lux(IR LED on)
Lens	
Focal Length (Zoom Ratio)	3.2~10mm(3.1x) motorized varifocal
Max. Aperture Ratio	F1.6(Wide)~F2.9(Tele)
Angular Field of View	H: 109.0°(Wide)~33.2°(Tele), V: 57.4°(Wide)~18.7°(Tele), D: 132.0°(Wide)~38.0°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	Remote adjustment (Max. 200cycles) Pan : 0~360°, Tilt : 30~90°, Rotate : 0~90°
Operational	
IR Viewable Length	30m
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SSDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR V
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (5) of (44)

LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC at event triggers Alarm output Handover
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
Network	
Ethernet	RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(5ea area), WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (6) of (44)

Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Edge Storage	Micro SD/SDHC/SDXC 4slot 512GB(Each CH)
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API) Wisenet open platform
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	5GB RAM, 1280MB Flash
Environmental	
Operating Temperature / Humidity	-40°C~+55°C(-40°F~+131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / Less than 90% RH
Certification	IP66, IK10, NEMA4X
Electrical	
Input Voltage	HPoE, 12VDC
Power Consumption	Max : 42W Typical : 28W
Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL9003
Product dimensions / weight	φ315x145.9mm / 5.2kg

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☒ DC 12 V ☒ PoE

1.2 Variant Model Differences

GYRO SENSOR Delete

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-9084RQZ	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
PoE Injector	PT-PSE109GBRO-AH	PT2138221217	Dongguan PROCET Network Technology co.,Ltd	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	
Notebook	HSN-Q07C	5CD8367KND	HP	-
Notebook Adapter	HSTNN-CA40	WFTKU0ERLB4Q CH	HP	-
Smartphone	A1586	-	APPLE .Inc	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Alarm	-	-	-	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	Sandisk	8 GB

1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	DC IN	Adapter	DC OUT	1.0	U
	Audio Out	Speaker	Audio In	2.1	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	RJ-45	Notebook	RJ-45	3.0	U
	Audio In		3.5 mm	1.7	U
Smartphone	3.5 mm			1.1	U
Notebook	DC IN	Notebook Adapter	DC OUT	1.6	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Injector (EUT)	RJ-45(PoE)	3.0	U
	Audio Out	Speaker	Audio In	2.1	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	Audio In	Notebook	3.5 mm	1.7	U
Smartphone	3.5 mm			1.1	U
PoE Injector (EUT)	RJ-45(LAN)		RJ-45	3.0	U
Notebook	DC IN	Notebook Adapter	DC OUT	1.6	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (9) of (44)

1.7 EUT Operating Mode(s)

Test Mode	operating
DC Mode	After placing the test equipment and peripheral devices as shown in the layout below, the tests were conducted while checking the 1 kHz tone output from the smartphone, the camera video output from the notebook and verifying that they were operating normally while Ping test.
PoE Mode	


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

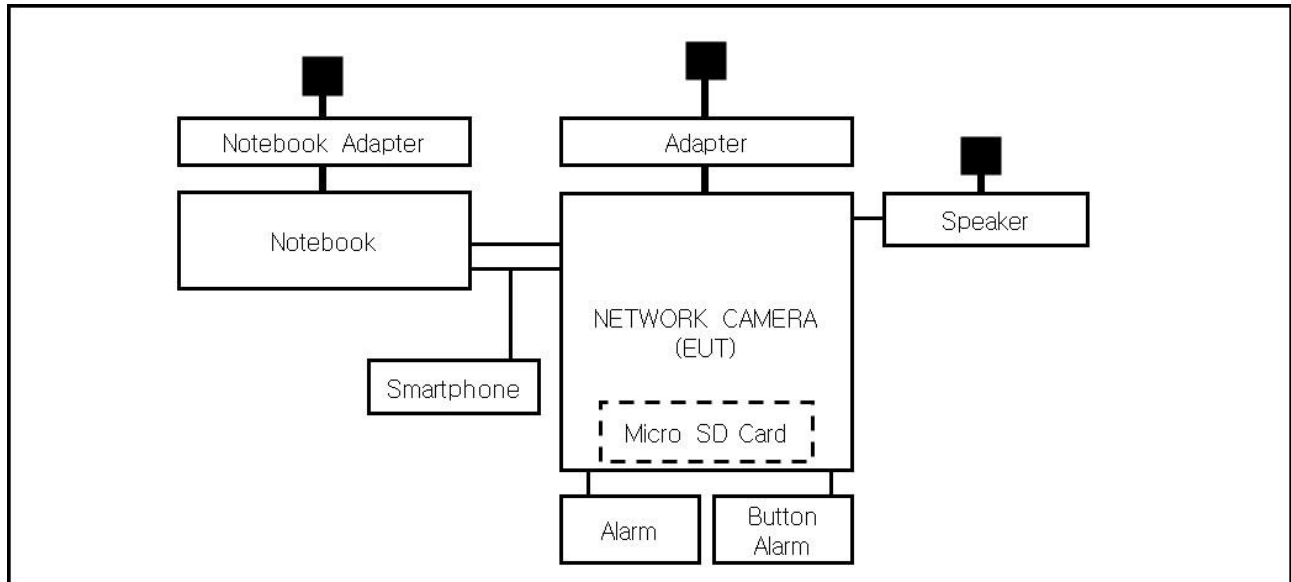

■ PoE Mode

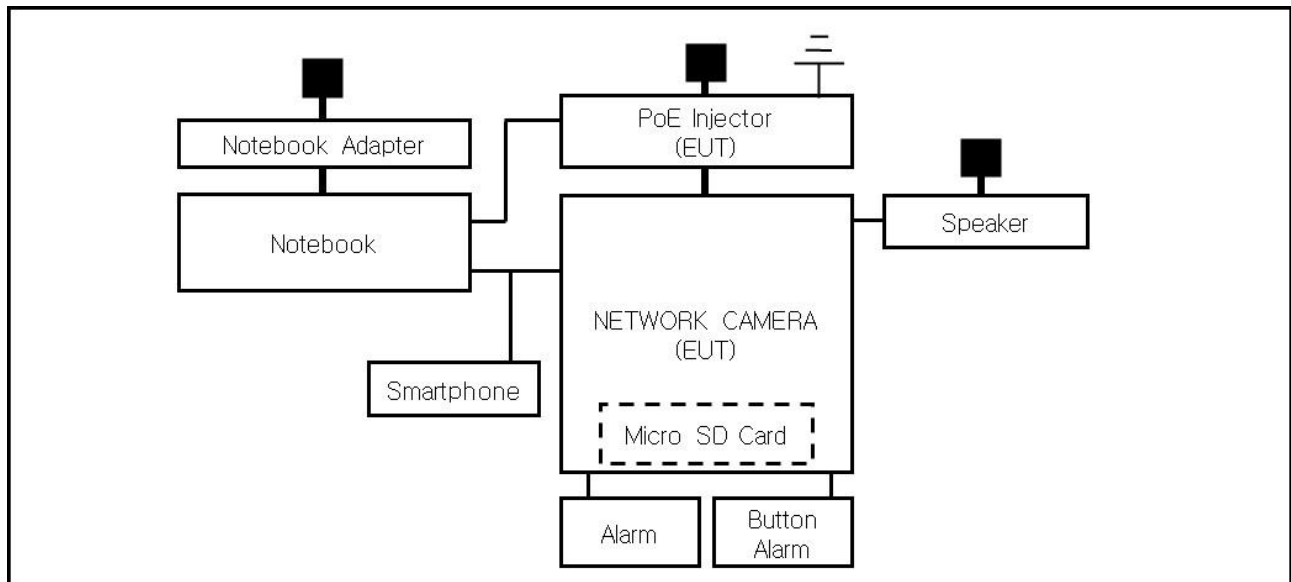

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (12) of (44)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (13) of (44)

2.1 Conducted Emissions Mains Power Ports

Test Date

Dec. 25, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (22,6 ± 0,1) °C

Relative Humidity: (43,3 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec. 25, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☐	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

Test Conditions

Temperature: (22,6 ± 0,1) °C

Relative Humidity: (43,3 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec. 25, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (22,1 ± 0,1) °C

Relative Humidity: (43,3 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec. 24, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 03, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (22,6 ± 0,2) °C

Relative Humidity: (43,1 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9084RQZ
Phase:	L1
Mode:	DC
Operator Name:	KES

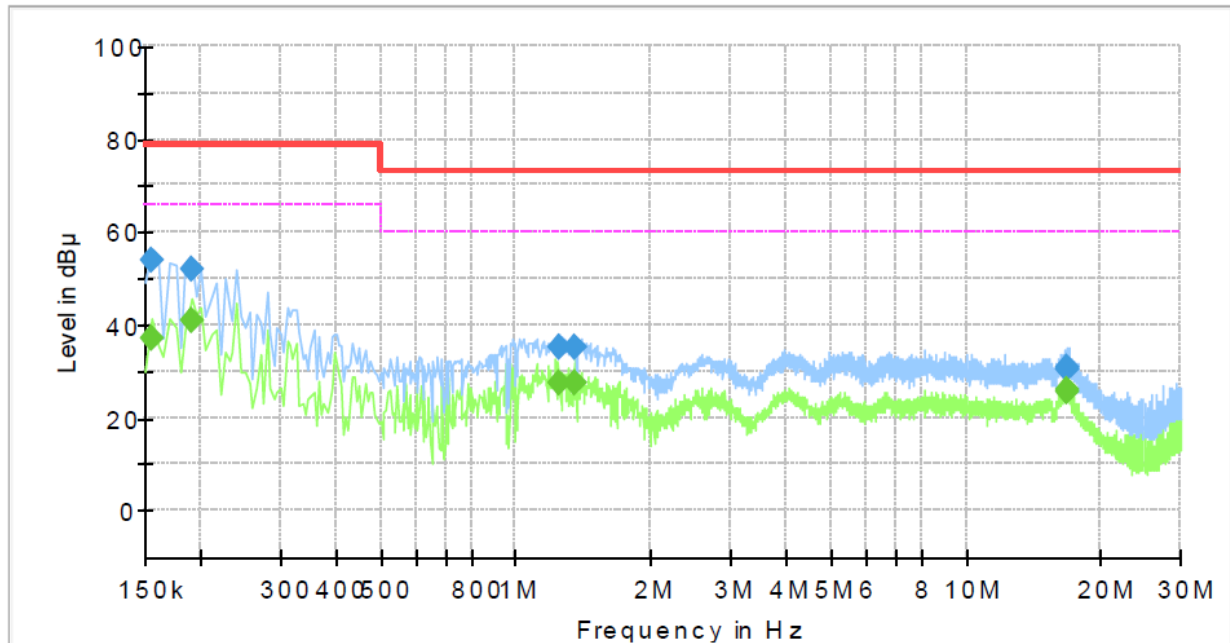

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	36.85	66.00	29.15	1000.0	9.000	L1	19.5
0.155000	53.69	---	79.00	25.31	1000.0	9.000	L1	19.5
0.190000	---	41.11	66.00	24.89	1000.0	9.000	L1	19.5
0.190000	51.90	---	79.00	27.10	1000.0	9.000	L1	19.5
1.250000	---	27.34	60.00	32.66	1000.0	9.000	L1	20.2
1.250000	35.06	---	73.00	37.94	1000.0	9.000	L1	20.2
1.350000	---	27.42	60.00	32.58	1000.0	9.000	L1	20.2
1.350000	35.35	---	73.00	37.65	1000.0	9.000	L1	20.2
16.715000	---	25.82	60.00	34.18	1000.0	9.000	L1	20.0
16.715000	30.97	---	73.00	42.03	1000.0	9.000	L1	20.0
16.810000	---	25.41	60.00	34.59	1000.0	9.000	L1	20.0
16.810000	30.50	---	73.00	42.50	1000.0	9.000	L1	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9084RQZ
Phase:	N
Mode:	DC
Operator Name:	KES

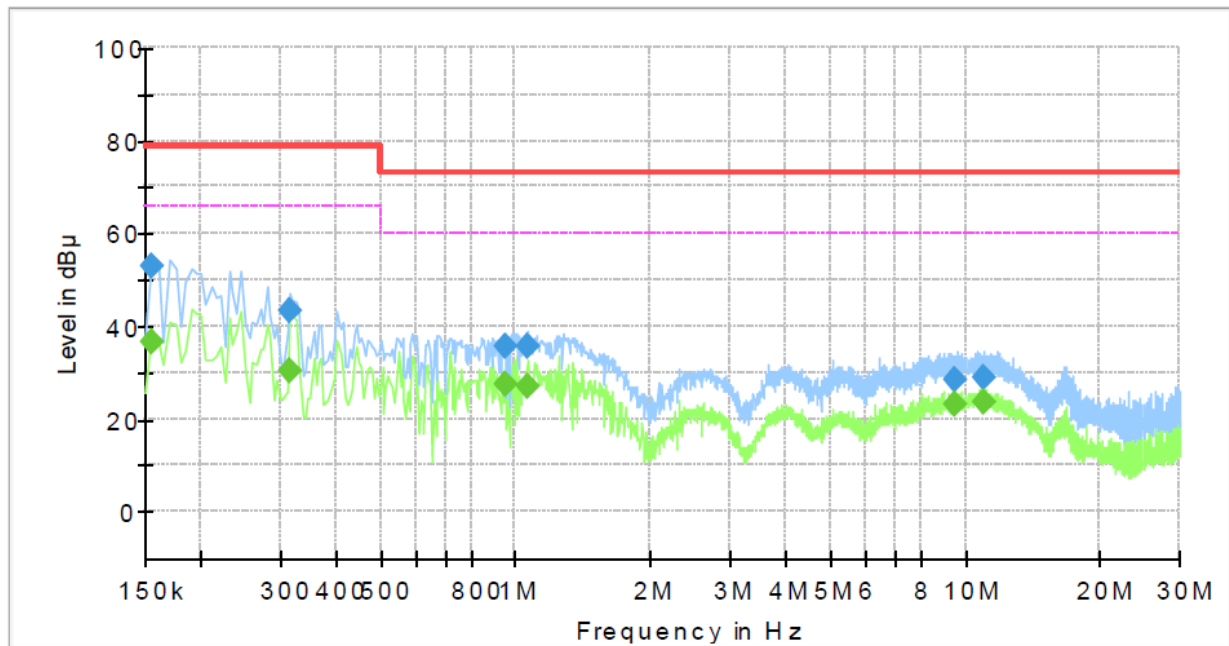

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	36.58	66.00	29.42	1000.0	9.000	N	19.4
0.155000	53.04	---	79.00	25.96	1000.0	9.000	N	19.4
0.315000	---	30.24	66.00	35.76	1000.0	9.000	N	19.6
0.315000	43.52	---	79.00	35.48	1000.0	9.000	N	19.6
0.950000	---	27.35	60.00	32.65	1000.0	9.000	N	20.1
0.950000	35.83	---	73.00	37.17	1000.0	9.000	N	20.1
1.060000	---	27.09	60.00	32.91	1000.0	9.000	N	20.1
1.060000	35.42	---	73.00	37.58	1000.0	9.000	N	20.1
9.455000	---	23.33	60.00	36.67	1000.0	9.000	N	19.8
9.455000	28.64	---	73.00	44.36	1000.0	9.000	N	19.8
11.010000	---	23.63	60.00	36.37	1000.0	9.000	N	20.0
11.010000	28.94	---	73.00	44.06	1000.0	9.000	N	20.0



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (19) of (44)

■ PoE Mode

HOT LINE

Common Information

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

PNM-9084RQZ

L1

PoE

KES

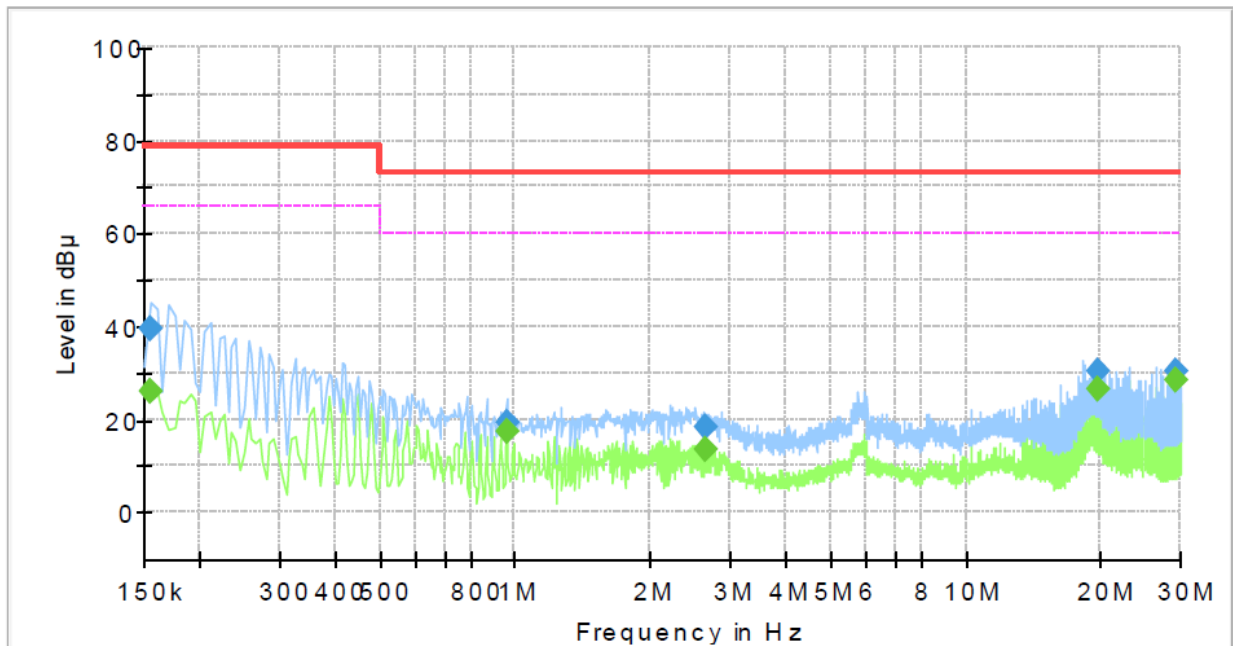

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	25.94	66.00	40.06	1000.0	9.000	L1	19.5
0.155000	39.39	---	79.00	39.61	1000.0	9.000	L1	19.5
0.960000	---	17.29	60.00	42.71	1000.0	9.000	L1	20.1
0.960000	19.31	---	73.00	53.69	1000.0	9.000	L1	20.1
2.655000	---	13.52	60.00	46.48	1000.0	9.000	L1	20.2
2.655000	18.51	---	73.00	54.49	1000.0	9.000	L1	20.2
19.710000	---	26.73	60.00	33.27	1000.0	9.000	L1	20.2
19.710000	30.55	---	73.00	42.45	1000.0	9.000	L1	20.2
29.235000	---	28.64	60.00	31.36	1000.0	9.000	L1	20.4
29.235000	30.47	---	73.00	42.53	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9084RQZ
Phase:	N
Mode:	PoE
Operator Name:	KES

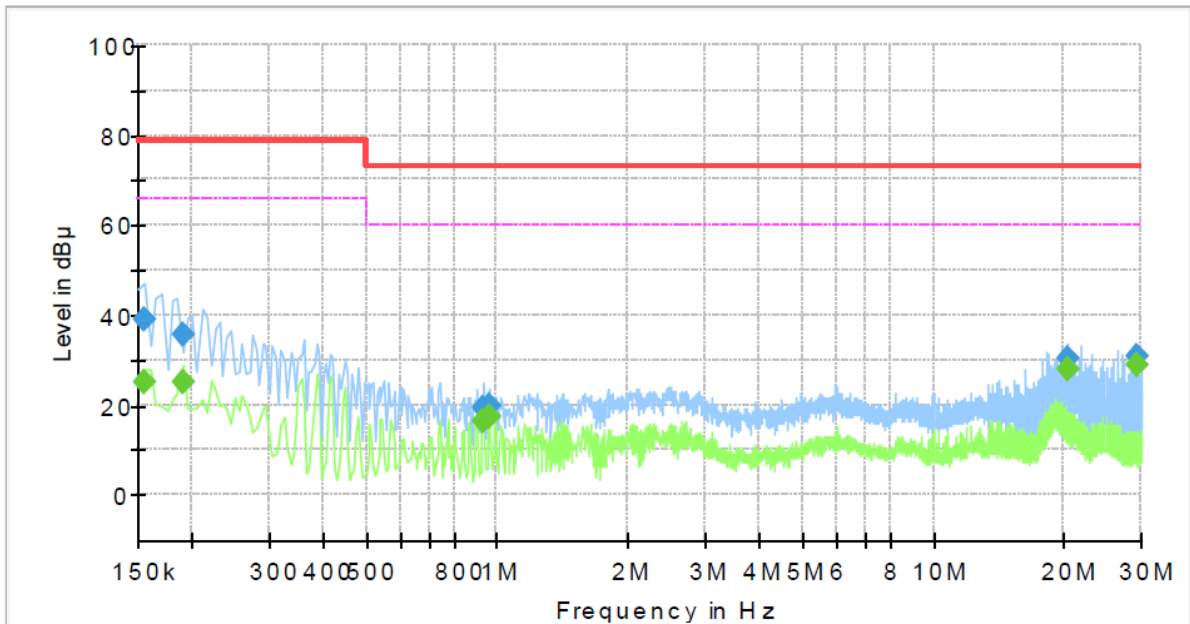

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	25.30	66.00	40.70	1000.0	9.000	N	19.4
0.155000	39.18	---	79.00	39.82	1000.0	9.000	N	19.4
0.190000	---	25.08	66.00	40.92	1000.0	9.000	N	19.4
0.190000	35.65	---	79.00	43.35	1000.0	9.000	N	19.4
0.930000	---	16.28	60.00	43.72	1000.0	9.000	N	20.1
0.930000	19.19	---	73.00	53.81	1000.0	9.000	N	20.1
0.960000	---	17.48	60.00	42.52	1000.0	9.000	N	20.1
0.960000	19.78	---	73.00	53.22	1000.0	9.000	N	20.1
20.260000	---	27.79	60.00	32.21	1000.0	9.000	N	20.2
20.260000	30.41	---	73.00	42.59	1000.0	9.000	N	20.2
29.235000	---	28.88	60.00	31.12	1000.0	9.000	N	20.4
29.235000	30.71	---	73.00	42.29	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9084RQZ
Mode :	DC
Speed :	1 000 Mbps
Operator Name:	KES

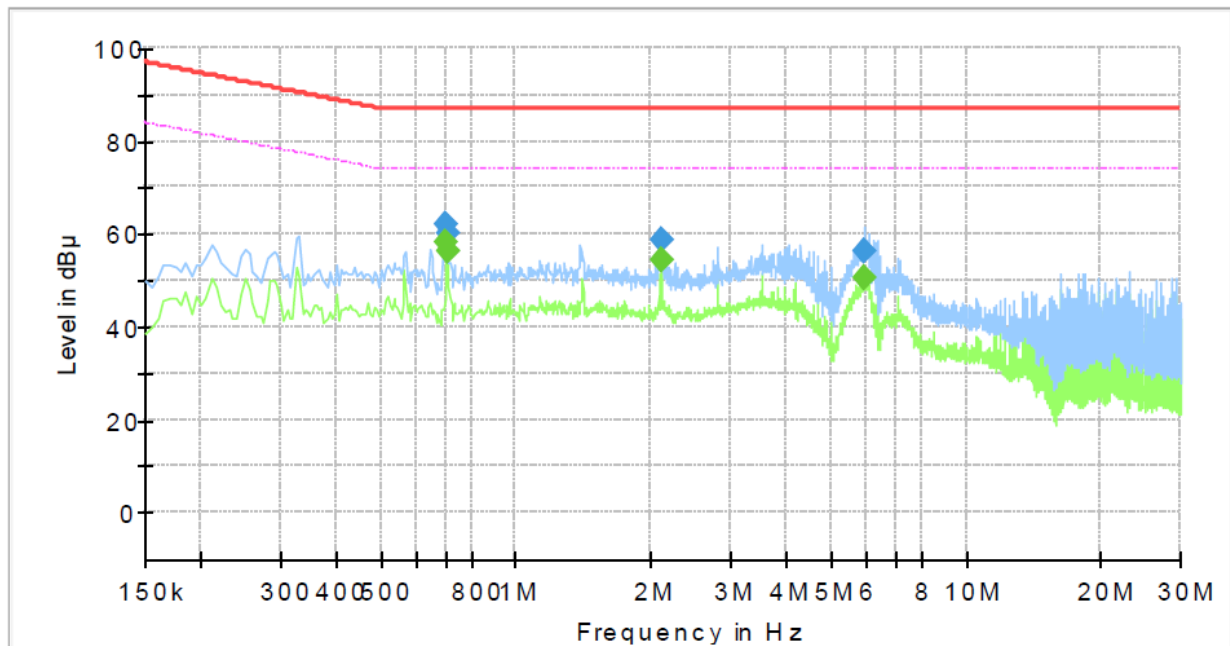

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.700000	---	58.42	74.00	15.58	1000.0	9.000	Single Line	19.9
0.700000	61.82	---	87.00	25.18	1000.0	9.000	Single Line	19.9
0.705000	---	56.22	74.00	17.78	1000.0	9.000	Single Line	19.9
0.705000	60.23	---	87.00	26.77	1000.0	9.000	Single Line	19.9
2.110000	---	54.46	74.00	19.54	1000.0	9.000	Single Line	20.2
2.110000	58.87	---	87.00	28.13	1000.0	9.000	Single Line	20.2
5.935000	---	50.50	74.00	23.50	1000.0	9.000	Single Line	19.4
5.935000	56.25	---	87.00	30.75	1000.0	9.000	Single Line	19.4


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

PoE Mode
[1 000 Mbps]
Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9084RQZ
Mode :	PoE
Speed :	1 000 Mbps
Operator Name:	KES

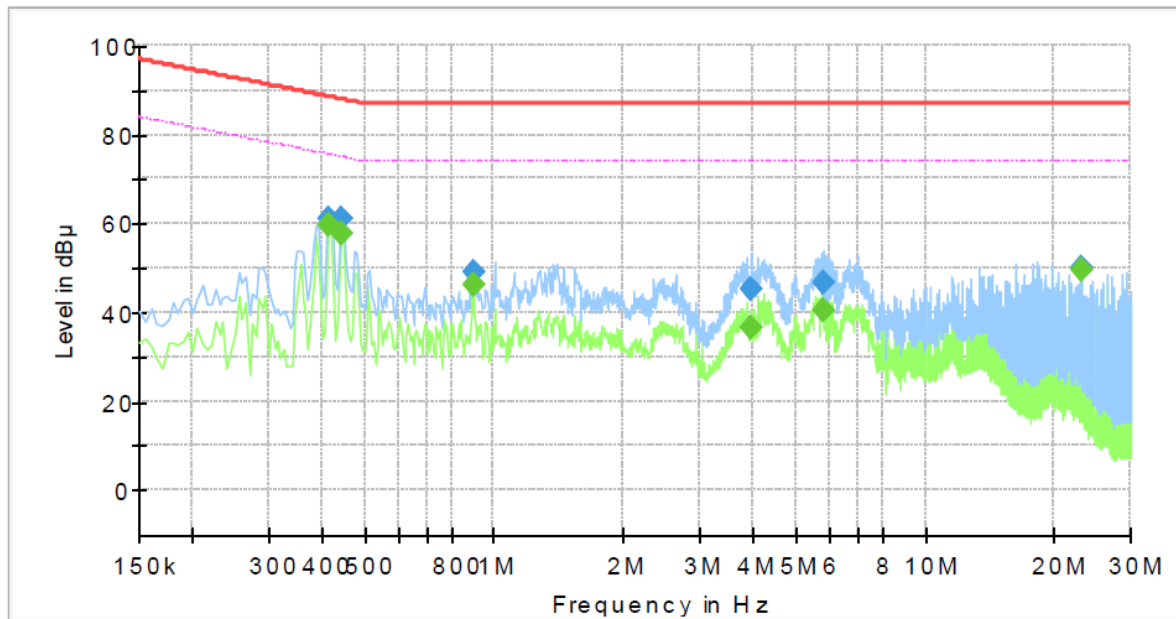
Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	59.65	75.55	15.90	1000.0	9.000	Single Line	19.8
0.415000	61.32	---	88.55	27.23	1000.0	9.000	Single Line	19.8
0.445000	---	57.58	74.97	17.39	1000.0	9.000	Single Line	19.8
0.445000	60.90	---	87.97	27.07	1000.0	9.000	Single Line	19.8
0.895000	---	45.99	74.00	28.01	1000.0	9.000	Single Line	20.1
0.895000	49.22	---	87.00	37.78	1000.0	9.000	Single Line	20.1
3.965000	---	36.58	74.00	37.42	1000.0	9.000	Single Line	19.8
3.965000	45.43	---	87.00	41.57	1000.0	9.000	Single Line	19.8
5.795000	---	40.45	74.00	33.55	1000.0	9.000	Single Line	19.4
5.795000	46.56	---	87.00	40.44	1000.0	9.000	Single Line	19.4
23.130000	---	49.47	74.00	24.53	1000.0	9.000	Single Line	20.0
23.130000	50.03	---	87.00	36.97	1000.0	9.000	Single Line	20.0

♦ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-22T0017-R2

Page (23) of (44)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

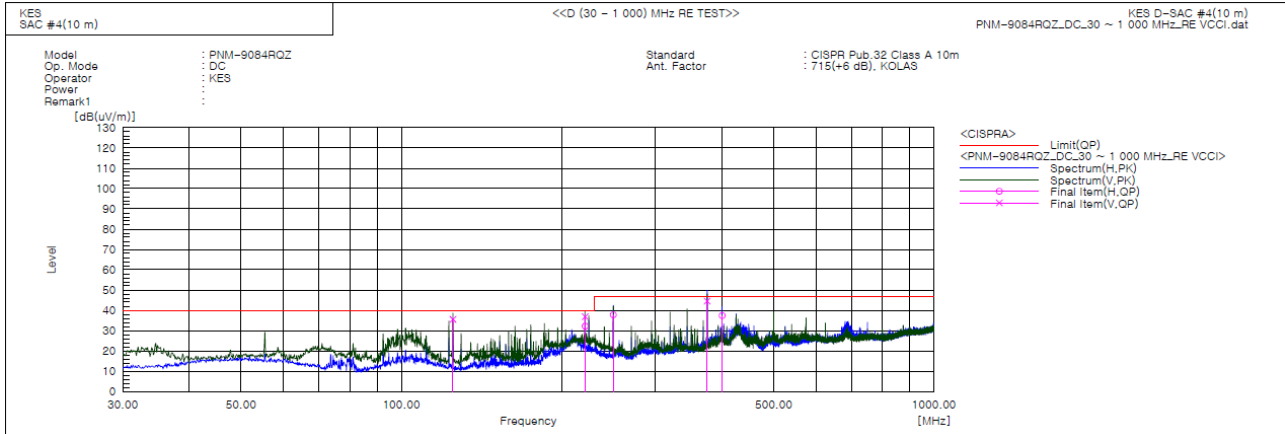

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	124.952	V	60.4	-24.8	35.6	40.0	4.4	124.0	173.0	
2	221.249	V	57.1	-20.2	36.9	40.0	3.1	162.0	350.0	
3	221.282	H	52.4	-20.2	32.2	40.0	7.8	372.0	310.0	
4	249.982	H	56.9	-19.1	37.8	47.0	9.2	385.0	99.0	
5	374.982	V	59.2	-14.6	44.6	47.0	2.4	121.0	120.0	
6	400.101	H	51.4	-14.0	37.4	47.0	9.6	345.0	151.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (24) of (44)

■ PoE Mode

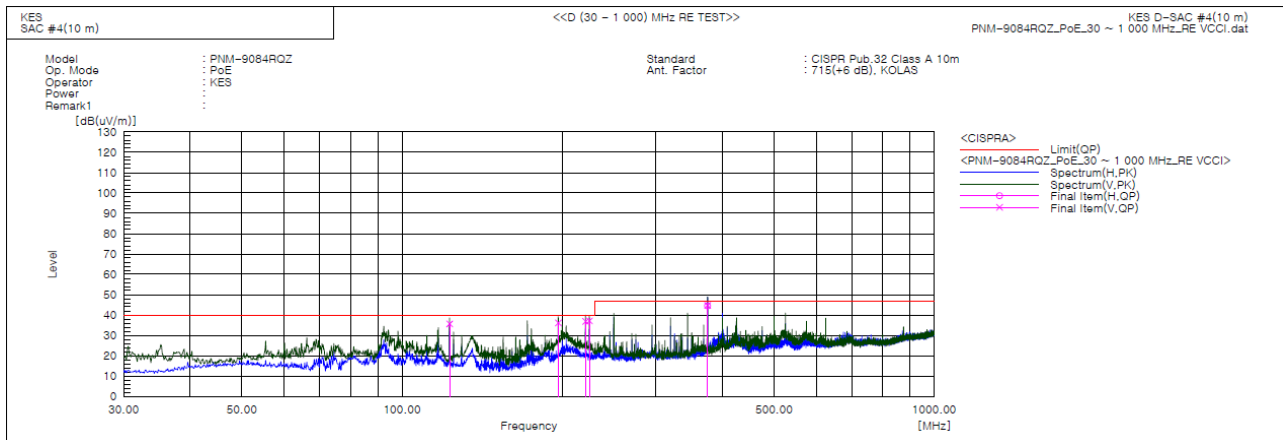

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP		QP	QP	QP			
			[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	122.891	V	60.2	-24.5	35.7	40.0	4.3	151.0	187.0	
2	196.622	V	57.1	-21.0	36.1	40.0	3.9	139.0	183.0	
3	221.222	V	57.1	-20.2	36.9	40.0	3.1	109.0	350.0	
4	224.982	V	57.2	-20.1	37.1	40.0	2.9	129.0	213.0	
5	374.981	H	59.1	-14.6	44.5	47.0	2.5	399.0	145.0	
6	374.989	V	59.4	-14.6	44.8	47.0	2.2	161.0	221.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-22T0017-R2

Page (25) of (44)

Radiated Electric Field Emissions(Above 1 GHz)

DC Mode

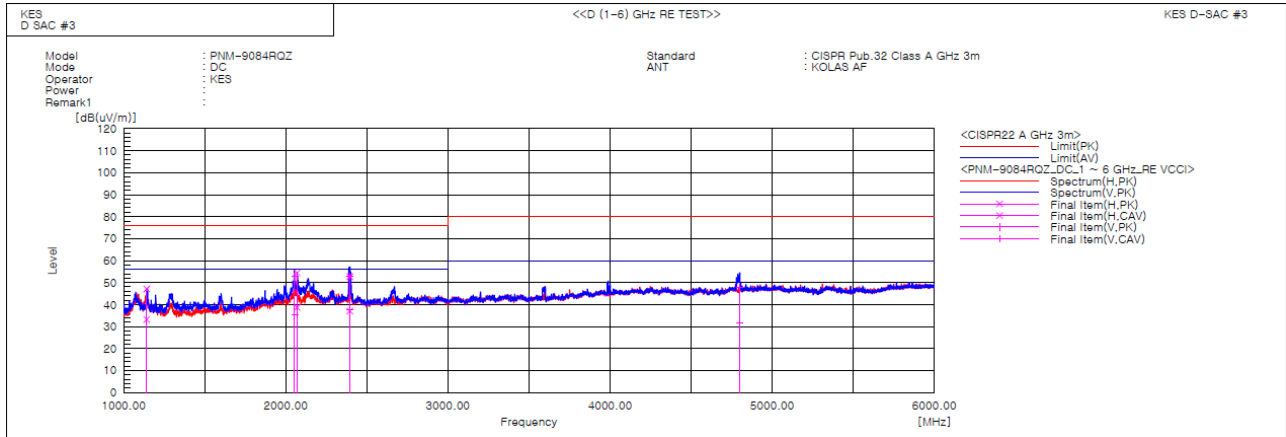

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1141.529	H	56.1	42.2	-9.0	47.1	33.2	76.0	56.0	28.9	22.8	100.0	152.5	
2	2053.522	V	53.7	36.4	-0.8	52.9	35.6	76.0	56.0	23.1	20.4	100.0	351.0	
3	2069.521	H	55.2	39.4	-0.7	54.5	38.7	76.0	56.0	21.5	17.3	100.0	190.9	
4	2394.184	H	52.5	36.9	0.2	52.7	37.1	76.0	56.0	23.3	18.9	100.0	342.6	
5	2395.411	V	52.5	37.2	0.2	52.7	37.4	76.0	56.0	23.3	18.6	100.0	138.5	
6	4800.492	V	39.6	23.7	8.0	47.6	31.7	80.0	60.0	32.4	28.3	100.0	182.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0017-R2

Page (26) of (44)

■ PoE Mode

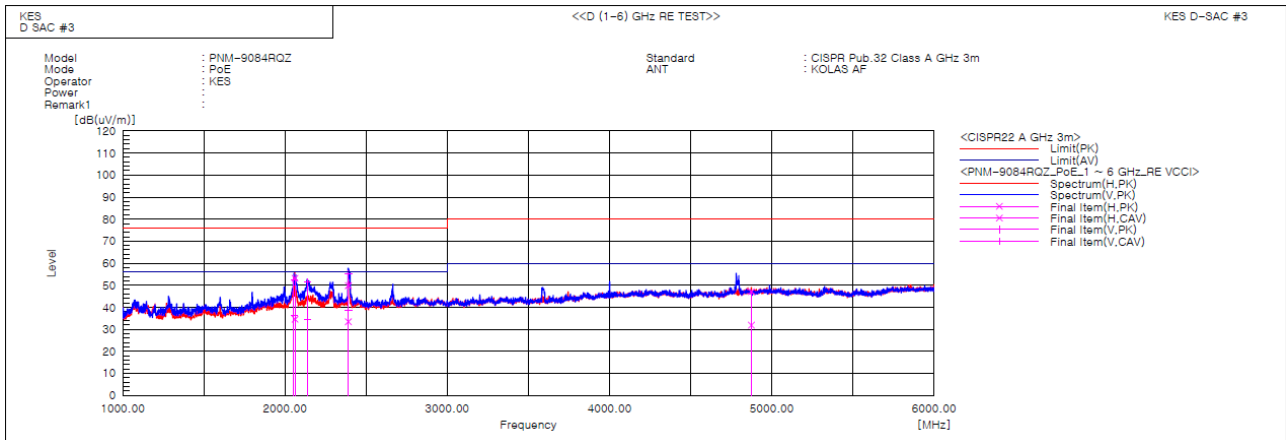

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2054.349	V	53.1	37.3	-0.8	52.3	36.5	76.0	56.0	23.7	19.5	100.0	177.0	
2	2060.429	H	53.9	35.3	-0.8	53.1	34.5	76.0	56.0	22.9	21.5	100.0	322.7	
3	2137.291	V	51.9	34.7	-0.5	51.4	34.2	76.0	56.0	24.6	21.8	100.0	256.6	
4	2390.185	H	49.6	33.2	0.2	49.8	33.4	76.0	56.0	26.2	22.6	100.0	351.4	
5	2390.492	V	54.8	38.5	0.2	55.0	38.7	76.0	56.0	21.0	17.3	100.0	45.2	
6	4873.581	H	38.7	23.5	8.4	47.1	31.9	80.0	60.0	32.9	28.1	100.0	351.4	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode



Conducted Emissions at Telecommunication Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode



Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode



Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

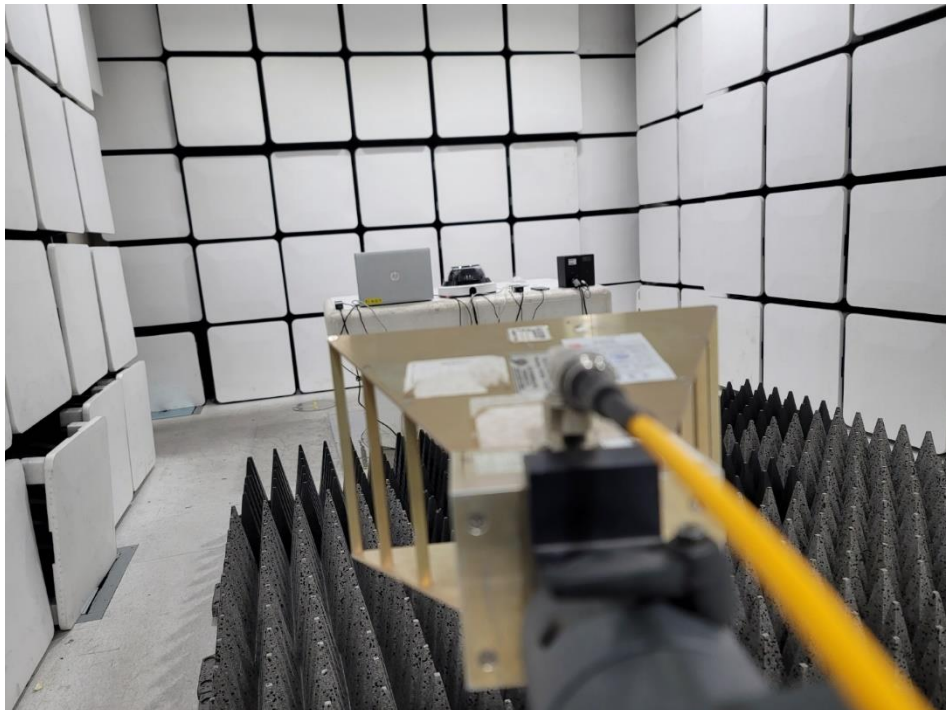

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode




EUT External Photographs

(Top)



(Bottom)

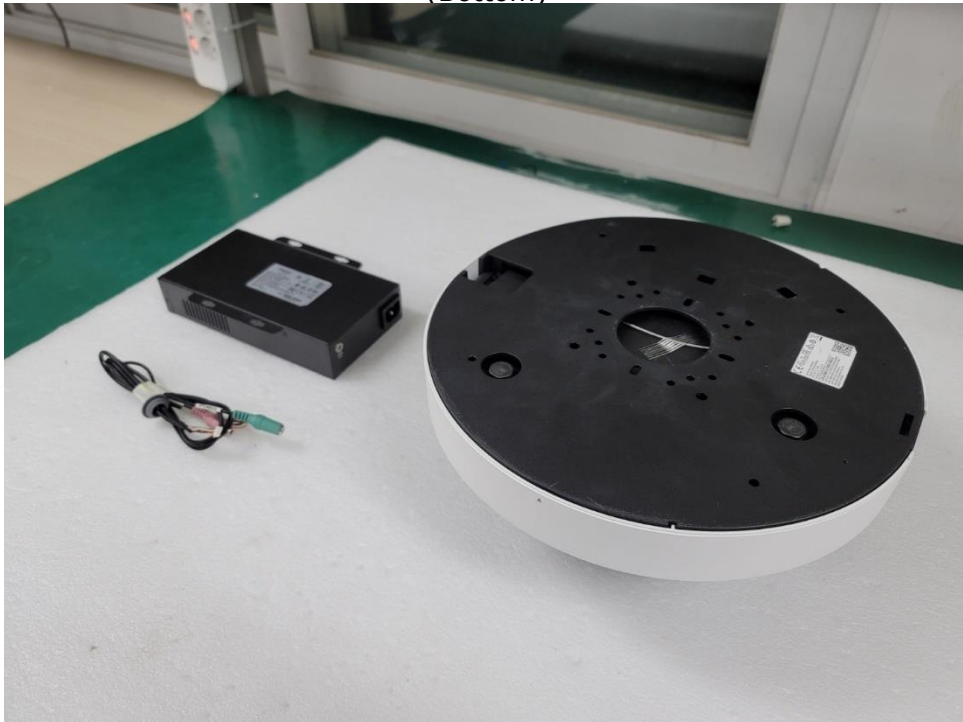

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Board 1

(Top)

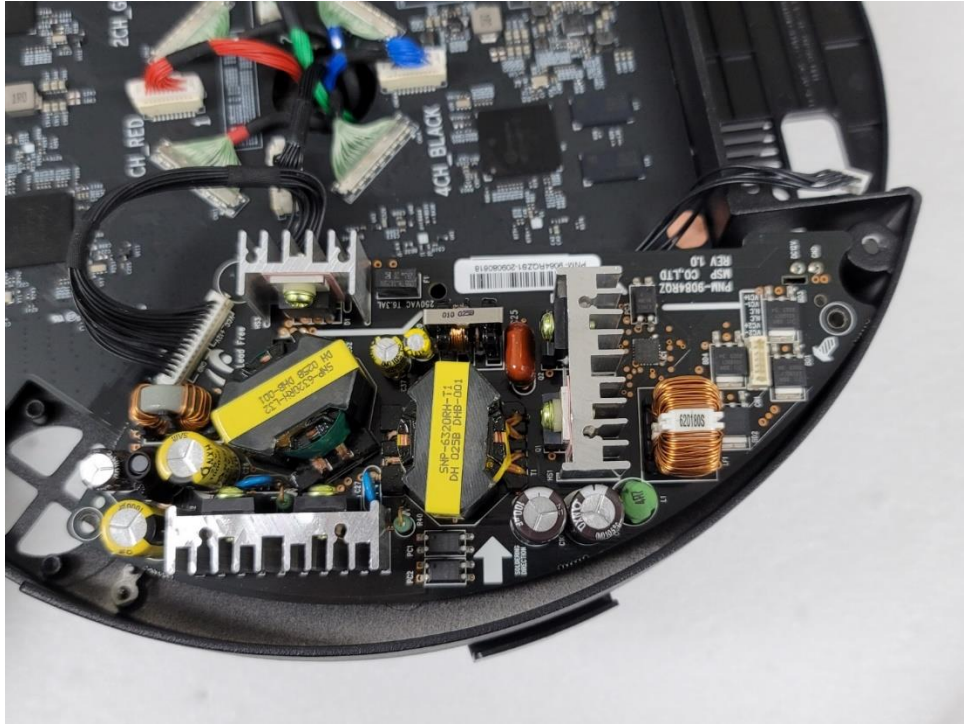

(Bottom)

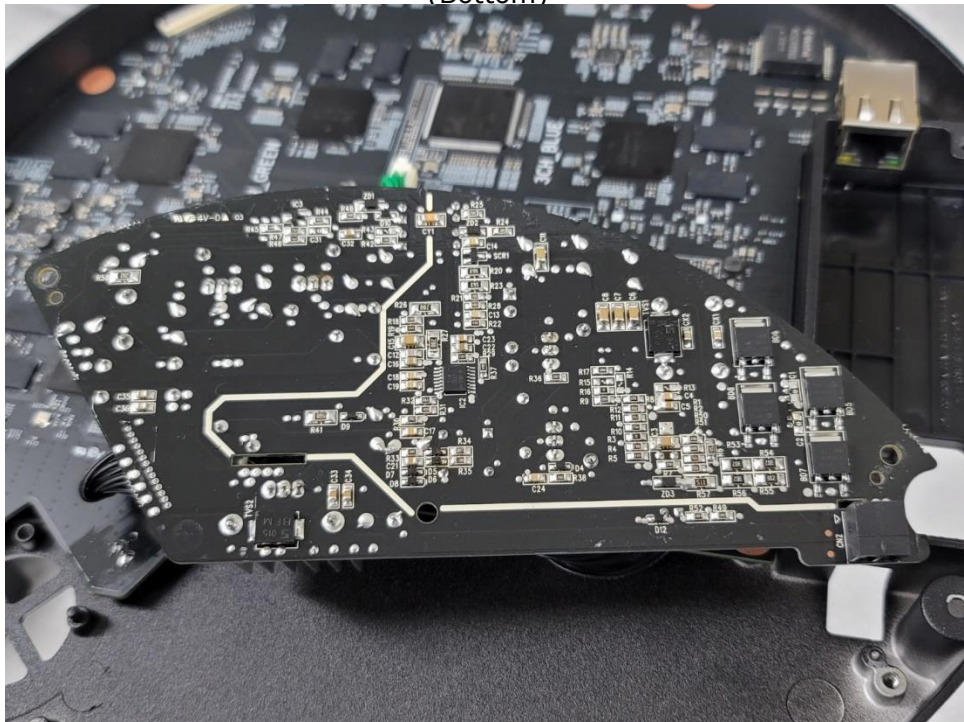


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)




(Bottom)

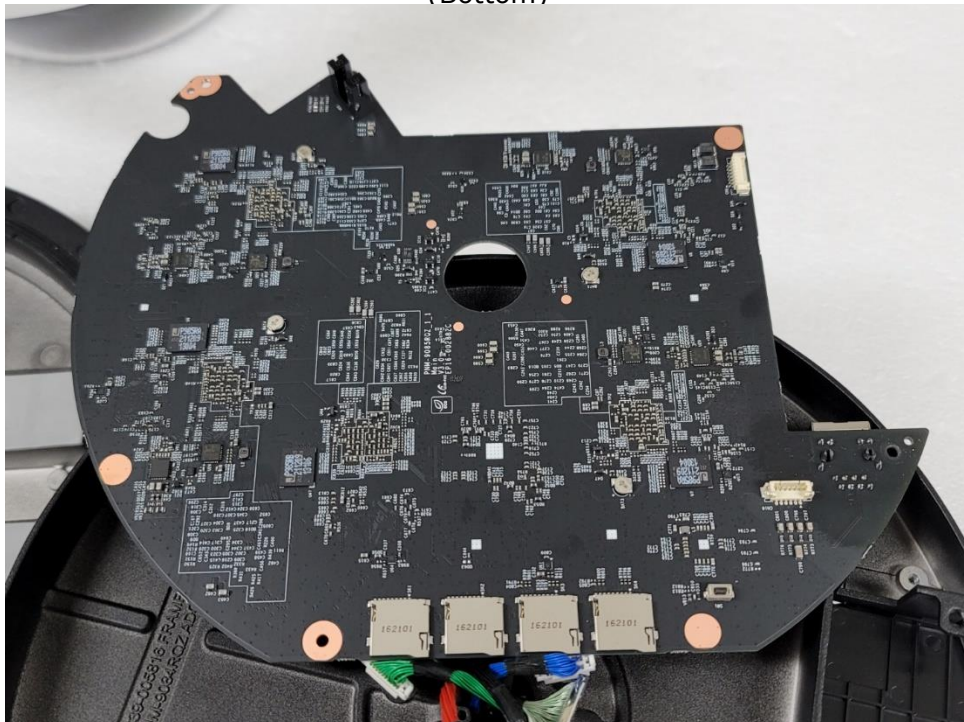

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)

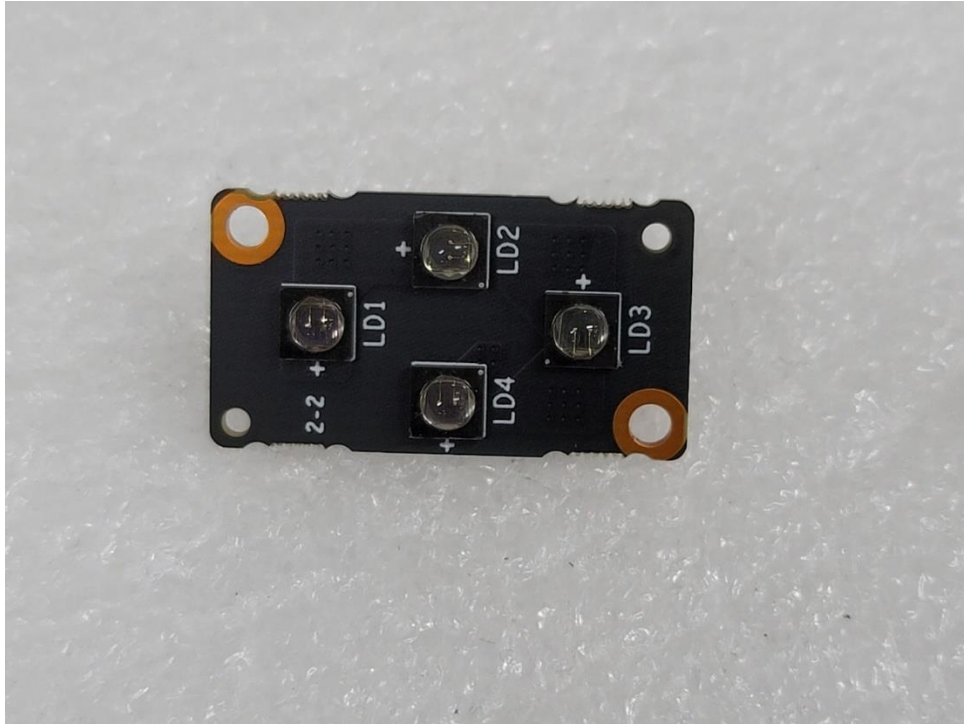

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 5

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 6

(Top)

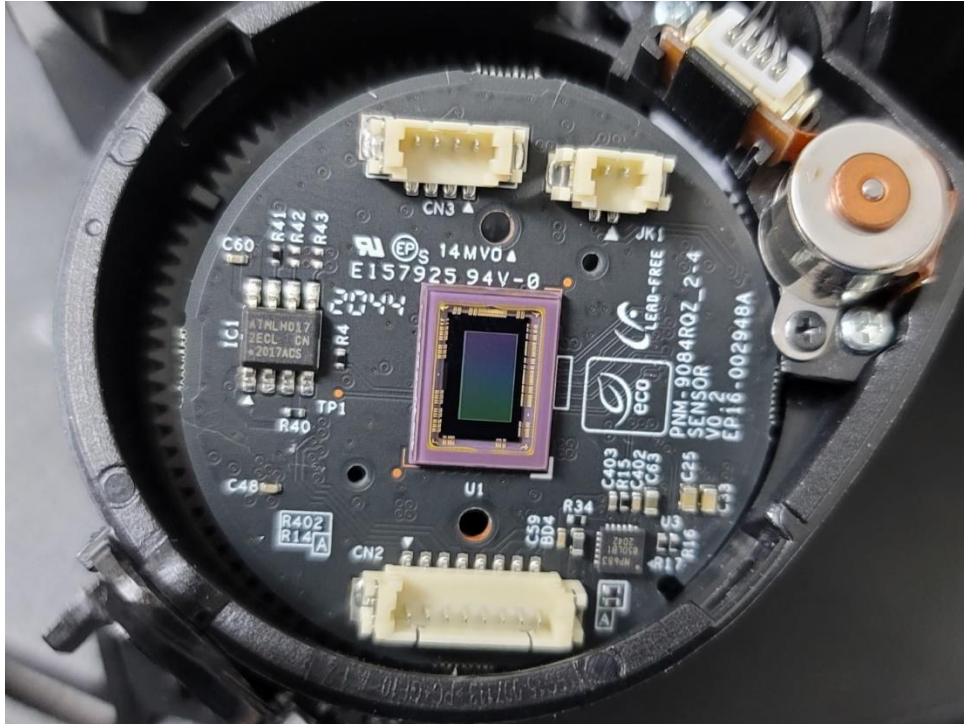


(Bottom)

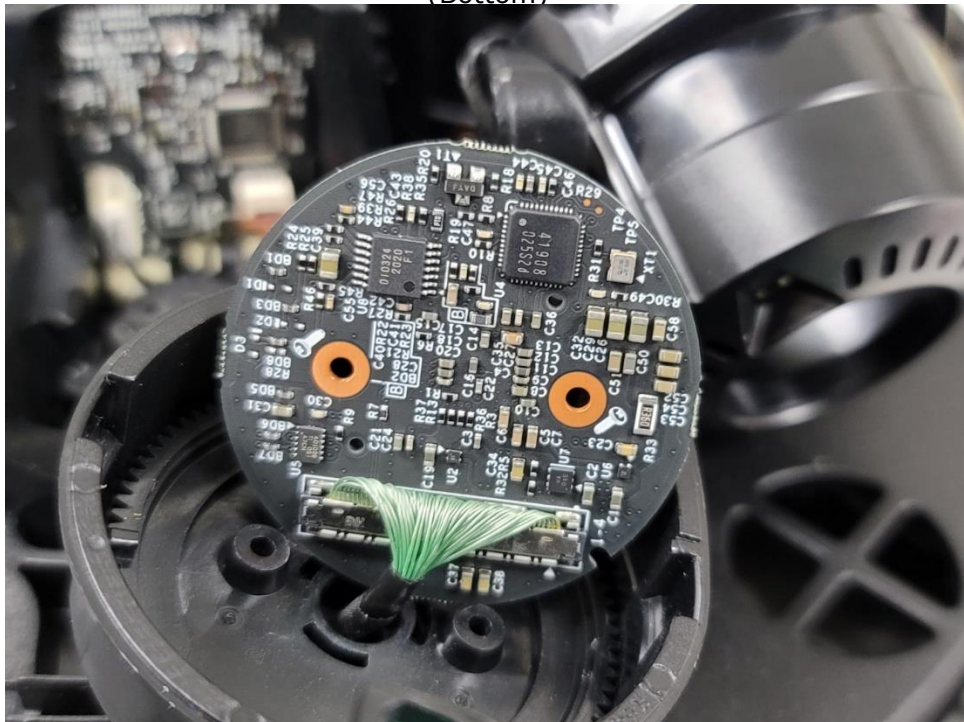


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)

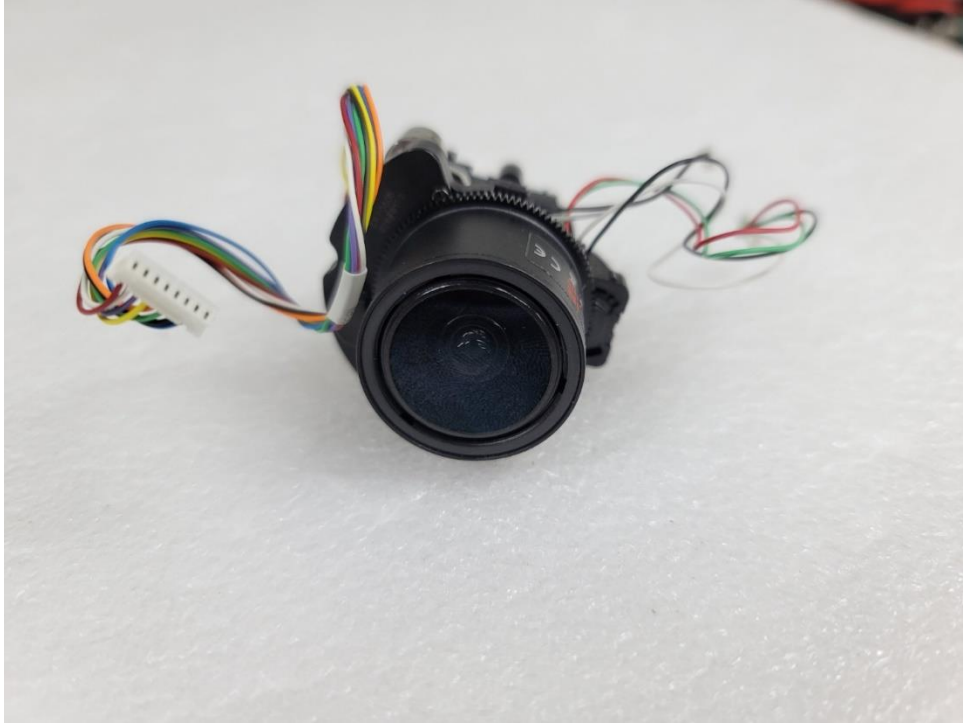


(Bottom)

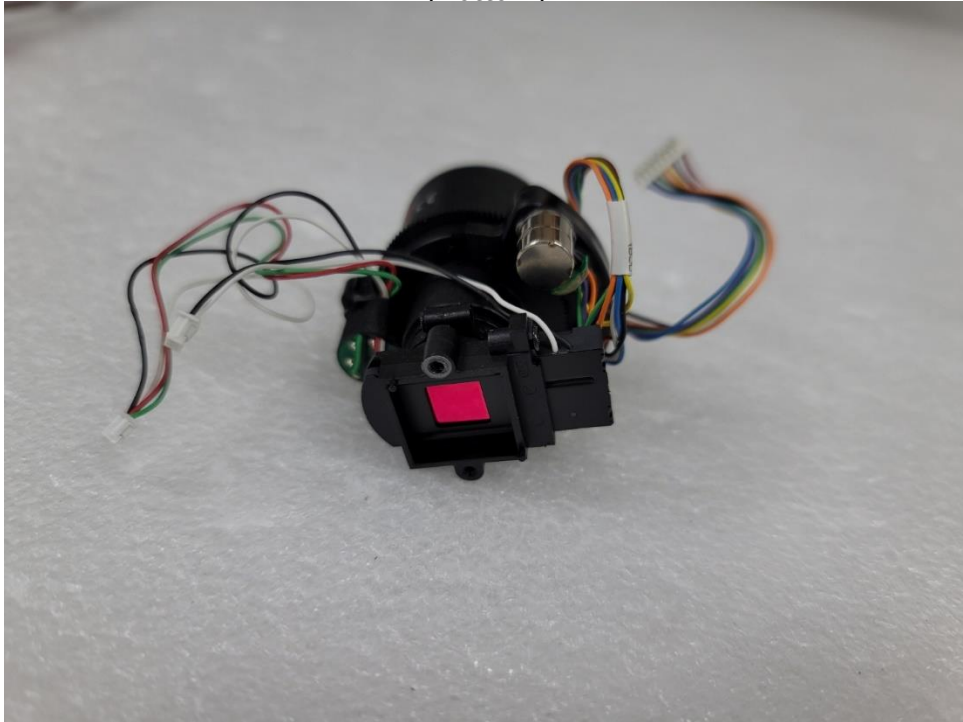

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

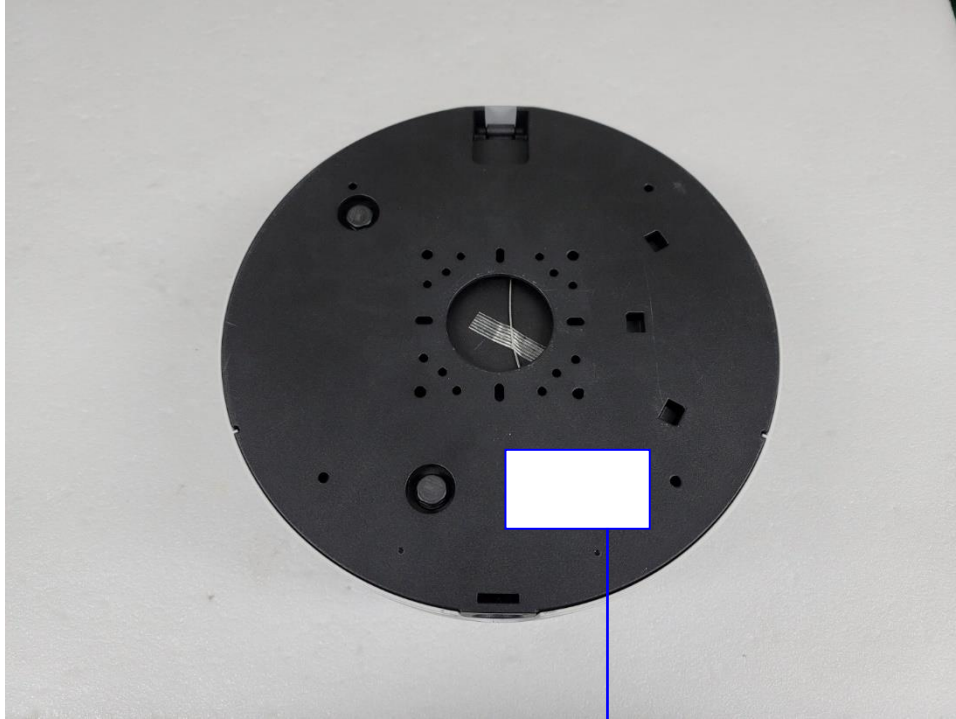

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A