



KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (1) of (30)



EMC TEST REPORT

Test Report No. : KES-EM-23T0788

Date of Issue : Sep. 08, 2023

Product name : NETWORK CAMERA

Model/Type No. : PNM-C16013RVQ

Variant Model : -

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
 2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
 2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

Equipment authorization : **Supplier's Declaration of Conformity**

Date of Receipt : Aug. 22, 2023

Test date : Sep. 05, 2023

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Kang Hyeon, Kim
 EMC Test Engineer

Reviewed by


Dae Jung, Choi
 EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (2) of (30)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Sep. 08, 2023	KES-EM-23T0788	Issued

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (3) of (30)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency.....	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications.....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments.....	7
1.6	External I/O Cabling.....	8
1.7	EUT Operating Mode(s).....	8
1.8	Configuration.....	9
1.9	Remarks when standards applied.....	10
1.10	Calibration Details of Equipment Used for Measurement.....	10
1.11	Test Facility.....	10
1.12	Laboratory Accreditations and Listings.....	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports.....	12
2.2	Radiated Electric Field Emissions(Below 1 GHz).....	14
2.3	Radiated Electric Field Emissions(Above 1 GHz).....	16
APPENDIX A – TEST DATA.....		18
	Conducted Emissions at Mains Power Ports.....	18
	Radiated Electric Field Emissions(Below 1 GHz).....	20
	Radiated Electric Field Emissions(Above 1 GHz).....	22
	Test Setup Photos and Configuration.....	23
	Conducted Emissions at Mains Power Ports.....	23
	Radiated Electric Field Emissions(Below 1 GHz).....	24
	Radiated Electric Field Emissions(Above 1 GHz).....	25
	EUT External Photographs.....	26
	EUT Internal Photographs.....	27

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (4) of (30)

1.0 General Product Description



Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" CMOS: each CH
Resolution	2592x1520, 2560x1440, 1920x1080, 1280x1024, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	(TBD) H.265/H.264: Max. 15fps/15fps MJPEG: Max. 15fps/15fps
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.075Lux(F1.2, 1/30sec, 30IRE) BW : 0Lux(IR LED on)
Video Out	USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	3.19mm fixed focal
Max. Aperture Ratio	F1.2
Angular Field of View	H: 97° / V: 54° / D: 116°
Min. Object Distance	2m(6.56ft)
Focus Control	Manual
Lens Type	Fixed Iris
Mount Type	M12
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0~360°(100° per CH)/ 0~75° / 0~90°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120db
Digital Noise Reduction	WiseNRⅡ(Based on AI engine), SSNRV
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	6ea, Rectangular zones - Color: Gray, Black, White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker(1/5~1/12,000sec) Auto Prefer shutter control(Based on AI engine)
Digital PTZ	None
Video Rotation	Flip, Mirror, Hallway view(90°/270°) - Each channel separately
Analytics	Classified object type: Person/Face/Vehicle/License plate Attributes: Vehicle(Type: Car/Bus/Truck/Motorcycle/Bicycle) Support BestShot Analytics events based on AI engine - Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit) Analytics events - Motion detection, Tampering, Virtual area(Appear/Disappear) * Audio detection, Sound classification(with NW I/O box SPM-4210)
Business Intelligence	None
Serial Interface	None
Alarm I/O	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (5) of (30)

Alarm Triggers	Analytics, Network disconnect, App event, Time schedule, MQTT subscription * Alarm input(with NW I/O Box SPM-4210)
Alarm Events	When alarm trigger occurred - File upload(image): e-mail/FTP - Notification: e-mail - Recording: SD/SDHC/SDXC or NAS recording at event triggers - Alarm output(with NW I/O box SPM-4210) - Handover: PTZ preset, Send message by HTTP/HTTPS/TCP - MQTT: publication
Audio In	Support via NW I/O Box SPM-4210
Audio Out	Support via NW I/O Box SPM-4210
IR Viewable Length	20m(65.62ft)
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	None
Smart Codec	Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(10 users) / Multicast Multiple streaming(Up to 3 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT
Security	TPM 2.0(FIPS 140-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Private Root CA, pre-installed) Secure OS/Boot/Storage, Verify firmware forgery
SIP support (VoIP, Peer-to-peer, SIP/PB)	None
Application Programming Interface	ONVIF Profile S/T/M SUNAPI(HTTP API) Wisenet open platform
Security	
OS / Firmware Protect	Secure boot, Verify firmware forgery, Firmware encryption
User authentication	Digest Authentication, Privent brute-force attack
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)
Access Control	IP address filtering
Data Protect	Authentication information encryption, ZIP compression encryption
Audit	User Access/System/Event log
Device ID	Device Certificate(Hanwha Techwin Root CA, pre-installed)
Secure Storage	TPM 2.0 with FIPS 140-2 level2
Security Certificate	Secure by default
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slot Max. 1TB(512GBx2)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (6) of (30)

Memory	4GB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-40°C~+55°C(-40°F~+131°F) * Start up should be done at above -35°C 0~95% RH(non-condensing), Humidity control /w AIR vent
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Certification	IP66, NEMA4X, IK10
Input Voltage	PoE+(IEEE802.3at type 2, Class4)
Power Consumption	PoE+: 22W, typical ??W
Mechanical	
Color / Material	White / Aluminum Hard-coated dome bubble
RAL Code	RAL9003
Product Dimensions / Weight	Ø200x80mm(7.87x3.15"), ???g(??? lb)
Compatible Conduit hole / Gangbox	None / single, double, 4" octagon, 4" square
Hanging Mount (Dome)	SBP-200HWW
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	None
Certifications & Standards	
Network	None
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC 62471
Environment	EN IEC 63000 IEC 60529 IP66, IEC 62262 IK10 NEMA 250 type 4X
Video	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	45.9m(150.47ft)
Observe (63PPM/ 19PPF)	18.3m(60.19ft)
Recognize (125PPM/ 38PPF)	9.2m(30.09ft)
Identify (250PPM/ 76PPF)	4.6m(15.05ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (7) of (30)

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V 60 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-C16013RVQ	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT


1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Injector	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	
Laptop	LG15N54	-	LG	-
Laptop Adapter	PA-1900-14	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD	-
Micro SD Card1	-	-	Transcend	16 GB
Micro SD Card2	-	-	Transcend	16 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (8) of (30)

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45(PoE)	PoE Injector	RJ-45(PoE)	4.0	U
	Micro SD Card Slot	Micro SD Card1	Micro SD Card Slot	-	-
	Micro SD Card Slot	Micro SD Card2	Micro SD Card Slot	-	-
Laptop	RJ-45(LAN)	PoE Injector	RJ-45(LAN)	1.0	U
	DC Jack	Laptop Adapter	DC Jack	1.6	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
Operater	1. Run the Web Viewer on your laptop and check the camera video output 2. PingTest from your laptop to check the network status 3. After the test, the Micro SD Card storage file was checked.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)






KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (9) of (30)



1.8 Configuration

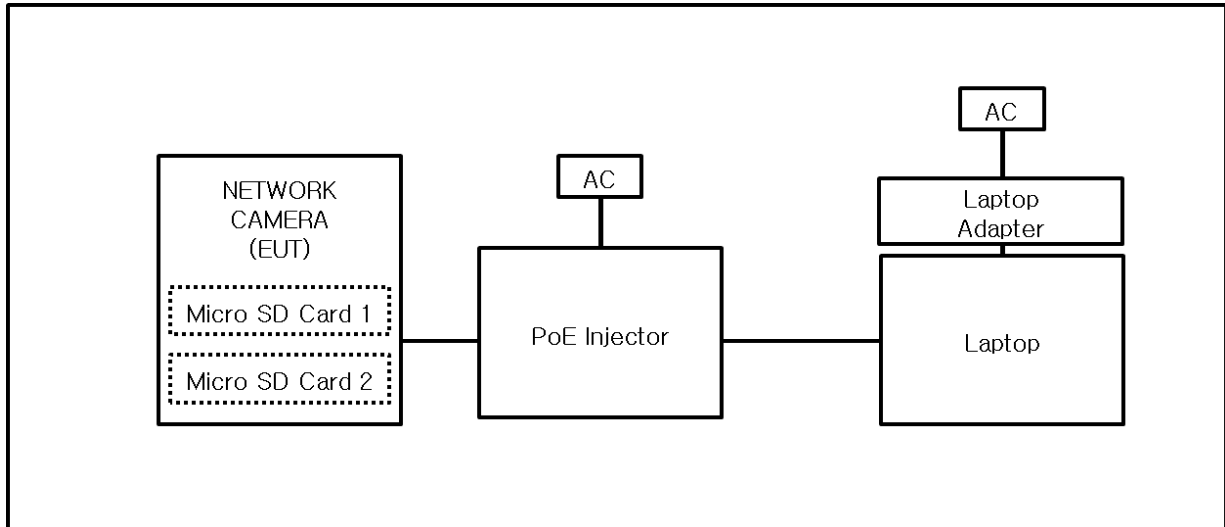

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (10) of (30)

1.9 Remarks when standards applied

USB Type-B Micro port is not tested because it is for administrator use.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.


1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

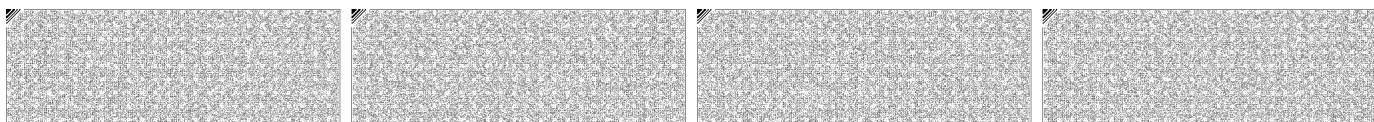



KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (11) of (30)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017


☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (12) of (30)

2.1 Conducted Emissions at Mains Power Ports


Test Date
 Sep. 05, 2023

Test Location
 Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Diagram of test setup

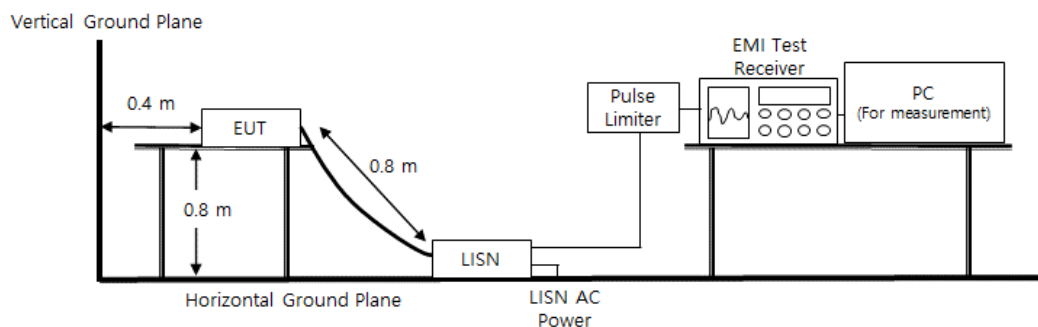

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (13) of (30)

Test Conditions

Temperature: (25,0 ± 0,2) °C
Relative Humidity: (49,3 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (14) of (30)

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date
 Sep. 05, 2023


Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 21, 2024
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 03, 2024

Diagram of test setup

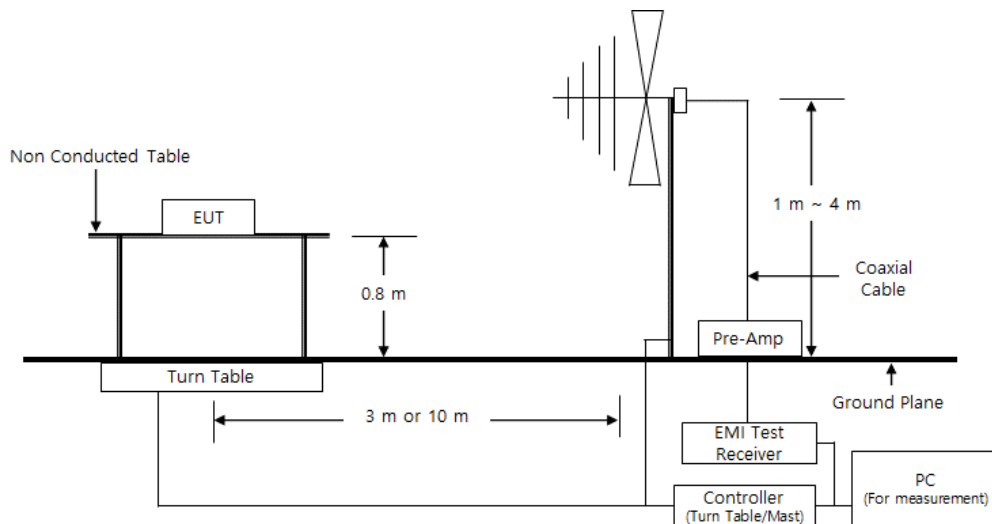

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (15) of (30)

Test Conditions

Temperature: (24,5 ± 0,3) °C
Relative Humidity: (48,7 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE


Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (16) of (30)

2.3 Radiated Electric Field Emissions(Above 1 GHz)


Test Date
 Sep. 05, 2023

Test Location
 SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 21, 2024
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023
☒	PREAMPLIFIER	8449B	HP	3008A00538	05, 31, 2024
☒	ATTENUATOR	8491B	HP	23094	03, 21, 2024

Diagram of test setup

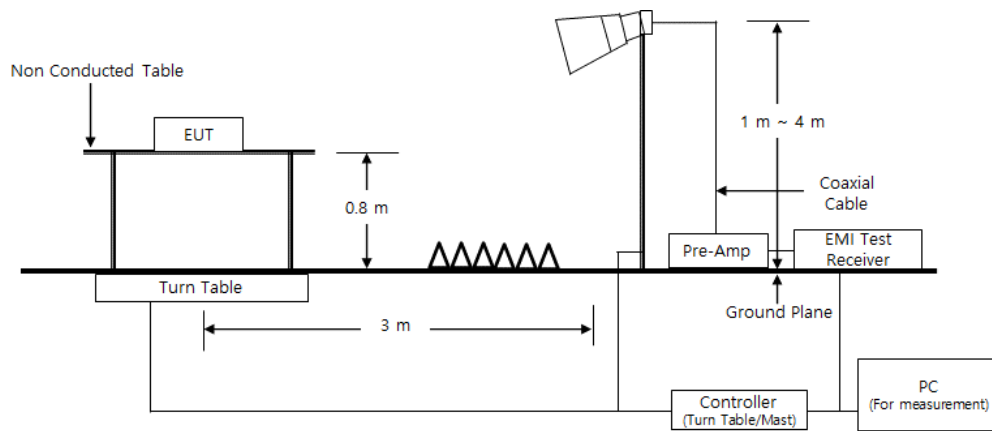

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (17) of (30)

Test Conditions

Temperature: (24,1 ± 0,2) °C
Relative Humidity: (47,5 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE




Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr


Report No.:
 KES-EM-23T0788
 Page (18) of (30)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-C16013RVQ
Phase:	L1
Mode:	PoE
Operator Name:	KES

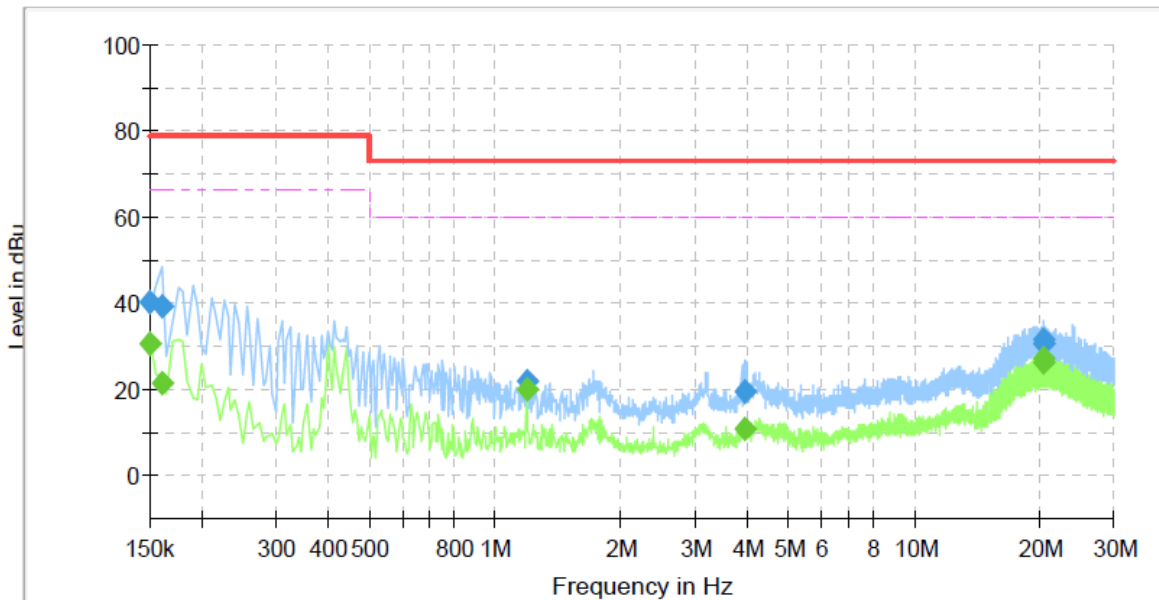


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	30.62	66.00	35.38	1000.0	9.000	L1	19.4
0.150000	40.21	---	79.00	38.79	1000.0	9.000	L1	19.4
0.160000	---	21.35	66.00	44.65	1000.0	9.000	L1	19.4
0.160000	39.43	---	79.00	39.57	1000.0	9.000	L1	19.4
1.190000	---	20.06	60.00	39.94	1000.0	9.000	L1	19.5
1.190000	22.06	---	73.00	50.94	1000.0	9.000	L1	19.5
3.965000	---	10.56	60.00	49.44	1000.0	9.000	L1	19.7
3.965000	19.23	---	73.00	53.77	1000.0	9.000	L1	19.7
20.270000	---	27.25	60.00	32.75	1000.0	9.000	L1	20.2
20.270000	31.44	---	73.00	41.56	1000.0	9.000	L1	20.2
20.475000	---	26.14	60.00	33.86	1000.0	9.000	L1	20.2
20.475000	30.74	---	73.00	42.26	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (19) of (30)

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-C16013RVQ
Phase:	N
Mode:	PoE
Operator Name:	KES

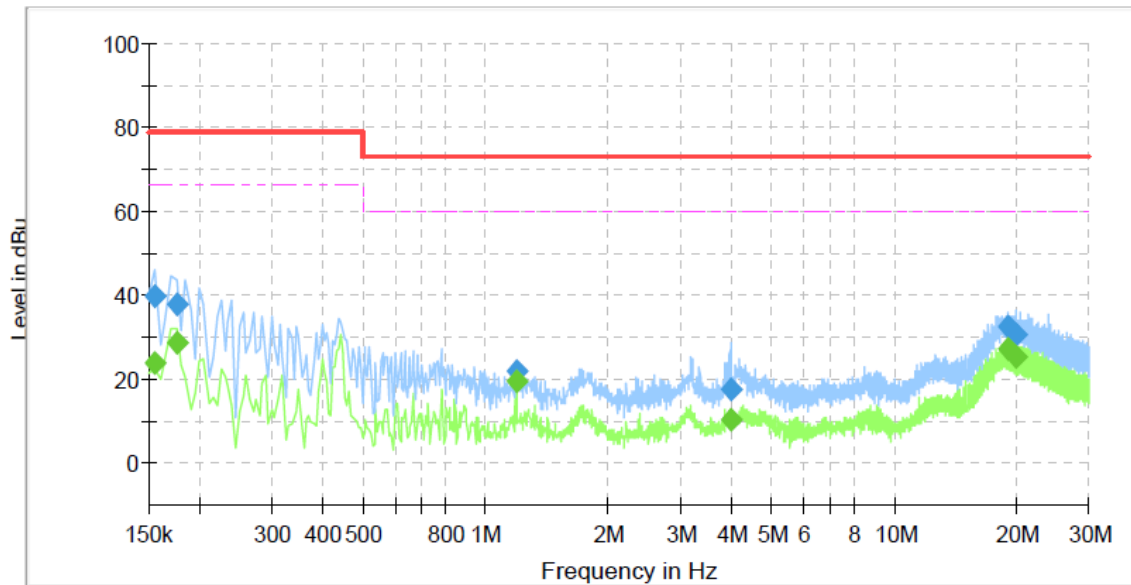

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	23.87	66.00	42.13	1000.0	9.000	N	19.4
0.155000	39.92	---	79.00	39.08	1000.0	9.000	N	19.4
0.175000	---	28.60	66.00	37.40	1000.0	9.000	N	19.4
0.175000	37.78	---	79.00	41.22	1000.0	9.000	N	19.4
1.190000	---	19.57	60.00	40.43	1000.0	9.000	N	19.5
1.190000	21.87	---	73.00	51.13	1000.0	9.000	N	19.5
4.005000	---	10.40	60.00	49.60	1000.0	9.000	N	19.7
4.005000	17.74	---	73.00	55.26	1000.0	9.000	N	19.7
19.030000	---	27.37	60.00	32.63	1000.0	9.000	N	20.2
19.030000	32.23	---	73.00	40.77	1000.0	9.000	N	20.2
19.860000	---	25.33	60.00	34.67	1000.0	9.000	N	20.2
19.860000	30.48	---	73.00	42.52	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (20) of (30)

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

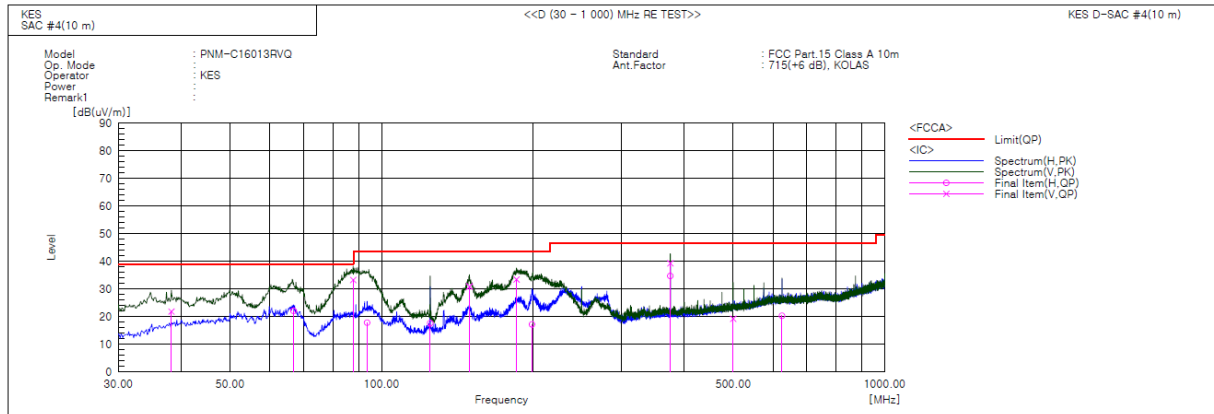


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.245	V	44.7	-22.9	21.8	39.0	17.2	103.0	67.0	
2	66.860	H	45.5	-23.4	22.1	39.0	16.9	375.0	37.0	
3	87.836	V	57.9	-24.7	33.2	39.0	5.8	101.0	238.0	
4	93.656	H	40.5	-22.7	17.8	43.5	25.7	400.0	63.0	
5	124.939	H	41.9	-24.3	17.6	43.5	25.9	369.0	288.0	
6	149.553	V	55.9	-25.0	30.9	43.5	12.6	100.0	337.0	
7	185.443	V	56.0	-22.6	33.4	43.5	10.1	100.0	75.0	
8	199.144	H	38.3	-21.1	17.2	43.5	26.3	394.0	2.0	
9	374.956	H	48.7	-14.0	34.7	46.5	11.8	360.0	236.0	
10	374.996	V	53.3	-14.0	39.3	46.5	7.2	103.0	79.0	
11	500.086	V	29.8	-10.6	19.2	46.5	27.3	123.0	161.0	
12	625.095	H	27.9	-7.6	20.3	46.5	26.2	400.0	116.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (21) of (30)

- IC Regulation ICES-003 Issue 7

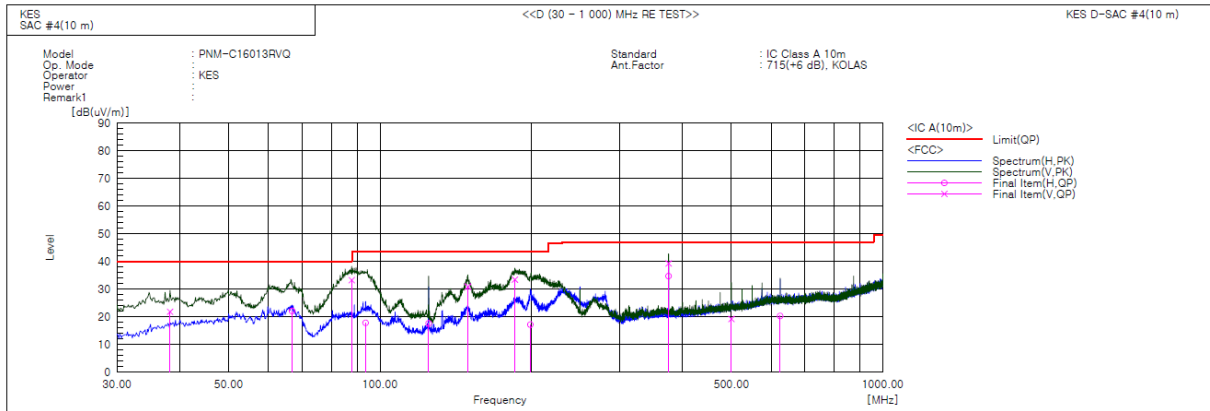

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.245	V	44.7	-22.9	21.8	40.0	18.2	103.0	67.0	
2	66.860	H	45.5	-23.4	22.1	40.0	17.9	375.0	37.0	
3	87.836	V	57.9	-24.7	33.2	40.0	6.8	101.0	238.0	
4	93.656	H	40.5	-22.7	17.8	43.5	25.7	400.0	63.0	
5	124.939	H	41.9	-24.3	17.6	43.5	25.9	369.0	288.0	
6	149.553	V	55.9	-25.0	30.9	43.5	12.6	100.0	337.0	
7	185.443	V	56.0	-22.6	33.4	43.5	10.1	100.0	75.0	
8	199.144	H	38.3	-21.1	17.2	43.5	26.3	394.0	2.0	
9	374.956	H	48.7	-14.0	34.7	47.0	12.3	360.0	236.0	
10	374.996	V	53.3	-14.0	39.3	47.0	7.7	103.0	79.0	
11	500.086	V	29.8	-10.6	19.2	47.0	27.8	123.0	161.0	
12	625.095	H	27.9	-7.6	20.3	47.0	26.7	400.0	116.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-23T0788
 Page (22) of (30)

Radiated Electric Field Emissions(Above 1 GHz)

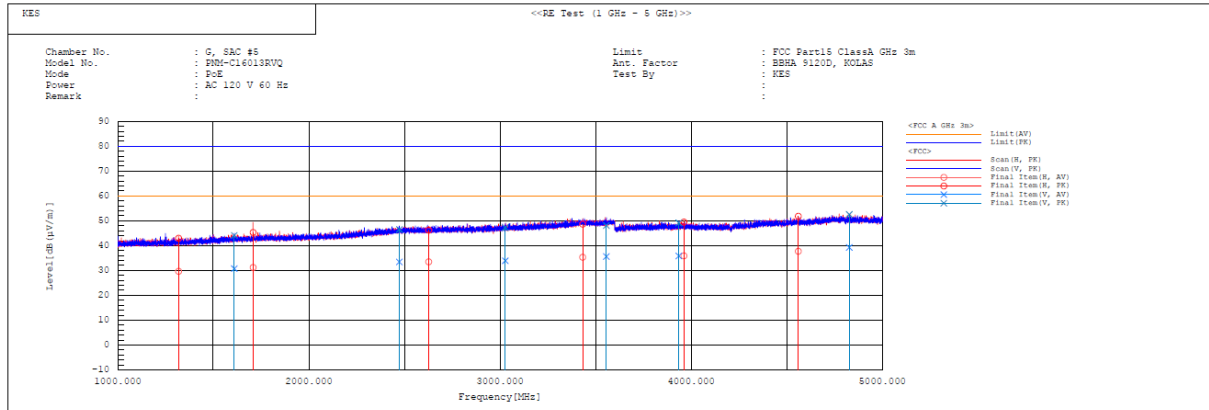

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (23) of (30)

Test Setup Photos and Configuration



Conducted Emissions at Mains Power Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (24) of (30)


Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (25) of (30)

Radiated Electric Field Emissions(Above 1 GHz)

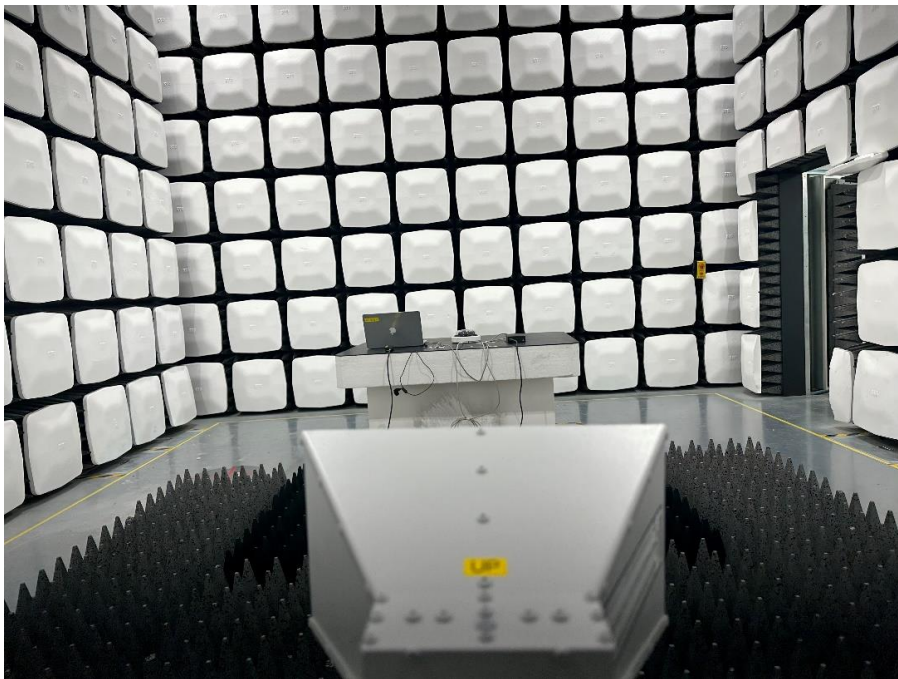

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (26) of (30)

EUT External Photographs

(Top)

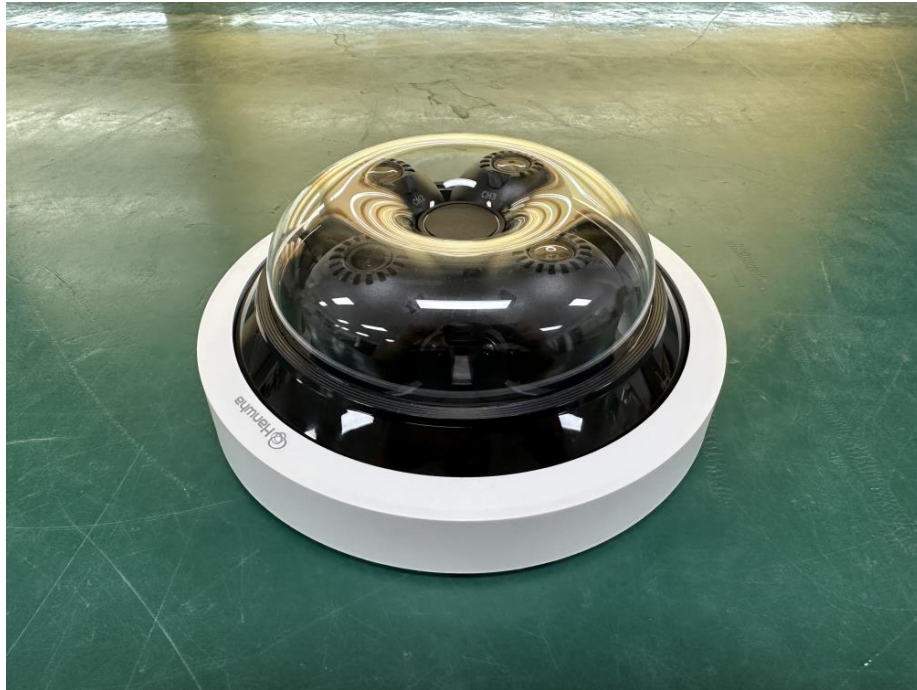


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (27) of (30)

EUT Internal Photographs



(Internal View)

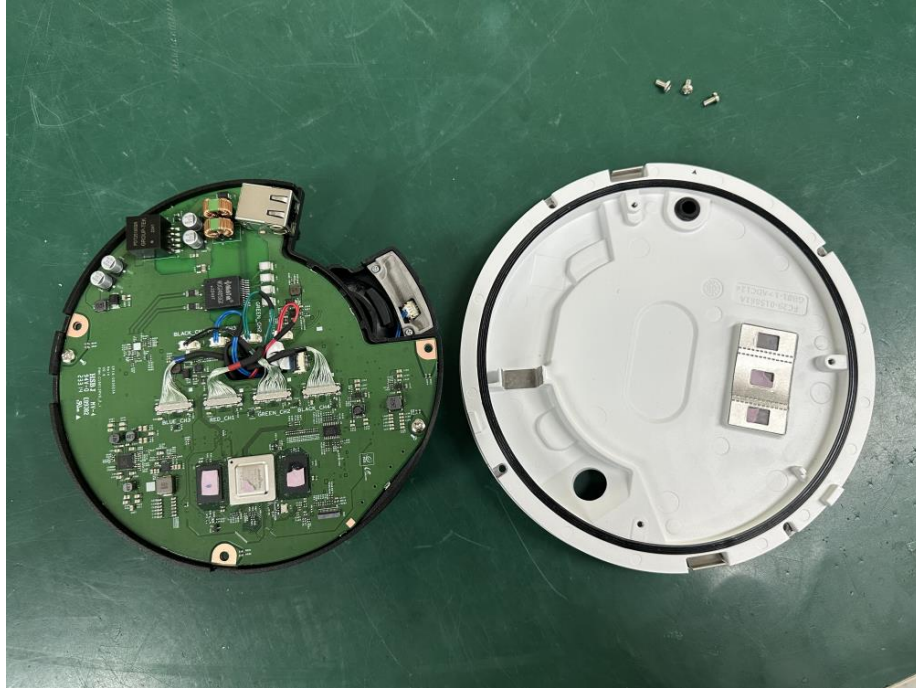

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)






KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-23T0788
Page (28) of (30)

EUT Internal View – Board 1

(Top)

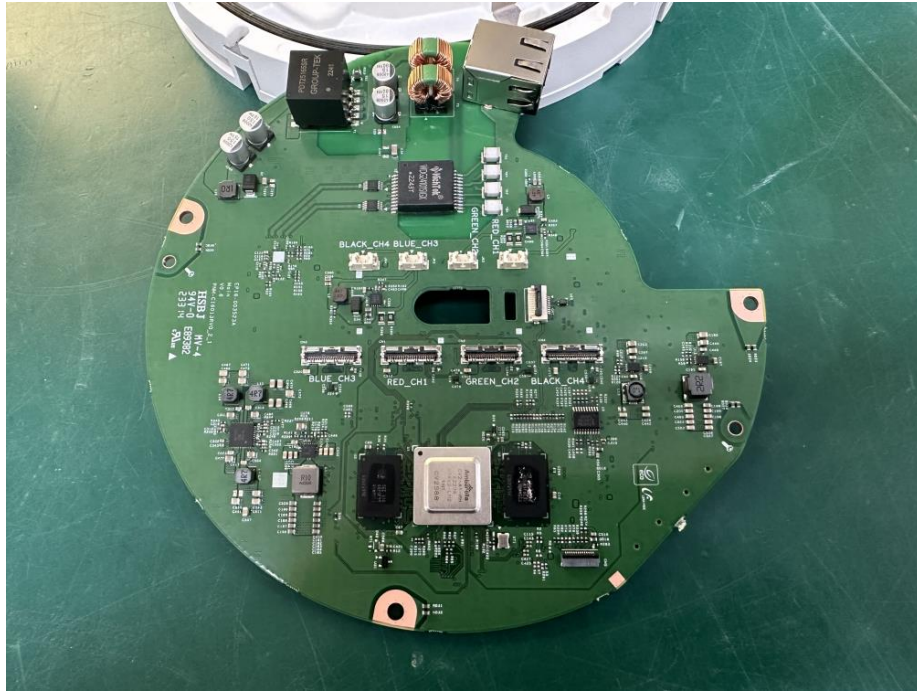


(Bottom)

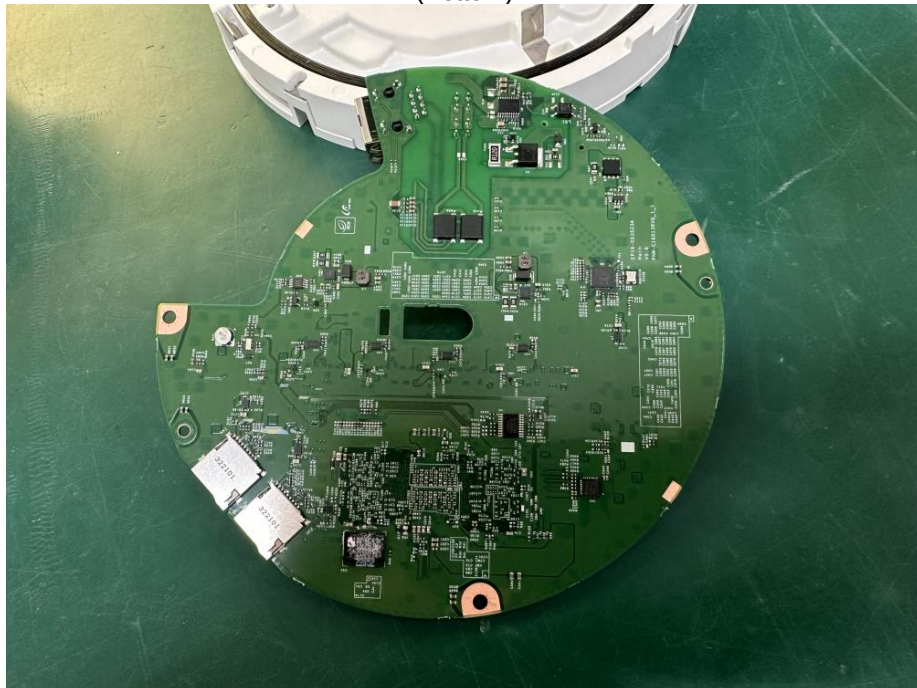

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)






KES Co., Ltd.
 3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr


Report No.:
 KES-EM-23T0788
 Page (29) of (30)

EUT Internal View – Board 2

(Top)

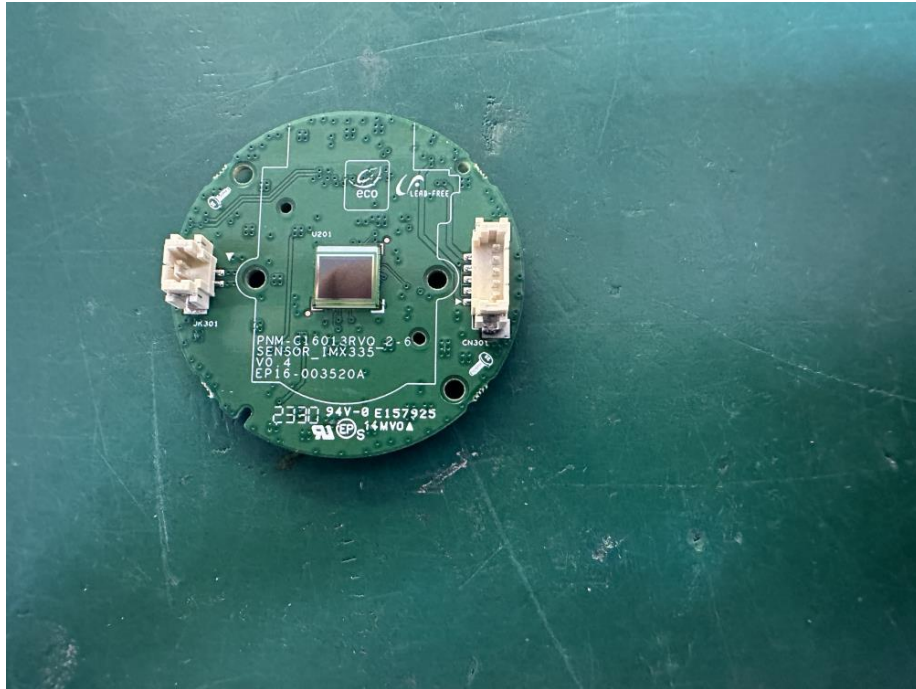


(Bottom)

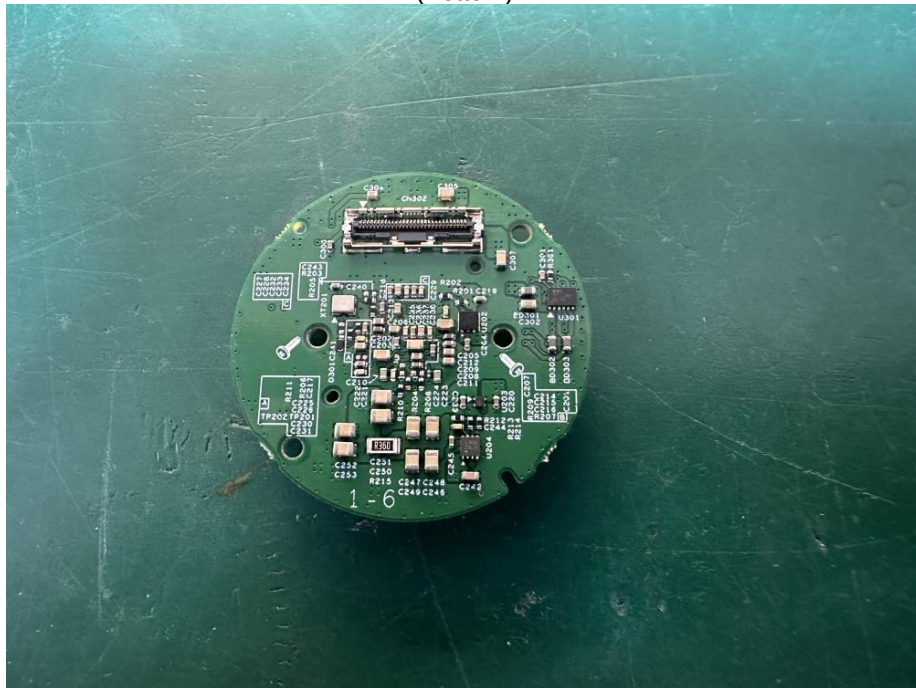

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이에스 (KES Co.,Ltd)





KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0788
Page (30) of (30)

Label Photographs

FCC Label



NETWORK CAMERA

PNM-C16013RVQ

IC Label

CAN ICES-003(A) / NMB-003(A)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)

주식회사 케이이엑스 (KES Co.,Ltd)

