

TEST REPORT

 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (1) / (29) pages	
--	--	--	--

1. Applicant

- Name : Hanwha Vision Co., Ltd
◦ Address : 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488 KOREA
◦ Date of Receipt : 2023-04-26

2. Manufacturer

- Name : HANWHA VISION VIETNAM COMPANY LIMITED
◦ Address : Lot O-2, Que Vo Industrial Zone extended area, Nam Son
commune, Bac Ninh city, Bac Ninh province, Vietnam

3. Use of Report

: Quality control

4. Test sample / Model

: Network Camera / PNM-C34404RQPZ

5. Date(s) of test

: 2023-04-26 to 2023-06-07

6. Location of Test :

☒ Permanent Testing Lab ☐ On Site Testing

Address: (5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

7. Test Standard (Method) used :

NEMA 250-2014

Enclosures for Electrical Equipment (1000 Volts
Maximum)

8. Testing Environment :

Temperature: (25.0 ± 5.0) °C
Humidity: (40.0 ± 5.0) %.

9. Test Results

: Refer to each test items

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This Test Report cannot be reproduced, except in full.

The test was conducted as one sample, and the test result does not depend on the number of
samples

Affirmation	Tested by HyungUk Jeon  (Signature)	Technical Manager SooChan Bae  (Signature)
-------------	---	--

2023-08-02

CTK Co., Ltd



 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (2) / (29) pages	
---	---	--	--

Test item description.....: NETWORK CAMERA

Trade Mark.....:



Manufacturer: Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam

Model/Type reference.....: PNM-C34404RQPZ

Ratings.....: Electrical

PoE (55 V $\Rightarrow$ 64.0 W),

PoE (55 V $\Rightarrow$ 1.17 A)

Dimension:

Ø 380 mm by 1193.2 mm, Ø 300 mm by 942 mm,

Ø 150 mm by 471 mm, Ø 120 mm by 376.8 mm,

Ø 220 mm by 690.8 mm, Ø 4.5 mm *8 by 113.04 mm,

Ø 6.5 mm *3 by 61.23 mm, Ø 5.0 mm *3 by 47.1 mm

Ø 6.5 mm *2 by 40.82 mm, Ø 8.0 mm *2 by 50.24 mm,

Ø 4.9 mm *4 by 61.544 mm, Ø 9.6 mm *2 by 60.288 mm,

Ø 5.4 mm by 16.956 mm

List of Attachments (including a total number of pages in each attachment):

Attachment 1: 11-12 pages (Construction Diagram including installation method)

Attachment 2: 13-19 pages (Parts List)

Attachment 3: 20-29 pages (photographs)

Summary of testing:

Tests performed (name of test and test clause):

Clause 5.7(Hose Down Test)

Testing location:

CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea

Copy of marking plate: The artwork above may be only a draft.

기기명칭: NETWORK CAMERA

모델명: PNM-C34404RQPZ

정격전압: PoE(55V $\Rightarrow$) 64.0W

M/C: PNM-C34404RQPZ/KDO

2023.07 S/N: Serial No.

MAC ADDRESS: XX-XX-XX-XX-XX-XX

인증번호: R-R-SIW-PNMC34404RQPZ

상호: 한화비전(주)

제조사/제조국가:한화비전(주)/한국



NETWORK CAMERA, PNM-C34404RQPZ

PoE(55V $\Rightarrow$) 1.17A

M/C: PNM-C34404RQPZ/KEX Fac.ID:D

2023.07 S/N: Serial No.

MAC ADDRESS: XX-XX-XX-XX-XX-XX

CAN ICES-3(A)/NMB-3(A)

HANWHA VISION CO.,LTD.

MADE IN KOREA

Rainproof Étanche
IP66

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (3) / (29) pages	
---	---	--	--

Test item particulars.....: Network Camera
Classification of installation and use Outdoor (Watertight/Corrosion Resistant)
Possible test case verdicts: - test case does not apply to the test object: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement: F (Fail) - test case does not evaluated to the test object : N/E

General remarks: "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator. Clause numbers between brackets refer to clauses in NEMA 250-2014
Name and address of factory (ies): 1. HANWHA VISION VIETNAM COMPANY LIMITED Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam 2. D-TECH CO., LTD. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex) Type 4X Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow, splashing water, and hose directed water); that provides an increased level of protection against corrosion; and that will be undamaged by the external formation of ice on the enclosure.

Table 2-1
Comparison of Specific Applications of Enclosures for Indoor Nonhazardous (Unclassified) Locations

Provides a Degree of Protection against the Following Conditions	Type of Enclosure									
	1	2	4	4X	5	6	6P	12	12K	13
Access to hazardous parts	X	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (falling dirt)	X	X	X	X	X	X	X	X	X	X
Ingress of water (dripping and light splashing)	...	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (circulating dust, lint, fibers, and flyings **)	...	...	X	X	...	X	X	X	X	X
Ingress of solid foreign objects (settling airborne dust, lint, fibers, and flyings **)	...	...	X	X	X	X	X	X	X	X
Ingress of water (hosedown and splashing water)	...	...	X	X	...	X	X	...	...	...
Oil and coolant seepage	...	...	...	...	...	...	...	X	X	X
Oil or coolant spraying and splashing	...	...	...	...	...	...	...	...	...	X
Corrosive agents	...	...	...	X	...	...	X	...	...	...
Ingress of water (occasional temporary submersion)	...	...	...	...	...	X	X	...	...	...
Ingress of water (occasional prolonged submersion)	...	...	...	...	...	...	X	...	...	...

** These fibers and flyings are not considered Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or flyings see the *National Electrical Code®*, Article 500.5(D).

Table 2-2
Comparison of Specific Applications of Enclosures for Indoor & Outdoor Nonhazardous (Unclassified) Locations

Provides a Degree of Protection Against the Following Conditions	Type of Enclosure									
	3	3X	3R	3RX	3S	3SX	4	4X	6	6P
Access to hazardous parts	X	X	X	X	X	X	X	X	X	X
Ingress of solid foreign objects (falling dirt)	X	X	X	X	X	X	X	X	X	X
Ingress of water (dripping and light splashing)	X	X	X	X	X	X	X	X	X	X
Ingress of water (rain, snow, and sleet **)	X	X	X	X	X	X	X	X	X	X
Sleet ***	...	...	...	...	X	X	...	...	...	...
Ingress of solid foreign objects (windblown dust, lint, fibers, and flyings****)	X	X	...	...	X	X	X	X	X	X
Ingress of water (hosedown and splashing water)	...	...	...	...	...	...	X	X	X	X
Corrosive agents	...	X	...	X	...	X	...	X	...	X
Ingress of water (occasional temporary submersion)	...	...	...	...	...	...	...	...	X	X
Ingress of water (occasional prolonged submersion)	...	...	...	...	...	...	...	...	...	X

** External operating mechanisms are not required to be operable when the enclosure is ice covered.

*** External operating mechanisms are operable when the enclosure is ice covered. See subsection 5.6.

**** These fibers and flyings are not considered Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or flyings see the *National Electrical Code®*, Article 500.5(D).

Table 5-1A
Degrees of Protection Against Access to Hazardous Parts

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP First Characteristic Numeral
		Brief Description	Definition	
4X	5.7	Protected against access to hazardous parts with a wire	An access probe of 1.0 mm shall not penetrate	6

Table 5-1B
Degrees of Protection Against Solid Foreign Objects

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP First Characteristic Numeral
		Brief Description	Definition	
4X	<u>Non-vented</u> 5.7	Windblown dust protected	No ingress of dust	6
	<u>Vented</u> 5.5.1 Dust Blast Method			

Table 5-1C
Degrees of Protection against Water

Enclosure Type	Test Conditions	Degree of Protection		Corresponding IP Second Characteristic Numeral
		Brief Description	Definition	
4X	5.7	Protected against hose directed water	Water projected against the enclosure in any direction shall not enter	6 No Ingress Allowed*

Table 5-1D
Additional Protection

Enclosure Type	Test Conditions	Additional Protection		Corresponding IP Second Characteristic Numeral
		Brief Description	Definition	
4X	5.6 5.9 5.10	Special corrosion protection and undamaged by the external formation of ice	Enclosure provides increased corrosion protection and is not damaged by ice that forms on the outside	None

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (6) / (29) pages	
---	--	---	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict

3	CONSTRUCTION		
----------	---------------------	--	--

3.1	General		P
3.2	Units of Measurement		P
3.3	Materials-General	Enclosures are made of metal or polymeric materials	P
3.4	Materials-Polymeric	More than 650 mm ² (1 in ²) in area Polymeric Materials used is declared as Min. V-2 Used to UL certified material. (See the attachment 2)	N/E
3.5	Corrosion Protection	Stainless steel and/or aluminium are declared as the materials used (See the attachment 2)	N/E
3.6	Openings	No openings in Product	N/A
3.7	Mounting	Mounting means are external to the equipment cavity (See the attachment 1)	P
3.8	Conduit Connection	No conduit connection (See the attachment 1)	N/A
3.9	Hubs and Fittings	No Hubs and Fittings	N/A
3.10	Knockouts	No Knockouts	N/A
3.11	External Operating Mechanisms	No External Operating Mechanisms	N/A
3.12	Access to Interior	Needs tool to open unit	P
3.13	Closing Hardware	No closing Hardware	N/A
3.14	Gaskets	Gaskets made of a silicone Sponge Rubber (no Elastomeric or Thermoplastic used) (See clause 5.14 and the attachment 2)	P
3.15	Observation Windows	No Observation Window	N/A

4	MARKING		
----------	----------------	--	--

 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (7) / (29) pages	
---	--	---	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict
4.1	Type Designations	"Type 4X" Marking is declared to be on the product before on the market	P
4.2	Supplemental Markings	Supplemental Marking (watertight/ corrosion resistant) is declared to be used when it is on the market. The required marking shall be added on the product)	P
4.3	Location of Markings	See the Attachment 3	P
4.4	Enclosure Orientation	No Particular Mounting Orientation	N/A
4.5	Conduit Hubs and Closure Plates	No Conduit Hubs and Closure Plates	N/A
4.6	Equipment Openings	No Openings on Unit	N/A
4.7	Drainage Openings	No Drain Openings	N/A

5	DESIGN TESTS	
----------	---------------------	--

5.1	General	See Table 5-1A to 5-1D and 5.1.5 in the General product information	P
5.2	Tests For Protection Against Access to Hazardous Parts	Rated 4X	N/A
5.3	Tests for Protection Against Ingress of Water (Dripping and Light Splashing)	Rated 4X	N/A
5.4	Tests for Protection Against Ingress of Water (Rain)	Rated 4X	N/A
5.5	Tests for Protection Against Ingress of Solid Foreign Objects (Setting Airborne Dust, Lint, Fibers, And Flings)	Non-vented (See clause 5.7)	N/A
5.6	External Icing Test	No external cavities to trap water when mounted in the normal position.	N/A
5.7	Tests for Protection Against Ingress of Water (Hosedown)	No entry of water See the test information	P
5.8	Indoor Corrosion Protection (Rust-Resistance Test (24-Hour Salt Spray Test))	See clause 3.5	N/E
5.9	Outdoor Corrosion Protection	See clause 3.5	N/E
5.10	Corrosion Protection-Type 3X, 3RX, 3SX, 4X Or 6P Enclosures	See clause 3.5	N/E

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (8) / (29) pages	
---	---	--	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict
5.11	Test for Protection Against Ingress of Water (Temporary Submersion)	Rated 4X	N/A
5.12	Test for Protection Against Ingress of Water (Prolonged Submersion)	Rated 4X	N/A
5.13	Oil Exclusion Test	Rated 4X	N/A
5.14	GASKET MATERIAL TESTS	The product itself(including gaskets) was conditioned at 70 °C for 168 hrs according to 5.14.3(Alternate Evaluation) before performing relevant required tests.	P
5.15	Test for Sharpness of Edges	No sharp edges	P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (9) / (29) pages	
---	--	---	--

NEMA 250-2014			
Clause	Requirement + Test	Result - Remark	Verdict

Test Information

	Hose Down Test: Clause 5.7	P
--	-----------------------------------	----------

Description of Test

The enclosure and its external mechanisms were subjected to a stream of water from a hose that has a 25.4 mm (1 in) inside diameter nozzle and delivers at least 240 L (65 gal) per minute.

The nozzle was held from 3.0 to 3.5 m (10 to 12 feet) from the enclosure, and the spray of water was directed at all points of potential water entry such as seams, joints, external operating mechanisms, and such. The nozzle was moved along each test point one time at a uniform rate of 6 mm/sec(1/4 in/sec).

Sample Dimension

Ø 250 mm by 785 mm, Ø 210 mm by 659.4 mm,
Ø 180 mm by 565.2 mm, Ø 165 mm by 518.1 mm,
Ø 63 mm by 197.82 mm, Ø 8.2*6 mm by 154.488 mm,
Ø 16 mm by 50.24 mm, Ø 25*2 mm by 157 mm

Test Duration = 185.23 secs

Acceptance conditions:

The enclosure shall be considered to have met the requirements if at the conclusion of the test no water has entered the enclosure

Test Results



Sample No (Model)	Water Flow	Presence of water inside	Result
PNM-C34404RQPZ	240 LPM	No	Pass

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (10) / (29) pages	
---	---	---	--


List of test equipment used:

Instr. Code	Instrument Type	Range Used	Mfr./Model	Calibration Date	
				Last	Due
S3-IP18	25.4mm Nozzle	25.4 mm	CTK/S3-IP18	-	Checked by calliper below before using
S1-SW2	Stop Watch	0.01 s	CASIO/ NONE	2022-02-22	2024-02-21
C-S1-D09	Steel Measuring Tape	5 m	KOMELON/KMC-74N	2023-02-17	2024-11-14
S3-IP23	Water flow meter	250LPM	Nuri tech/ Z-6504	2024.01.19	2024.02.12
C-S1-D02	DIGITAL VERNIER CALIPER	150 mm	MITUTOYO/150 mm	2021-08-28	2023-08-09

Attachment 1 – Construction Diagram and installation method

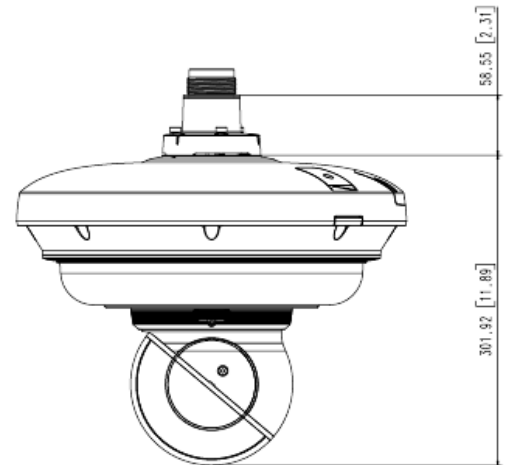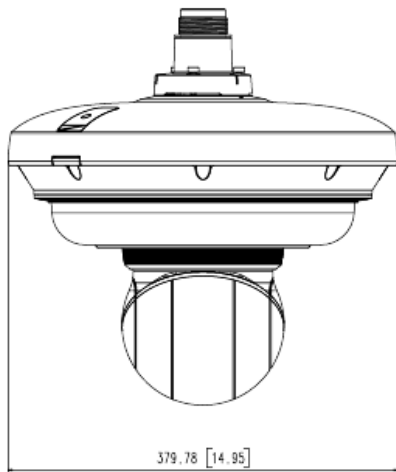

Attachment 1 – Construction Diagram and installation method

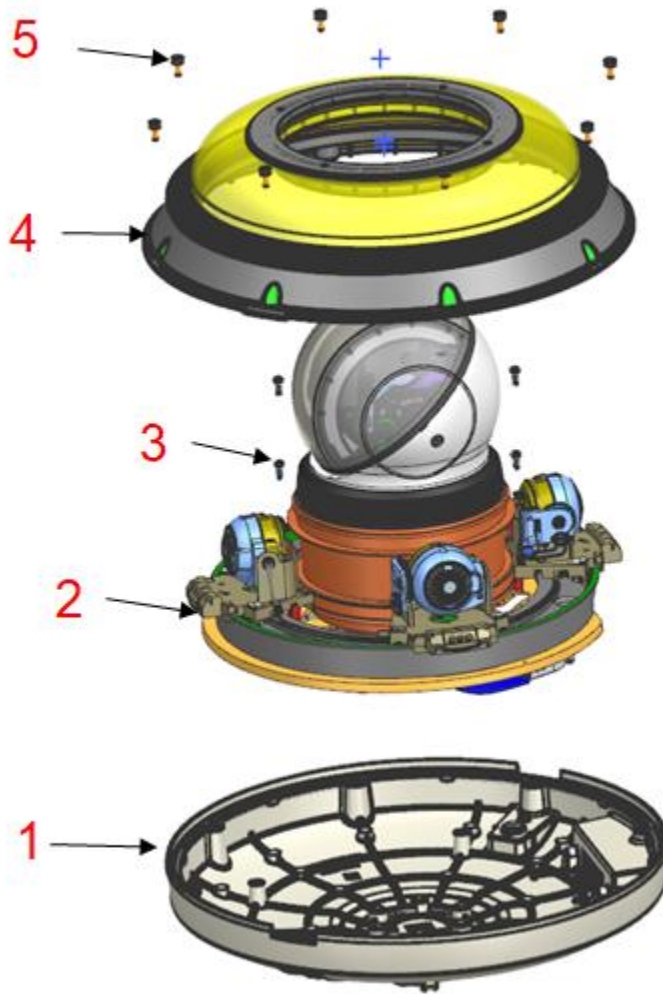

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01675 Page (13) / (29) pages	
---	---	--	--

Attachment 2 – Parts List

NO	품번	품명	Q'TY	재질
1	AM07-016646A	ASSY COVER TOP	1	
2		ASSY HALF	1	
3	FC18-006234A	SCREW SEMS TORX20, M5, L15	4	STEEL
4	AM07-016647A	ASSY SUB WINDOW	1	
5	FC18-006625A	SCREWMACHINE, SH, T20, M4, L8		STEEL
6				
7				
8				
9				
10				



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (14) / (29) pages

Attachment 2 – Parts List



Component - Plastics

File Number: E207780

SABIC JAPAN L L C
PACIFIC GRADES - RESIN
2-2 KINUGAOKA
MOKA-SHI, TOCHIGI-KEN 321-4392 Japan



Lexan: EXL9330(X)(f1)(GG)(B1)(IP)

PC/Siloxane, pellets

(B1) - Represents colour code BK1E526 and BK1E649

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

(GG) - Denotes a global grade formulation previously in File E161759.

(X) - All colors except natural.

B1 - Represents color code BK1E526, BK1E649 and BK1E519

IP - Inclined Plane Tracking per UL746A, average time to track at 1.5 kV is 60+ minutes.

NOTE - Material designation may be followed by a color nomenclature consisting of either an alpha/numeric or numeric/alpha combination.

Flammability	Value	Test Method
Flame Rating		
0.70 mm, ALL	HB	UL 94
0.8 mm, (B1)	V-1	UL 94 IEC 60695-11-10, -20
1.5 mm, (X)	V-0	UL 94 IEC 60695-11-10, -20
2.0 mm, (X)	V-0	UL 94 IEC 60695-11-10, -20
2.3 mm, (X)	V-0	UL 94 IEC 60695-11-10, -20
2.5 mm, BK, GY	V-0, 5VB	UL 94 IEC 60695-11-10, -20
3.0 mm, (X)	V-0, 5VA	UL 94 IEC 60695-11-10, -20
0.70 mm, ALL	HB75	IEC 60695-11-10, -20
Glow Wire Flammability Index		IEC 60695-2-12
1.0 mm	960 °C	
1.5 mm	960 °C	
2.0 mm	960 °C	
2.3 mm	960 °C	
2.5 mm	960 °C	
3.0 mm	960 °C	
Glow Wire Ignition Temperature		IEC 60695-2-13
1.0 mm	825 °C	
1.5 mm	825 °C	
2.0 mm	825 °C	
2.3 mm	825 °C	
2.5 mm	825 °C	
3.0 mm	825 °C	



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (15) / (29) pages

Attachment 2 – Parts List

Component - Plastics File Number: E207780



Electrical	Value	Test Method
Hot-wire Ignition (HWI)		UL 746
0.60 mm	PLC 3	
0.63 mm	PLC 3	
0.70 mm	PLC 3	
0.8 mm	PLC 3	
1.0 mm	PLC 3	
1.5 mm	PLC 2	
2.0 mm	PLC 2	
2.3 mm	PLC 2	
2.5 mm	PLC 2	
3.0 mm	PLC 1	
High Amp Arc Ignition (HAI)		UL 746
0.60 mm	PLC 1	
0.63 mm	PLC 1	
0.70 mm	PLC 1	
0.8 mm	PLC 1	
1.0 mm	PLC 1	
1.5 mm	PLC 1	
2.0 mm	PLC 1	
2.3 mm	PLC 0	
2.5 mm	PLC 0	
3.0 mm	PLC 0	
Comparative Tracking Index (CTI)	PLC 3	UL 746
Dielectric Strength	25 kV/mm	ASTM D149 IEC 60243-1
Inclined-Plane Tracking	1.5 kV	ASTM D2303
Volume Resistivity	1.0E+17 ohms-cm	ASTM D257 IEC 60093
Thermal	Value	Test Method
RTI Elec		UL 746
0.60 mm	80.0 °C	
0.63 mm	125 °C	
0.70 mm	125 °C	
0.8 mm	125 °C	
1.0 mm	125 °C	
1.5 mm	125 °C	
2.0 mm	125 °C	
2.3 mm	125 °C	
2.5 mm	125 °C	
3.0 mm	125 °C	
RTI Imp		UL 746
0.60 mm	80.0 °C	
0.63 mm	105 °C	
0.70 mm	105 °C	
0.8 mm	105 °C	
1.0 mm	105 °C	
1.5 mm	110 °C	
2.0 mm	110 °C	
2.3 mm	110 °C	
2.5 mm	110 °C	
3.0 mm	115 °C	



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (16) / (29) pages

Attachment 2 – Parts List

Component - Plastics

File Number: E207780



Thermal	Value	Test Method
RTI Str		UL 746
0.60 mm	80.0 °C	
0.63 mm	115 °C	
0.70 mm	115 °C	
0.8 mm	115 °C	
1.0 mm	115 °C	
1.5 mm	120 °C	
2.0 mm	120 °C	
2.3 mm	120 °C	
2.5 mm	120 °C	
3.0 mm	125 °C	
Physical	Value	Test Method
Dimensional Stability	0.0 %	ASTM D1042 ISO 2796
Outdoor Suitability	f1	UL 746C

Attachment 2 – Parts List



UL 인증

INFINO	Grade	QC-1220UR
---------------	-------	-----------

Component - Plastics

Grade Information

LOTTE ADVANCED MATERIALS CO LTD
88 Gomsan-ro, Suwon-si, Gyeonggi-do 410-711 KOR

QC-1221(H1)
Polycarbonate (PC) "MFRN", furnished as pellets

Color	Min. Thickness (mm)	Dimension (mm)	H100	H150	ST1	ST2	ST3
ALL	1.6	1/2	3	0	130	125	125
	3.2	1/2	2	0	130	130	130

Comparative Tracking Index (CTI): 0
Dielectric Strength (kV/mm): -
High-Voltage Arc Tracking Rate (PVTRE): 2
Dimensional Stability (%): -

Inclined Plane Tracking (IPT) kV: -
Volume Resistivity (10¹² ohm-cm): 10¹²
High Volt. Low Current Arc Resistance (DAR): 5

(1) - May be replaced by one, two, or three numbers (and/or letters)
(2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C, where the accessibility for outdoor use is to be determined by UL.

Report Date: 2020-10-17
Last Revised: 2019-10-11 © 2019 UL LLC

Test Name	Test Method	Units	Typ (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	1.6	V-2 (M4)
			3.2	V-2 (M4)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	1.6	960
			3.2	950
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	1.6	980
			3.2	975
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60068-10-2	°C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 6266	kJ/m ²	-	-
ISO Izod Impact	ISO 188	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

Component - Plastics

Grade Information

LOTTE ADVANCED MATERIALS CO LTD
88 Gomsan-ro, Suwon-si, Gyeonggi-do 410-711 KOR

QC-1221(H2)
Polycarbonate (PC) "MFRN", furnished as pellets

Color	Min. Thickness (mm)	Dimension (mm)	H100	H150	ST1	ST2	ST3
NO	0.6	1/2	-	-	80	90	90
ALL	1.6	1/2	3	0	130	125	125
	3.2	1/2	2	0	130	130	130

Comparative Tracking Index (CTI): 0
Dielectric Strength (kV/mm): -
High-Voltage Arc Tracking Rate (PVTRE): 2
Dimensional Stability (%): -

Inclined Plane Tracking (IPT) kV: -
Volume Resistivity (10¹² ohm-cm): 10¹²
High Volt. Low Current Arc Resistance (DAR): 5

(1) - May be replaced by one, two, or three numbers (and/or letters)
(2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C, where the accessibility for outdoor use is to be determined by UL.

Report Date: 2020-10-17
Last Revised: 2019-07-31 © 2019 UL LLC

Test Name	Test Method	Units	Typ (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	0.6	V-3 (M2)
			1.6	V-2 (M4)
			3.2	V-2 (M4)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	1.6	950
			3.2	950
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	1.6	980
			3.2	975
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60068-10-2	°C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 6266	kJ/m ²	-	-
ISO Izod Impact	ISO 188	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (18) / (29) pages

Attachment 2 – Parts List

Component - Plastics

E41179

MITSUBISHI ENGINEERING-PLASTICS CORP

ENVIRONMENT & QUALITY ASSURANCE DEPT, DIV 1, SHIODOME SUMITOMO-BLDG 25TH FL, 1-9-2 HIGASHI-SHINBASHI, MINATO-KU TOKYO 105-0021 JP

S-2000V+(f1), S-2001V+(f1), S-2003V+(f1)

Polycarbonate (PC), unreinforced, furnished as pellets

Color	Min Thk (mm)	Flame Class	HMI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.38	V-2	-	-	80	80	80
	1.5	V-2	3	0	125	115	125
	3.0	V-2	3	0	125	115	125

Comparative Tracking Index (CTI): 2

Dielectric Strength (kV/mm): 20

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Stability (%): 0

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁸ ohm-cm): 7

High Volt, Low Current Arc Resis (D495): 5

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

+ - Suffix optional, exceptions: The following cannot be used as optional suffixes: "T" for grade 2030, "A" for 1501, 1502, 1511, 1521 & 2502, "N" for NXG5050, NXG5030, NXG5501, & CGF-(v)(u), "S1" for F20-54.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1992-10-01

Last Revised: 2004-03-23

Underwriters Laboratories Inc®

IEC and ISO Test Methods

Test Name	Test Method	Units	Thickness Tested (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	0.38	V-2 (ALL)
			1.5	V-2 (ALL)
			3.0	V-2 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	C	-	-
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	C	-	-
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

Underwriters Laboratories Inc®

Component - Plastics

[guide info]

SAMYANG CORPORATION

407 3-Ga Paibok-Dong, Cheonju Cheonbuk 560-200 KR

3025G-(y)

Polycarbonate (PC) "TRIEX", furnished as pellets

Color	Min Thk (mm)	Flame Class	HMI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	1.5	V-0	2	0	130	125	130
	3.0	V-0	2	0	130	125	130
	6.0	V-0	1	0	130	125	130

Comparative Tracking Index (CTI): 3

Dielectric Strength (kV/mm): 31

High-Voltage Arc Tracking Rate (HVTR): 3

Dimensional Stability (%): 0

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁸ ohm-cm): 15

High Volt, Low Current Arc Resis (D495): 7

(y) - Represents any number 10-19 ind.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1990-05-22

Last Revised: 2003-10-24

© 2017 UL LLC

IEC and ISO Test Methods

Test Name	Test Method	Units	Thk (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	1.5	V-0 (ALL)
			3.0	V-0 (ALL)
			6.0	V-0 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	-	-
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	-	-
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	°C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

E121254



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (19) / (29) pages

Attachment 2 – Parts List

Component - Plastics

E115797

Guide Information

LOTTE CHEMICAL CORPORATION

56 Gosan-ro, Uiwang-si Gyeonggi-do 437-711 KR

HN-1068(+)(f1)

Polycarbonate (PC) "INFINO", furnished as pellets

Color	Min. Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	1.5	V-0	3	3	130	130	130
	3.0	V-0	-	-	130	130	130

Comparative Tracking Index (CTI): 3

Dielectric Strength (kV/mm): 31.8

High-Voltage Arc Tracking Rate (HVTR): -

Dimensional Stability (%): -

Inclined Plane Tracking (IPT) kV: -

Volume Resistivity (10^x ohm-cm): 17

Surface Resistivity (10^x ohm-cm): -

High Volt, Low Current Arc Resis (D495): -

(+) - May be replaced by one, two, or three numbers and/or letter(s)

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1998-08-24

Last Revised: 2019-08-27

© 2020 UL LLC



IEC and ISO Test Methods

Test Name	Test Method	Units	Thk (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	1.5	V-0 (ALL)
			3.0	V-0 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	°C	1.5	960
			3.0	960
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	°C	1.5	825
			3.0	825
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	°C	-	130
ISO Heat Deflection (1.80 MPa)	ISO 75-2	°C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-

Attachment 3 – Photographs

Test Unit





CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (21) / (29) pages


Attachment 3 – Photographs

Hose down test



Attachment 3 – Photographs

Test Result

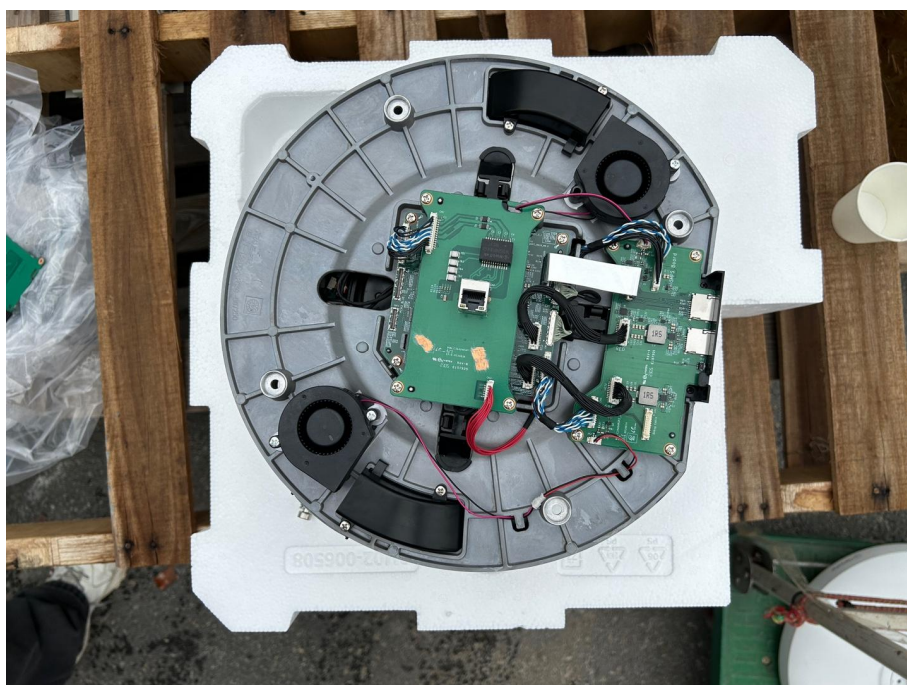



CTK Co., Ltd.



5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01675
Page (23) / (29) pages



Attachment 3 – Photographs



Attachment 3 – Photographs

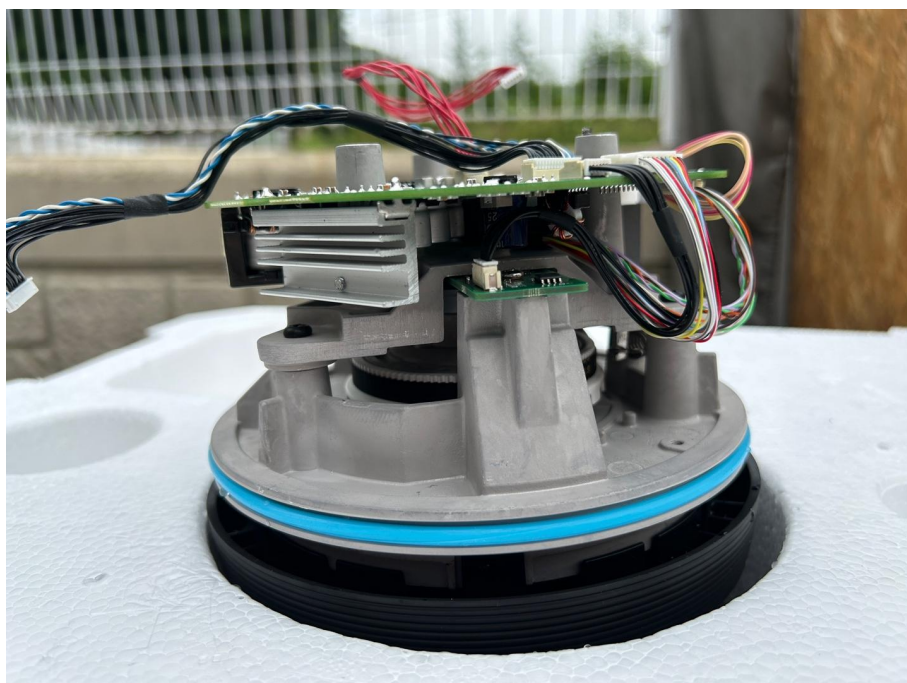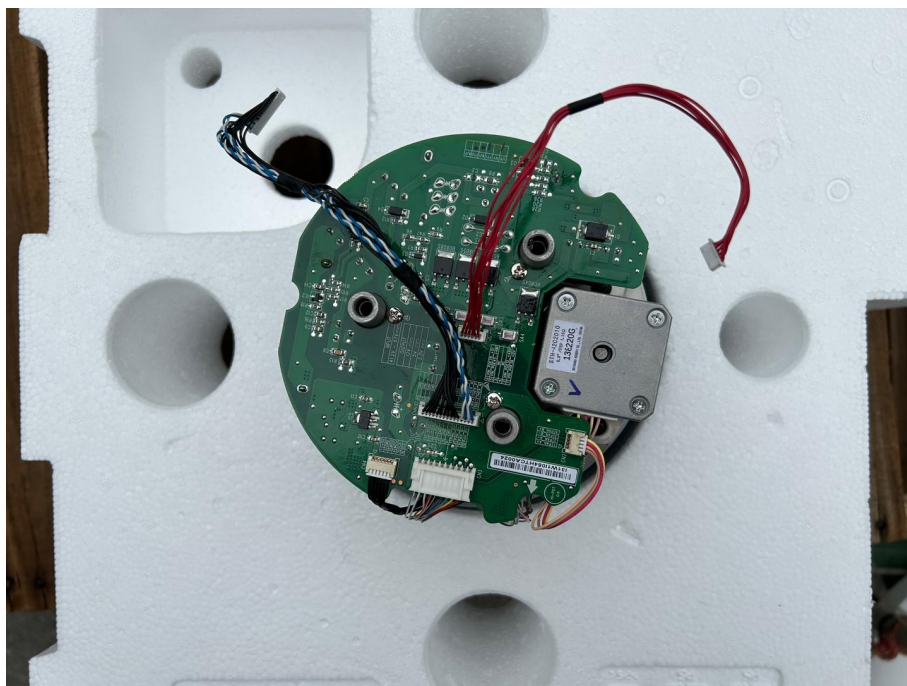


Attachment 3 – Photographs

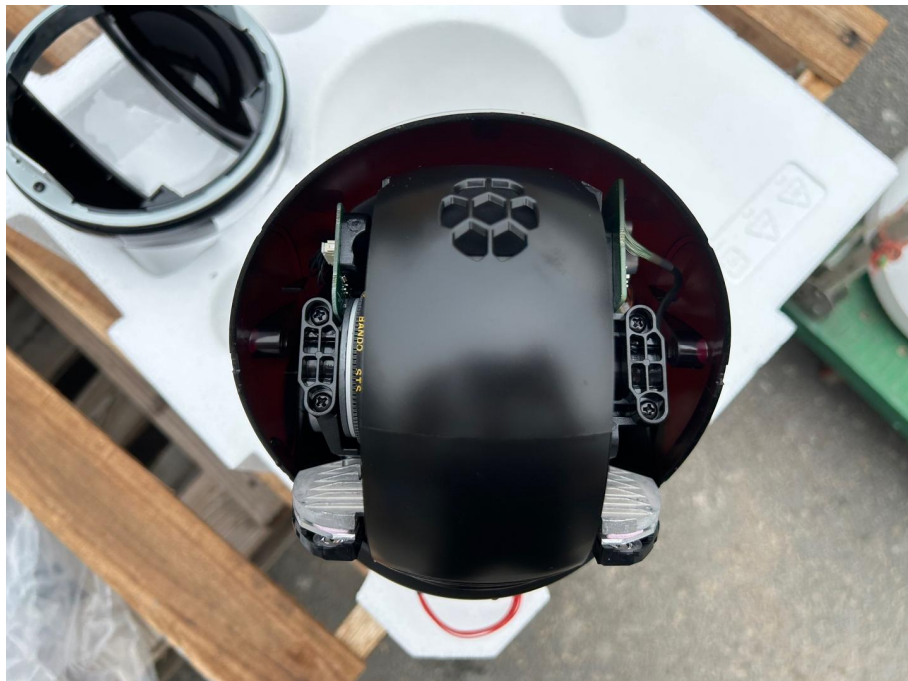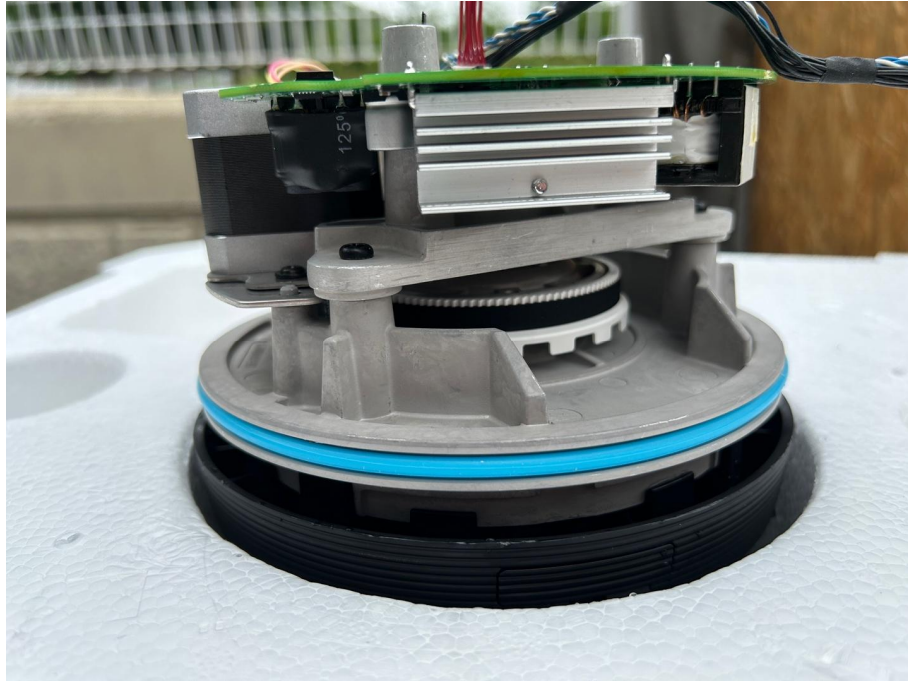


Attachment 3 – Photographs




Attachment 3 – Photographs

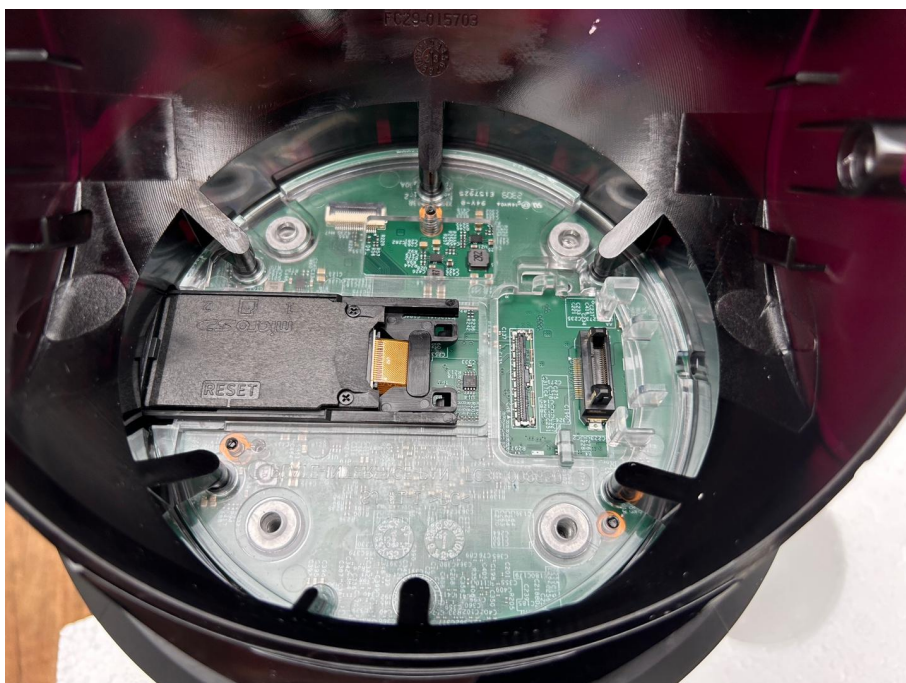

Attachment 3 – Photographs

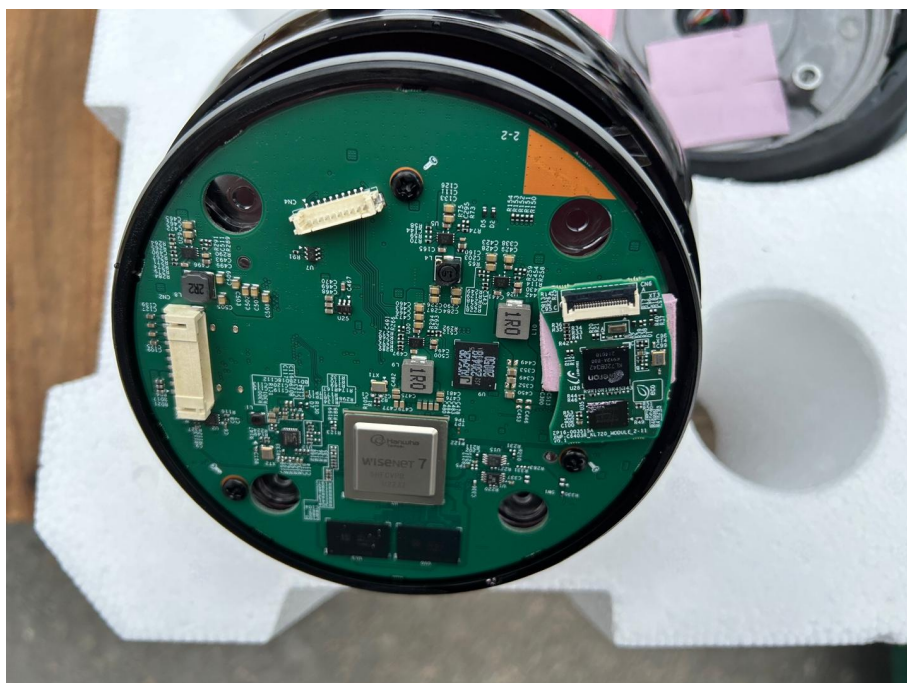

Attachment 3 – Photographs

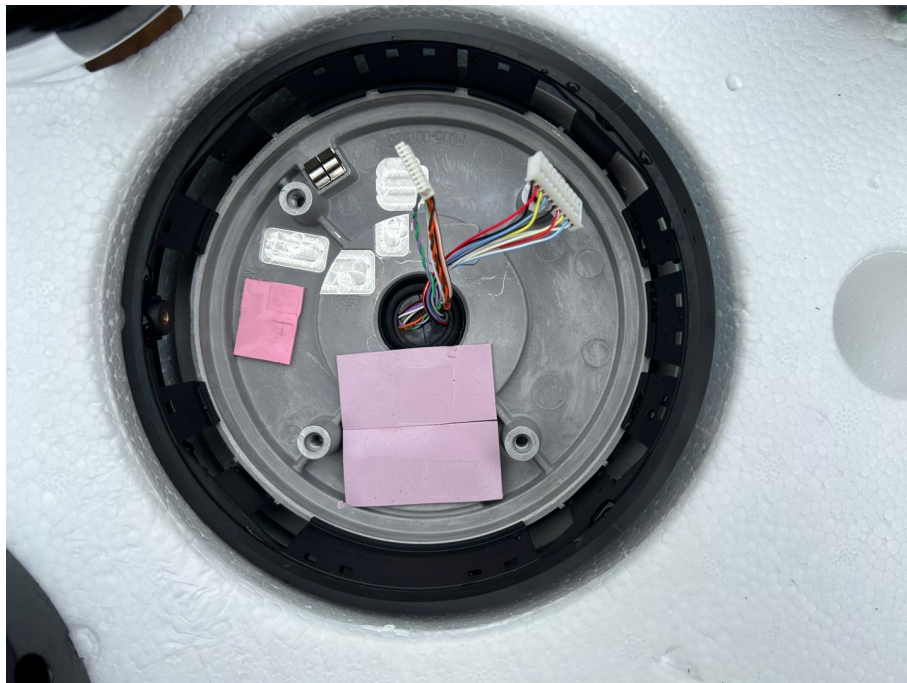

-END-