



EMC TEST REPORT For VCCI

Test Report No. : KES-EM-23T0059
Date of Issue : Jan. 20, 2023
Product name : NETWORK CAMERA
Model/Type No. : PNV-A6081R-E2T
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Dec. 22, 2022
Test date : Jan. 09, 2023 ~ Jan. 11, 2023
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

김세헌

Se Heon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0059
Page (2) of (41)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 20, 2023	KES-EM-23T0059	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Conducted Emissions at Telecommunication Ports		19
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration		25
Conducted Emissions at Mains Power Ports.....		25
Conducted Emissions at Telecommunication Ports		26
Radiated Electric Field Emissions(Below 1 GHz)		28
Radiated Electric Field Emissions(Above 1 GHz)		30
EUT External Photographs		32
EUT Internal Photographs		33

1.0 General Product Description

Main Specifications of EUT are:

	PNV-A6081R-E2T
Video	
Imaging Device	1/2" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.265/H.264: 2MP Max. 120fps/100fps/60fps/50fps/30fps/25fps(120Hz/100Hz/60Hz/50Hz/30Hz/25Hz) MJPEG: 2MP Max. 30fps/30fps/30fps/30fps/30fps/25fps(120Hz/100Hz/60Hz/50Hz/30Hz/25Hz)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.008Lux(F1.3, 1/30sec, 30IRE) B/W: 0.0008Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on), 30/25fps Color: 0.016Lux(F1.3, 1/60sec, 30IRE) B/W: 0.0016Lux(F1.3, 1/60sec, 30IRE), 0Lux(IR LED on), 60/50fps Color: 0.032Lux(F1.3, 1/120sec, 30IRE) B/W: 0.0032Lux(F1.3, 1/120sec, 30IRE), 0Lux(IR LED on), 120/100fps
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	4.38~9.33mm(2.13x) motorized varifocal
Max. Aperture Ratio	F1.3(Wide)~F2.15(Tele)
Angular Field of View	H:103.1°(Wide)~44.5°(Tele) V:54.2°(Wide)~24.9°(Tele) D:124°(Wide)~51.1°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	P-iris(IR corrected)
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0°~360° / -45°~85° / 0°~355°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SSDR
Wide Dynamic Range	120dB
Digital Noise Reduction	(Need to check) WiseNRⅡ(Based on AI engine), SSNR V
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	(Need to check) 6ea, Rectangular zones - Color: Gray/Black/White

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0059
Page (5) of (41)

Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Prefer / Anti flicker(1/5~1/12,000sec) Auto Prefer shutter control(Based on AI engine)
Digital PTZ	Support(preset/group)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	(need to check) Classified object type: Person/Face/Vehicle/License plate Attributes: Person(Gender, Color and Bag), Face(Age, Gender, Mask and Glasses), Vehicle(Type: car/bus/truck/motorcycle/bicycle and Color) Support Bestshot per object Analytics events based on AI engine - Object detection, Virtual line*(Crossing/Direction), Virtual area*(Loitering/Intrusion/Enter/Exit), Face mask detection, Digital auto tracking, Social distancing detection Analytics events - Defocus detection, Motion detection, Tampering, Audio detection, Sound classification, Virtual area(Appear/Disappear)
Business Intelligence	None
Serial Interface	None
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input, App event, Time schedule, MQTT subscription
Alarm Events	When alarm trigger occurred - File upload(image): e-mail/FTP - Notification: e-mail - Recording: SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover: PTZ preset, send message by HTTP/HTTPS/TCP - Audio clip playback - MQTT: publication
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	WiseIR 40m(131.23ft)
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(6 users) / Multicast Multiple streaming(Up to 5 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), MQTT

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0059
Page (6) of (41)

Security	TPM 2.0(FIPS 140-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure Boot, Verify firmware forgery
SIP support (VoIP, Peer-to-peer, SIP/RTP)	None
Application Programming Interface	ONVIF Profile S/T/M SUNAPI(HTTP API)
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	2TB SSD included(WAVE pre-installed) Possible to register the maximum number of camera - up to 6 camera(Host + 5 camera) - Total bandwidth: up to 33Mbps * Cannot support the camera when use AI mode
Memory	4GB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	(TBD) -20°C~+50°C(-4°F~+122°F) / 0~95%RH(non-condensing) * Start up should be done at above -20°C Humidity control /w AIR vent
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Certification	IP66/IP67/IP6K9K, NEMA4X, IK10
Input Voltage	PoE+(IEEE802.3at type 2, Class4), 12VDC
Power Consumption	(TBD) PoE+: Max ??W, typical ??W DC 12V: Max ??W, typical ??W
Mechanical	
Color / Material	White / Aluminum Hard-coated dome bubble
RAL Code	RAL9003
Product Dimensions / Weight	(TBD) Ø180x130mm(7.09x5.12"), 1900g(4.19 lb)
Compatible Conduit hole / Gangbox	19.1mm(3/4")(M25) single, double, 4" octagon, 4" square
Hanging Mount (Dome)	SBP-187HMW
Skin Cover (Dome)	None
Weather Cap (Dome)	include
Power Module	None
Backbox	None
Certifications & Standards	
Network	None
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Environment	IEC/EN 63000 IEC/EN 60529 IP66/IP67, ISO 20653 IP6K9K, IEC/EN 62262 IK10 NEMA 250 type 4X
Video	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	Wide: 30.5m(100.03ft) / Tele: 93.9m(307.95ft)
Observe (63PPM/ 19PPF)	Wide: 12.2m(40.01ft) / Tele: 37.5m(123.18ft)
Recognize (125PPM/ 38PPF)	Wide: 6.1m(20.01ft) / Tele: 18.8m(61.59ft)
Identify (250PPM/ 76PPF)	Wide: 3.0m(10.00ft) / Tele: 9.4m(30.79ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNV-A6081R-E2T	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
M.2 SSD	TS2TMTS952T2- HWT	-	Transcend	2 TB

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adaptor	FSP060-DIBAN2	-	Zhonghan Electronics (Shenzhen) Co.,Ltd.	-
PoE Adaptor	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	LG15N54	503NZWY038929	LG Electronics	-
Notebook Adaptor	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Smartphone	-	-	SAMSUNG	-
Headset	K550	-	Britz®	-
Micro SD Card1	-	-	Sandisk	8 GB
Micro SD Card2	-	-	Sandisk	8 GB

1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	4.0	S
	Slot	Micro SD Card1	Slot	-	-
	Slot	Micro SD Card2	Slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	Audio IN	Headset	Audio IN	1.7	U
	Audio OUT		Audio OUT	1.7	U
	DC IN	Adaptor	DC OUT	1.5	U
Notebook	3.5 mm	Smartphone	3.5 mm	1.3	U
	DC JACK	Notebook Adaptor	DC JACK	1.5	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	4.0	S
	Slot	Micro SD Card1	Slot	-	-
	Slot	Micro SD Card2	Slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	Audio IN	Headset	Audio IN	1.7	U
	Audio OUT		Audio OUT	1.7	U
Notebook	RJ-45 (LAN)	PoE Adaptor	RJ-45 (LAN)	1.5	S
	3.5 mm	Smartphone	3.5 mm	1.3	U
	DC JACK	Notebook Adaptor	DC JACK	1.5	U

* Unshielded=U, Shielded=S



1.7 EUT Operating Mode(s)

■ DC Mode, PoE Mode


Test Mode	operating
Operating	1. Check the camera video output on the laptop 2. Check if the network status is operating normally during PING TEST 3. Check the output of the 1 kHz tone output from the smartphone and the microphone input from the headset 4. Press the alarm button to check the normal operation of the button alarm. 5. After testing, I checked the files stored on Micro SD cards1,2 and SSD.

EUT Test operating S / W		
Name	Version	Manufacture Company
-	-	-


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

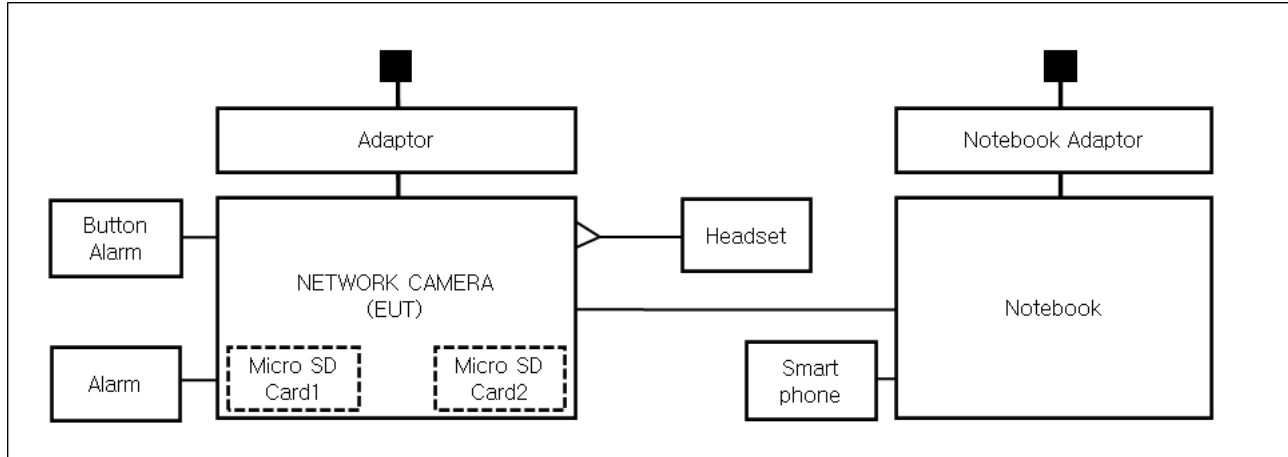

■ PoE Mode

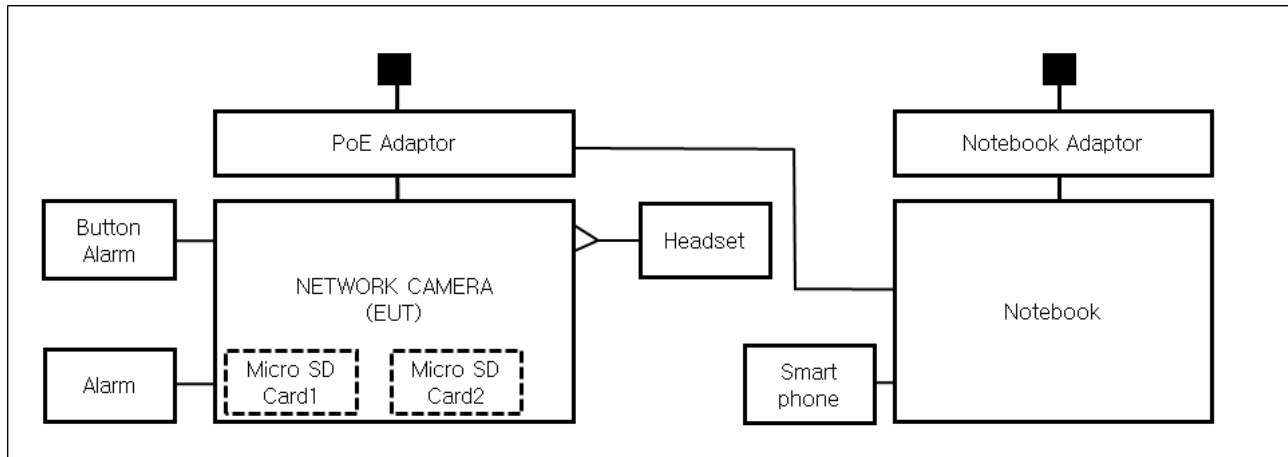

1.9 Remarks when standards applied

- VIDEO port is for administrator use and is excluded from testing.
- In PoE mode, the LAN port is regarded as a wired communication network port and power-related ports are not tested.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0059
Page (12) of (41)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ VCCI-CISPR 32:2016

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date

Jan. 09, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Test Conditions

Temperature: (22,1 ± 0,0) °C

Relative Humidity: (44,8 ± 0,0) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jan. 09, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 07, 2023

Test Conditions

Temperature: (22,1 ± 0,0) °C

Relative Humidity: (44,8 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 11, 2023

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (22,2 ± 0,1) °C

Relative Humidity: (45,0 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE**Remarks**See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 10, 2023

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 01, 2023
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 01, 2023
☒	ATTENUATOR	8491A	HP	35496	03, 08, 2023
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (22,7 ± 0,2) °C

Relative Humidity: (45,1 ± 0,0) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:

Conducted Emission

Model No.:

PNV-A6081R-E2T

Phase:


H

Mode:

DC

Operator Name:

KES

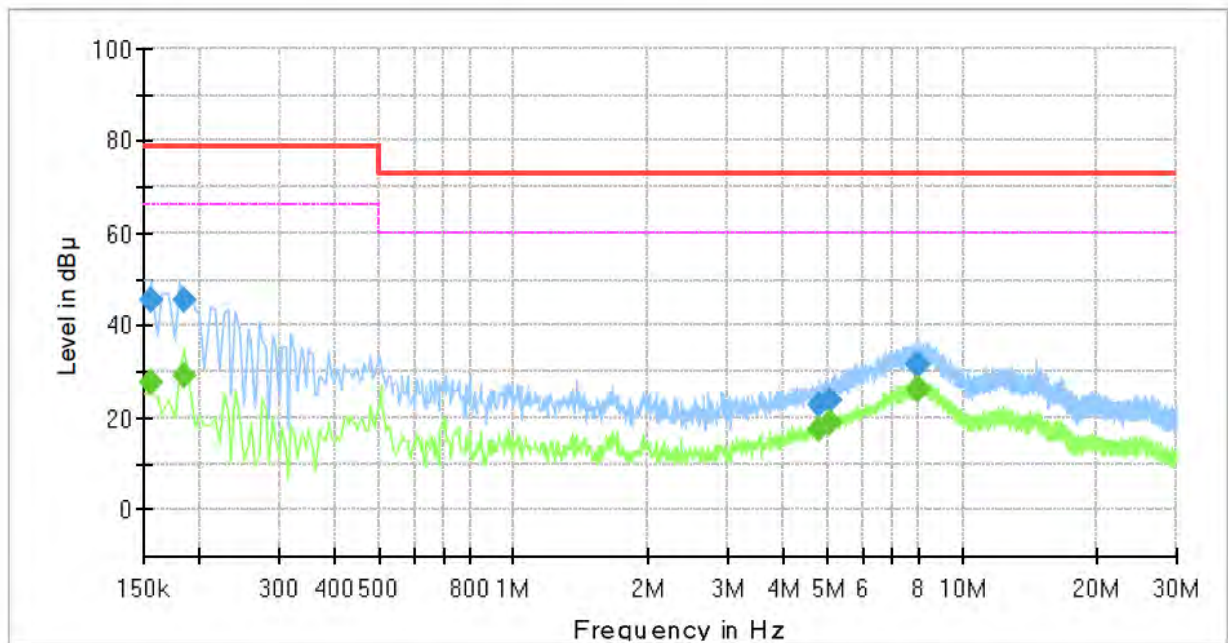

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	27.46	66.00	38.54	1000.0	9.000	L1	19.5
0.155000	45.32	---	79.00	33.68	1000.0	9.000	L1	19.5
0.185000	---	28.98	66.00	37.02	1000.0	9.000	L1	19.5
0.185000	45.38	---	79.00	33.62	1000.0	9.000	L1	19.5
4.810000	---	17.74	60.00	42.26	1000.0	9.000	L1	19.7
4.810000	22.75	---	73.00	50.25	1000.0	9.000	L1	19.7
5.090000	---	18.78	60.00	41.22	1000.0	9.000	L1	19.7
5.090000	23.83	---	73.00	49.17	1000.0	9.000	L1	19.7
7.865000	---	26.10	60.00	33.90	1000.0	9.000	L1	19.6
7.865000	31.60	---	73.00	41.40	1000.0	9.000	L1	19.6
8.035000	---	26.23	60.00	33.77	1000.0	9.000	L1	19.7
8.035000	31.56	---	73.00	41.44	1000.0	9.000	L1	19.7

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNV-A6081R-E2T
Phase:	N
Mode:	DC
Operator Name:	KES

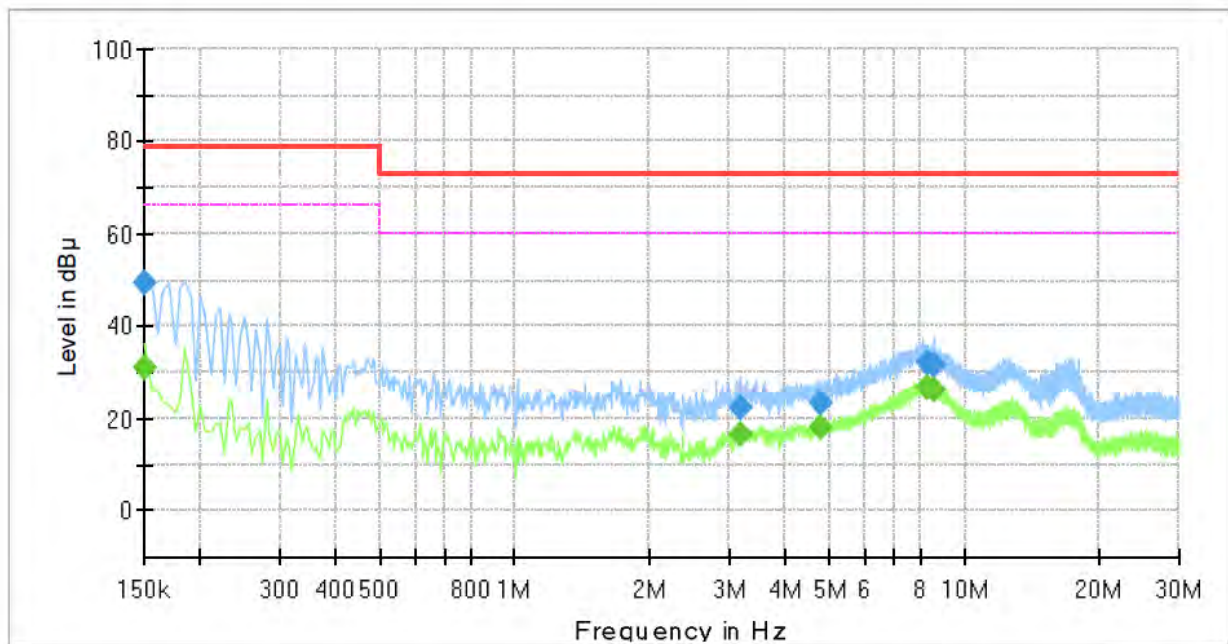

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	30.84	66.00	35.16	1000.0	9.000	N	19.4
0.150000	49.36	---	79.00	29.64	1000.0	9.000	N	19.4
3.180000	---	16.55	60.00	43.45	1000.0	9.000	N	20.1
3.180000	22.51	---	73.00	50.49	1000.0	9.000	N	20.1
4.800000	---	18.20	60.00	41.80	1000.0	9.000	N	19.7
4.800000	23.31	---	73.00	49.69	1000.0	9.000	N	19.7
8.305000	---	26.65	60.00	33.35	1000.0	9.000	N	19.7
8.305000	32.01	---	73.00	40.99	1000.0	9.000	N	19.7
8.540000	---	26.29	60.00	33.71	1000.0	9.000	N	19.7
8.540000	31.64	---	73.00	41.36	1000.0	9.000	N	19.7

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNV-A6081R-E2T
Mode :	DC
Speed :	1 000 Mbps
Operator Name:	KES

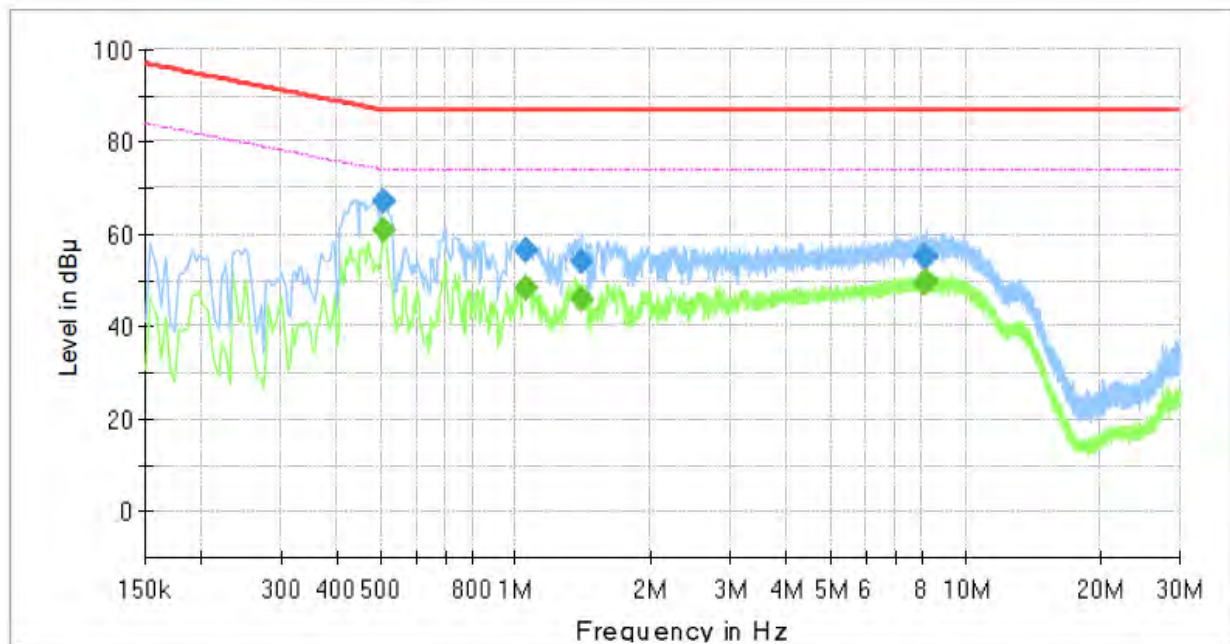

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.506000	---	60.85	74.00	13.15	1000.0	9.000	Single Line	19.6
0.506000	67.18	---	87.00	19.82	1000.0	9.000	Single Line	19.6
1.054000	---	48.36	74.00	25.64	1000.0	9.000	Single Line	20.0
1.054000	56.77	---	87.00	30.23	1000.0	9.000	Single Line	20.0
1.402000	---	45.90	74.00	28.10	1000.0	9.000	Single Line	20.1
1.402000	54.21	---	87.00	32.79	1000.0	9.000	Single Line	20.1
8.058000	---	49.39	74.00	24.61	1000.0	9.000	Single Line	19.5
8.058000	55.04	---	87.00	31.96	1000.0	9.000	Single Line	19.5
8.210000	---	49.59	74.00	24.41	1000.0	9.000	Single Line	19.5
8.210000	55.33	---	87.00	31.67	1000.0	9.000	Single Line	19.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNV-A6081R-E2T
Mode :	PoE
Speed :	1 000 Mbps
Operator Name:	KES

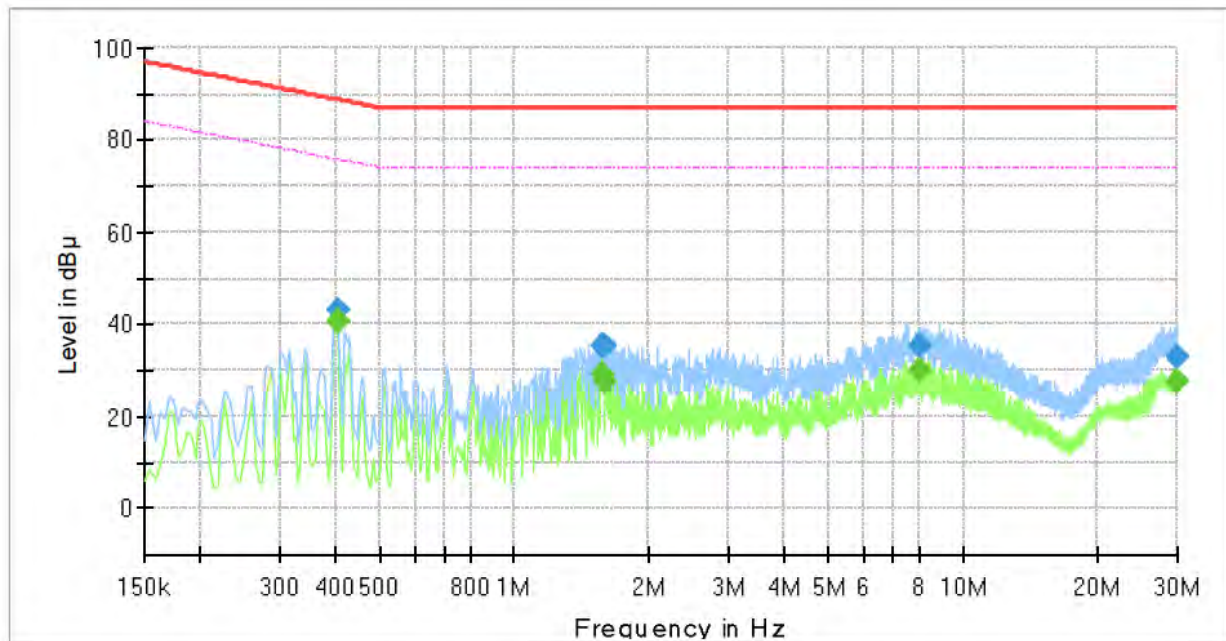

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.402000	---	40.59	75.81	35.22	1000.0	9.000	Single Line	19.4
0.402000	43.24	---	88.81	45.57	1000.0	9.000	Single Line	19.4
1.574000	---	29.18	74.00	44.82	1000.0	9.000	Single Line	20.1
1.574000	35.25	---	87.00	51.75	1000.0	9.000	Single Line	20.1
1.590000	---	27.85	74.00	46.15	1000.0	9.000	Single Line	20.1
1.590000	35.55	---	87.00	51.45	1000.0	9.000	Single Line	20.1
8.042000	---	30.00	74.00	44.00	1000.0	9.000	Single Line	19.5
8.042000	35.32	---	87.00	51.68	1000.0	9.000	Single Line	19.5
29.938000	---	27.74	74.00	46.26	1000.0	9.000	Single Line	20.4
29.938000	33.07	---	87.00	53.93	1000.0	9.000	Single Line	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)


■ DC Mode

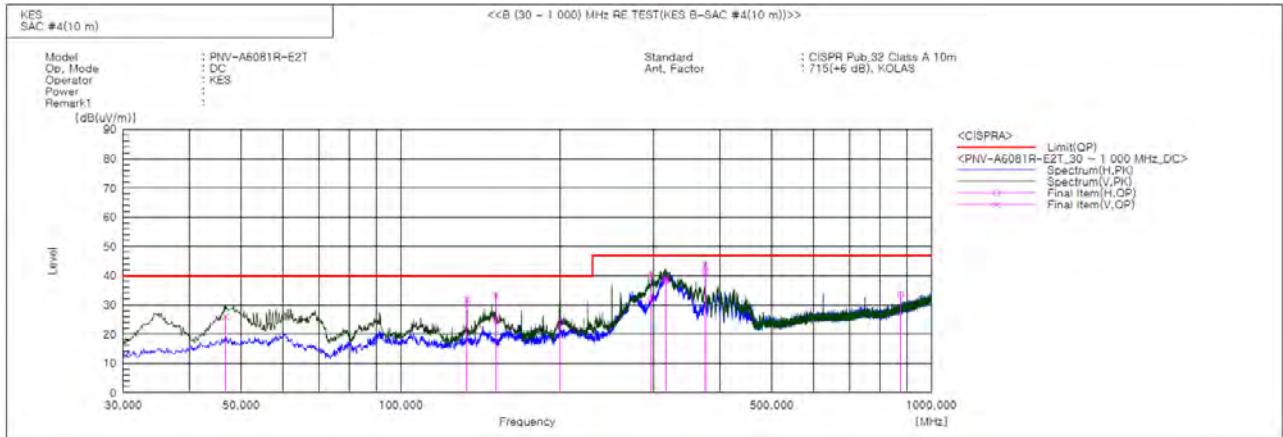

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	46.733	V	46.7	-20.7	26.0	40.0	14.0	117.0	220.0	
2	133.305	V	56.6	-24.9	31.7	40.0	8.3	144.0	40.0	
3	151.008	V	58.1	-24.9	33.2	40.0	6.8	129.0	235.0	
4	151.129	H	49.7	-24.9	24.8	40.0	15.2	352.0	73.0	
5	199.871	H	44.8	-21.0	23.8	40.0	16.2	380.0	325.0	
6	296.629	H	49.6	-17.6	32.0	47.0	15.0	373.0	152.0	
7	296.629	V	58.3	-17.6	40.7	47.0	6.3	106.0	209.0	
8	315.423	V	55.6	-16.7	38.9	47.0	8.1	148.0	122.0	
9	316.150	H	54.8	-16.6	38.2	47.0	8.8	394.0	152.0	
10	374.956	V	57.4	-14.0	43.4	47.0	3.6	137.0	122.0	
11	374.956	H	55.3	-14.0	41.3	47.0	5.7	397.0	81.0	
12	875.113	H	38.0	-4.6	33.4	47.0	13.6	368.0	12.0	

■ PoE Mode

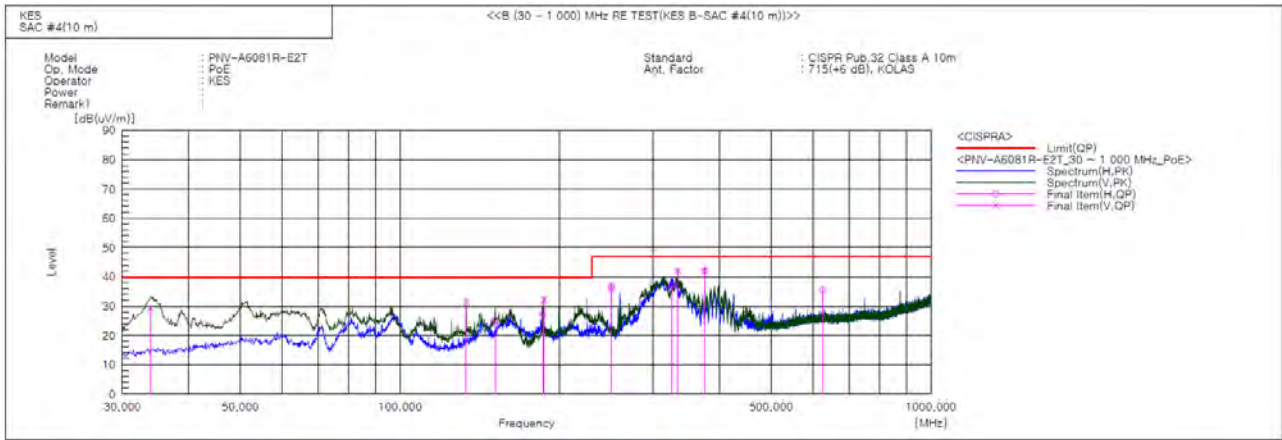

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	33.880	V	53.8	-24.5	29.3	40.0	10.7	112.0	209.0	
2	133.305	V	56.3	-24.9	31.4	40.0	8.6	138.0	68.0	
3	151.008	H	50.1	-24.9	25.2	40.0	14.8	358.0	188.0	
4	185.564	H	49.9	-22.6	27.3	40.0	12.7	374.0	222.0	
5	186.655	V	54.7	-22.5	32.2	40.0	7.8	103.0	5.0	
6	249.948	H	55.4	-18.8	36.6	47.0	10.4	366.0	113.0	
7	249.948	V	54.8	-18.8	36.0	47.0	11.0	119.0	19.0	
8	325.244	H	53.2	-16.1	37.1	47.0	9.9	391.0	316.0	
9	333.731	V	57.7	-15.6	42.1	47.0	4.9	126.0	138.0	
10	374.956	H	56.0	-14.0	42.0	47.0	5.0	363.0	72.0	
11	374.956	V	56.1	-14.0	42.1	47.0	4.9	144.0	53.0	
12	625.095	H	43.1	-7.6	35.5	47.0	11.5	371.0	229.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-23T0059

Page (23) of (41)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

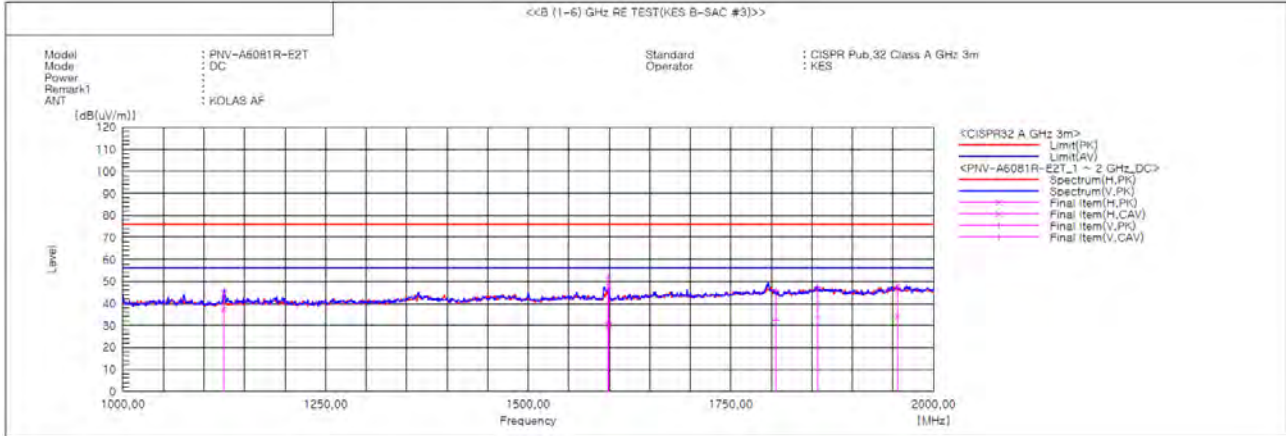


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1124.640	H	47.9	40.1	-3.0	44.9	37.1	76.0	56.0	31.1	18.9	100.0	215.8	
2	1598.609	V	51.1	30.7	0.6	51.7	31.3	76.0	56.0	24.3	24.7	100.0	211.8	
3	1599.350	H	47.1	29.5	0.6	47.7	30.1	76.0	56.0	28.3	25.9	100.0	203.8	
4	1805.528	V	42.4	29.0	3.3	45.7	32.3	76.0	56.0	30.3	23.7	100.0	22.9	
5	1857.300	V	43.6	29.9	3.8	47.4	33.7	76.0	56.0	28.6	22.3	100.0	4.7	
6	1955.330	H	43.3	29.5	4.4	47.7	33.9	76.0	56.0	28.3	22.1	100.0	135.3	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

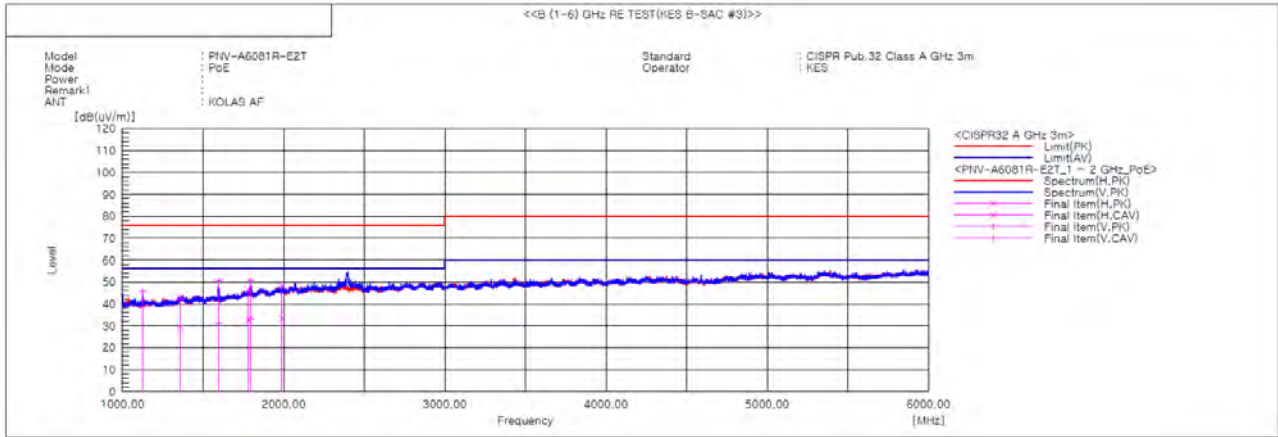

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1125.390	V	48.6	41.7	-3.0	45.6	38.7	76.0	56.0	30.4	17.3	100.0	226.9	
2	1357.104	H	44.0	30.4	-1.0	43.0	29.4	76.0	56.0	33.0	26.6	100.0	352.2	
3	1596.269	V	49.9	30.7	0.6	50.5	31.3	76.0	56.0	25.5	24.7	100.0	52.0	
4	1781.064	H	43.3	29.6	3.1	46.4	32.7	76.0	56.0	29.6	23.3	100.0	337.5	
5	1796.930	V	47.3	29.7	3.3	50.6	33.0	76.0	56.0	25.4	23.0	100.0	30.6	
6	1988.886	H	43.7	28.6	4.6	48.3	33.2	76.0	56.0	27.7	22.8	100.0	27.2	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode




Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

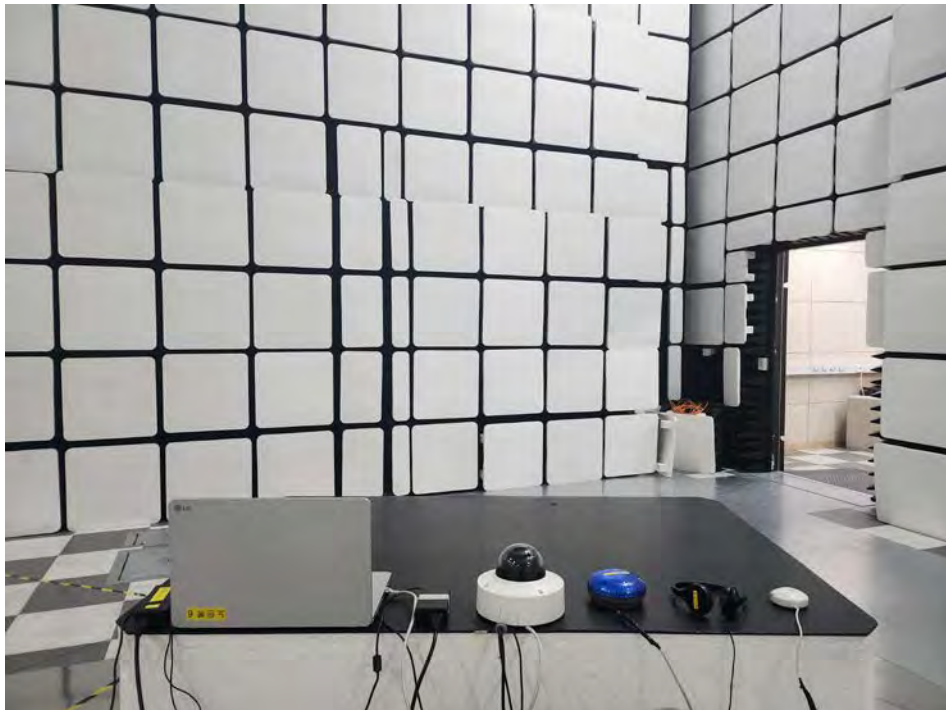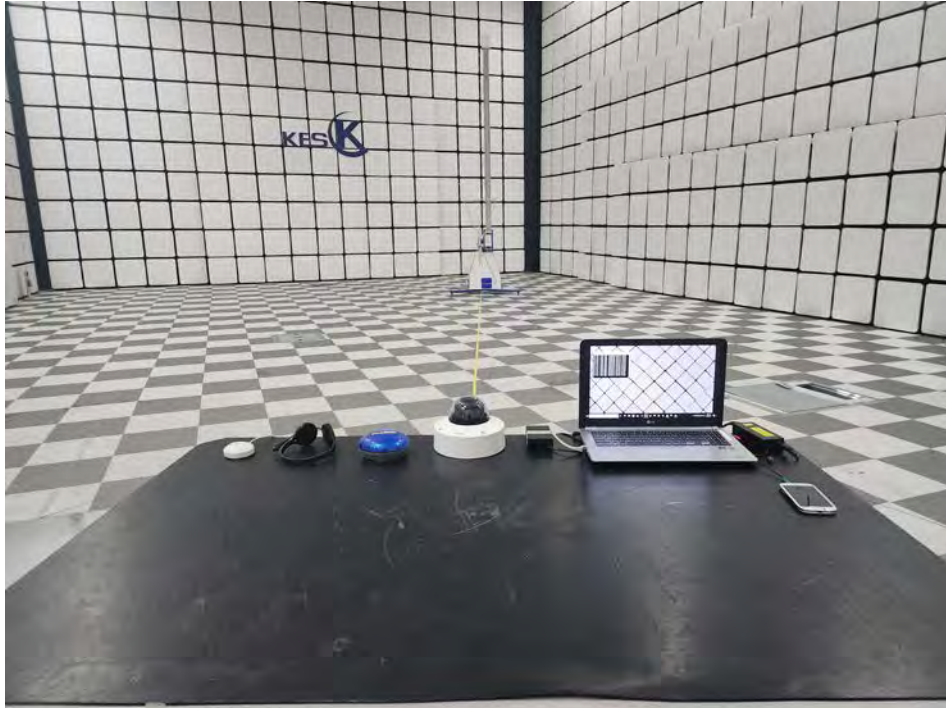


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

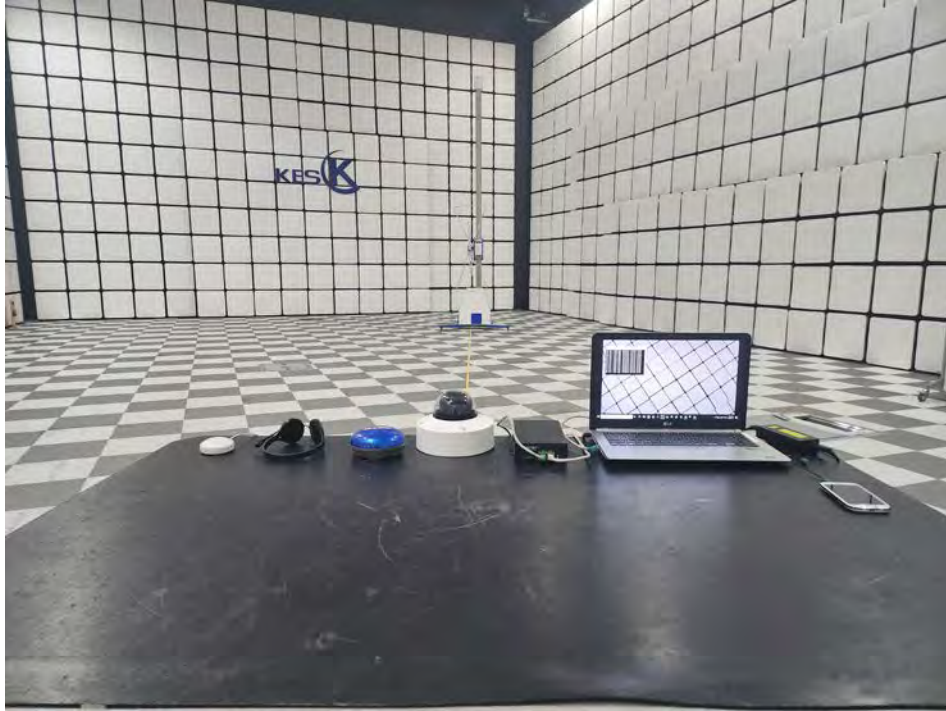


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

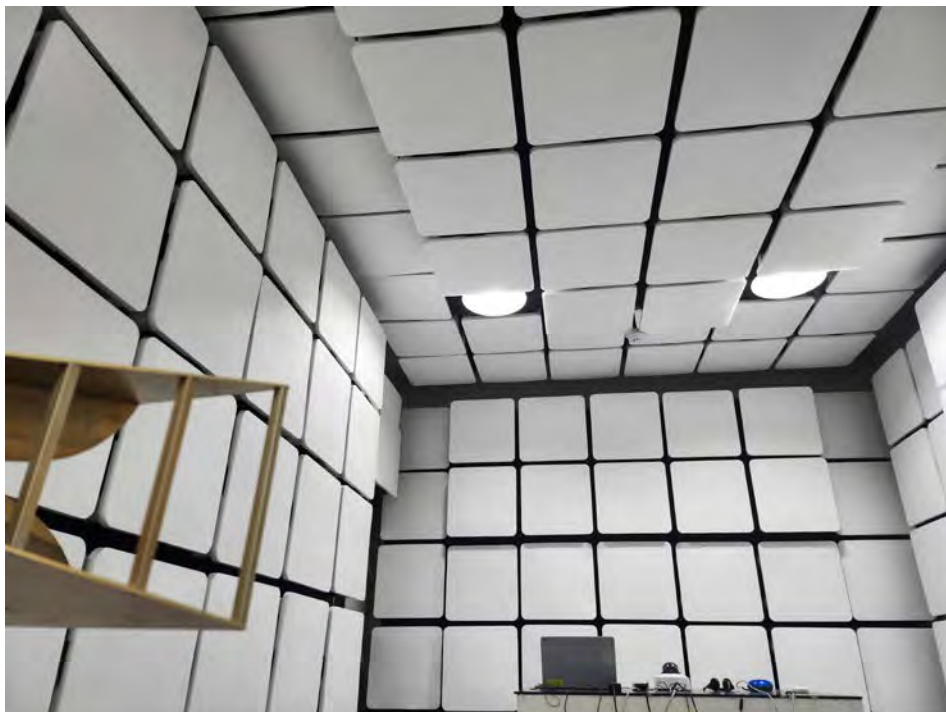

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

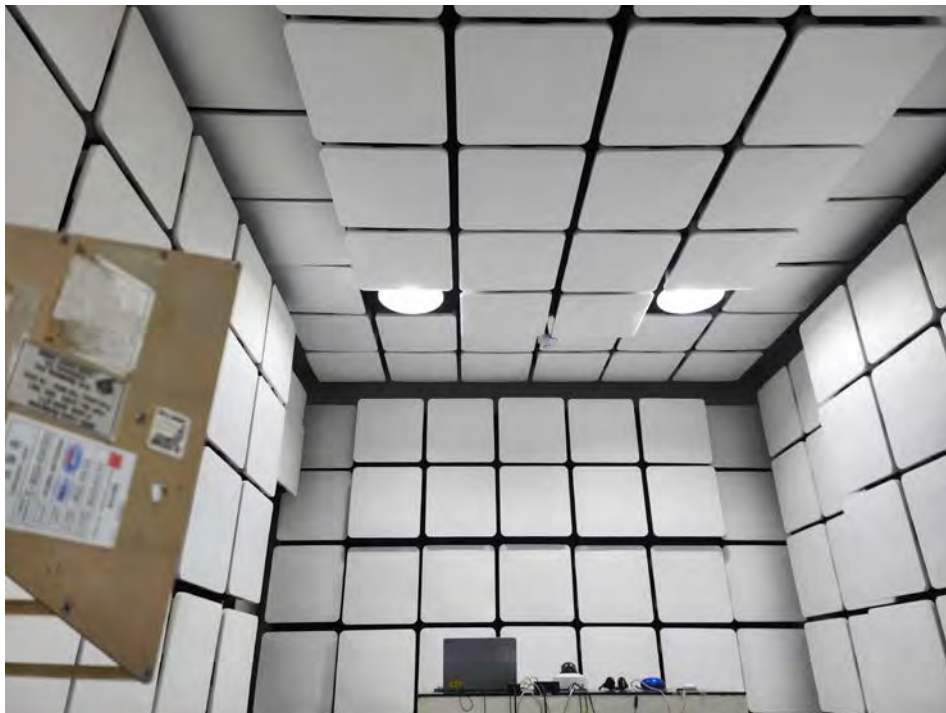

EUT External Photographs

(Top)



(Bottom)



EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)

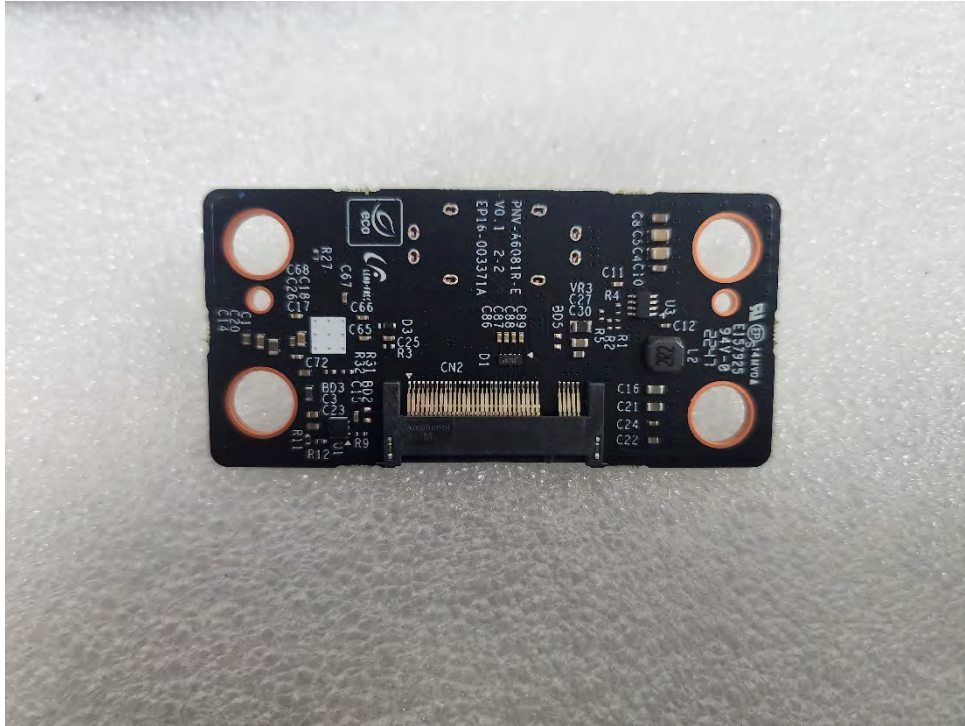

(Bottom)

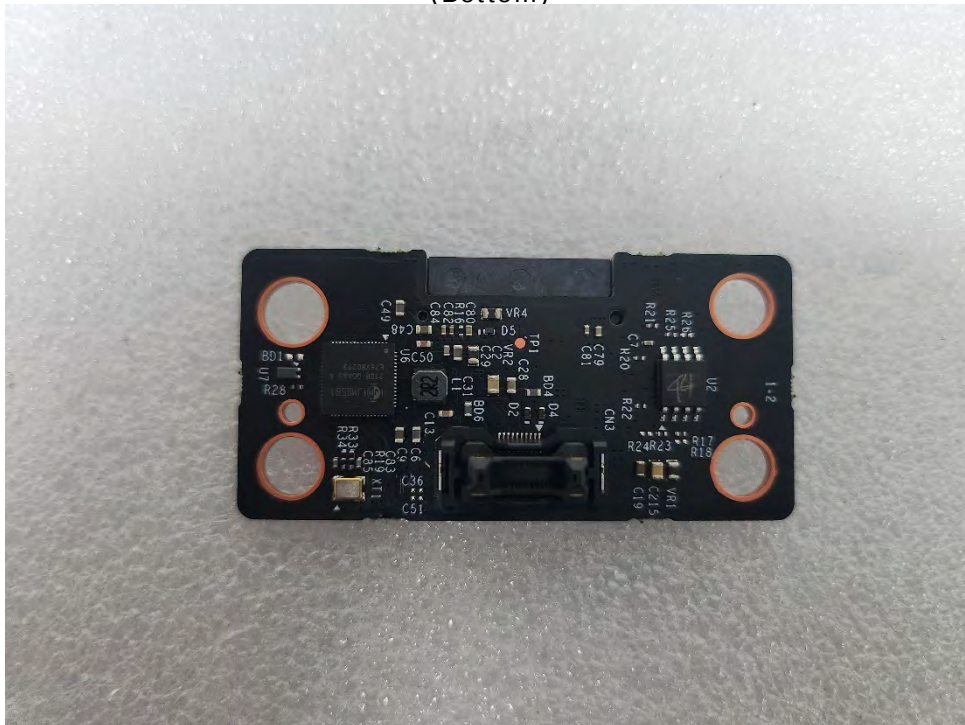


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)



(Bottom)

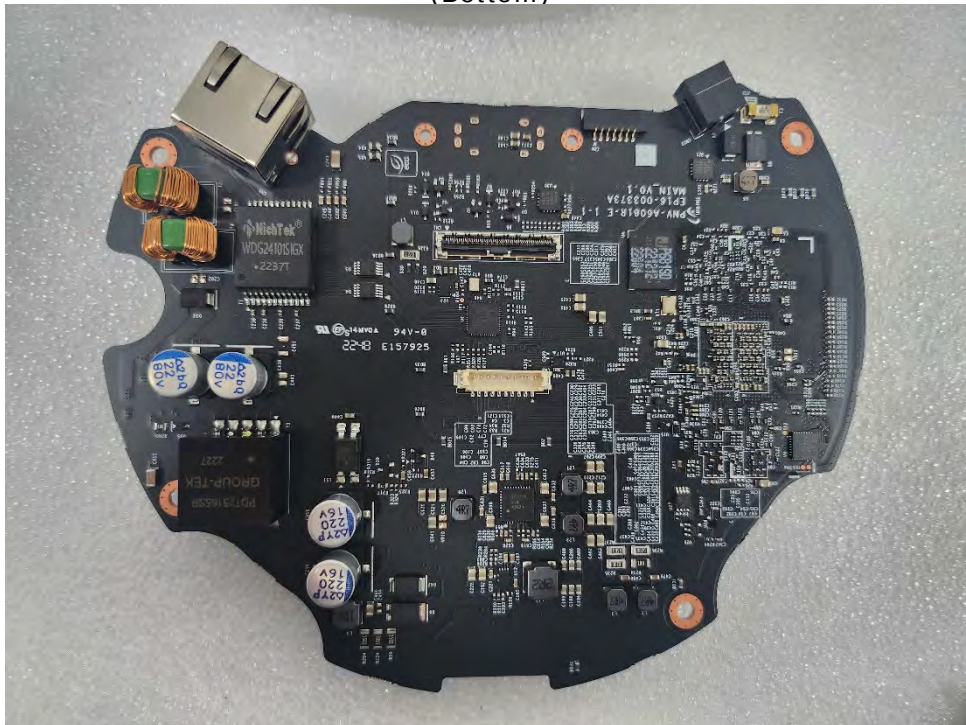


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)



(Bottom)

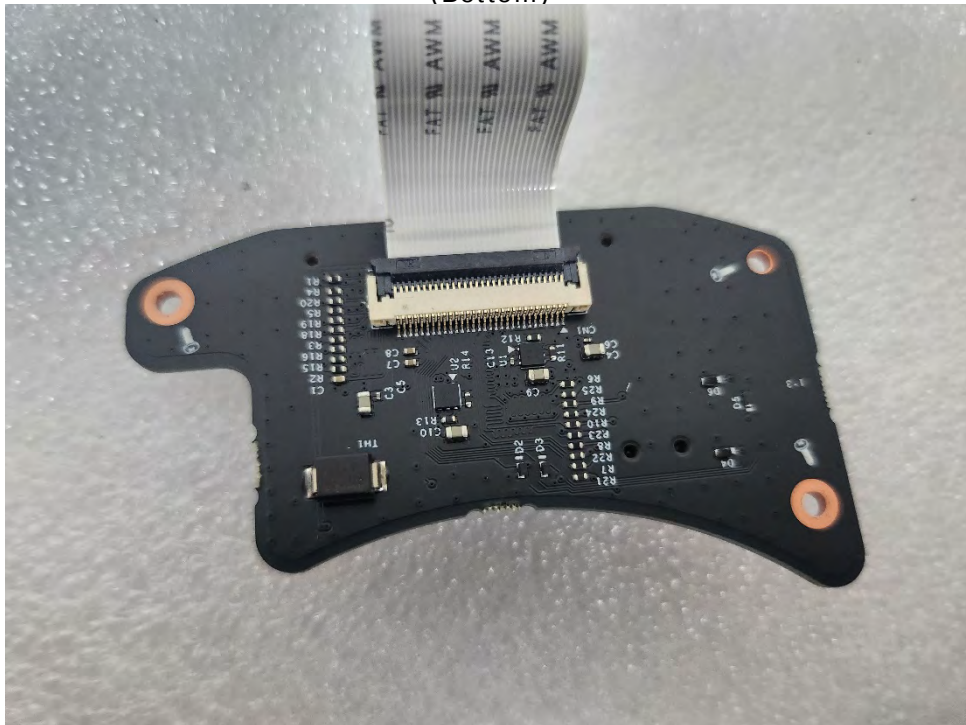

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 4

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 5

(Top)

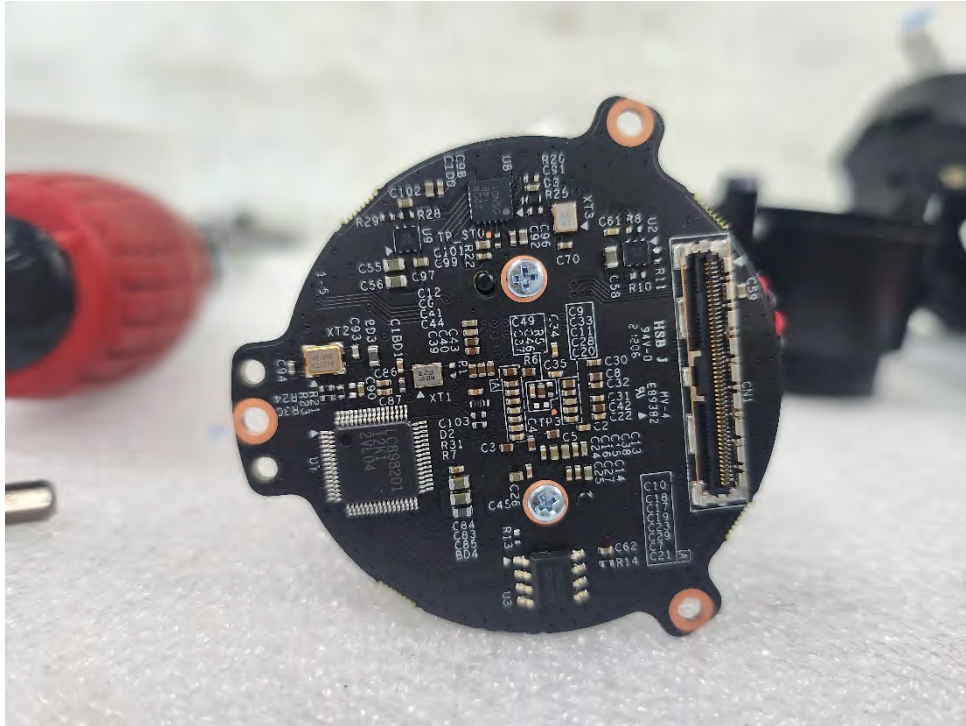


(Bottom)

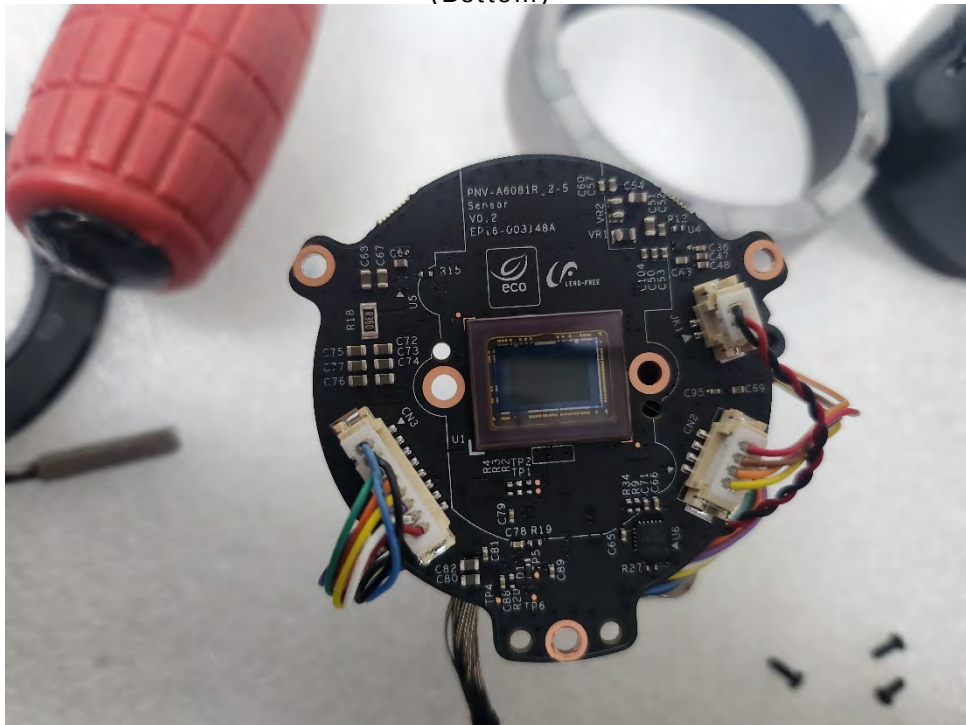

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens

(Top)

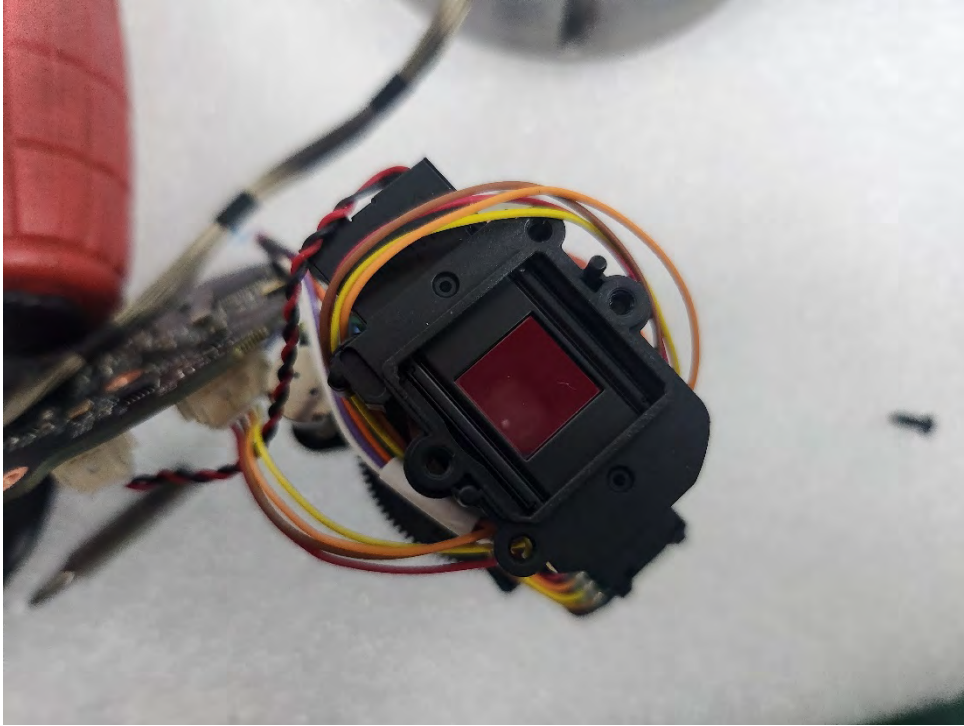

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SSD

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs

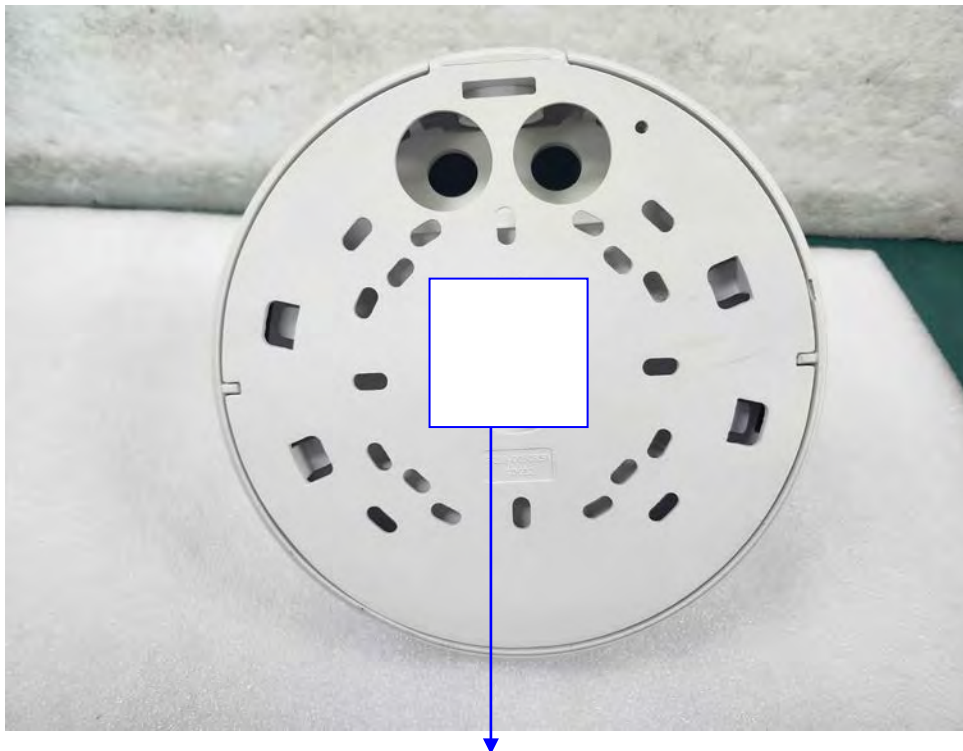

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A