

TEST REPORT

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-00102 Page (1) / (17) pages	
---	---	---	--

1. Applicant

◦ Name : Hanwha Techwin Co., Ltd.
◦ Address : 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA
◦ Date of Receipt : 2022-12-19

2. Manufacturer

◦ Name : Hanwha Techwin Co., Ltd.

3. Use of Report

: Quality control

4. Test sample / Model

: NETWORK CAMERA / PNV-A6081R-E2T

5. Date(s) of test

: 2022-12-19 to 2023-01-04

6. Location of Test

: ☒ Permanent Testing Lab ☐ On Site Testing

(Address: 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

7. Test Standard (Method) used

: KS C IEC 60529:2013

8. Testing Environment

: Temperature: (20.0 ± 1.0) °C,
Humidity: (50.0 ± 1.0) %R.H.

9. Test Results

: Refer to each test items

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This Test Report cannot be reproduced, except in full.

Affirmation	Tested by:	Technical Manager:
	Name: Min-gi Moon	Name: SooChan Bae
	(Signature)	(Signature)

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2023-01-26


CTK Co., Ltd



1. Degrees of protection provided by enclosures (IP code)

1.1 Test standard: KS C IEC 60529:2013

1.2 Arrangement of the IP code

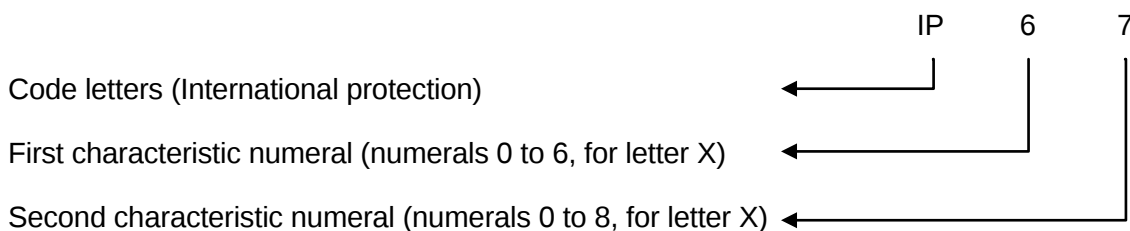

1.2.1 Degree of protection against access to hazardous parts indicated by the first characteristic numeral

First characteristic numeral	Degree of protection	Application
6	Protected against access to hazardous parts with a wire. The access probe of 1.0 mmØ, shall not penetrate. Test force: 1 N ± 10 %	☒

NOTE In the case of the first characteristic numerals 3, 4, 5 and 6, protection against access to hazardous parts is satisfied if adequate clearance is kept. The adequate clearance should be specified by the relevant product committee in accordance with 12.3.

Due to the simultaneous requirement specified in table 2, the definition “shall not penetrate” is given in table 1.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-xxxxx Page (3) / (17) pages	
---	--	--	--

1.2.2 Degree of protection against solid foreign objects indicated by the first characteristic numeral

First characteristic numeral	Degree of protection	Application
6	In Dust Testing Equipment, the test sample has to have no ingress of dust after testing atmospheric pressure present condition for 8 hr. (Talcum powder have to go through the measured sieve by Φ 50 μm wire that are spacing 75 μm in squared, per volume and union Talcum powder have to be 2 kg/m³) Products in volume: 5 079.48 cm³ → 5.08 L Target intake volume (Products in volume 80): 406.36 L Suction volume (Max product in volume 60): 304.77 LPH → 5.08 LPM Actual Suction volume: 5.08 L Suction pressure (Up to 2 kPa): 2 kPa Test time (Up to 8 time): 8 hr	☒
¹⁾ The full diameter of the object probe shall not pass through an opening of the enclosure. Due to the simultaneous requirement specified in table 2, the definition “shall not penetrate” is given in table 1.		

1.2.3 Degree of protection against water indicated by the second characteristic numeral

Second characteristic numeral	Degrees of protection	Application
7	Sink the product in the water by the Pressure and Time according to regulation and the product must not be harmed. Immersion tank water-level on enclosure with: ☐ height equal to or greater than 850 mm: the highest point of enclosures located 0.15 m below the surface of the water ☒ height less than 850 mm: the lowest point of enclosures located 1 m below the surface of the water Duration of test: 30 min	☒

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-xxxxx Page (4) / (17) pages	
---	--	--	--

Test Result

IP Code	Remark
IP 6X	No penetration of probe No ingress of dust
IP X7	No ingress of water.

※ The results shown in this test report refer only to the sample(s) tested unless otherwise stated

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-xxxxx Page (5) / (17) pages	
---	---	---	--

Manufacturer's name

Name and address of factory (ies)	1) D-TECH CO.,LTD. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex) 2) HANWHA TECHWIN SECURITY VIETNAM CO.,LTD Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
--	---

Model description

Basic Model	PNV-A6081R-E2T
Series model	PNV-A6081R-E1T
Model differences	SSD Capacity Differences PNV-A6081R-E2T : 2TB SSD applied PNV-A6081R-E1T : 1TB SSD applied

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-xxxxx Page (6) / (17) pages	
---	--	--	--

List of test equipment used:

Instrument type	Model	Make	Serial	Calibration Effective Date
Stop Watch	NONE	Casio	612Q01R-1	2023-03-03
Aneroid Barometer	BAROMEX	SATO	84682	2023-04-07
Hygro Thermograph	ST-50M	SEKONIC	HE51-000147	2023-10-13
Push Pull Gage	FB30K	Imada	83805	2023-02-22
Test wire (1.0 mm)	TRP-02	ED&D	S1-J15	-
Dust Chamber	NONE	JFM	S3-IP36	2023-07-06
Immersion tank	Cage for IPX7 / IPX8	Kingpo	-	-
Steel measuring meter	10 m	KOMELON	S3-D01	2023-02-24

2 APPENDIX

2.1 Product Photographs

< Photo 1 > Product Front View



< Photo 2 > Product Rear View



< Photo 3 > Product Top View



< Photo 4 > Product Bottem View



2.2 Test Setup Photos and Configuration

< Photo 5 > The First Characteristic Numeral Test



< Photo 6 > The Second Characteristic Numeral Test



2.2. Product internal photographs after test

< Photo 7 > The First Characteristic Numeral Test



< Photo 8 >



< Photo 9 > The First Characteristic Numeral Test



< Photo 10 >



< Photo 11 > The First Characteristic Numeral Test



< Photo 12 >



< Photo 13 > The First Characteristic Numeral Test



< Photo 14 >



< Photo 15 > The Second Characteristic Numeral Test



< Photo 16 >



< Photo 17 > The Second Characteristic Numeral Test





< Photo 18 >




Product Appearance

Enclosure Dimensions [Unit: mm]

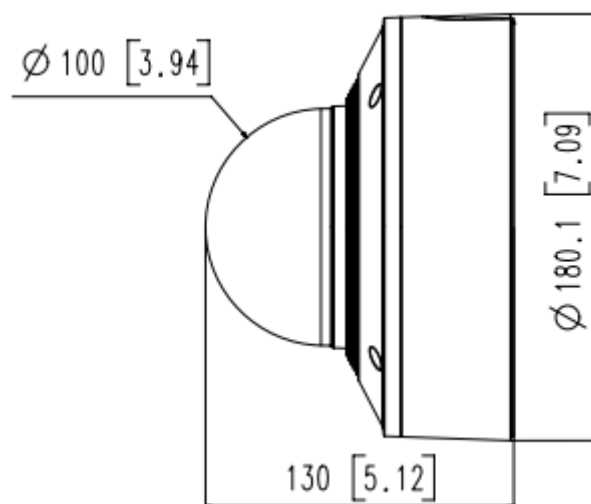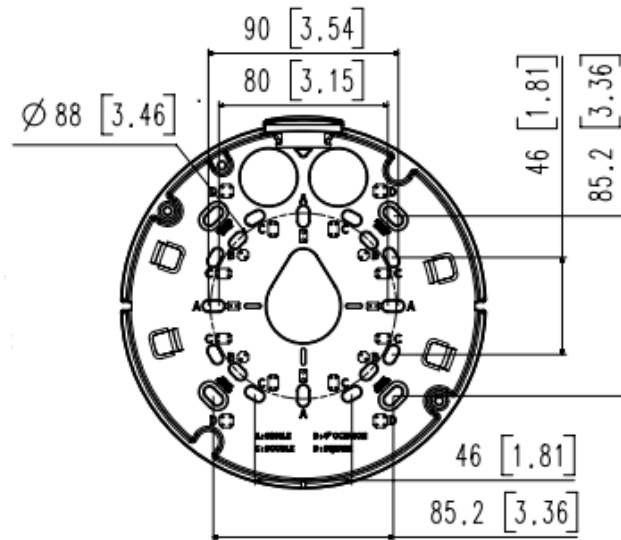

Enclosure Dimensions [Unit: mm]

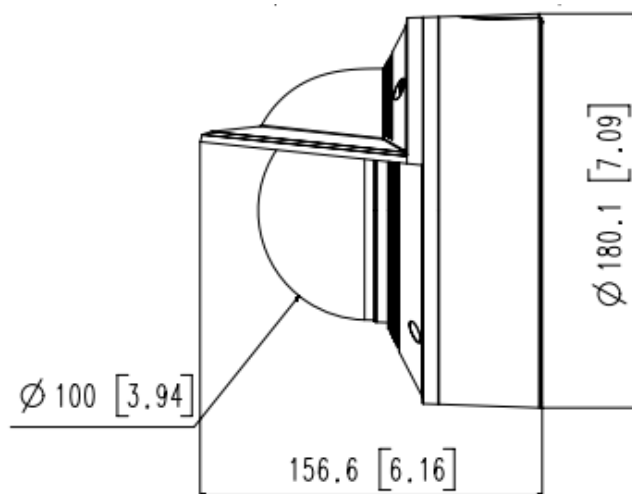

- End -