



TEST REPORT



Report No. : KES-EM251563

Page 1 / 35

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : PNV-A7082RZ

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)

3. Date of Receipt : Apr. 28, 2025

4. Test date : May. 03, 2025 ~ May. 05, 2025

5. Date of Issue : May. 23, 2025

6. Test Results : In Compliance

Tested by

Reviewed by

Dae Soo, Kim
EMC Test Engineer

Dong Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr)



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 23, 2025	KES-EM251563	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test	6
1.5	Support Equipments	6
1.6	External I/O Cabling.....	7
1.7	EUT Operating Mode(s).....	7
1.8	Configuration.....	8
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement.....	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations	10
2.1	Conducted Emissions Mains Power Ports.....	11
2.2	Conducted Emissions at Telecommunication Ports.....	12
2.3	Radiated Electric Field Emissions(Below 1 GHz).....	13
2.4	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA		15
Conducted Emissions at Mains Power Ports		15
Conducted Emissions at Telecommunication Ports		17
Radiated Electric Field Emissions(Below 1 GHz)		18
Radiated Electric Field Emissions(Above 1 GHz).....		19
Test Setup Photos and Configuration.....		20
Conducted Emissions at Mains Power Ports		20
Conducted Emissions at Telecommunication Ports		21
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		23
EUT External Photographs.....		24
EUT Internal Photographs.....		25



1.0 General Product Description

Main Specifications of EUT are:

Video		Operational		
Imaging Device	1/1.8" CMOS	Camera Title	Displayed up to 85 characters	
Resolution	2592x1520, 2560x1440, 1920x1080, 1600x1200, 1280x960, 1280x720, 1024x768, 800x600, 640x480, 640x360, 320x240, 320x180	Direction Indicator	None	
		Day & Night	Auto(ICR)	
		Backlight Compensation	BLC, HLC, WDR, SSDR	
		Wide Dynamic Range	120dB	
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MPEG: Max. 30fps@4MP Max. 5fps)	Digital Noise Reduction	SSNR.V, WiseNRII(Based on AI engine)	
		Digital Image Stabilization	Support	
NETD	None	Defog	Support	
Pixel Size	None	Motion Detection	8ea, 8point polygonal zones 32ea, 8point polygonal zones - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic	
Video Out	None	Privacy Masking	Dynamic Privacy Mask(Based on AI engine) - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic	
Video Transmission Distance	None	Gain Control	Off / Max Gain / Manual	
Lens		White Balance	ATW / NarrowATW / AWC / Manual / Indoor / Outdoor	
		LDC	Support(Fill/Stretch mode)	
Focal Length (Zoom Ratio)	4.6~9.35mm(2.0x) motorized varifocal	Electronic Shutter Speed	Minimum / Maximum / Anti flicker(2~1/30,000sec) Prefer shutter control(Based on AI engine)	
Optical Zoom	None	Digital PTZ	None	
Max. Aperture Ratio	F1.3(Wide)~F2.15(Tele)	Video Rotation	Flip, mirror, hallway view(90°/270°)	
Angular Field of View	H: 105°(Wide)~47°(Tele) V: 58°(Wide)~27°(Tele) D: 128°(Wide)~55°(Tele)	Analytics	Classified object type: Person/Face/Vehicle(Type: car/bus/truck/motorcycle/bicycle)/License plate Attributes: Person(Gender, Clothing top/bottom color, Bag), Face(Age, Gender, Mask, Glasses), Vehicle(Type: car/bus/truck/motorcycle/bicycle, Color) Support BestShot Support Re-ID(Person)	
			Analytics events based on AI engine - Motion detection, Object detection, Virtual line(Crossing/Direction), Virtual area(Lotering/Intrusion/Enter/Exit/Appear/Disappear), Slip & fall detection, Face mask detection, Social distancing detection, Sound classification(To be released)	
			Analytics events - Defocus detection, Tampering, Shock detection, Audio detection	
			Based on AI engine: People/Vehicle/Crowd counting, Queue management, Heatmap	
Min. Object Distance	1.5m(4.92ft)	Business Intelligence	Based on AI engine: People/Vehicle/Crowd counting, Queue management, Heatmap	
Focus Control	Simple focus	Serial Interface	None	
Lens Type	P-iris(IR corrected)	Alarm I/O	None	
Mount Type	None	Alarm Triggers	Analytics, Network disconnection, Alarm input, Time schedule, MQTT subscription, Day/Night, Storage disruption, Case tampering * Alarm input(with NW I/O Box SPM-4210)	
Optional Lens	None	Alarm Events	When alarm trigger occurred - File upload(image): e-mail/FTP/SFTP - File upload(video clip): FTP/SFTP - Notification: e-mail - Recording: 5D/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover: PTZ preset, send message by HTTP/HTTPS/TCP - Audio clip playback(WAV, MP3) - MQTT: publication	
Pan / Tilt / Rotate			Audio Streaming	None
Pan / Tilt / Rotate Range	Remote adjustment(Max. 3,650cycles) 0°~350° / 0°~85° / 0°~180°		Audio In	None
Pan Range	None		Audio Out	None
Pan Speed	None	Light Type	IR LED	
Tilt Range	None	Light Viewable Length	WiseIR 30m(98.43ft)	
Tilt Speed	None	IR Viewable Length	None	
Rotate Range	None	IR Illuminator (Optional)	None	
Sequence	None	IR Radiation angle	None	
Preset Accuracy	None	IR LED	None	
		IR Wavelength	850nm	
		IR Operation	None	
		Water Removal	None	
		Auto Tracking	None	
		Coaxial Protocol	None	
		Color Palettes	None	



Report No. : KES-EM251563

Radiometry		Environmental & Electrical	
Temperature Detect Range	None	Operating Temperature / Humidity	-50°C~+55°C(-58°F~+131°F) / 0~100% RH +74°C(+165°F)(MAX) based on NEMA-TS 2(2.2.7) * Start up should be done at above -30°C Humidity control /w AIR vent
Temperature Accuracy	None	Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Temperature Detection	None	Wind Load	None
Additional	None	EPA(Effective Projected Area)	0.017m ²
Network		Certification	IP66/IP67/IP6K9K, NEMA4X, IK11, NEMA-TS 2(2.2.7.2-8, 2.2.8, 2.2.9)
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)	Input Voltage	PoE+(IEEE802.3at type2, Class4)
Video Compression	H.265/H.264: Main/Baseline/High MJPEG	Power Consumption	PoE: Max. 15.0W, typical 9.0W Support Wispower - Power monitoring(Max/Current/Avg.)
Audio Compression	None	Mechanical	
Smart Codec	WiseStream(Based on AI engine)	Color / Material	White / Aluminum Bubble: Hard-coated dome
Video Quality Adjustment	None	RAL Code	RAL9003
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	Product Dimensions / Weight	ø180x135mm(ø7.09x5.31"), 2.100g(4.63lb)
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 5 profiles, 3 virtual channel support)	Compatible Conduit hole / Gasket	19.1mm(3/4") (M25) single, double, 4" octagon, 4" square
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP/SFTP, SMTP(StartTLS), ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), CDP, MQTT, Syslog	Certifications & Standards	
SIP support (VoIP, Peer-to-peer)	None	Network	None
Security	None	EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI C1SPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A, KS C 9835
Application Programming Interface	SUNAPI(HTTP API) Hanwha Vision Open Platform	Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Security		Environment	IEC/EN 63000 IEC/EN 60529 IP66/IP67/IP6K9K, IEC/EN 62262 IK11, NEMA 250 Type 4X, NEMA-TS 2(2.2.7.2-8, 2.2.8, 2.2.9) IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78
OS / Firmware Protect	Encrypted Firmware, Secure boot, Signed Firmware	Video	None
User authentication	Digest Authentication, Prevent brute-force attack	Compatible Models	
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)	Hanging Adaptor	SBP-180HWM1
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)	Back Box	SBV-180BW, SBV-180WW
Access Control	IP-based access control, MAC-based access control, Auto logout	Ceiling Mount (Assy)	SBP-150CMI, SBP-300CMI, SBP-300CMW1, SBP-900CMW, SBP-300CMTW, SBP-300CMTS, SBP-156CMW
Data Protect	Encryption Credentials, Encrypt compress for live recording file export	Ceiling Mount (Single Unit)	SBP-180CMB, SBP-140CMB, SBP-180CMS, SBP-900CMP, SBP-300CMP, SBP-150CMP, SBP-C15P, SBP-C15H
Audit	Access / System / Event Log management	Wall Mount	SBP-400WMW, SBP-250WMW, SBP-156WMW
Device ID	Device Certificate(Hanwha vision Root CA)	Wall Mount Adaptor	None
Secure Storage	Secure element, SDcard partition encrypt	Pole Mount	SBD-180PMW
Security Certificate	ETSI EN 303 645, Secure element(FIPS 140-3 level3, CC EAL6+)	In-ceiling Mount	SHD-1370FPW
General		Corner Mount	SBD-180KMA
Webpage Language	English, Korean, Simplified Chinese, Traditional Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	Parapet Mount	SBP-156LMW1, SBP-300LMW
Web Viewer	None	Tilt Mount	None
Edge Storage	Micro SD/SDHC/SDXC 2slots 2TB(1TBx2)	Cabinet	SBP-150NBW, SBP-300NBW
Memory	4GB RAM, 8GB eMMC	Housing	None
		Gang Plate	None
		Skin Cover	None
		Weather Cap	None (included)
		Dome Cover	SPB-VAN87W
		Conduit Adaptor	None
		Power Module	None
		Interface Box	SPM-4210
		Other Compatible Models	SPB-VAN88W, SBP-115PFA
		DORI (EN62676-4 standard)	
		Detect (25PPM/ 8PPF)	Wide: 39.8m(130.51ft) / Tele: 119.2m(391.15ft)
		Observe (63PPM/ 19PPF)	Wide: 15.9m(52.20ft) / Tele: 47.7m(156.46ft)
		Recognize (125PPM/ 38PPF)	Wide: 8.0m(26.10ft) / Tele: 23.8m(78.23ft)
		Identify (250PPM/ 76PPF)	Wide: 4.0m(13.05ft) / Tele: 11.9m(39.12ft)



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNV-A7082RZ	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	GS728TPP	-	NETGEAR	-
LAPTOP	LG15U47	-	Tech-Front (Chongqing) Computer Co., Ltd.	-
LAPTOP Adapter	A13-040N3A	-	CHICONY POWER TECHNOLOGY (Chongqing) CO., LTD.	-
Micro SD Card 1	-	-	SanDisk	-
Micro SD Card 2	-	-	SanDisk	-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.1	U
	Micro SD Card Slot	Micro SD Card 1	Micro SD Card Slot	-	-
	Micro SD Card Slot	Micro SD Card 2	Micro SD Card Slot	-	-
PoE Adapter	RJ-45 (LAN)	LAPTOP	RJ-45 (LAN)	2.0	U
LAPTOP	DC JACK	LAPTOP Adapter	DC JACK	1.6	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test mode	Normal operating
Operating	- IP from the test equipment to the laptop was tested by Ping Test on the laptop. - The test was conducted by checking whether the camera image was output normally in the Web Viewer. - After the test, I checked whether the video was recorded normally on the Micro SD Card 1, 2.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	HANWHA VISION VIETNAM COMPANY LIMITED



1.8 Configuration

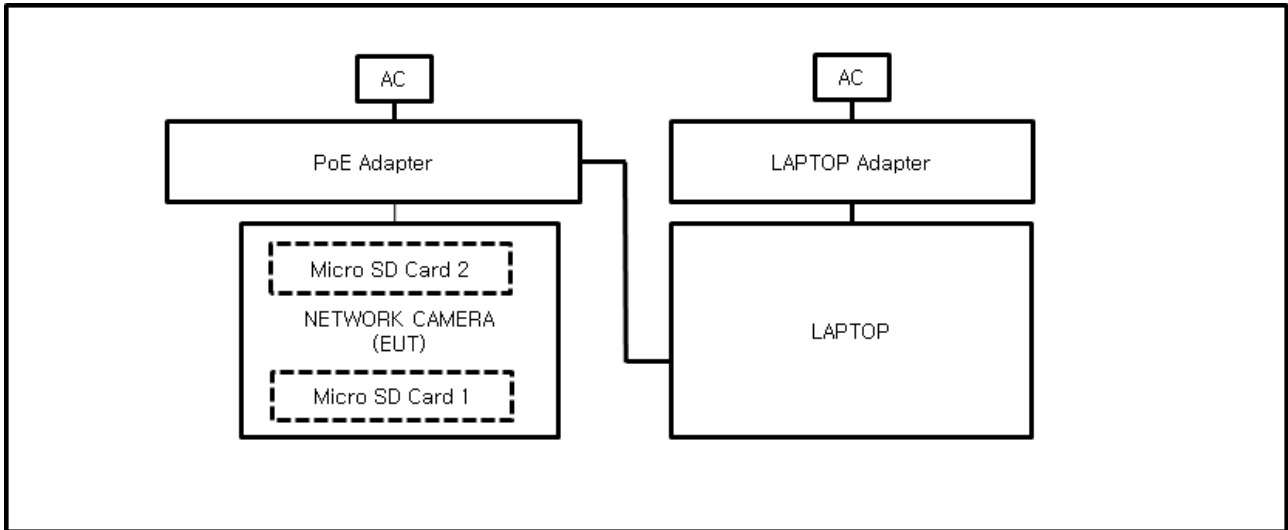

**1.9 Remarks when standards applied**

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ VCCI-CISPR 32:2016

☒ Class A

☐ Class B





2.1 Conducted Emissions Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☐	LISN	ENV216	R & S	101786	01, 09, 2026
☐	LISN	ESH2-Z5	R & S	100450	11, 06, 2025
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 03, 2025

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☒	LISN	ENV216	R & S	101786	01, 09, 2026
☒	ARTIFICIAL MAINS NETWORK	ESH2-Z5	R & S	100450	11, 06, 2025
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025
☒	8-WIRE ISN CAT6	ENY81-CAT6	Rohde & Schwarz	101666	02, 27, 2026

Test Conditions

Temperature: (23,5 ± 0,0) °C
Relative Humidity: (46,4 ± 0,0) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 03, 2025

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESW8	R & S	101319	03, 24, 2026
☒	AMPLIFIER	SCU 01	R & S	100603	11, 06, 2025
☒	BILOG ANTENNA	VULB 9168	SCHWARZBECK	9168-461	05, 09, 2026
☒	ATTENUATOR	6806.17.A	HUBER+SUHNER	-	02, 13, 2026

Test Conditions

Temperature: (23,3 ± 0,0) °C

Relative Humidity: (46,0 ± 0,0) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 05, 2025

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100517	10, 07, 2025
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	03, 05, 2026
☒	ATTENUATOR	8491A	HP	35496	02, 13, 2026
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 05, 2026

Test Conditions

Temperature: (23,0 ± 0,0) °C

Relative Humidity: (47,8 ± 0,0) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

N/A



NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Conducted Emissions at Telecommunication Ports****[1 000 Mbps]**

Test Description: Telecommunication Emission
Job No.: KES-EM251563
Mode : mode 1
Speed : 1 000 Mbps
Operator Name: KES

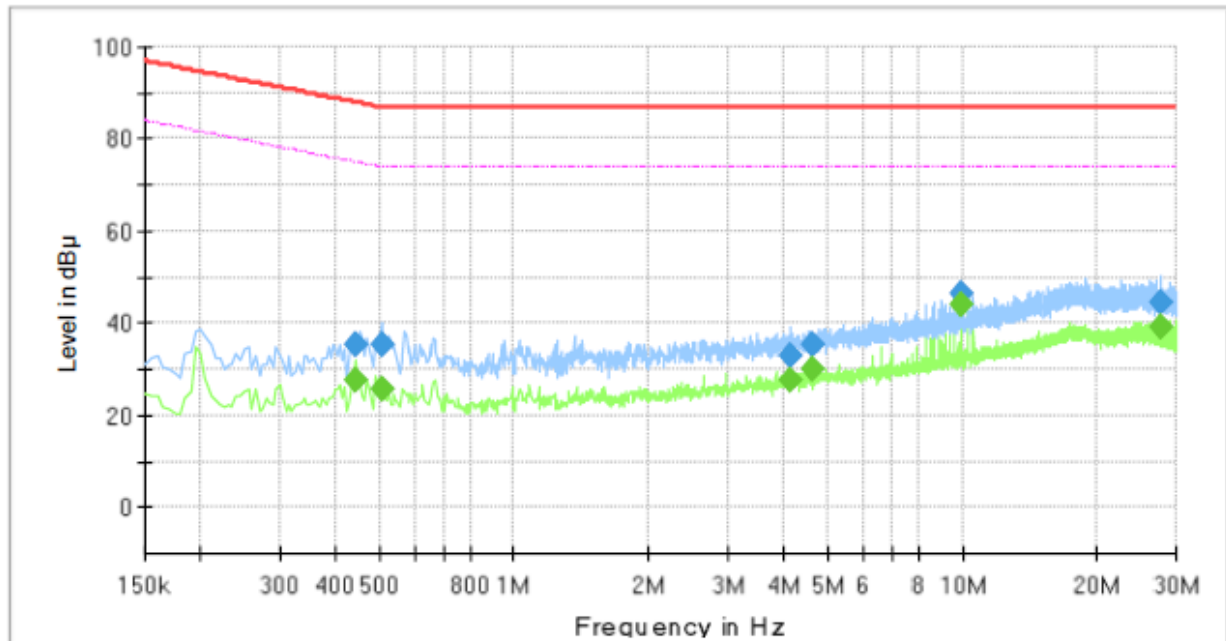**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	---	27.53	74.97	47.44	1000.0	9.000	Single Line	19.4
0.445000	35.58	---	87.97	52.39	1000.0	9.000	Single Line	19.4
0.505000	---	25.87	74.00	48.13	1000.0	9.000	Single Line	19.4
0.505000	35.58	---	87.00	51.42	1000.0	9.000	Single Line	19.4
4.145000	---	27.62	74.00	46.38	1000.0	9.000	Single Line	19.4
4.145000	33.11	---	87.00	53.89	1000.0	9.000	Single Line	19.4
4.625000	---	30.23	74.00	43.77	1000.0	9.000	Single Line	19.5
4.625000	35.52	---	87.00	51.48	1000.0	9.000	Single Line	19.5
9.915000	---	44.03	74.00	29.97	1000.0	9.000	Single Line	19.6
9.915000	46.26	---	87.00	40.74	1000.0	9.000	Single Line	19.6
27.665000	---	39.42	74.00	34.58	1000.0	9.000	Single Line	20.0
27.665000	44.67	---	87.00	42.33	1000.0	9.000	Single Line	20.0


◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

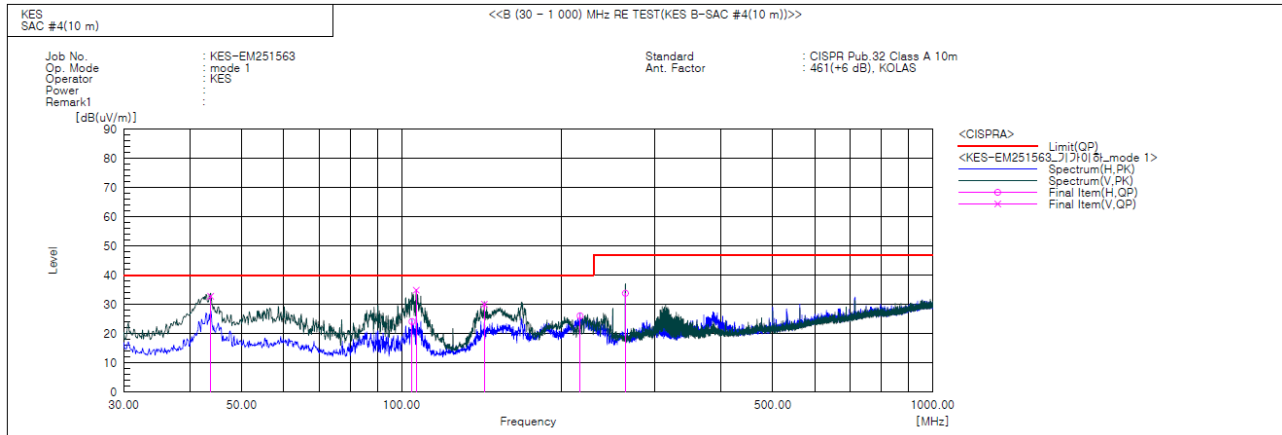**Radiated Electric Field Emissions(Below 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	43.701	V	54.2	-21.4	32.8	40.0	7.2	105.0	119.0	
2	104.690	H	48.2	-24.1	24.1	40.0	15.9	352.0	52.0	
3	106.630	V	58.8	-23.9	34.9	40.0	5.1	100.0	173.0	
4	143.248	V	49.8	-19.7	30.1	40.0	9.9	121.0	142.0	
5	216.846	H	47.5	-21.4	26.1	40.0	13.9	397.0	169.0	
6	264.013	H	52.4	-18.6	33.8	47.0	13.2	400.0	95.0	


◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

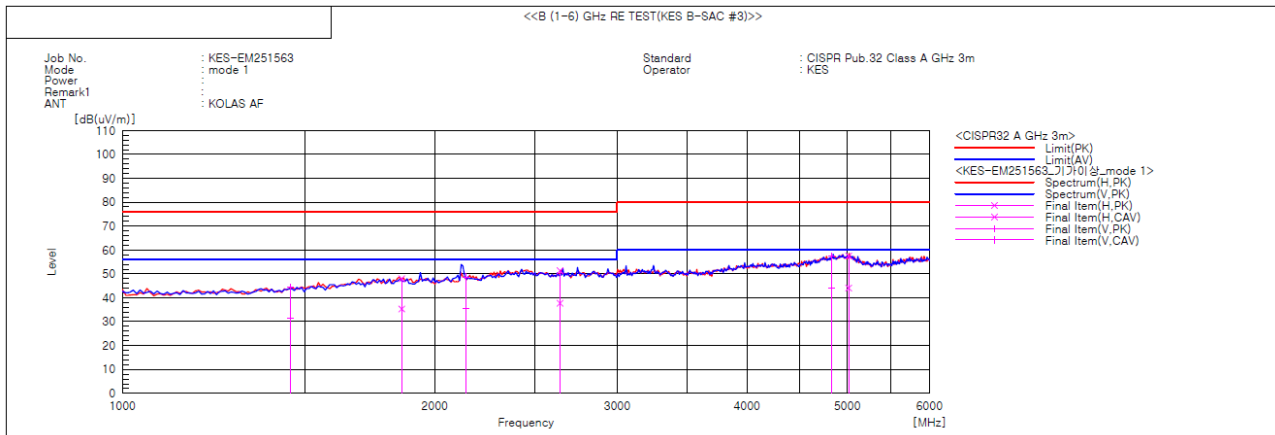**Radiated Electric Field Emissions(Above 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1452.163	V	44.5	31.4	-0.1	44.4	31.3	76.0	56.0	31.6	24.7	100.0	273.8	
2	1858.734	H	43.7	31.0	4.3	48.0	35.3	76.0	56.0	28.0	20.7	100.0	234.6	
3	2143.830	V	43.1	29.8	5.6	48.7	35.4	76.0	56.0	27.3	20.6	100.0	190.2	
4	2641.186	H	43.5	29.8	7.9	51.4	37.7	76.0	56.0	24.6	18.3	100.0	238.6	
5	4825.801	V	40.6	27.3	16.8	57.4	44.1	80.0	60.0	22.6	15.9	100.0	74.6	
6	5013.863	H	39.8	26.4	17.7	57.5	44.1	80.0	60.0	22.5	15.9	100.0	357.5	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Test Setup Photos and Configuration


Conducted Emissions at Mains Power Ports

N/A







Conducted Emissions at Telecommunication Ports

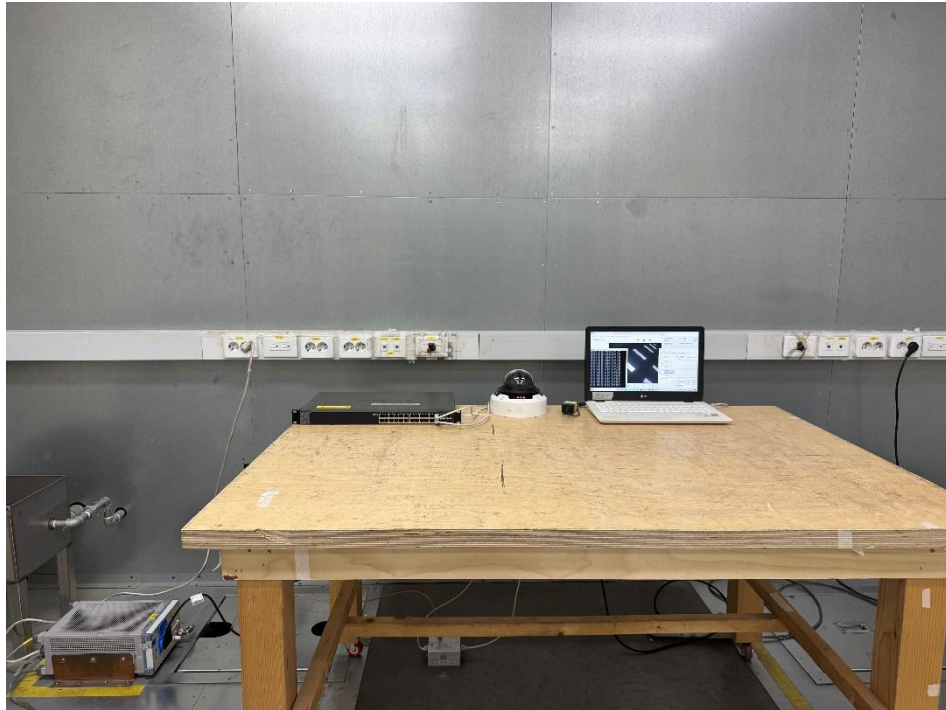





Radiated Electric Field Emissions(Below 1 GHz)

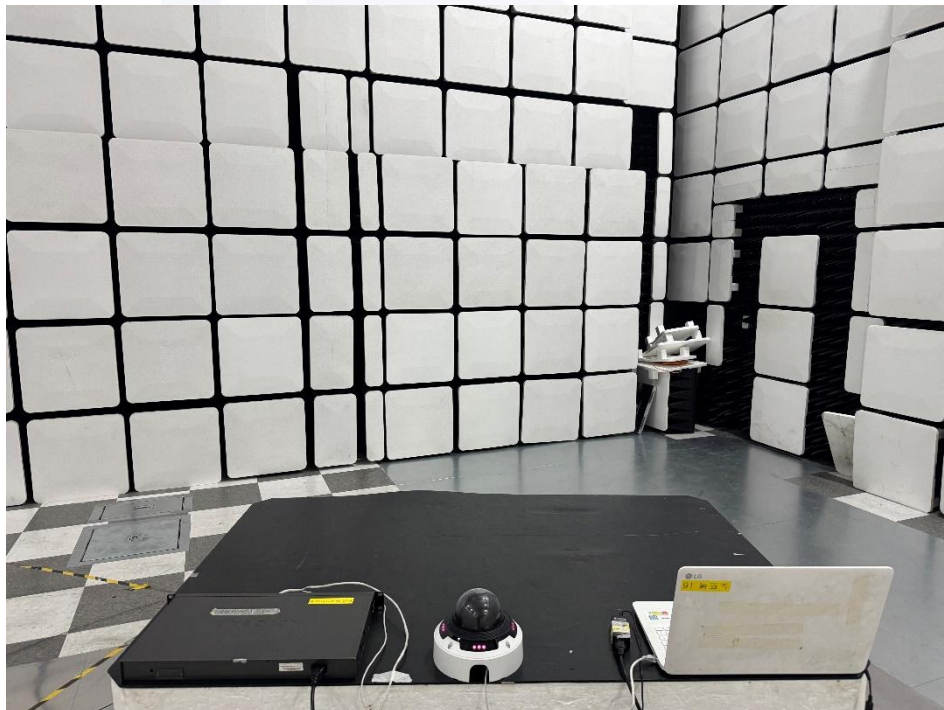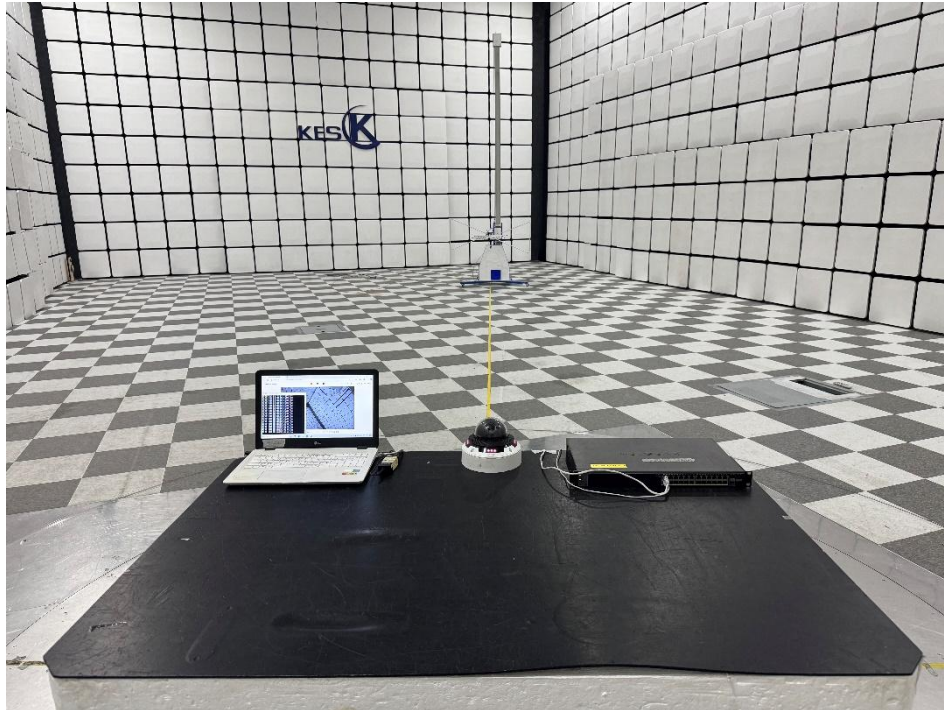



Radiated Electric Field Emissions(Above 1 GHz)

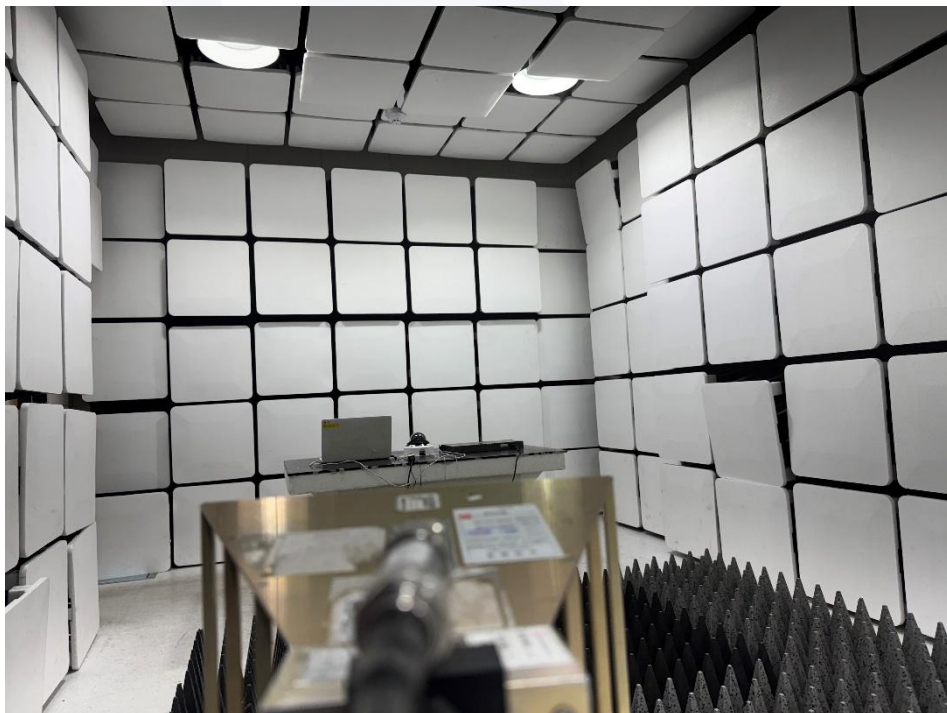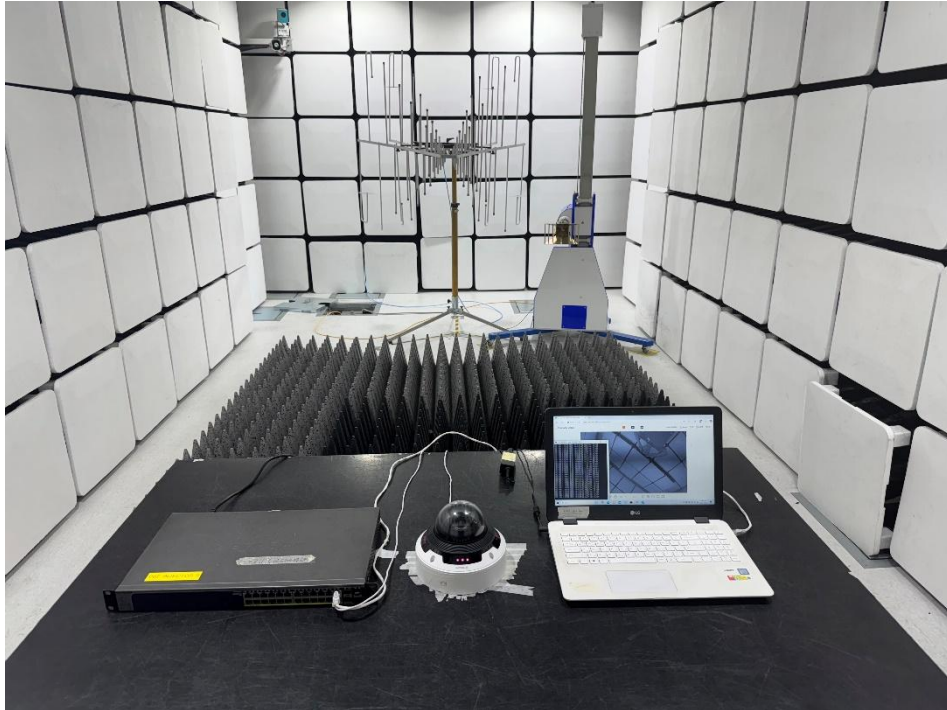



EUT External Photographs

(Top)



(Bottom)





EUT Internal Photographs


(Internal View)






EUT Internal View – Board 1

(Top)

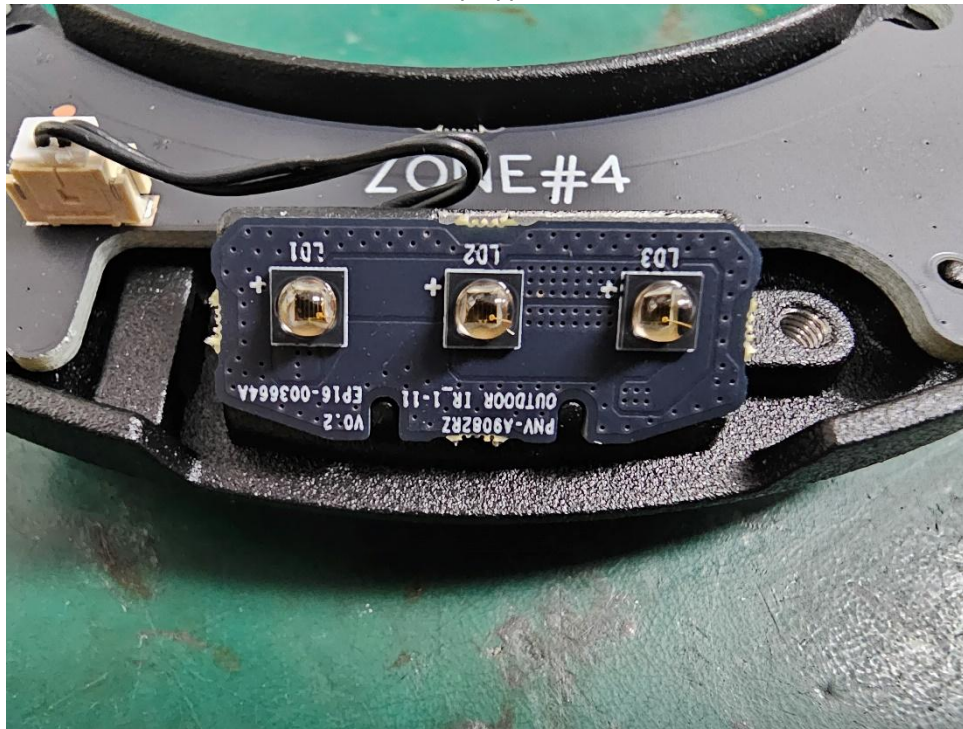

(Bottom)

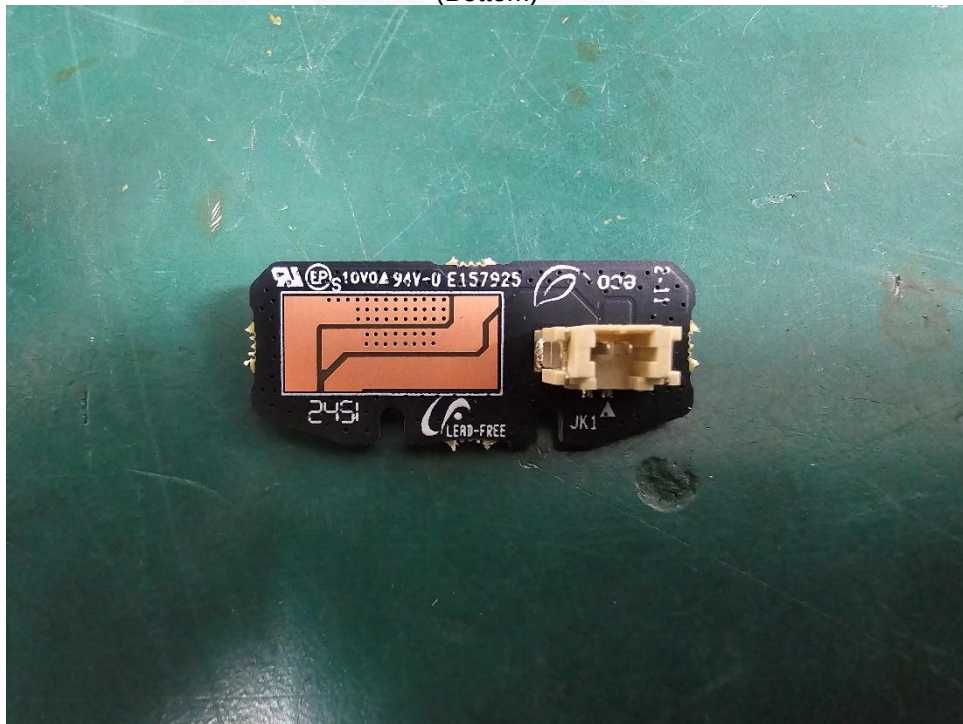



EUT Internal View – Board 2

(Top)




(Bottom)






EUT Internal View – board 3

(Top)

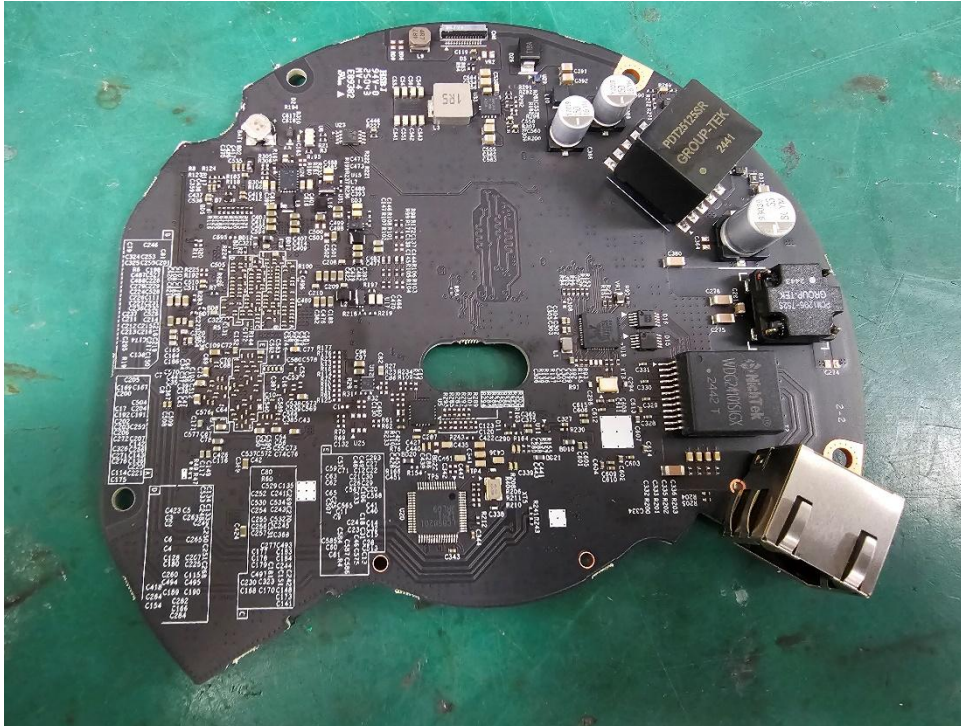

(Bottom)

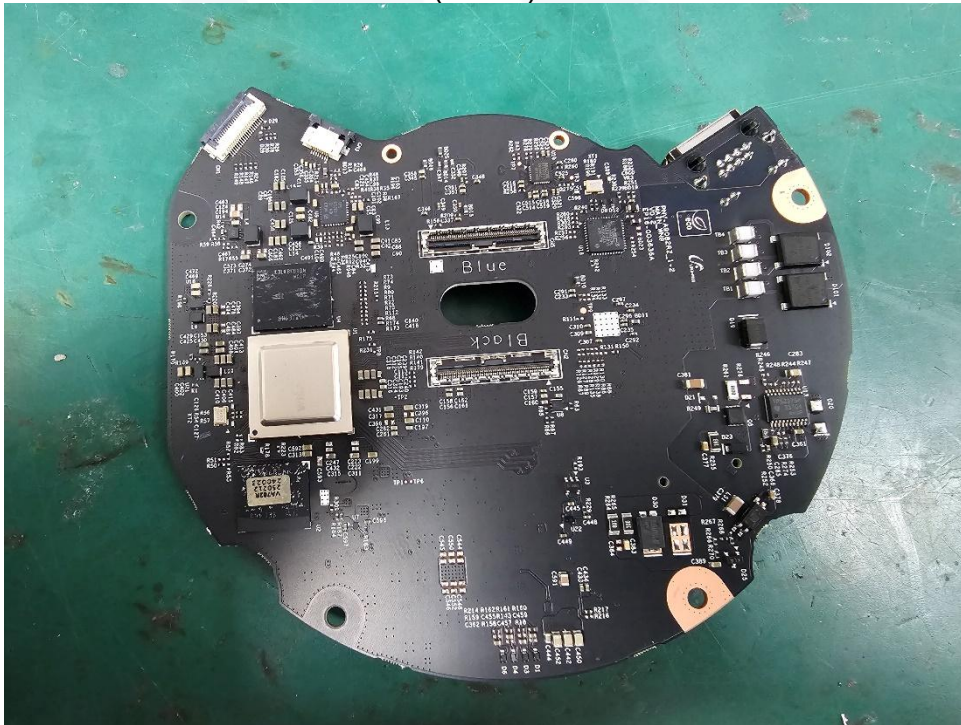



EUT Internal View – board 4

(Top)



(Bottom)





EUT Internal View – board 5

(Top)




(Bottom)





EUT Internal View – board 6


(Top)

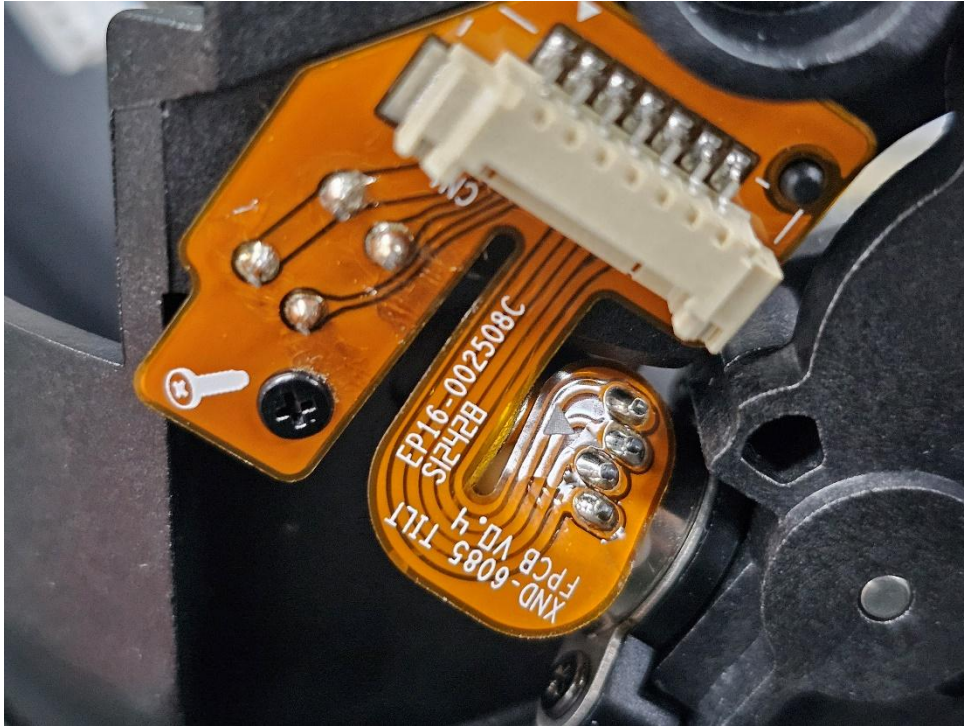




EUT Internal View – board 7

(Top)

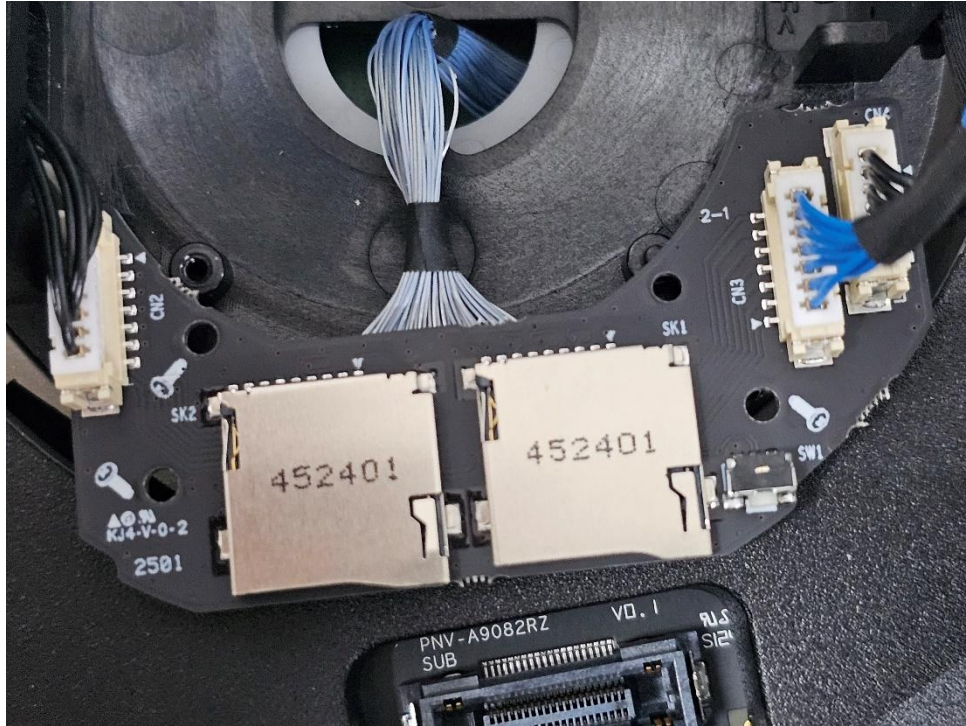


(Bottom)

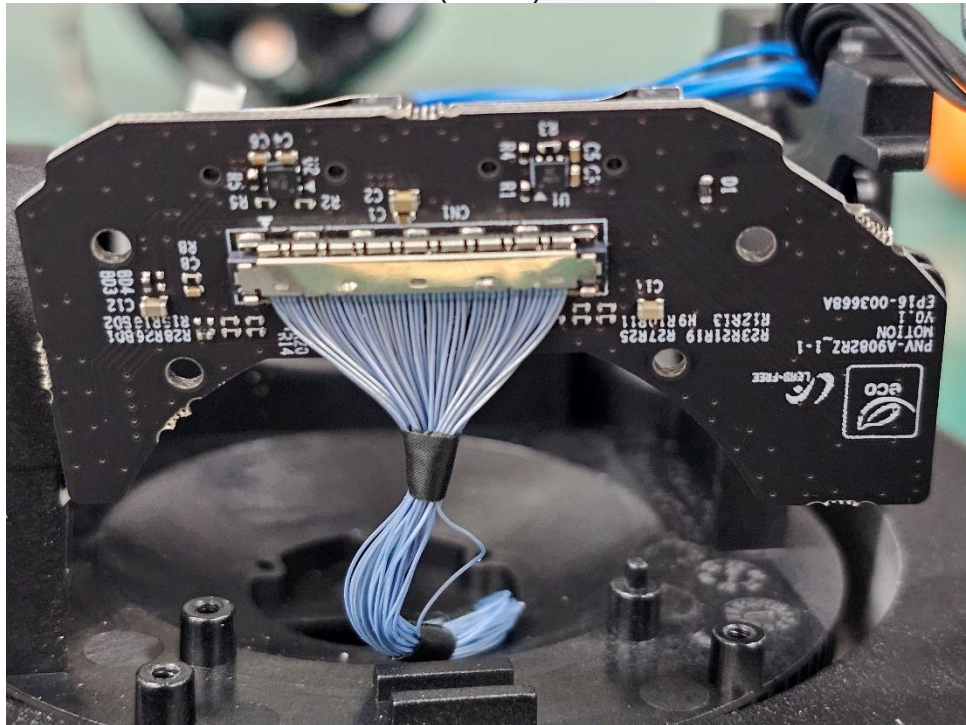



EUT Internal View – board 8

(Top)

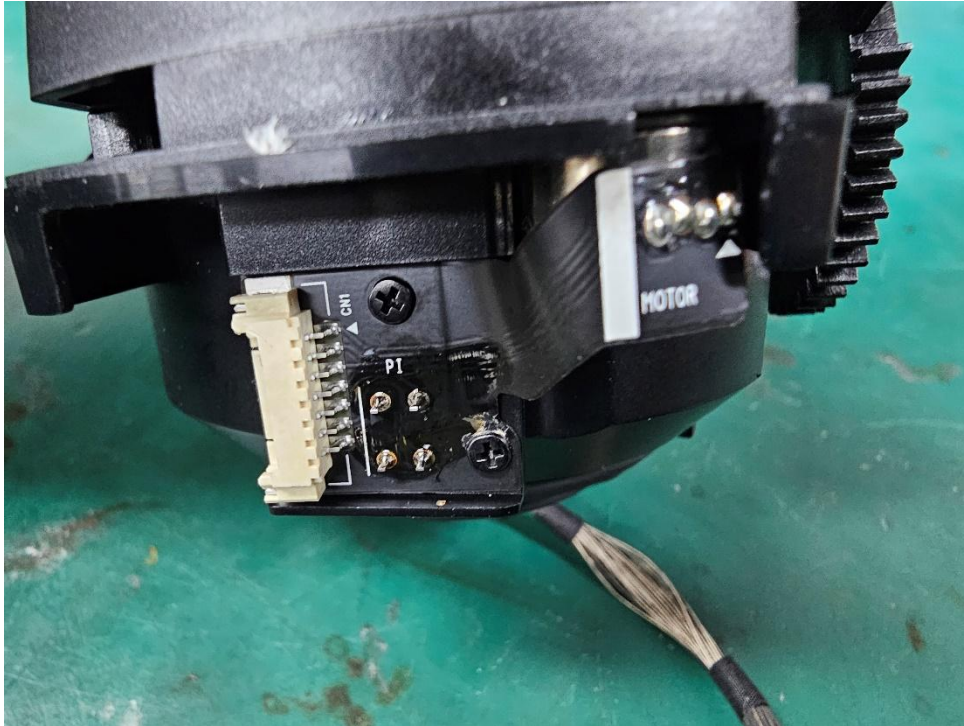




EUT Internal View – board 9

(Top)




(Bottom)

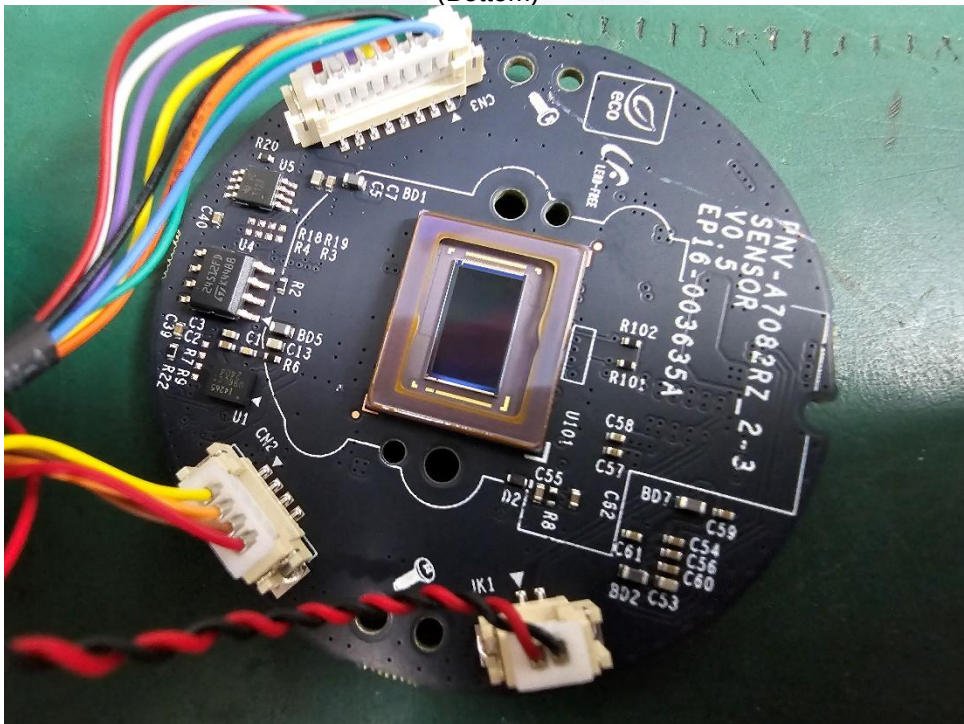



Label Photographs

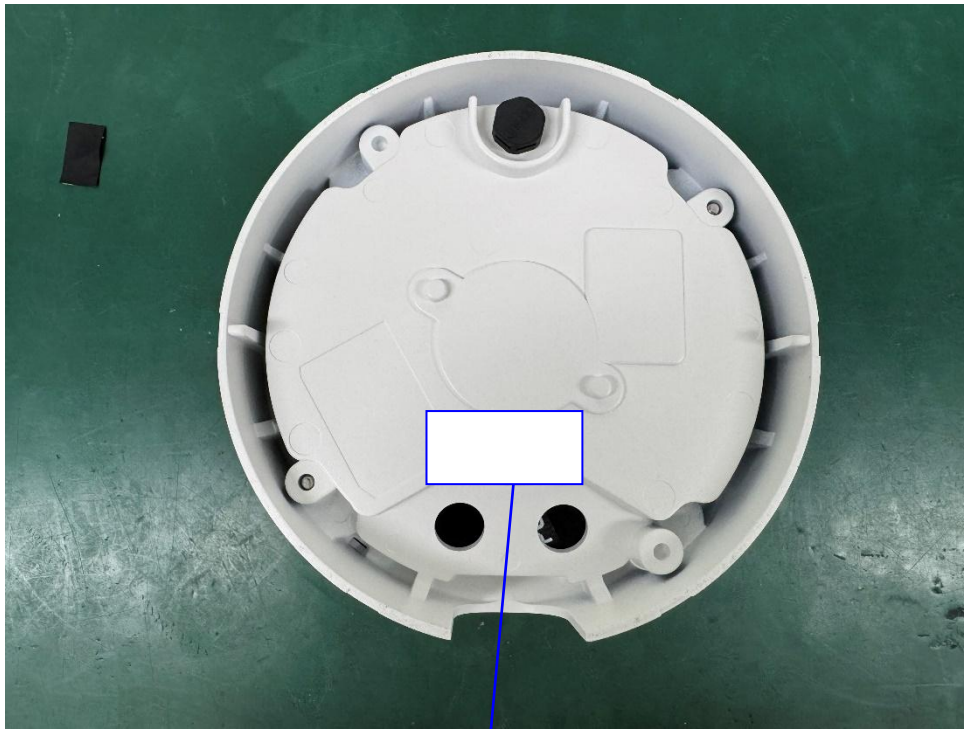

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A

The End.