



EMC TEST REPORT For CE

Test Report No. : KES-E1-19T0138-R1
Date of Issue : Sep. 18, 2019
Product name : Network Camera
Model/Type No. : XNP-6320RH
Variant Model : XNP-6250RH, QNP-6230RH
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA
Manufacturer : 1. HANWHA TECHWIN (TIANJIN) CO.,LTD.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.
Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)
Date of Receipt : Feb. 20, 2019
Test date : Mar. 02, 2019 ~ Mar. 05, 2019
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Min Seong, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (2) of (79)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 06, 2019	KES-E1-19T0138	Issued
Sep. 18, 2019	KES-E1-19T0138-R1	Re-issue due to additional derivative and specification updates

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations	12
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
2.5	Harmonic Current Emissions	18
2.6	Voltage Fluctuations and Flicker	19
3.0	Criteria for compliance	20
3.1	Electrostatic Discharge	22
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	32
3.5	Conducted Disturbance	36
3.6	Voltage Dips and Short Interruptions	39
APPENDIX A – TEST DATA		41
Conducted Emissions at Mains Power Ports		41
Conducted Emissions at Telecommunication Ports		45
Radiated Electric Field Emissions(Below 1 GHz)		49
Radiated Electric Field Emissions(Above 1 GHz)		51
Harmonic Current Emissions and Voltage Fluctuations and Flicker		53
Test Setup Photos and Configuration		58
Conducted Voltage Emissions		58
Conducted Telecommunication Emissions		59
Radiated Electric Field Emissions(Below 1 GHz)		60
Radiated Electric Field Emissions(Above 1 GHz)		61
Harmonic Current Emissions and Voltage Fluctuations and Flicker		62
Electrostatic Discharge		63
Radiated Electric Field Immunity		63
Electrical Fast Transients/Bursts		64
Surge Transients		64
Conducted Disturbance		65
Voltage Dips and Short Interruptions		65
EUT External Photographs		66
EUT Internal Photographs		67



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EI-19T0138-R1

Page (4) of (79)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2MP CMOS
Effective Pixels	1944(H)x1212(V)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.05Lux(F1.6, 1/30sec) BW: 0Lux(IR LED On)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Focal Length (Zoom Ratio)	4.44~111mm(25x) 줌 렌즈
Max. Aperture Ratio	F1.6(Wide)~F3.9(Tele)
Angular Field of View	H: 61.8°(Wide)~2.84°(Tele) / V: 36.2°(Wide)~1.60°(Tele)
Min. Object Distance	Wide: 1.5m(4.92ft), Tele: 2m(6.56ft)
Focus Control	Oneshot AF
Lens Type	DC auto iris
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	360° Endless
Pan Speed	Preset: 400°/sec, Manual: 0.024°/sec~250°/sec
Tilt Range	95°(-5°~90°)
Tilt Speed	Preset: 250°/sec, Manual: 0.024°/sec~250°/sec
Rotate Range	None
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule
Preset Accuracy	±0.2°
Azimuth	Support
Auto Tracking	Support
Operational	
IR Viewable Length	200m(656.17ft)
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SSDR
Wide Dynamic Range	150dB
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, rectangular Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (5) of (79)

Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Digital PTZ	None
Video Rotation	Flip, Mirror
Analytics	Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification, Shock detection
Business Intelligence	None
Serial Interface	RS-485(Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell)
Alarm I/O	Input 4ea / Output 2ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output PTZ Preset
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Illuminator (Optional)	None
Wiper	None
Coaxial Protocol	None
Video Transmission Distance	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None
Temperature detection	None
Additional	None
Network	
Ethernet	RJ-45(10/100BASE-T), SFP(Optional)
Video Compression	H.265/H.264,MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(5ea area), WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast (128 user) Multiple streaming(Up to 10 profiles)
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EI-19T0138-R1

Page (6) of (79)

Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour,LLDP, SRTP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Edge Storage	Micro SD/SDHC/SDXC 2slot 512GB
Application Programming In	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	1024MB RAM, 256MB Flash
Environmental	
Operating Temperature / Humidity	24VAC : -50°C~+55°C (-58°F ~ +131°F) / Less than 90% RH HPoE : -40°C~+55°C (-40°F ~ +131°F) / Less than 90% RH * Start up should be done at above -35°C
Storage Temperature / Humidity	-50°C~+60°C (-58°F~+140°F) / Less than 90% RH
Certification	IP66, IK10
Electrical	
Input Voltage	24VAC, HPoE(IEEE802.3bt, Class7)
Power Consumption	24VAC: Max. 83W (typical : 30W) HPoE : Max. 51W (typical : 30W)
Mechanical	
Color / Material	Body: Ivory / Plastic, Head: Black / Plastic
RAL Code	None
Product dimensions / weigh	Ø236.9x407.7mm(9.33x16.05"), 6.8Kg(14.99 lb)
Conduit hole	None
Hanging mount(Dome)	SBP-303HF(SFP)
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☒ 24 Vac ☐ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Model name	Differences
XNP-6250RH	Added a simple derivative model for classification by vendor
QNP-6230RH	Added device to block 1 SD card slot. Software specifications are the same as basic model.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNP-6320RH	-	HANWHA TECHWIN (TIANJIN) CO.,LTD.	EUT
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EI-19T0138-R1

Page (8) of (79)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	NT500R5M	0Q7491AJ800552B	Samsung Electronics Co., Ltd.	-
Notebook Adapter	A13-040N2A	AD-4019C	Chicony Power Technology Co., Ltd.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Button Alarm	-	-	-	-
Controller	SPC-1010	C60E67WD601003	SamSung Techwin Co.,Ltd.	-
Controller Adapter	RS-AB1000	-	Dongguan Jinhuaasheng Power Technology Co.,Ltd.	-
Micro SD Card	-	-	SanDisk	4 GB
Smart Phone	A1303	-	APPLE .Inc	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.6 External I/O Cabling

■ AC 24 V

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45	Notebook	RJ-45	3.5	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	MIC	XLR	1.4	U
	2 Pin	Alarm	Line-In	3.0	U
	2 Pin	Button Alarm	Line-Out	3.0	U
	2 Pin	Controller	2 Pin	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

■ PoE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	2.5	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	MIC	XLR	1.4	U
	2 Pin	Alarm	Line-In	3.0	U
	2 Pin	Button Alarm	Line-Out	3.0	U
	2 Pin	Controller	2 Pin	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Smart Phone	3.5 mm	1.0	U
	RJ-45 (DATA)	PoE Adaptor	RJ-45 (DATA)	3.5	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
AC 24 V	EUT Monitoring, Ping Test
PoE	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

■ AC Main
 □ DC Main

■ AC 24 V

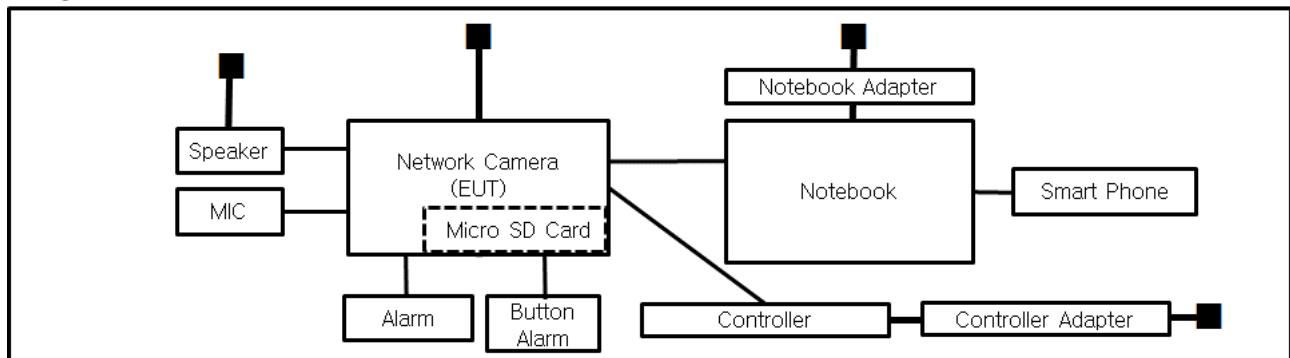

■ PoE

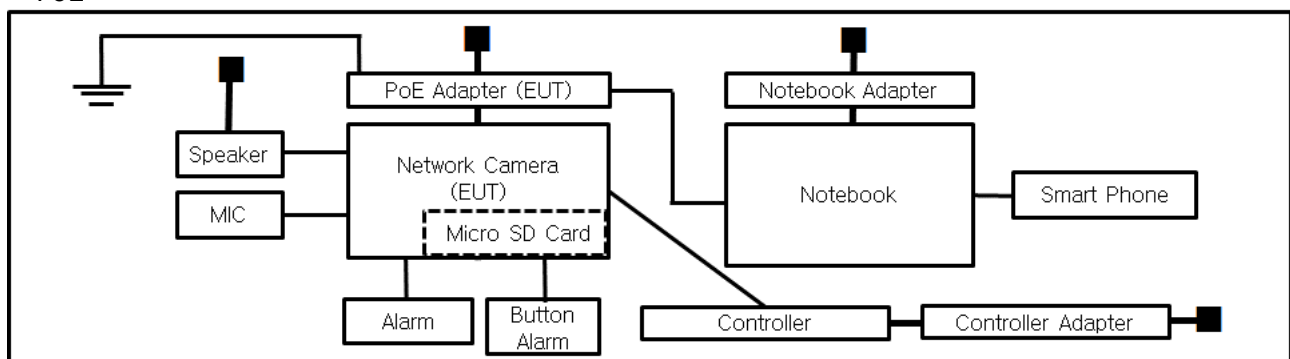

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036 T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0003

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011+A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (13) of (79)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 03, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 04, 2020
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019

Test Conditions

Temperature: 21,4 °C
Relative Humidity: 42,5 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Mar. 03, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 04, 2020
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2020
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2020

Test Conditions

Temperature: 21,4 °C
Relative Humidity: 42,5 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 02, 2019

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
☒	ATTENUATOR	8491A	HP	32173	03, 21, 2019
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020

Test Conditions

Temperature: 21,8 °C
Relative Humidity: 40,9 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 02, 2019

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 22,6 °C
Relative Humidity: 41,7 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Mar. 02, 2019

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 20,7 °C
Relative Humidity: 41,8 % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Mar. 02, 2019

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 20,7 °C
Relative Humidity: 41,8 % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011+A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it

difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Mar. 05, 2019

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 11, 2019
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 21,7 °C
Relative Humidity: 42,6 % R.H.
Atmospheric Pressure: 101,1 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:

Air
Contact

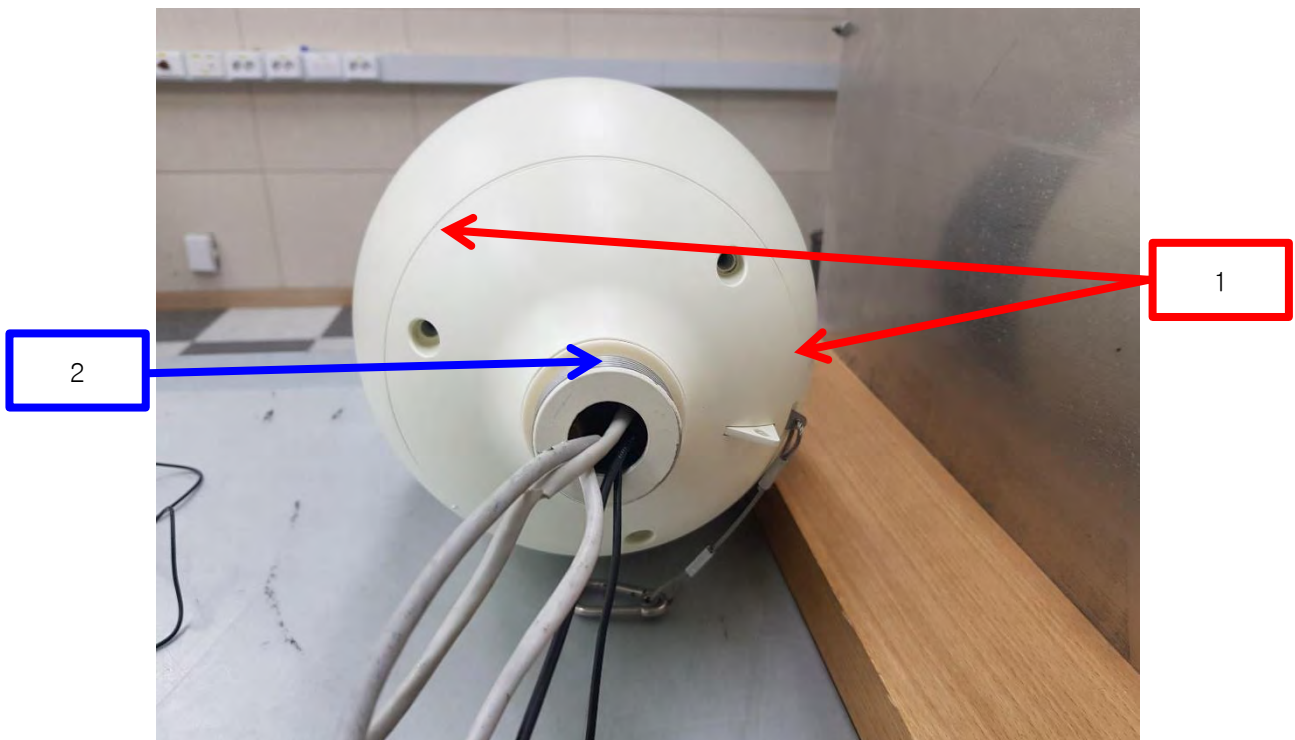

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

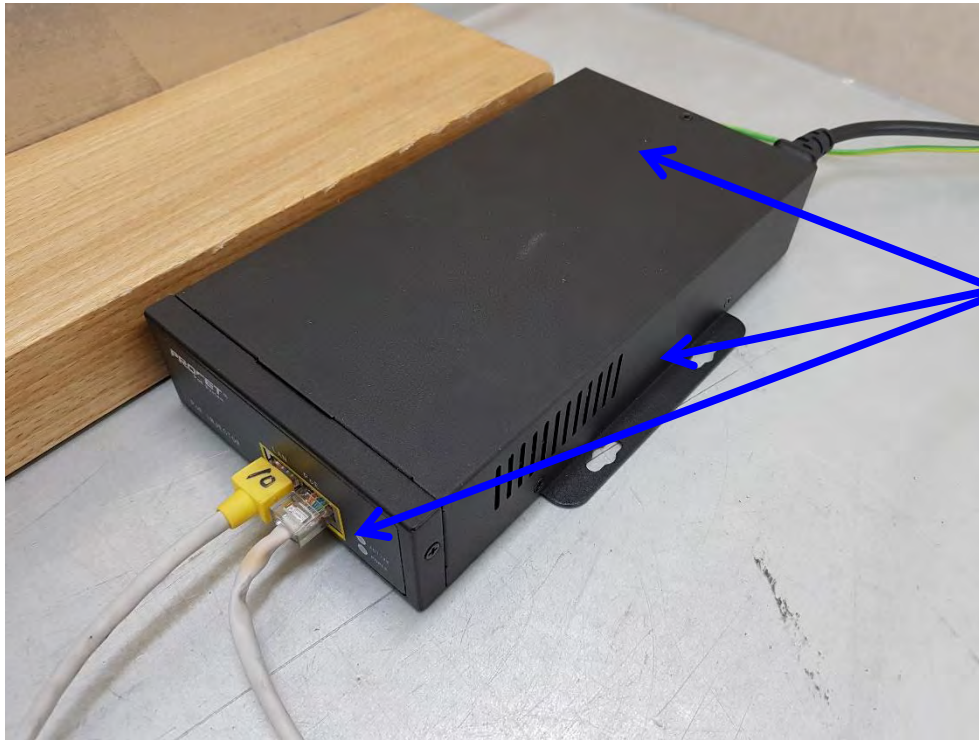



Test Data

■ AC 24 V

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	EUT Enclosure	Air Discharge	Complied	-
2	EUT Conductor	Contact Discharge	Complied	-

Note: "Blank" = Not performed

■ PoE

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	EUT Conductor	Contact Discharge	Complied	-
3	PoE Adapter Surface	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Mar. 04, 2019

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 06, 2019
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 06, 2019
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 06, 2019
☒	POWER METER	NRP2	R & S	103475	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 06, 2019
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 06, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 40,1 % R.H.
Atmospheric Pressure: 100,8 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (27) of (79)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (28) of (79)

Test Data

■ AC 24 V

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Mar. 05, 2019

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2019

Test Conditions

Temperature: 21,7 °C
Relative Humidity: 42,6 % R.H.
Atmospheric Pressure: 101,1 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (30) of (79)

Test Data

■ AC 24 V

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
L - N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm (2 Pin)	Complied	Complied
Button Alarm OUT (2 Pin)	Complied	Complied
Controller (2 Pin)	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
Alarm (2 Pin)	Complied	Complied
Button Alarm OUT (2 Pin)	Complied	Complied
Controller (2 Pin)	Complied	Complied
RJ-45 (DATA)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Mar. 05, 2019

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 28, 2019

Test Conditions

Temperature: 21,7 °C
Relative Humidity: 42,6 % R.H.
Atmospheric Pressure: 101,1 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (33) of (79)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (34) of (79)

Test Data

■ AC 24 V

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (35) of (79)

■ PoE

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
Alarm (2 Pin)	Complied	Complied
Button Alarm OUT (2 Pin)	Complied	Complied
Controller (2 Pin)	Complied	Complied
RJ-45 (DATA)	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Mar. 03, 2019

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 26, 2019
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 26, 2019
☒	CDN	CDN M016	TESEQ	43694	11, 26, 2019
☐	CDN	CDN M016	TESEQ	43697	11, 26, 2019
☒	CDN	CDN T800	TESEQ	42800	11, 26, 2019
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 27, 2019

Test Conditions

Temperature: 21,4 °C
Relative Humidity: 42,5 % R.H.
Atmospheric Pressure: 101,0 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (37) of (79)

Test Data

■ AC 24 V

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm (2 Pin)	Clamp	Complied
Button Alarm OUT (2 Pin)	Clamp	Complied
Controller (2 Pin)	Clamp	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (38) of (79)

■ PoE

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N - PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (DATA)	CDN	Complied
Alarm (2 Pin)	Clamp	Complied
Button Alarm OUT (2 Pin)	Clamp	Complied
Controller (2 Pin)	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Mar. 03, 2019

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019

Test Conditions

Temperature: 21,7 °C
Relative Humidity: 42,6 % R.H.
Atmospheric Pressure: 101,1 kPa



Test Specifications & Observations/Remarks

■ AC 24 V

(Test Voltage : 230 V)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

■ PoE

(Test Voltage : 230 V)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ AC 24 V
 [HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6320RH
Mode	AC 24 V_H
Operator Name:	KES

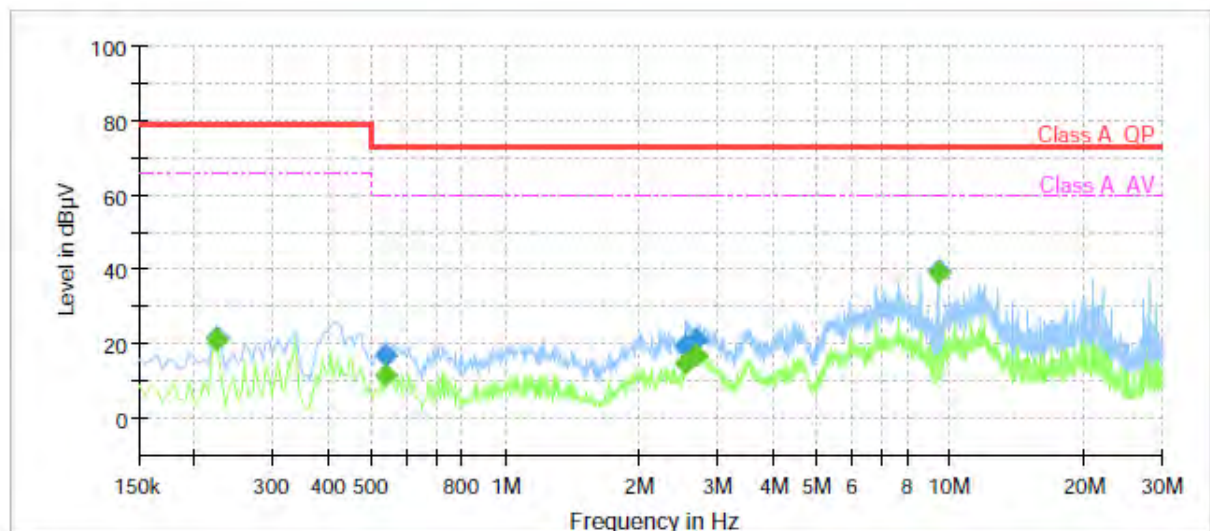


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.225000	---	21.01	66.00	44.99	1000.0	9.000	L1	19.6
0.225000	21.75	---	79.00	57.25	1000.0	9.000	L1	19.6
0.540000	---	11.63	60.00	48.37	1000.0	9.000	L1	19.6
0.540000	16.82	---	73.00	56.18	1000.0	9.000	L1	19.6
2.545000	---	14.79	60.00	45.21	1000.0	9.000	L1	19.7
2.545000	19.79	---	73.00	53.21	1000.0	9.000	L1	19.7
2.695000	---	16.89	60.00	43.11	1000.0	9.000	L1	19.7
2.695000	21.16	---	73.00	51.84	1000.0	9.000	L1	19.7
9.380000	---	39.06	60.00	20.94	1000.0	9.000	L1	19.9
9.380000	39.58	---	73.00	33.42	1000.0	9.000	L1	19.9

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNP-6320RH
Mode: AC 24 V_N
Operator Name: KES

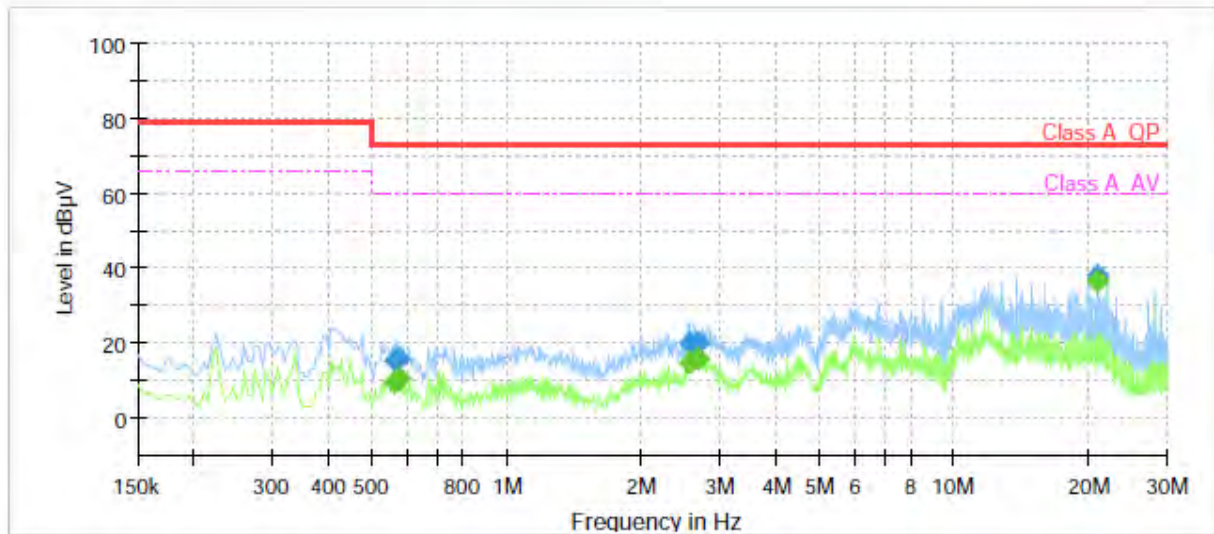

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.560000	---	9.59	60.00	50.41	1000.0	9.000	N	19.6
0.560000	15.61	---	73.00	57.39	1000.0	9.000	N	19.6
0.575000	---	10.44	60.00	49.56	1000.0	9.000	N	19.6
0.575000	16.16	---	73.00	56.84	1000.0	9.000	N	19.6
2.560000	---	14.84	60.00	45.16	1000.0	9.000	N	19.7
2.560000	19.96	---	73.00	53.04	1000.0	9.000	N	19.7
2.695000	---	15.76	60.00	44.24	1000.0	9.000	N	19.7
2.695000	20.09	---	73.00	52.91	1000.0	9.000	N	19.7
20.990000	---	36.41	60.00	23.59	1000.0	9.000	N	20.2
20.990000	38.32	---	73.00	34.68	1000.0	9.000	N	20.2

■ PoE
[HOT]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNP-6320RH

PoE_H

KES

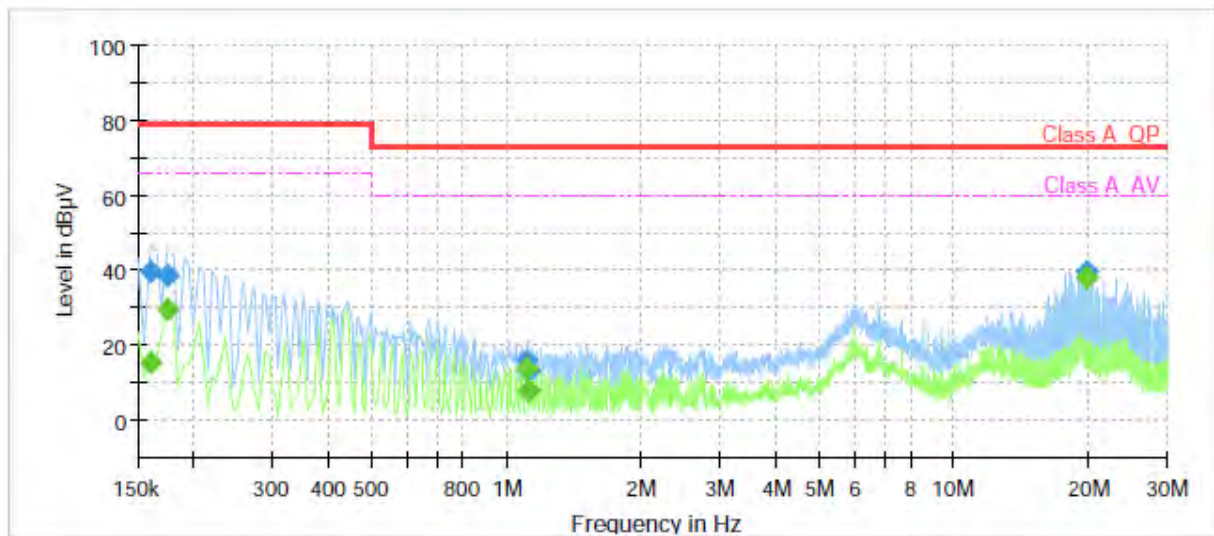

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	15.27	66.00	50.73	1000.0	9.000	L1	19.5
0.160000	39.46	---	79.00	39.54	1000.0	9.000	L1	19.5
0.175000	---	29.84	66.00	36.16	1000.0	9.000	L1	19.5
0.175000	38.41	---	79.00	40.59	1000.0	9.000	L1	19.5
1.110000	---	14.00	60.00	46.00	1000.0	9.000	L1	19.7
1.110000	16.17	---	73.00	56.83	1000.0	9.000	L1	19.7
1.115000	---	7.73	60.00	52.27	1000.0	9.000	L1	19.7
1.115000	13.48	---	73.00	59.52	1000.0	9.000	L1	19.7
19.710000	---	38.31	60.00	21.69	1000.0	9.000	L1	20.1
19.710000	39.51	---	73.00	33.49	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNP-6320RH
Mode: PoE_N
Operator Name: KES

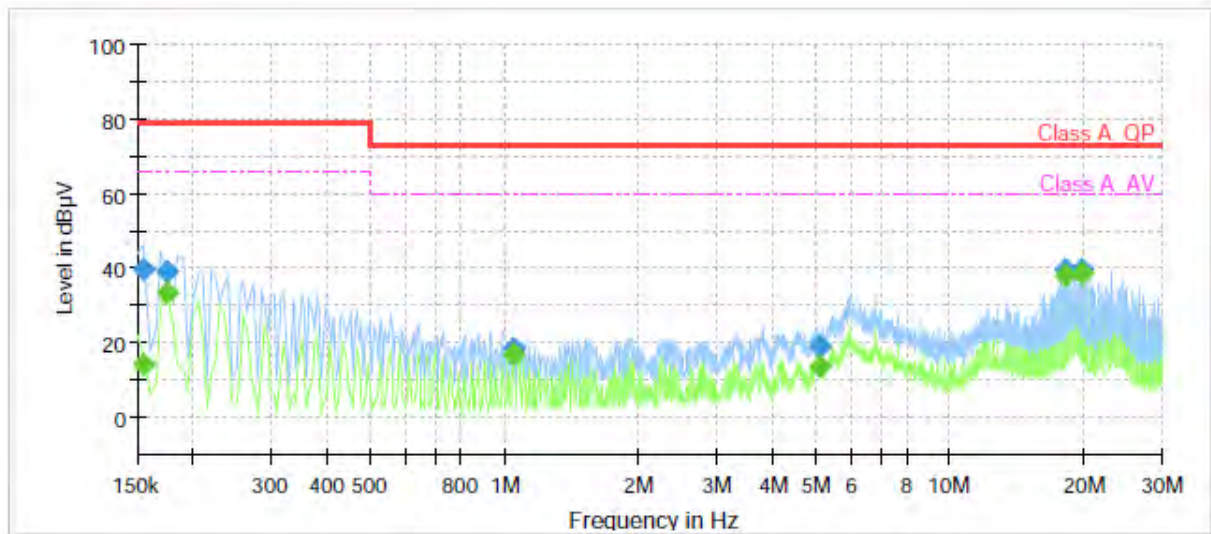

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	14.19	66.00	51.81	1000.0	9.000	N	19.6
0.155000	39.70	---	79.00	39.30	1000.0	9.000	N	19.6
0.175000	---	33.12	66.00	32.88	1000.0	9.000	N	19.5
0.175000	39.28	---	79.00	39.72	1000.0	9.000	N	19.5
1.050000	---	16.95	60.00	43.05	1000.0	9.000	N	19.7
1.050000	18.76	---	73.00	54.24	1000.0	9.000	N	19.7
5.100000	---	13.84	60.00	46.16	1000.0	9.000	N	19.8
5.100000	19.27	---	73.00	53.73	1000.0	9.000	N	19.8
18.245000	---	38.18	60.00	21.82	1000.0	9.000	N	20.2
18.245000	39.85	---	73.00	33.15	1000.0	9.000	N	20.2
19.710000	---	38.44	60.00	21.56	1000.0	9.000	N	20.2
19.710000	39.76	---	73.00	33.24	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Conducted Emissions at Telecommunication Ports

■ AC 24 V
 [10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320RH
Mode	AC 24 V_10 Mbps
Operator Name:	KES

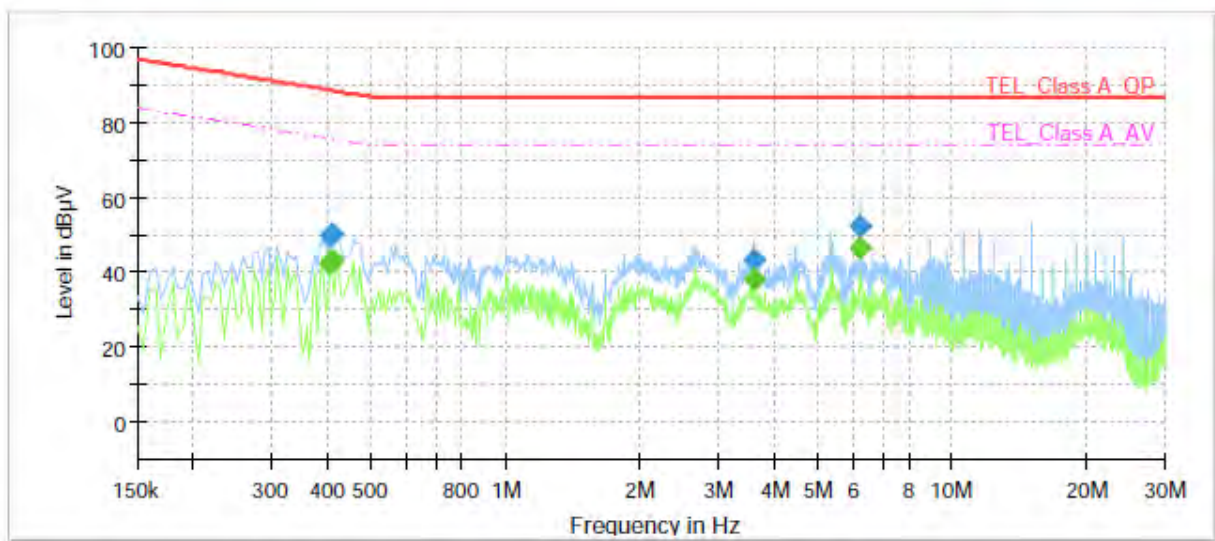


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.405000	---	42.37	75.75	33.38	1000.0	9.000	Single Line	19.8
0.405000	49.79	---	88.75	38.96	1000.0	9.000	Single Line	19.8
0.410000	---	43.64	75.65	32.01	1000.0	9.000	Single Line	19.8
0.410000	50.36	---	88.65	38.29	1000.0	9.000	Single Line	19.8
3.585000	---	38.28	74.00	35.72	1000.0	9.000	Single Line	19.7
3.585000	43.52	---	87.00	43.48	1000.0	9.000	Single Line	19.7
6.250000	---	46.72	74.00	27.28	1000.0	9.000	Single Line	19.8
6.250000	52.39	---	87.00	34.61	1000.0	9.000	Single Line	19.8

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320RH
Mode	AC 24 V_100 Mbps
Operator Name:	KES

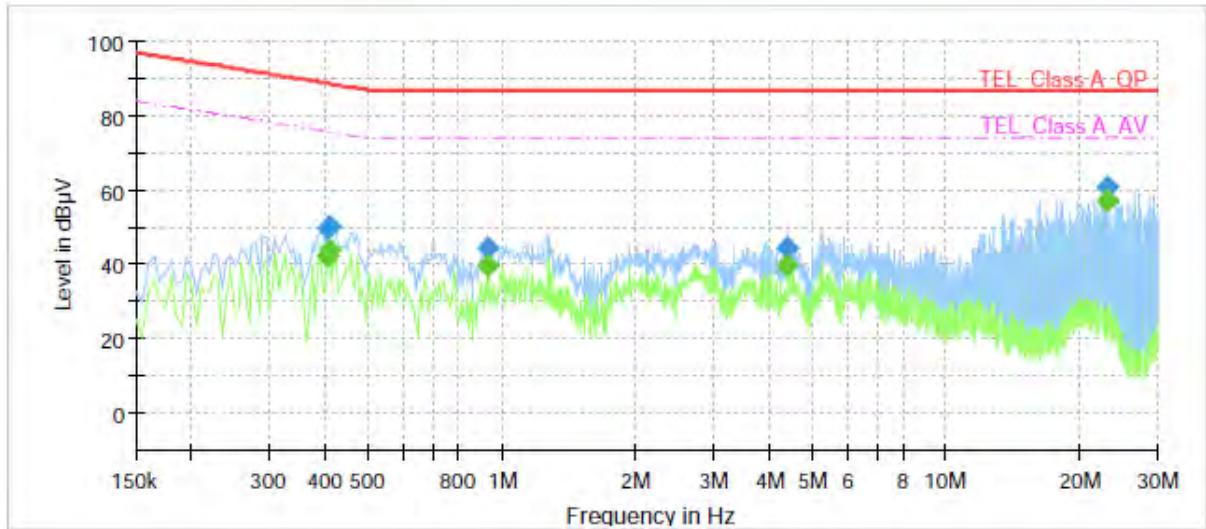

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.405000	---	42.30	75.75	33.45	1000.0	9.000	Single Line	19.7
0.405000	49.67	---	88.75	39.08	1000.0	9.000	Single Line	19.7
0.410000	---	43.89	75.65	31.76	1000.0	9.000	Single Line	19.7
0.410000	50.42	---	88.65	38.23	1000.0	9.000	Single Line	19.7
0.930000	---	39.89	74.00	34.11	1000.0	9.000	Single Line	19.6
0.930000	44.54	---	87.00	42.46	1000.0	9.000	Single Line	19.6
4.410000	---	39.93	74.00	34.07	1000.0	9.000	Single Line	19.6
4.410000	44.48	---	87.00	42.52	1000.0	9.000	Single Line	19.6
23.130000	---	57.31	74.00	16.69	1000.0	9.000	Single Line	20.3
23.130000	60.77	---	87.00	26.23	1000.0	9.000	Single Line	20.3

■ PoE
[10 Mbps]

Common Information

Test Description:
Model No.:
Mode
Operator Name:

Telecommunication Emission
XNP-6320RH
PoE_10 Mbps
KES

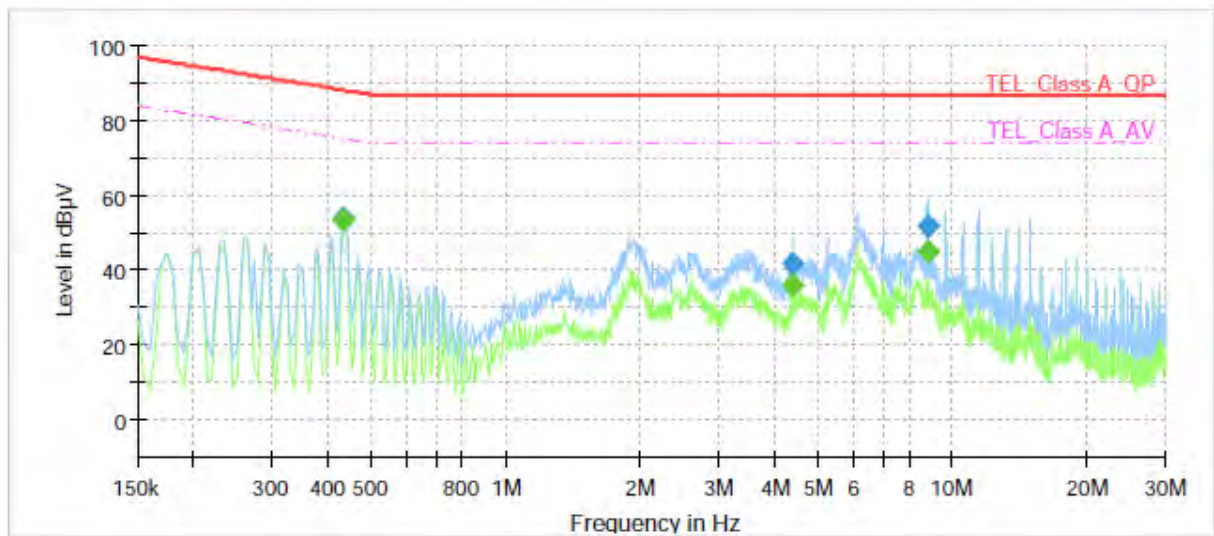


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.435000	---	53.30	75.16	21.86	1000.0	9.000	Single Line	19.8
0.435000	53.79	---	88.16	34.37	1000.0	9.000	Single Line	19.8
4.400000	---	35.77	74.00	38.23	1000.0	9.000	Single Line	19.7
4.400000	41.85	---	87.00	45.15	1000.0	9.000	Single Line	19.7
8.805000	---	44.77	74.00	29.23	1000.0	9.000	Single Line	19.8
8.805000	51.99	---	87.00	35.01	1000.0	9.000	Single Line	19.8

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320RH
Mode	PoE_100 Mbps
Operator Name:	KES

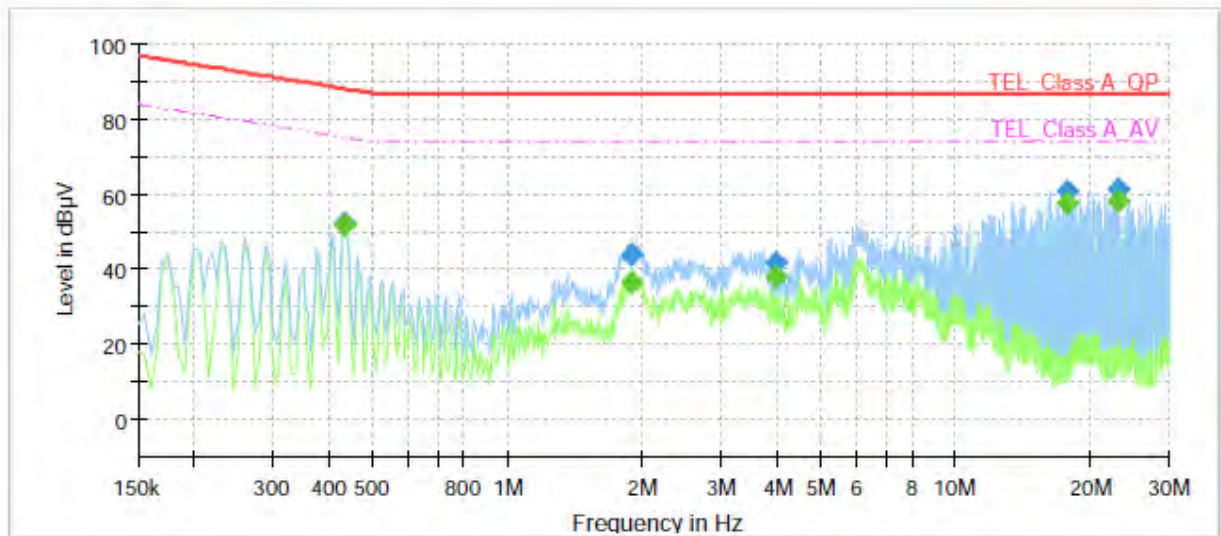

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.435000	---	52.12	75.16	23.04	1000.0	9.000	Single Line	19.7
0.435000	52.32	---	88.16	35.84	1000.0	9.000	Single Line	19.7
1.890000	---	36.29	74.00	37.71	1000.0	9.000	Single Line	19.6
1.890000	43.88	---	87.00	43.12	1000.0	9.000	Single Line	19.6
3.955000	---	38.28	74.00	35.72	1000.0	9.000	Single Line	19.6
3.955000	42.01	---	87.00	44.99	1000.0	9.000	Single Line	19.6
17.695000	---	57.80	74.00	16.20	1000.0	9.000	Single Line	20.0
17.695000	60.95	---	87.00	26.05	1000.0	9.000	Single Line	20.0
23.130000	---	58.36	74.00	15.64	1000.0	9.000	Single Line	20.3
23.130000	61.59	---	87.00	25.41	1000.0	9.000	Single Line	20.3

◆ Calculation

$$\text{QuasiPeak [dBμV]} / \text{CAverage [dBμV]} = \text{Reading Value [dBμV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-19T0138-R1

Page (49) of (79)

Radiated Electric Field Emissions(Below 1 GHz)

■ AC 24 V

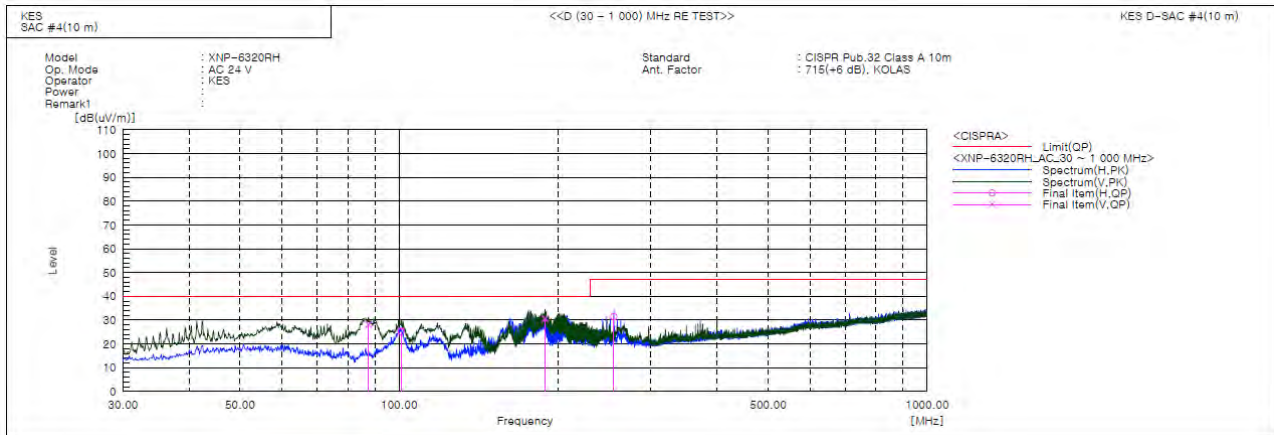

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	87.542	V	53.8	-25.6	28.2	40.0	11.8	138.0	234.0	
2	100.810	H	47.9	-22.6	25.3	40.0	14.7	400.0	206.0	
3	188.959	V	53.6	-23.0	30.6	40.0	9.4	100.0	169.0	
4	255.040	H	51.5	-20.0	31.5	47.0	15.5	380.0	75.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (50) of (79)

■ PoE

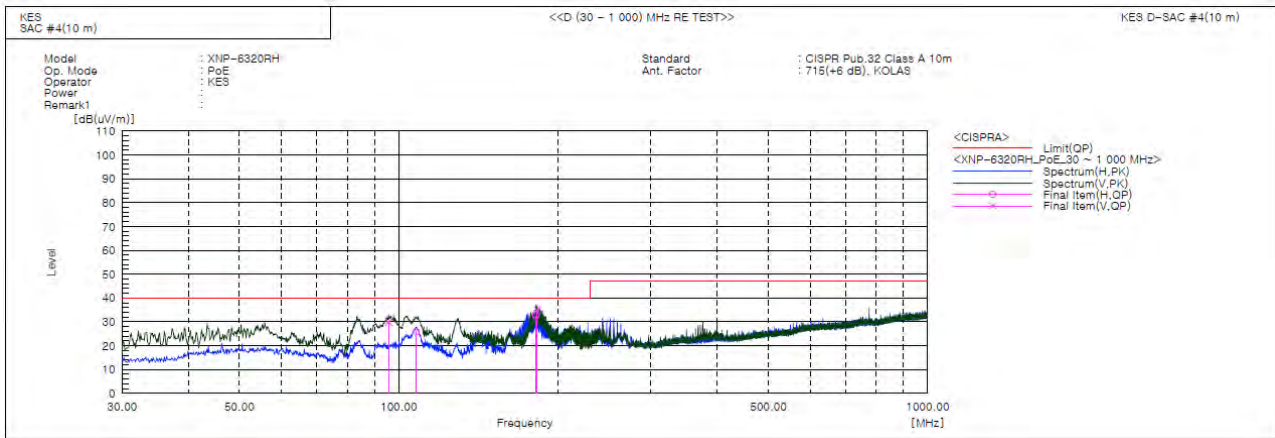

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	95.718	V	53.2	-23.3	29.9	40.0	10.1	124.0	258.0	
2	107.964	H	48.4	-22.6	25.8	40.0	14.2	400.0	92.0	
3	181.684	H	56.5	-23.8	32.7	40.0	7.3	367.0	88.0	
4	182.775	V	58.7	-23.7	35.0	40.0	5.0	100.0	188.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-19T0138-R1

Page (51) of (79)

Radiated Electric Field Emissions(Above 1 GHz)

■ AC 24 V

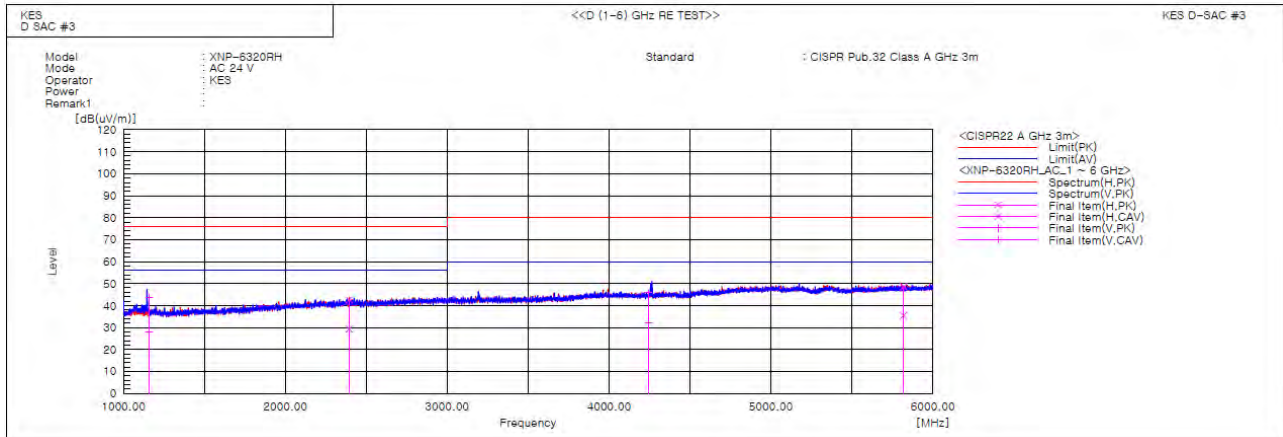

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1155.158	V	50.8	35.5	-7.3	43.5	28.2	76.0	56.0	32.5	27.8	100.0	271.7	
2	2393.810	H	42.9	29.7	-0.3	42.6	29.4	76.0	56.0	33.4	26.6	100.0	354.3	
3	4245.184	V	41.0	27.5	4.8	45.8	32.3	80.0	60.0	34.2	27.7	100.0	182.4	
4	5818.148	H	39.6	26.4	9.1	48.7	35.5	80.0	60.0	31.3	24.5	100.0	75.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (52) of (79)

■ PoE

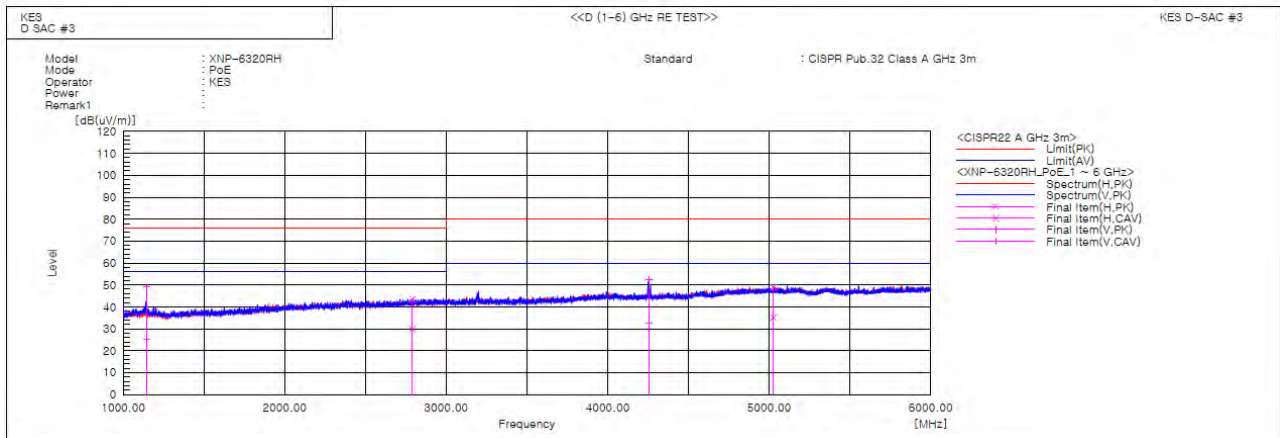

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1144.789	V	56.4	32.8	-7.4	49.0	25.4	76.0	56.0	27.0	30.6	100.0	6.9	
2	2789.921	H	42.4	28.9	1.0	43.4	29.9	76.0	56.0	32.6	26.1	100.0	80.6	
3	4257.659	V	47.7	27.5	4.9	52.6	32.4	80.0	60.0	27.4	27.6	100.0	213.3	
4	5025.482	H	40.4	26.4	8.6	49.0	35.0	80.0	60.0	31.0	25.0	100.0	103.5	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ AC 24 V

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	77.754E-3			
2	3.148E-3			PASS
3	67.502E-3	2.935	2.30	PASS
4	4.303E-3			PASS
5	65.206E-3	5.720	1.14	PASS
6	3.736E-3			PASS
7	62.229E-3	8.082	770.00E-3	PASS
8	2.857E-3			PASS
9	58.317E-3	14.579	400.00E-3	PASS
10	3.960E-3			PASS
11	53.740E-3	16.285	330.00E-3	PASS
12	3.495E-3			PASS
13	48.656E-3	23.170	210.00E-3	PASS
14	2.266E-3			PASS
15	43.166E-3	28.777	150.00E-3	PASS
16	1.810E-3			PASS
17	37.562E-3	28.381	132.35E-3	PASS
18	1.853E-3			PASS
19	31.787E-3	26.842	118.42E-3	PASS
20	1.573E-3			PASS
21	25.725E-3	16.007	160.71E-3	PASS
22	1.041E-3			PASS
23	20.576E-3	14.022	146.74E-3	PASS
24	881.825E-6			PASS
25	15.826E-3	11.723	135.00E-3	PASS
26	773.211E-6			PASS
27	11.236E-3	8.989	124.99E-3	PASS
28	723.206E-6			PASS
29	7.617E-3	6.545	116.39E-3	PASS
30	708.125E-6			PASS
31	4.662E-3			PASS
32	676.448E-6			PASS
33	2.364E-3			PASS
34	719.732E-6			PASS
35	1.927E-3			PASS
36	637.324E-6			PASS
37	2.685E-3			PASS
38	664.155E-6			PASS
39	3.078E-3			PASS
40	643.241E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (54) of (79)

Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	78.535E-3			
2	4.629E-3			PASS
3	67.681E-3	1.962	3.45	PASS
4	5.162E-3	0.800	645.00E-3	PASS
5	65.457E-3	3.828	1.71	PASS
6	4.412E-3			PASS
7	62.393E-3	5.402	1.15	PASS
8	4.080E-3			PASS
9	58.487E-3	9.748	600.00E-3	PASS
10	4.740E-3			PASS
11	54.195E-3	10.949	495.00E-3	PASS
12	4.146E-3			PASS
13	48.902E-3	15.524	315.00E-3	PASS
14	2.873E-3			PASS
15	43.428E-3	19.301	225.00E-3	PASS
16	2.551E-3			PASS
17	37.857E-3	19.069	198.52E-3	PASS
18	2.201E-3			PASS
19	32.058E-3	18.048	177.63E-3	PASS
20	1.866E-3			PASS
21	25.942E-3	16.142	160.71E-3	PASS
22	1.517E-3			PASS
23	20.795E-3	14.171	146.74E-3	PASS
24	1.158E-3			PASS
25	16.068E-3	11.902	135.00E-3	PASS
26	957.679E-6			PASS
27	11.361E-3	9.089	124.99E-3	PASS
28	944.067E-6			PASS
29	7.716E-3	6.630	116.39E-3	PASS
30	800.554E-6			PASS
31	4.852E-3			PASS
32	736.632E-6			PASS
33	2.538E-3			PASS
34	826.940E-6			PASS
35	2.150E-3			PASS
36	755.417E-6			PASS
37	3.132E-3			PASS
38	799.942E-6			PASS
39	3.451E-3			PASS
40	744.191E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	78.230E-3			
2	3.263E-3			PASS
3	67.794E-3	2.948	2.30	PASS
4	4.169E-3			PASS
5	65.525E-3	5.748	1.14	PASS
6	3.764E-3			PASS
7	62.469E-3	8.113	770.00E-3	PASS
8	2.938E-3			PASS
9	58.542E-3	14.636	400.00E-3	PASS
10	3.896E-3			PASS
11	54.026E-3	16.372	330.00E-3	PASS
12	3.412E-3			PASS
13	48.850E-3	23.262	210.00E-3	PASS
14	2.377E-3			PASS
15	43.120E-3	28.746	150.00E-3	PASS
16	1.931E-3			PASS
17	37.480E-3	28.319	132.35E-3	PASS
18	1.890E-3			PASS
19	31.848E-3	26.894	118.42E-3	PASS
20	1.555E-3			PASS
21	25.733E-3	16.012	160.71E-3	PASS
22	1.079E-3			PASS
23	20.586E-3	14.028	146.74E-3	PASS
24	954.843E-6			PASS
25	15.790E-3	11.697	135.00E-3	PASS
26	797.268E-6			PASS
27	11.093E-3	8.875	124.99E-3	PASS
28	777.955E-6			PASS
29	7.504E-3	6.447	116.39E-3	PASS
30	663.315E-6			PASS
31	4.508E-3			PASS
32	657.333E-6			PASS
33	2.195E-3			PASS
34	736.795E-6			PASS
35	1.998E-3			PASS
36	645.559E-6			PASS
37	2.793E-3			PASS
38	649.908E-6			PASS
39	3.164E-3			PASS
40	650.744E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	79.022E-3			
2	4.717E-3			PASS
3	68.190E-3	1.977	3.45	PASS
4	4.850E-3			PASS
5	65.917E-3	3.855	1.71	PASS
6	4.581E-3			PASS
7	62.803E-3	5.438	1.15	PASS
8	4.424E-3			PASS
9	58.900E-3	9.817	600.00E-3	PASS
10	4.772E-3			PASS
11	54.552E-3	11.021	495.00E-3	PASS
12	4.118E-3			PASS
13	49.109E-3	15.590	315.00E-3	PASS
14	3.144E-3			PASS
15	43.752E-3	19.446	225.00E-3	PASS
16	2.696E-3			PASS
17	37.983E-3	19.133	198.52E-3	PASS
18	2.239E-3			PASS
19	32.098E-3	18.070	177.63E-3	PASS
20	1.829E-3			PASS
21	26.083E-3	16.230	160.71E-3	PASS
22	1.600E-3			PASS
23	20.951E-3	14.277	146.74E-3	PASS
24	1.215E-3			PASS
25	16.097E-3	11.924	135.00E-3	PASS
26	1.001E-3			PASS
27	11.337E-3	9.070	124.99E-3	PASS
28	1.011E-3			PASS
29	7.849E-3	6.744	116.39E-3	PASS
30	747.576E-6			PASS
31	4.870E-3			PASS
32	740.359E-6			PASS
33	2.528E-3			PASS
34	882.776E-6			PASS
35	2.191E-3			PASS
36	764.517E-6			PASS
37	3.120E-3			PASS
38	809.986E-6			PASS
39	3.515E-3			PASS
40	734.121E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0138-R1

Page (57) of (79)

Test Data - Voltage Fluctuations

Maximum Flicker results

■ AC 24 V

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.047	4.00	PASS
Tmax [s]	0.000	0.50	PASS

■ PoE

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.123	4.00	PASS
Tmax [s]	0.000	0.50	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Telecommunication Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

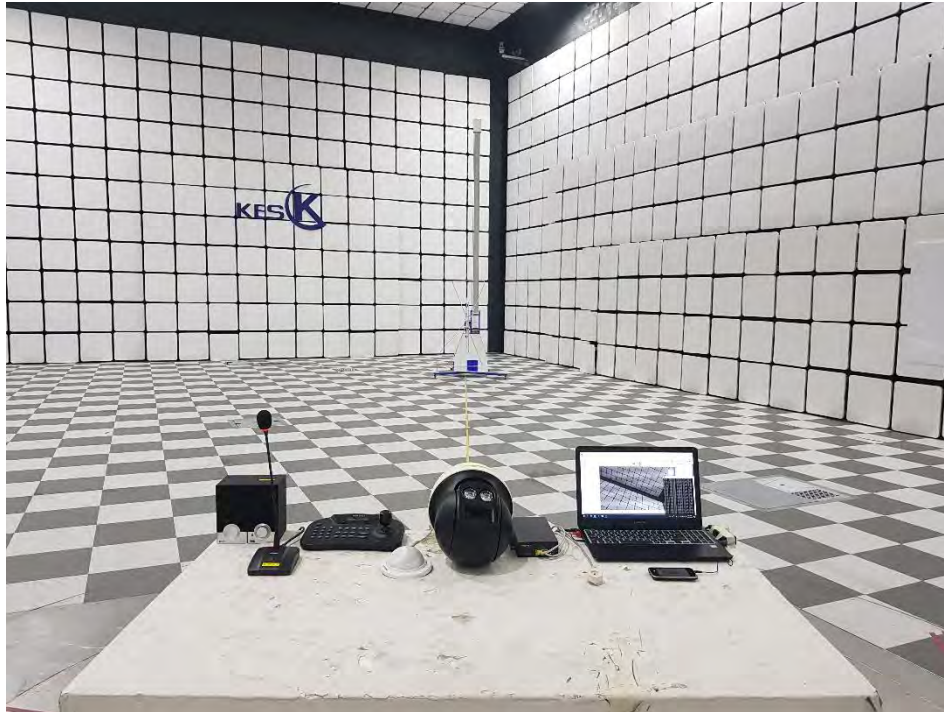

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

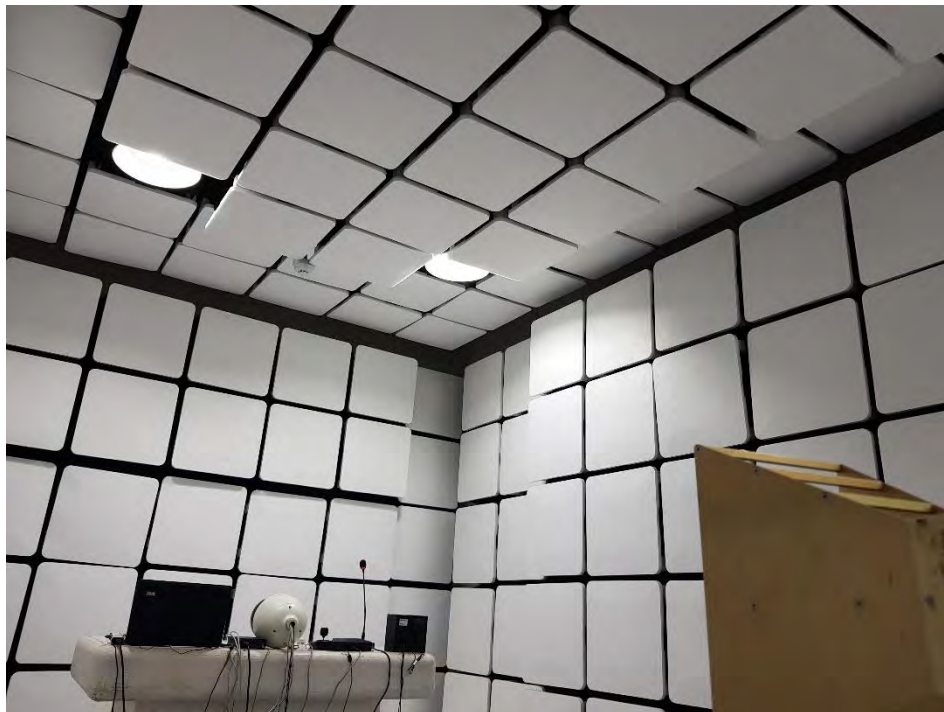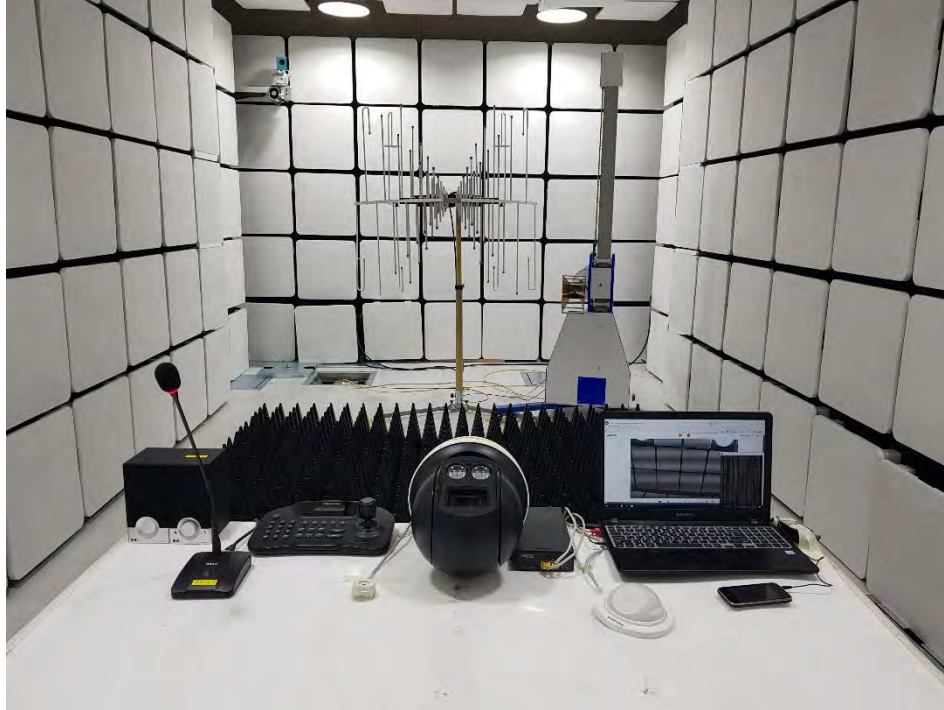

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge




Radiated Electric Field Immunity

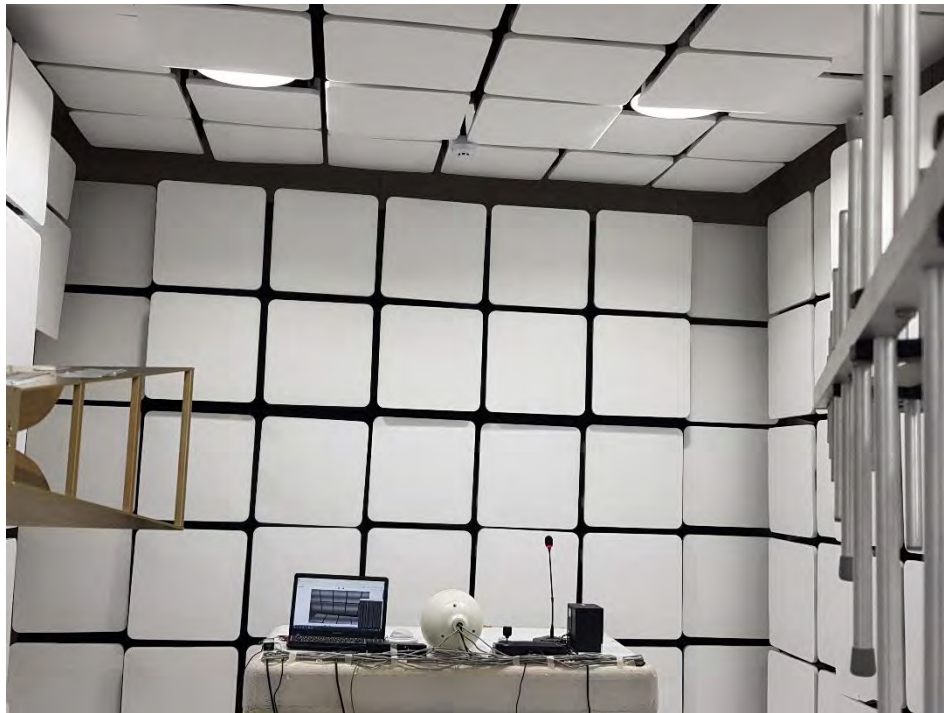


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts

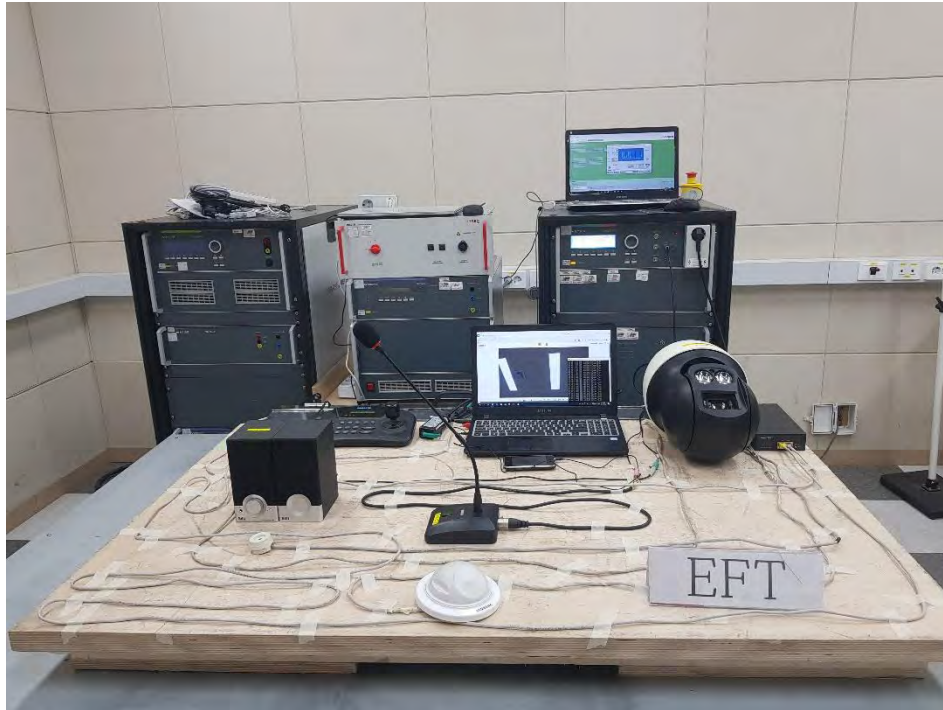


Surge Transients

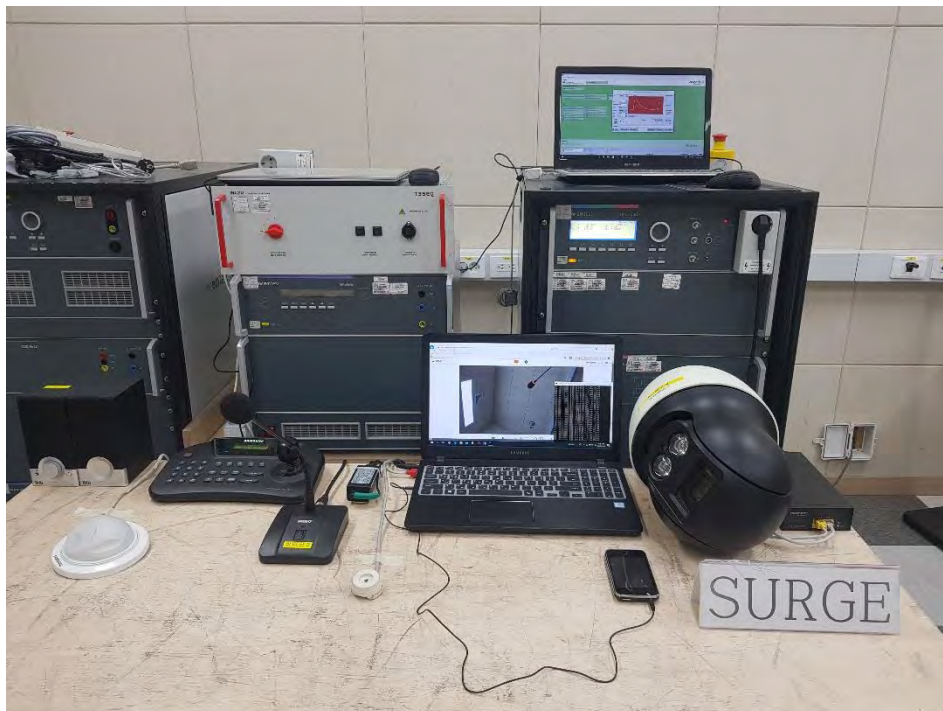


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Disturbance

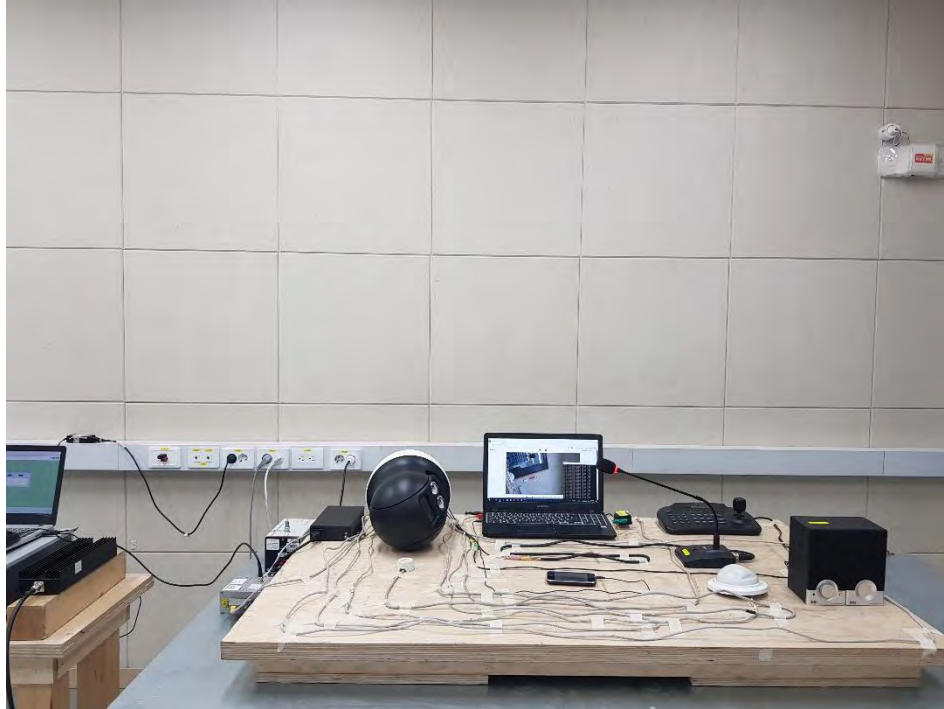

Voltage Dips and Short Interruptions

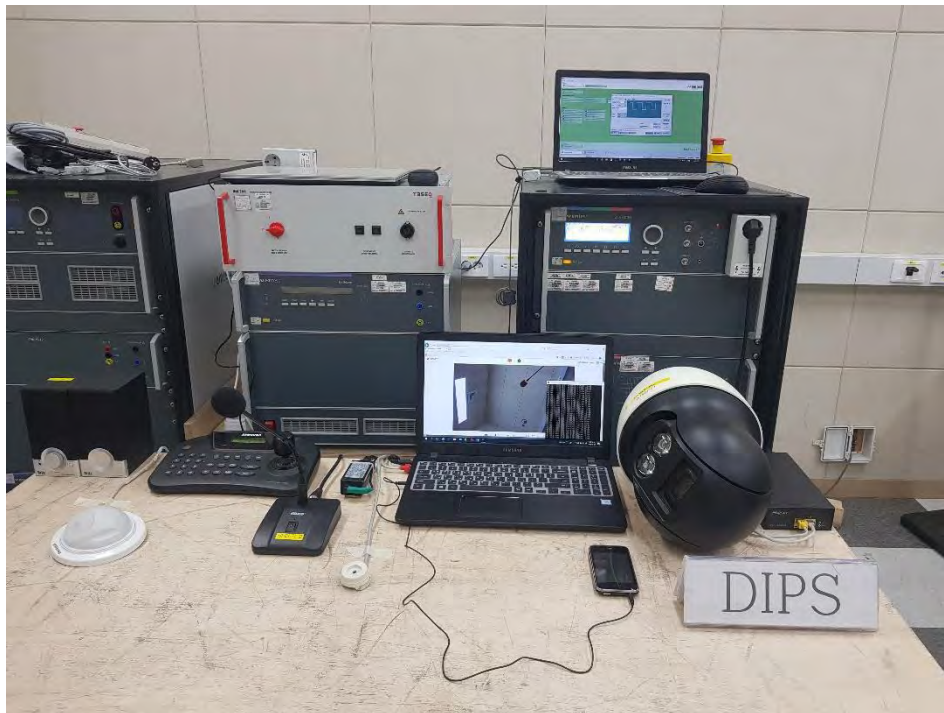

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – AC Power Board

(Top)

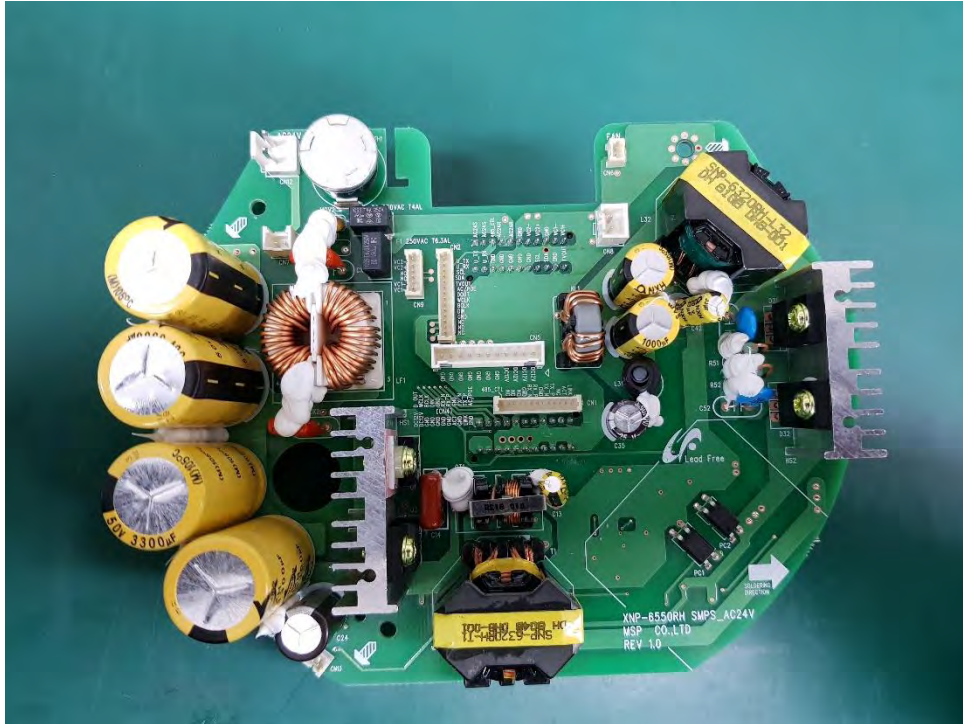


(Bottom)

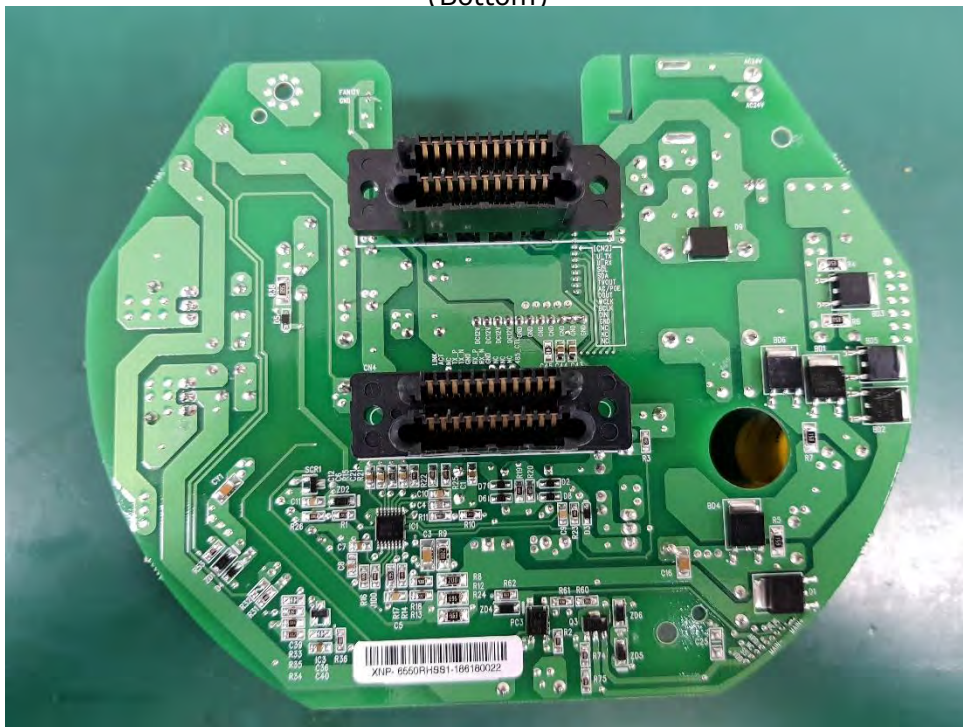


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – PoE Power Board

(Top)

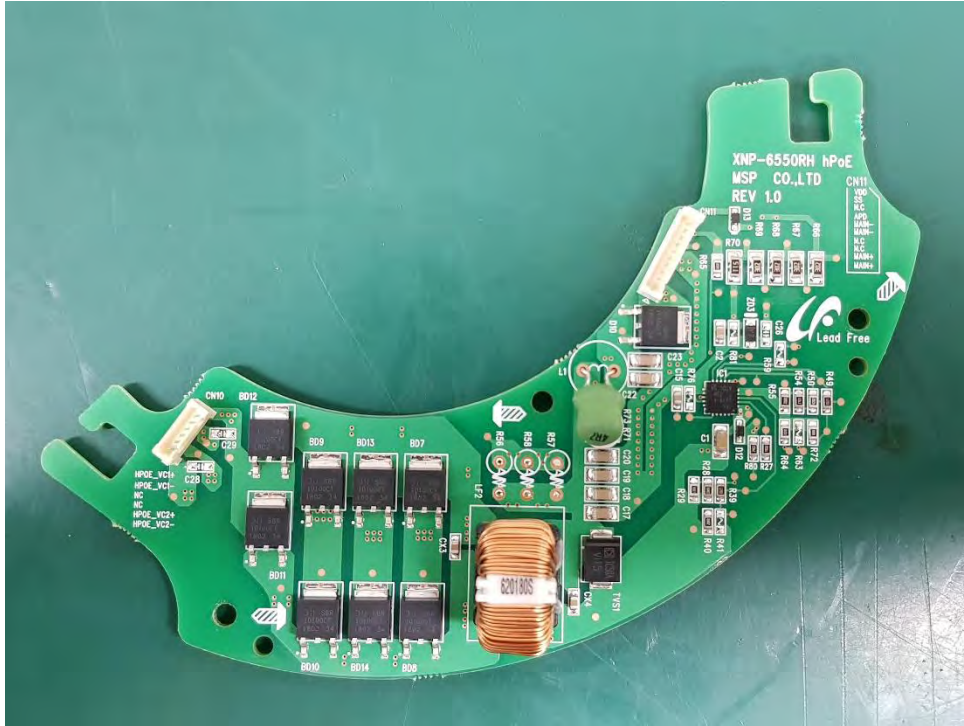


(Bottom)

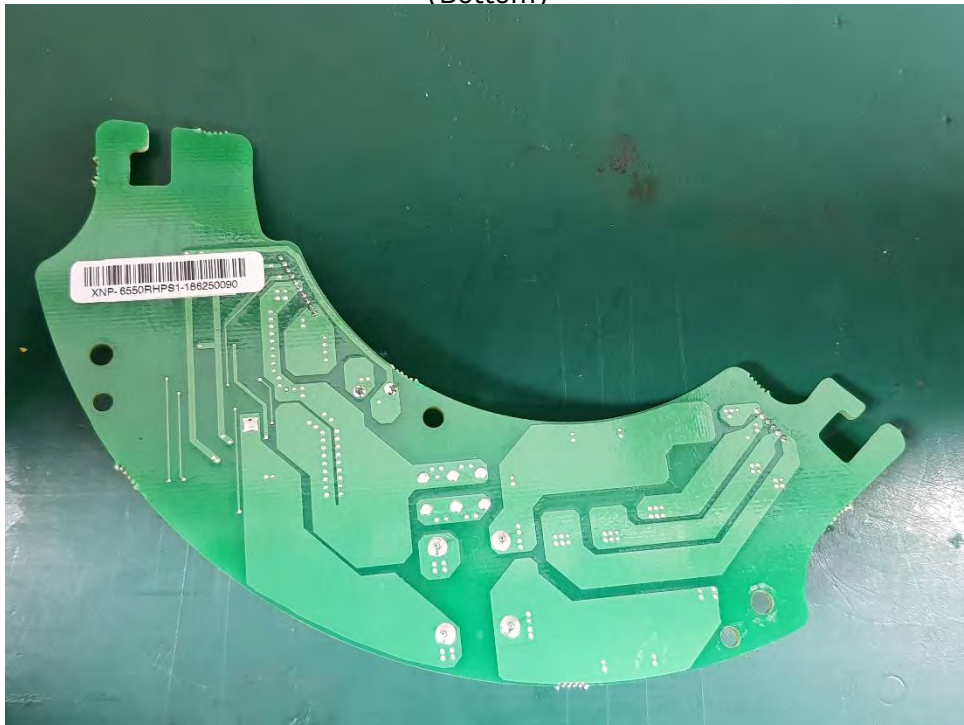


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – CMOS Board

(Top)

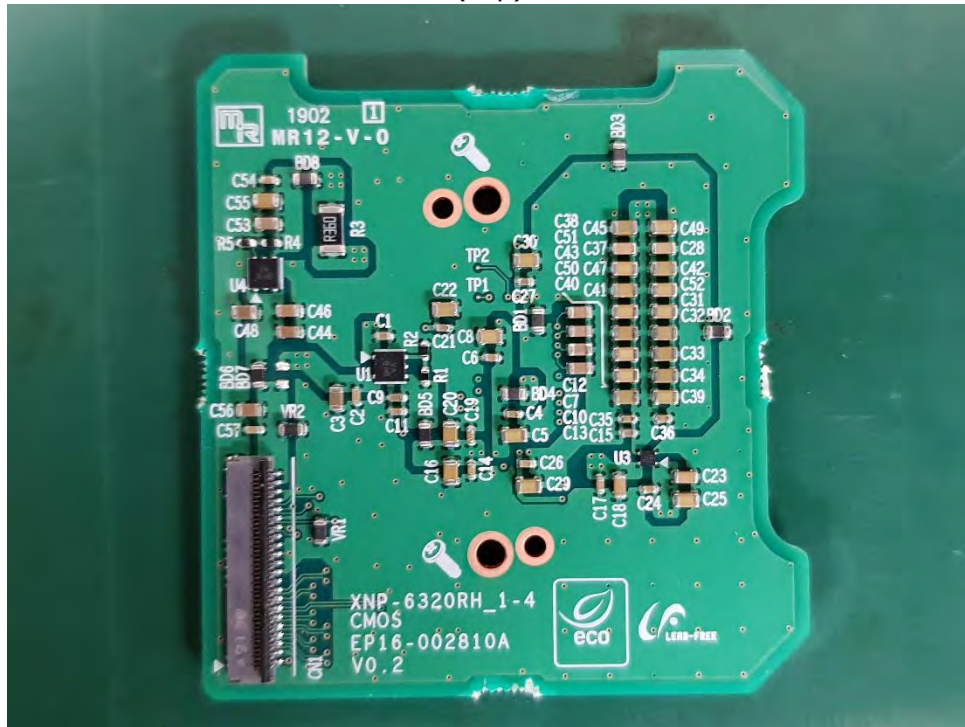


(Bottom)

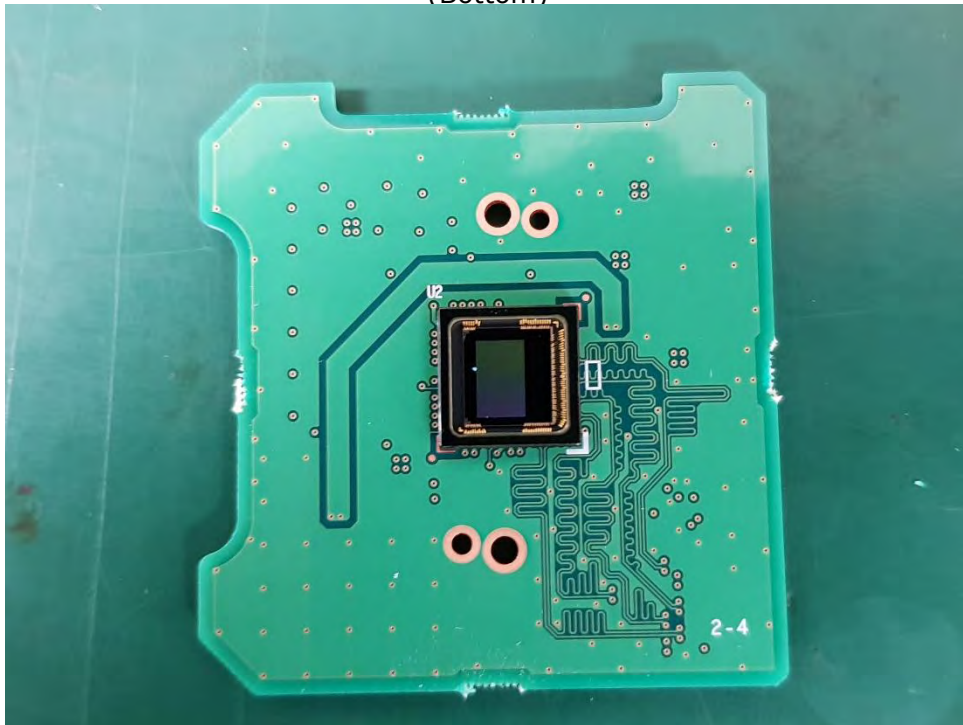


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Drive Board

(Top)

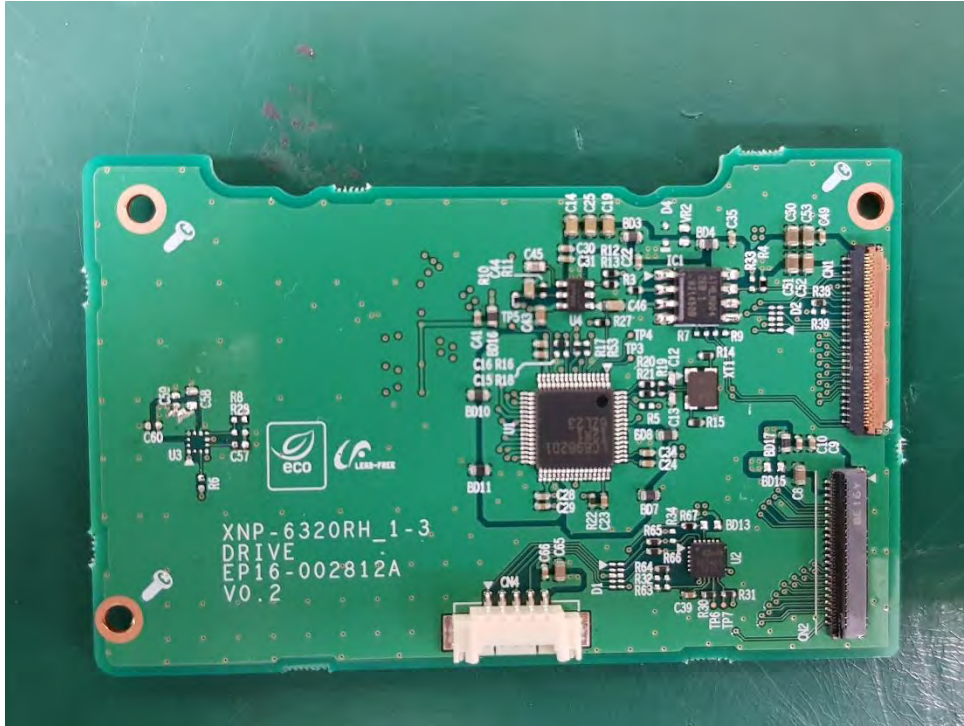


(Bottom)

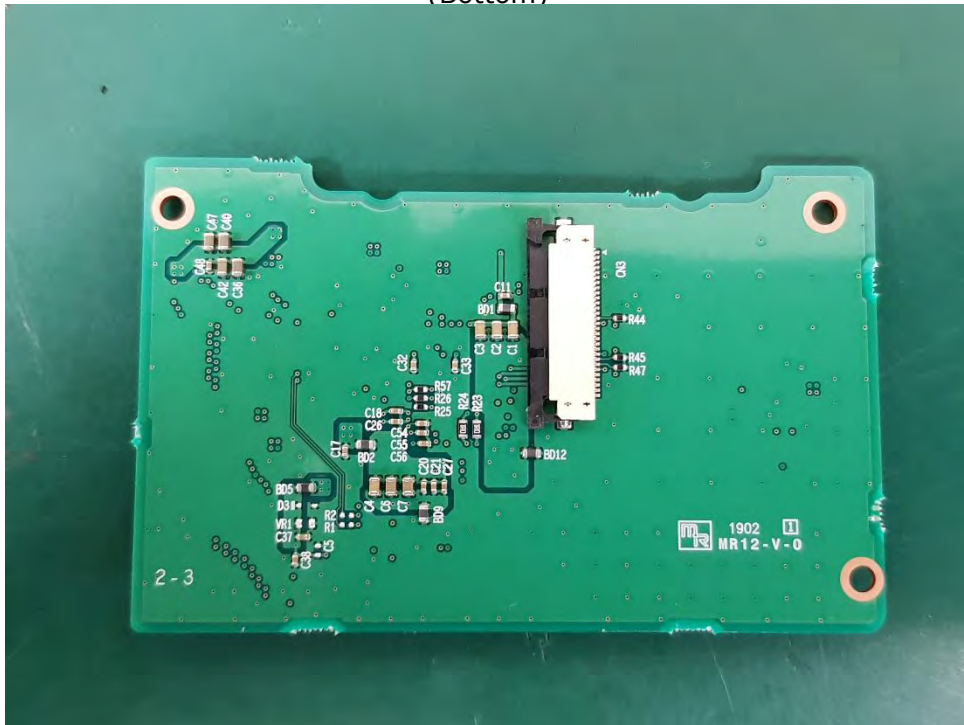


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Interface Board

(Top)

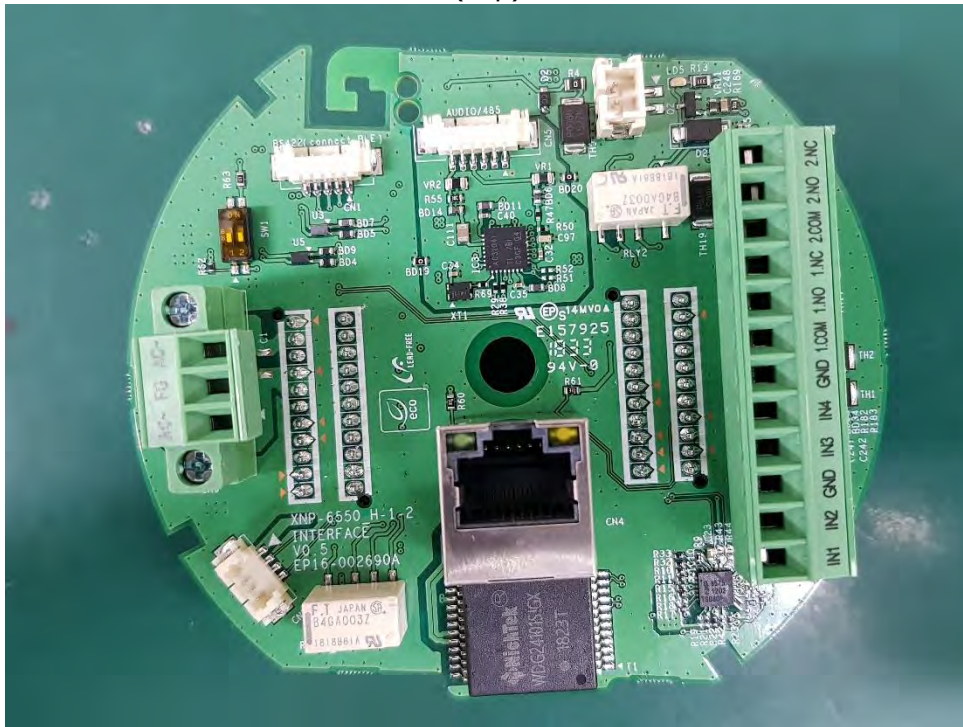


(Bottom)

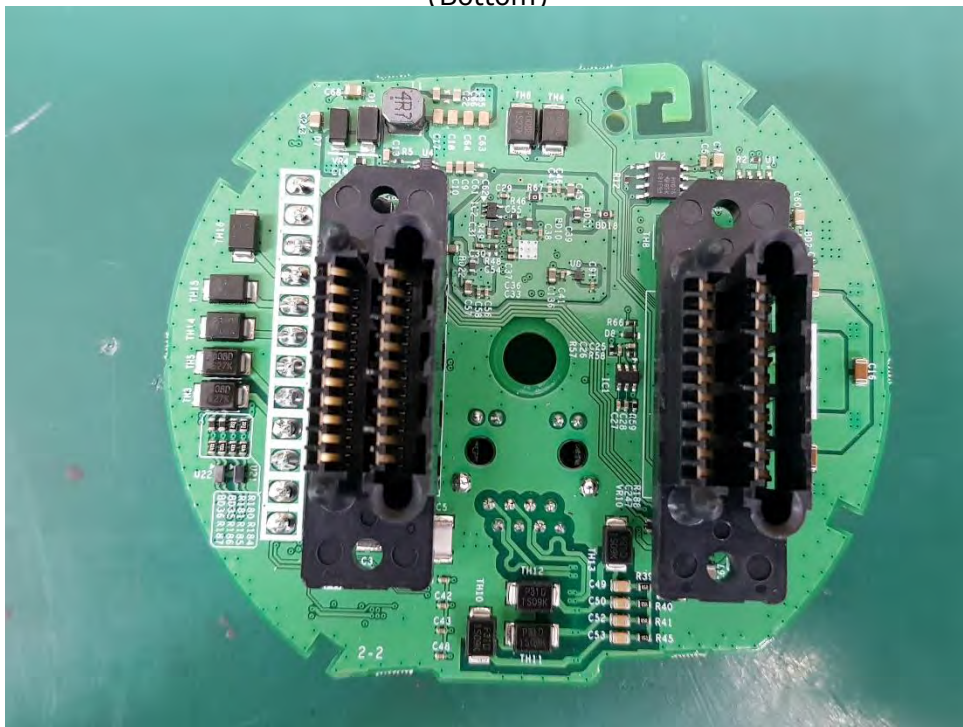

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – IR Control Board

(Top)

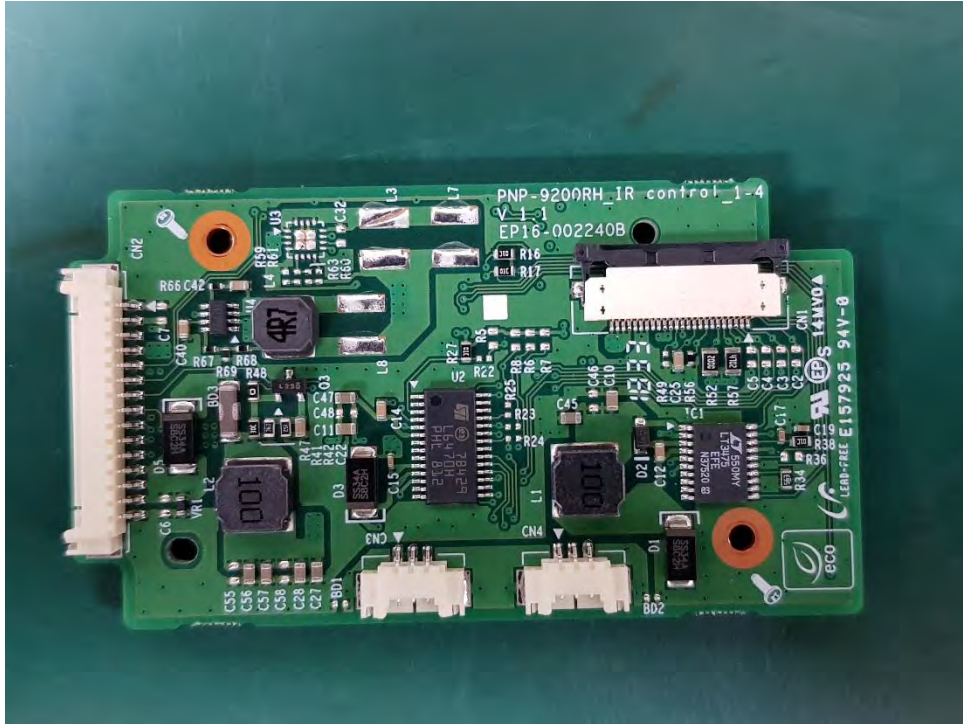


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – LED Board

(Top)

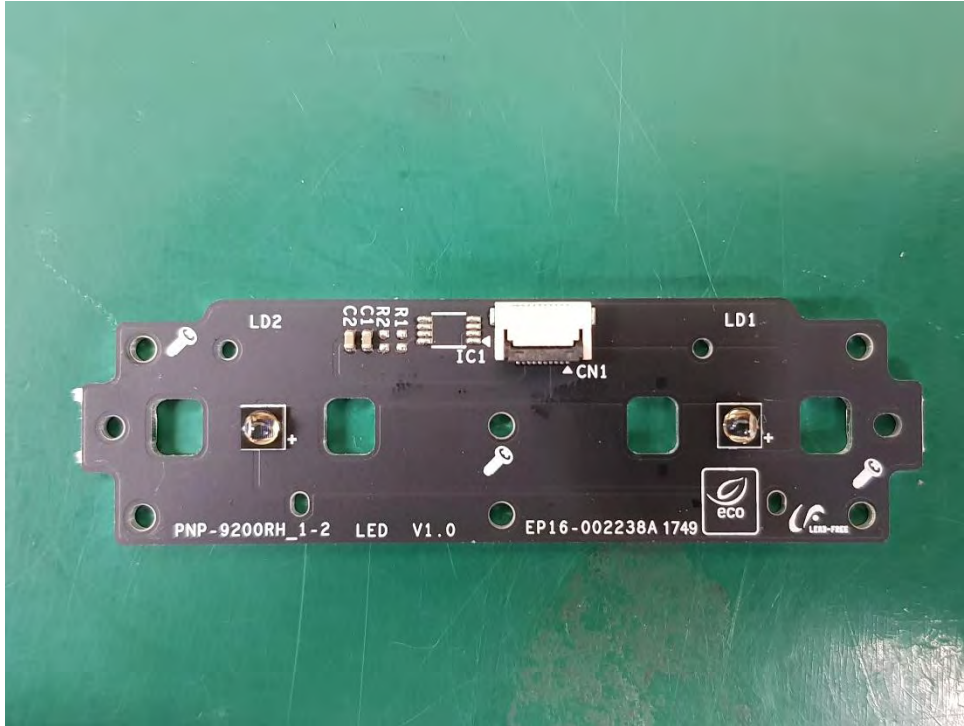

(Bottom)

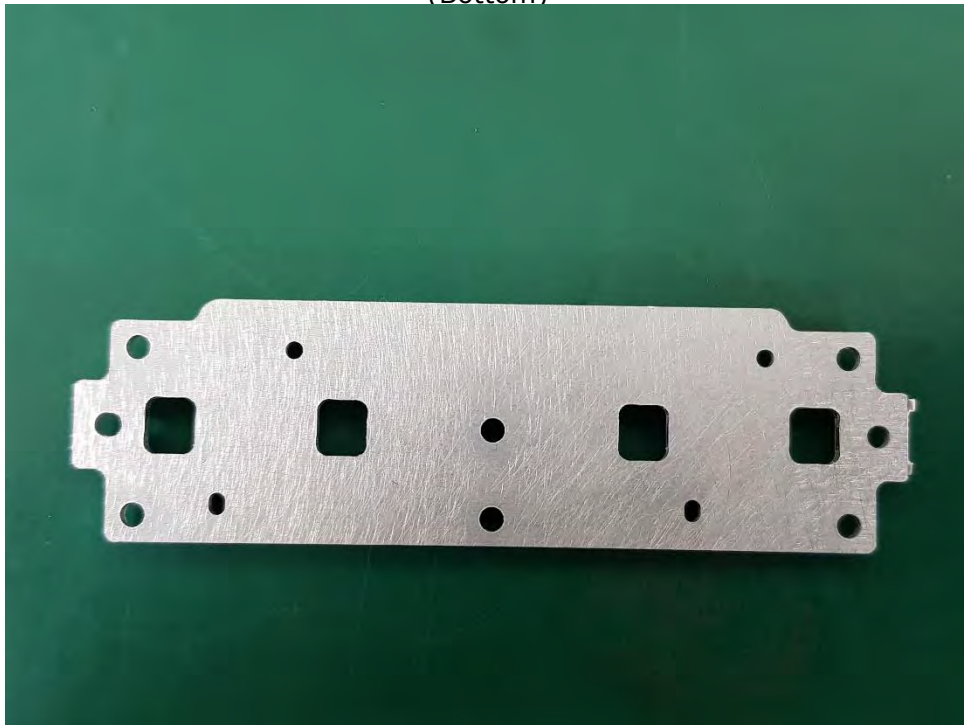

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Network Board

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – PANPI Board

(Top)

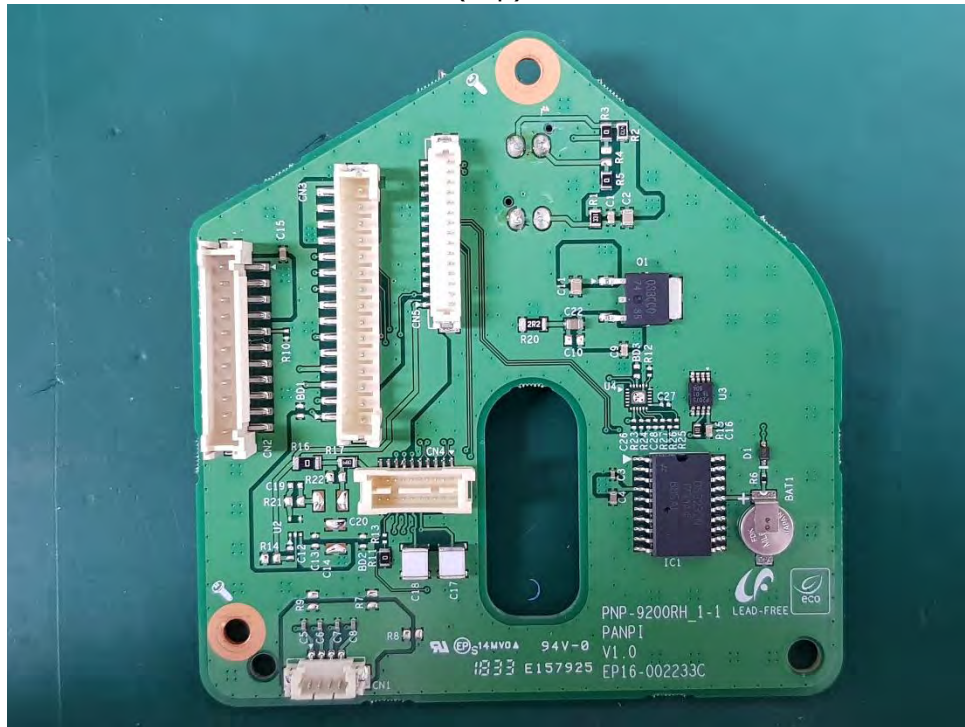


(Bottom)

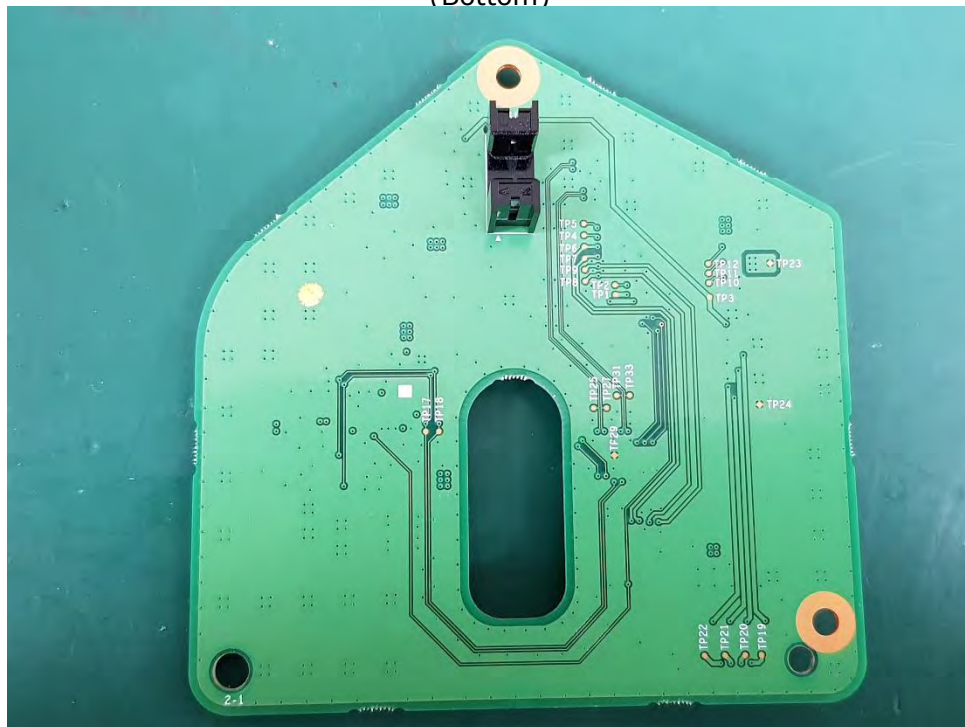

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – TILT Board

(Top)

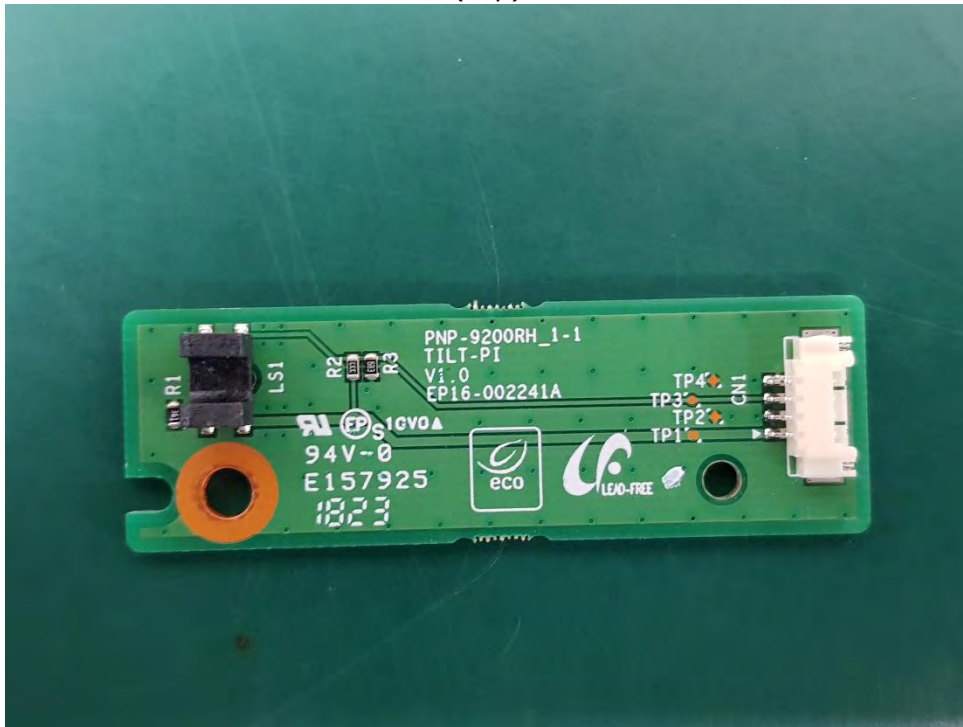

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location

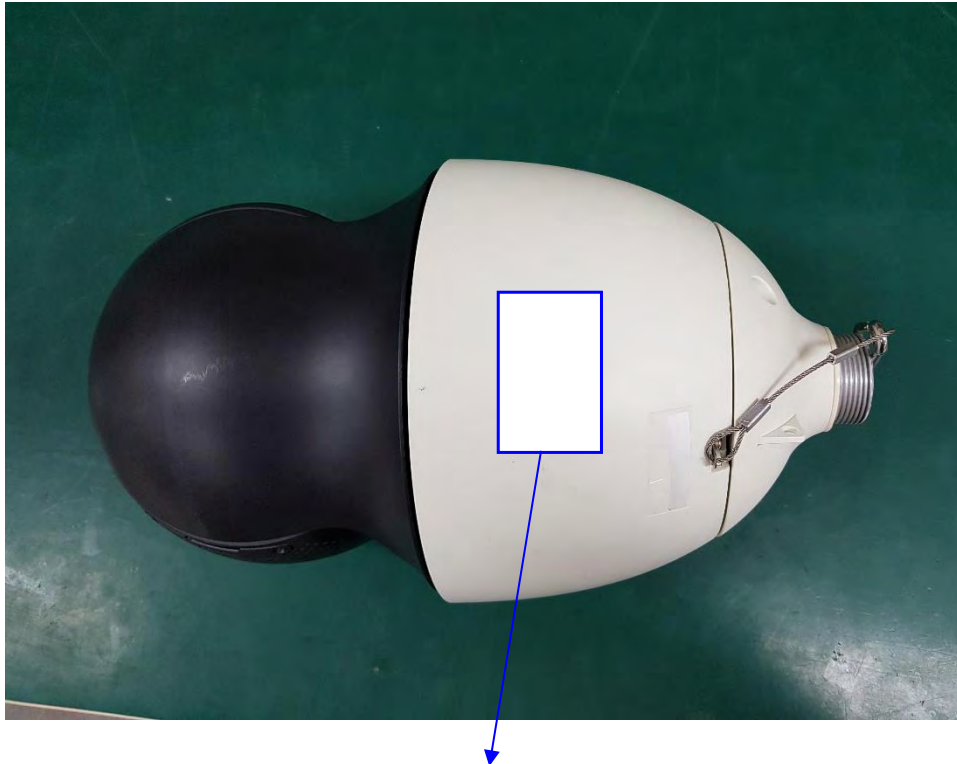

Network Camera

Model No : XNP-6320RH

Manufacturer : HANWHA TECHWIN (TIANJIN) CO.,LTD.

Made in China

