



TEST REPORT



Report No. : KES-E1-19T0539-R3

Page 1 / 54

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : QNV-6024RM

Variant Model : QNV-6024RBM, QNV-6025RM

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)

3. Date of Receipt : Jul. 10, 2024

4. Test date : Sep. 01, 2019 ~ Sep. 03, 2019

5. Date of Issue : Jul. 24, 2024

6. Test Results : In Compliance

Tested by

Reviewed by

Min Seong, Kim
EMC Test Engineer

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Sep. 06, 2019	KES-E1-19T0539	Issued
Sep. 04, 2020	KES-E1-19T0539-R1	Re-issue due to variant model addition
Jan. 15, 2021	KES-E1-19T0539-R2	Re-issue due to variant model addition
Jul. 24, 2024	KES-E1-19T0539-R3	- Change the Applicant and manufacturer at the request of the customer - Re-issue due to regulations update

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency.....	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications.....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments.....	7
1.6	External I/O Cabling.....	8
1.7	EUT Operating Mode(s).....	8
1.8	Configuration.....	9
1.9	Remarks when standards applied.....	10
1.10	Calibration Details of Equipment Used for Measurement.....	10
1.11	Test Facility.....	10
1.12	Laboratory Accreditations and Listings.....	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports.....	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz).....	14
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	15
2.5	Harmonic Current Emissions.....	16
2.6	Voltage Fluctuations and Flicker.....	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge.....	19
3.2	Radiated Electric Field Immunity.....	22
3.3	Electrical Fast Transients/Bursts.....	25
3.4	Surge Transients.....	27
3.5	Conducted Disturbance.....	30
APPENDIX A – TEST DATA.....		32
Conducted Emissions at Mains Power Ports.....		32
Conducted Emissions at Telecommunication Ports.....		34
Radiated Electric Field Emissions(Below 1 GHz).....		36
Radiated Electric Field Emissions(Above 1 GHz).....		37
Harmonic Current Emissions and Voltage Fluctuations and Flicker.....		38
Test Setup Photos and Configuration.....		41
Conducted Voltage Emissions.....		41
Conducted Telecommunication Emissions.....		42
Radiated Electric Field Emissions(Below 1 GHz).....		43
Radiated Electric Field Emissions(Above 1 GHz).....		44
Harmonic Current Emissions and Voltage Fluctuations and Flicker.....		45
Electrostatic Discharge.....		46
Radiated Electric Field Immunity.....		46
Electrical Fast Transients/Bursts.....		47
Surge Transients.....		47
Conducted Disturbance.....		48
EUT External Photographs.....		49
EUT Internal Photographs.....		50



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2MP CMOS
Effective Pixels	1920(H)x1080(V)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.1Lux(F2.0, 1/30sec) (TBD) BW: 0Lux(IR LED on)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Focal Length (Zoom Ratio)	3.6mm fixed focal
Max. Aperture Ratio	F2.0
Angular Field of View	H: 94.8° / V: 49.3° / D: 114.3° (TBD)
Min. Object Distance	(TBD)
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	±5° / 0°~67° / ±90°
Operational	
IR Viewable Length	15m(49.21ft)
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR
Digital Image Stabilization	None
Defog	None
Motion Detection	4ea, polygonal zones
Privacy Masking	6ea, rectangular zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec)



Digital PTZ	None
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line
Business Intelligence	None
Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics, Network disconnect
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers
Audio In	Selectable(mic in/line in/built-in mic)
Audio Out	Line out, Max.output level: 1Vrms
Network	
Ethernet	M12 (10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Resolution	1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.265/H.264: Max.60fps/50fps(60Hz/50Hz) MJPEG: Max.30fps/25fps(60Hz/50Hz)
Smart Codec	WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality Level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(6 users) / Multicast Multiple streaming (Up to 3 profiles)
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP



Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Edge Storage	Micro SD/SDHC/SDXC 1slot 128GB
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.12, 10.13, 10.14 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	512MB RAM, 256MB Flash
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C(-22°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	IP66, IK10, NEMA4X EN55011:2009+A1:2010, EN50581:2012, EN50121-3-2:2015, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2012, EN61000-4-5:2014 EN61000-4-6:2009, EN50155:2007 EN45545-2 , NFPA130 , BSS7239 , E-mark
Electrical	
Input Voltage	PoE(IEEE802.3af, Class3)
Power Consumption	PoE: Max 6.70W, typical 5.00W
Mechanical	
Color / Material	Ivory / Aluminum
RAL Code	None
Product dimensions / weight	98.9x52.0x100.0mm(3.89x2.05x3.94"), 295g(0.65 lb)



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

QNV-6024RBM - Case color difference

QNV-6025RM - RTC Battery delete

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QNV-6024RM	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	NT730U3E	JJRE91CF200065A	Samsung Electronics Co., Ltd.	-
Notebook Adapter	PA-1600-66	AD-6019P	LITEON	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Adapter	RJ-45	3.0	U
	Speaker	Speaker	3.5 mm	1.4	U
	MIC	MIC	XLR	1.4	U
Notebook	RJ-45	PoE Adapter	RJ-45	1.8	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
OP	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
WebView	-	-



1.8 Configuration

■ AC Main
□ DC Main

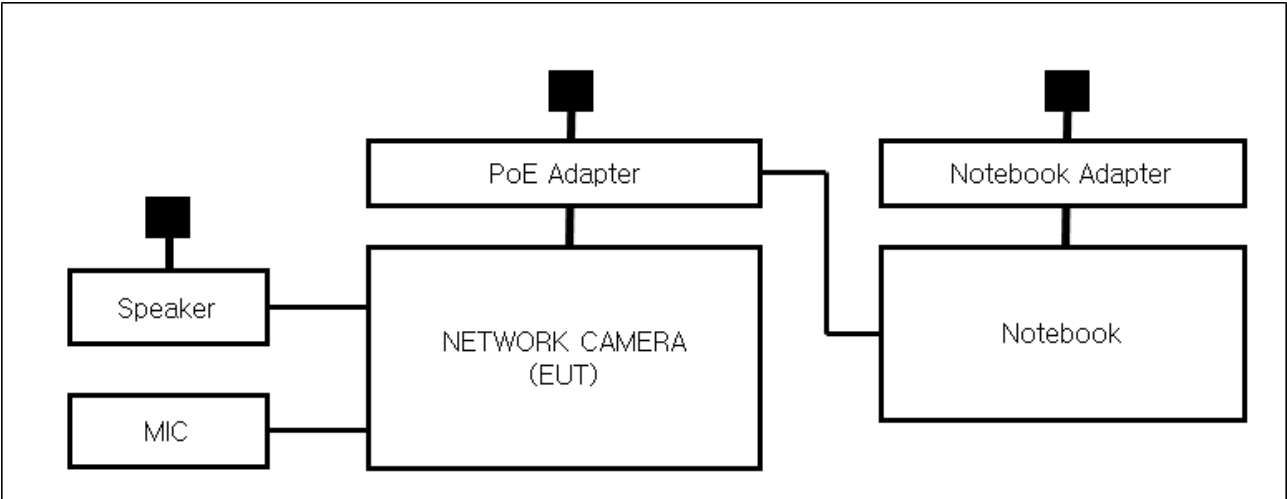



1.9 Remarks when standards applied

The power frequency magnetic field (EN 61000-4-8) are not tested because the EUT is not sensitive to magnetic fields.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55011:2016/A2:2021

☒ Group 1

☐ Group 2

☒ Class A

☐ Class B

☒ EN 50121-3-2:2016/A1:2019

☒ **EMC – Regulations 2016**

☒ EN 55011:2016/A2:2021

☒ Group 1

☐ Group 2

☒ Class A

☐ Class B

☒ EN 50121-3-2:2016/A1:2019



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 22, 2020
☐	LISN	ENV216	R & S	101787	01, 04, 2020
☐	LISN	ESH2-Z5	R & S	100450	04, 22, 2020
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksPoE is not tested apply because it is considered to be wired networks ports



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Sep. 01, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 22, 2020
☒	LISN	ENV216	R & S	101787	01, 04, 2020
☒	LISN	ESH2-Z5	R & S	100450	04, 22, 2020
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2020
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2020

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 55,2 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Sep. 01, 2019

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 09, 2020
☒	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
☒	ATTENUATOR	8491A	HP	32173	03, 11, 2020

Test Conditions

Temperature: 23,0 °C

Relative Humidity: 49,0 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Sep. 02, 2019

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2020
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 27, 2020
☐	ATTENUATOR	8491A	HP	35496	03, 11, 2020
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 12, 2021

Test Conditions

Temperature: 23,5 °C

Relative Humidity: 48,4 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test SW	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 09, 2020
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

RemarksIt is not tested apply because it is powered by PoE



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test SW	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 09, 2020
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksIt is not tested apply because it is powered by PoE



3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

General performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are the following.

Performance criterion A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Sep. 03, 2019

Test Location

EMS-ESD: Electro wave Shieldroom#7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 11, 2019
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 100,1 kPa

Test SpecificationsDischarge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☒ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☒ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane



VCP: Vertical coupling plane

Required Performance Criteria: ☒ B



Location of Discharge:

Air
Contact

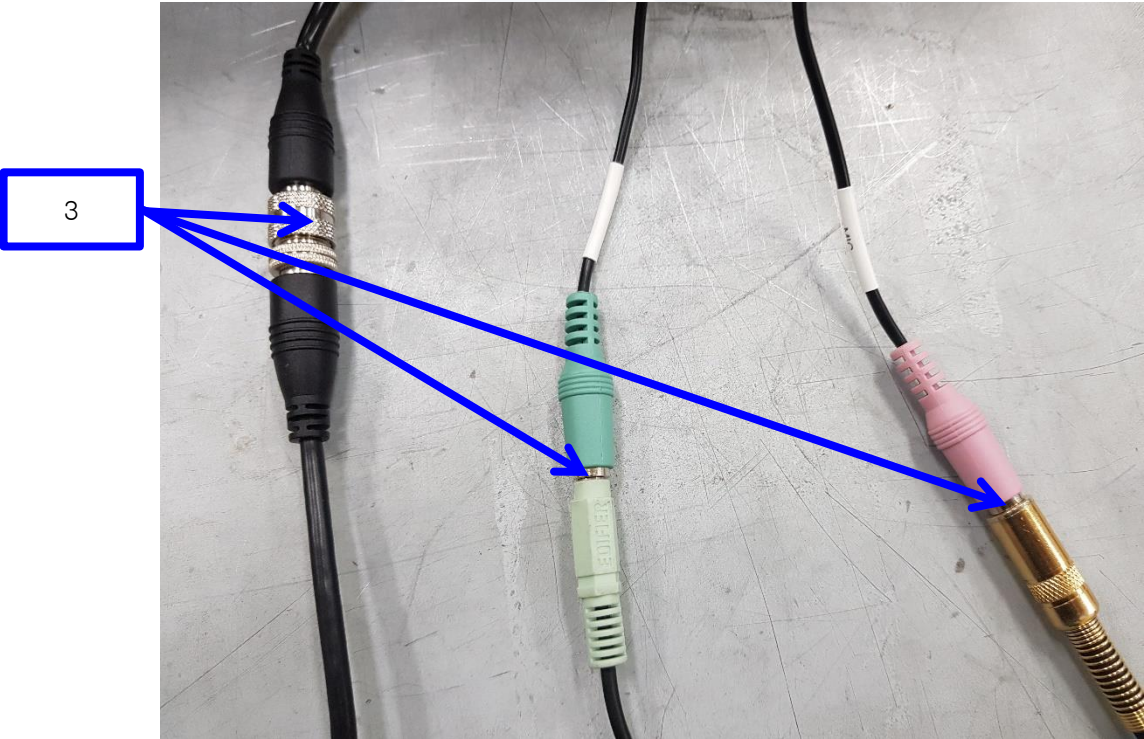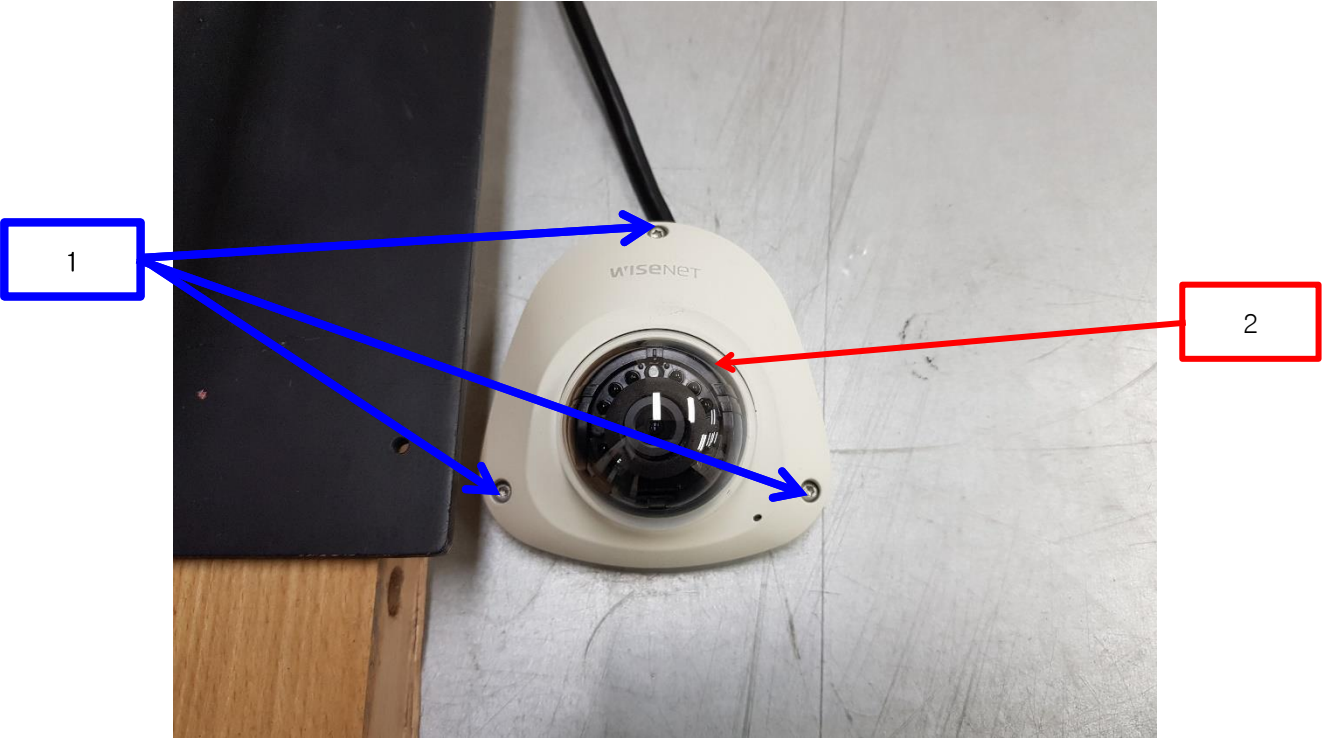

**Test Data**

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	A	-
2	VCP Contact	Contact Discharge	A	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screws	Contact Discharge	A	-
2	Enclosure	Air Discharge	A	-
3	Ports	Contact Discharge	A	-

Note: "Blank" = Not performed

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006+A2:2010

Test Date

Sep. 02, 2019

Test LocationEMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 06, 2020
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	05, 15, 2020
☒	POWER METER	E4419B	Agilent	GB40203000	05, 15, 2020
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	05, 15, 2020
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	05, 15, 2020
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 D	SCHWARZBECK	9128D038	-
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	03, 12, 2020

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 48,4 % R.H.
Atmospheric Pressure: 100,7 kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Frequency Range: ☒ 80 MHz to 800 MHz [20V/m]
[Field Strength] ☒ 800 MHz to 1 GHz [20 V/m]
☒ 1,4 GHz to 2,0 GHz [10 V/m]
☒ 2,0 GHz to 2,7 GHz [5 V/m]
☒ 5,1 GHz to 6,0 GHz [3 V/m]

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☐ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ A

**Test Data**

Side Exposed	Observations	
	Horizontal	Vertical
Front	A	A
Right	A	A
Back	A	A
Left	A	A

Note: "Blank" = Not performed

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Sep. 03, 2019

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2019

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 100,1 kPa

Test Specifications

Pulse Amplitude & Polarity:
(Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Signal Lines) ☐ ± 0.5 kV ☐ ± 1.0 kV
☒ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☒ 5 klz ☐ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ A

**Test Data**☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	A	A

Note: “Blank” = Not performed

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria.



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Sep. 03, 2019

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test SW	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 28, 2019

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 100,1 kPa



Test Specifications

Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode and 42 ohm for DC Mode
(power supply is isolated from earth)

Surge Amplitude : Common Mode
☐ 2 kV
Differential Mode
☐ 1 kV

Number of Surges: ☐ 5 surges per angle

Angle: ☐ 0°, 90°, 180°, 270° (input AC power port)

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ B

Signal Lines

Source Impedance: 42 ohm
Surge Amplitude: Common Mode
☐ 2 kV
Differential Mode
☒ 1 kV

Number of Surges: ☒ 5 Surges

Polarity: ☒ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ B

**Test Data**☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	A	A

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Note: "Blank" = Not performed

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria
- ☐ NOT APPLICABLE

RemarksPASS Required Performance Criteria.



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Sep. 01, 2019

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 26, 2019
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 26, 2019
☒	CDN	CDN M016	TESEQ	43694	11, 26, 2019
☐	CDN	CDN M016	TESEQ	43697	11, 26, 2019
☒	CDN	CDN T800	TESEQ	42800	11, 26, 2019
☐	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 27, 2019

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 55,2 % R.H.
Atmospheric Pressure: 100,0 kPa

Test Specifications

Frequency range: ☐ 150 kHz to 100 MHz ☒ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☒ 10 Vrms ☐ 3 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ A

**Test Data**☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	A

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Conducted Emissions at Telecommunication Ports**

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: QNV-6024RM
Mode :
Speed : 10 Mbps
Operator Name: KES

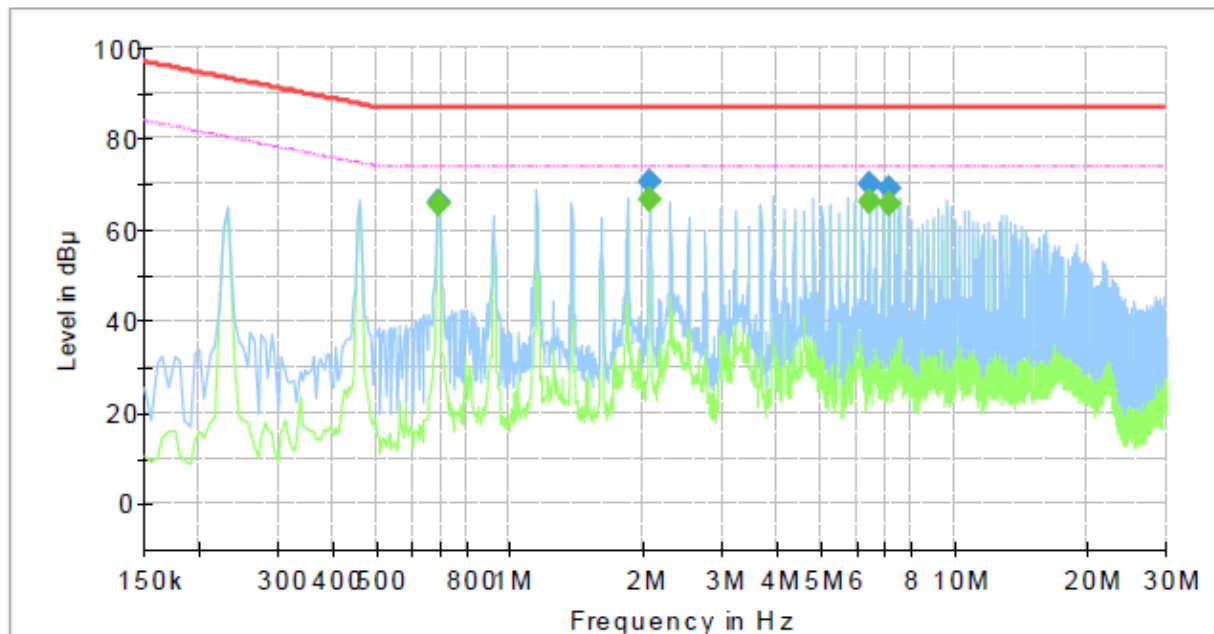**Final Result**


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.690000	---	65.92	74.00	8.08	1000.0	9.000	Single Line	20.2
0.690000	66.34	---	87.00	20.66	1000.0	9.000	Single Line	20.2
2.060000	---	66.53	74.00	7.47	1000.0	9.000	Single Line	20.5
2.060000	70.60	---	87.00	16.40	1000.0	9.000	Single Line	20.5
6.415000	---	66.36	74.00	7.64	1000.0	9.000	Single Line	19.8
6.415000	70.00	---	87.00	17.00	1000.0	9.000	Single Line	19.8
7.105000	---	65.59	74.00	8.41	1000.0	9.000	Single Line	19.9
7.105000	68.96	---	87.00	18.04	1000.0	9.000	Single Line	19.9



[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: QNV-6024RM
Mode :
Speed : 100 Mbps
Operator Name: KES

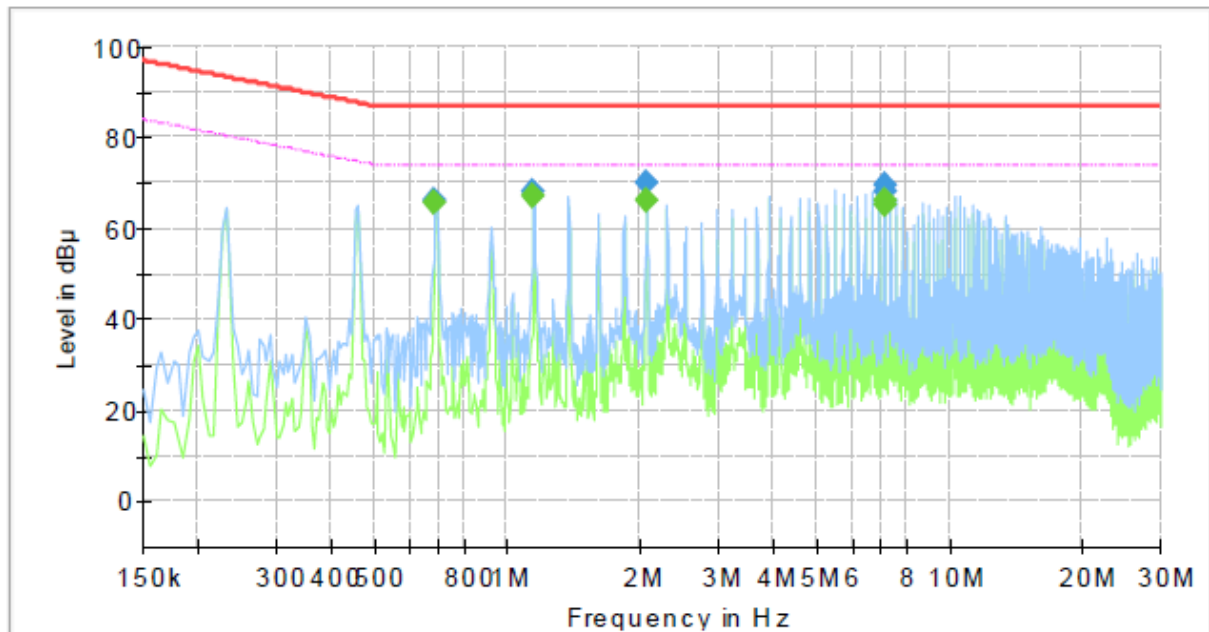**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.685000	---	65.79	74.00	8.21	1000.0	9.000	Single Line	20.1
0.685000	66.10	---	87.00	20.90	1000.0	9.000	Single Line	20.1
1.145000	---	67.10	74.00	6.90	1000.0	9.000	Single Line	20.3
1.145000	68.37	---	87.00	18.63	1000.0	9.000	Single Line	20.3
2.060000	---	66.21	74.00	7.79	1000.0	9.000	Single Line	20.3
2.060000	70.06	---	87.00	16.94	1000.0	9.000	Single Line	20.3
7.100000	---	65.03	74.00	8.97	1000.0	9.000	Single Line	19.8
7.100000	68.33	---	87.00	18.67	1000.0	9.000	Single Line	19.8
7.105000	---	66.31	74.00	7.69	1000.0	9.000	Single Line	19.8
7.105000	69.63	---	87.00	17.37	1000.0	9.000	Single Line	19.8


◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

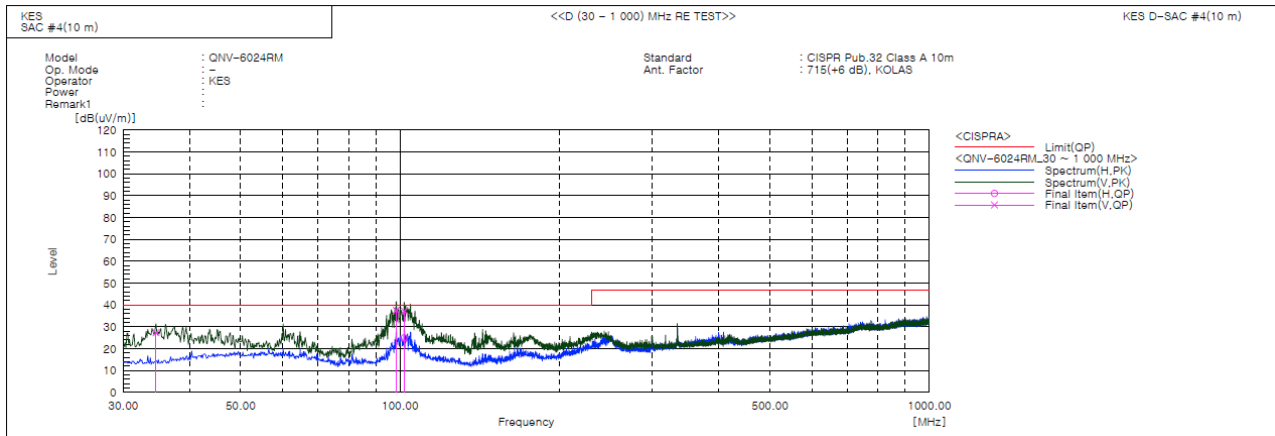**Radiated Electric Field Emissions(Below 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	34.608	V	52.3	-24.9	27.4	40.0	12.6	133.0	77.0	
2	98.385	V	60.2	-22.6	37.6	40.0	2.4	105.0	255.0	
3	101.780	H	47.4	-22.4	25.0	40.0	15.0	400.0	317.0	
4	101.901	V	59.6	-22.4	37.2	40.0	2.8	160.0	248.0	


◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

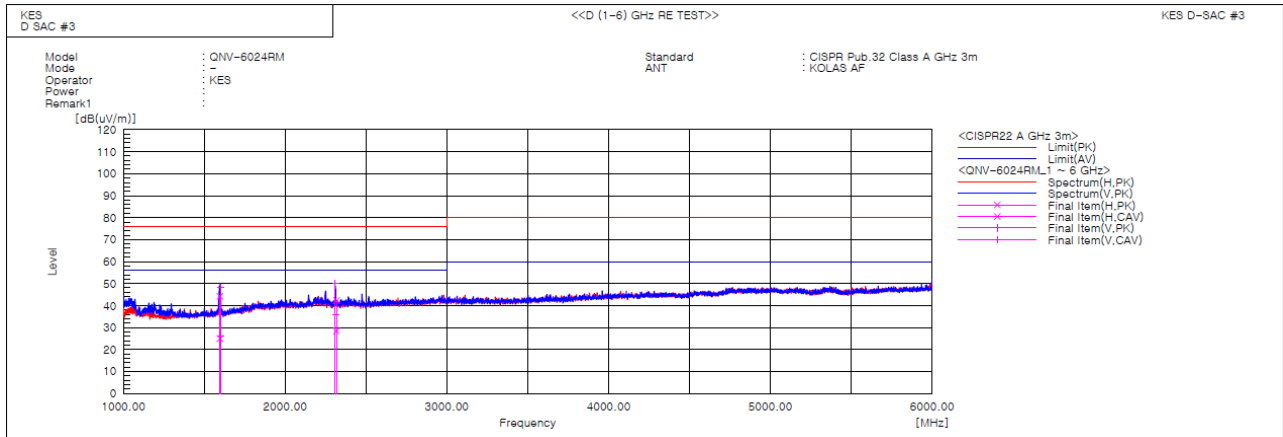**Radiated Electric Field Emissions(Above 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1596.131	H	50.1	30.8	-5.8	44.3	25.0	76.0	56.0	31.7	31.0	100.0	194.8	
2	1599.920	V	54.2	32.1	-5.8	48.4	26.3	76.0	56.0	27.6	29.7	100.0	8.4	
3	2310.240	V	51.1	36.8	-1.0	50.1	35.8	76.0	56.0	25.9	20.2	100.0	99.6	
4	2317.748	H	43.3	29.4	-0.9	42.4	28.5	76.0	56.0	33.6	27.5	100.0	210.4	

◆ Calculation

Over Limit [dB] = (Read Level[dB μ V] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dB μ V]

Over Limit : Marjin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

**Harmonic Current Emissions and Voltage Fluctuations and Flicker**

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
N/A				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
N/A				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Report No. : KES-E1-19T0539-R3

Page 40 / 54

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	-	-	-	-	-
Limits:	-	-	-	-	-
Results:	-	-	-	-	-






Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A



Conducted Telecommunication Emissions

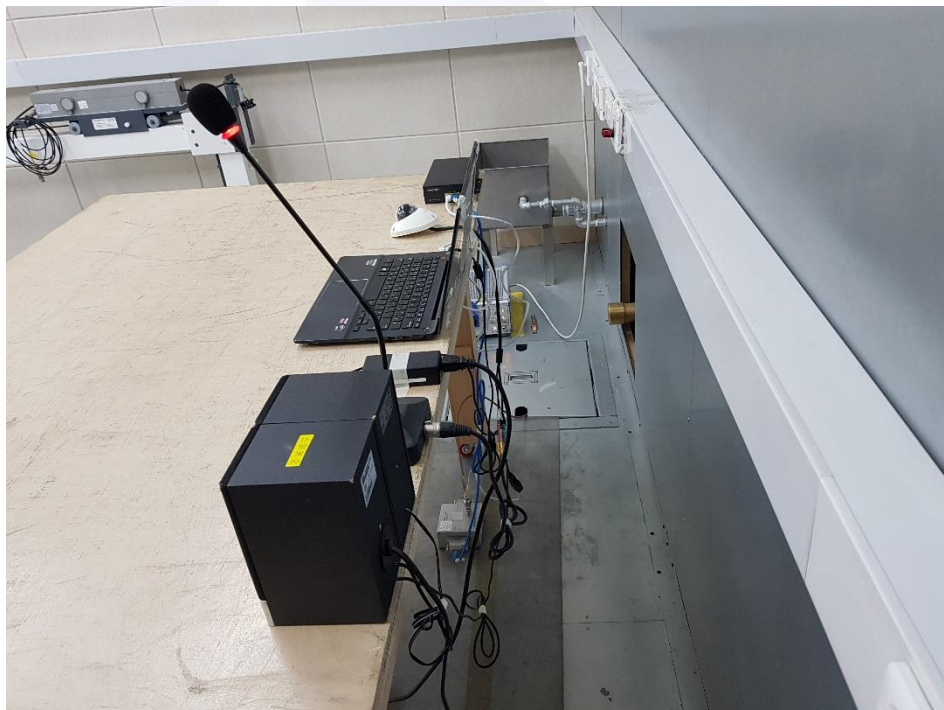




Radiated Electric Field Emissions(Below 1 GHz)





Radiated Electric Field Emissions(Above 1 GHz)

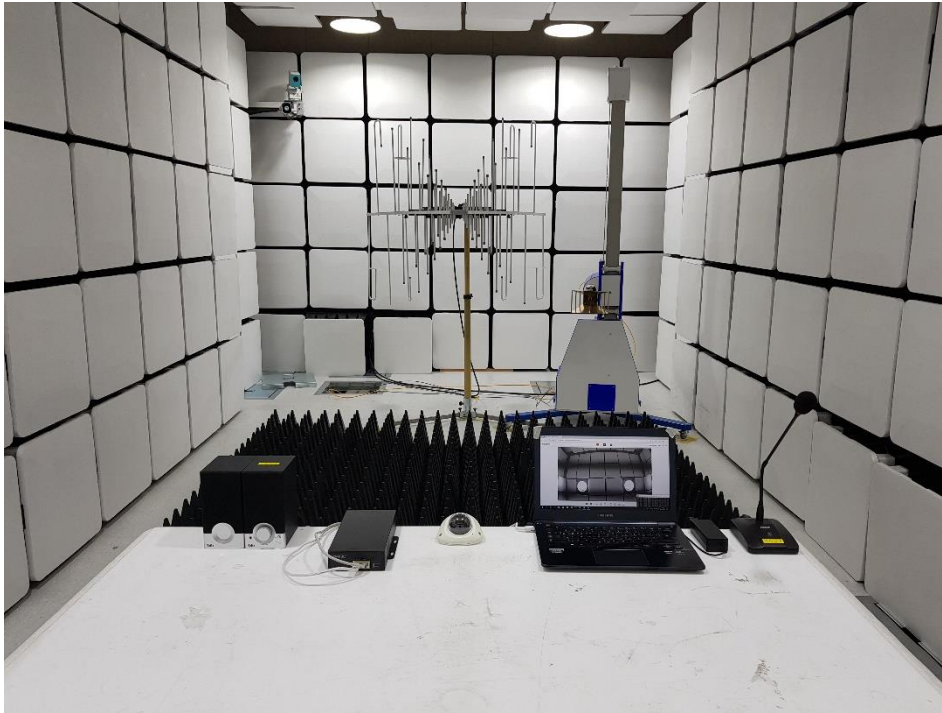



Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A






Electrostatic Discharge



Radiated Electric Field Immunity

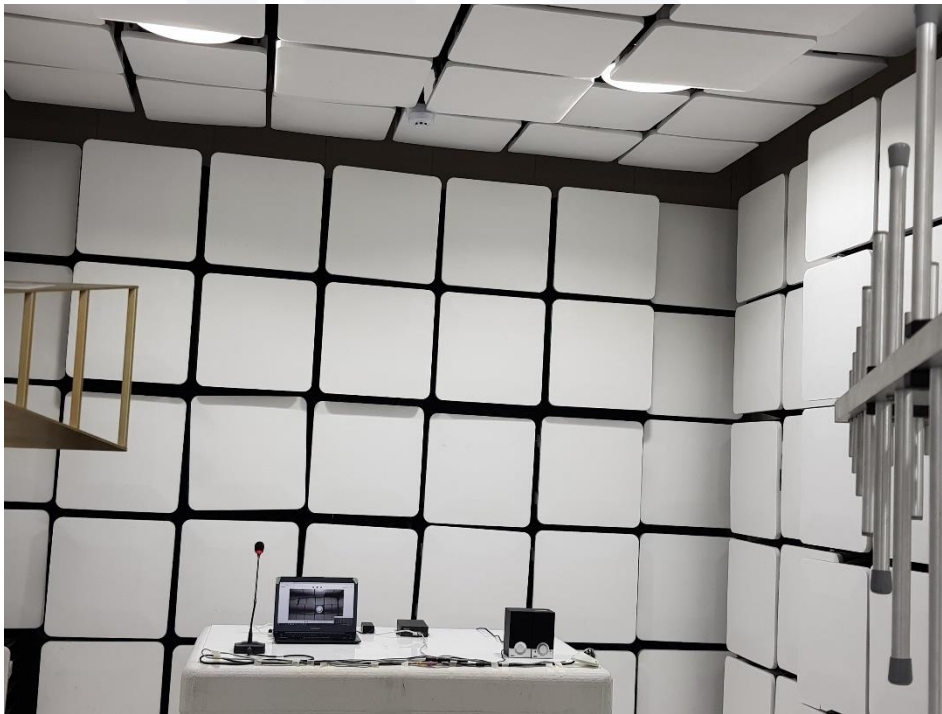



Electrical Fast Transients/Bursts



Surge Transients





Conducted Disturbance





EUT External Photographs

(Top)



(Bottom)





EUT Internal Photographs


(Internal View)






EUT Internal View – Main Board

(Top)

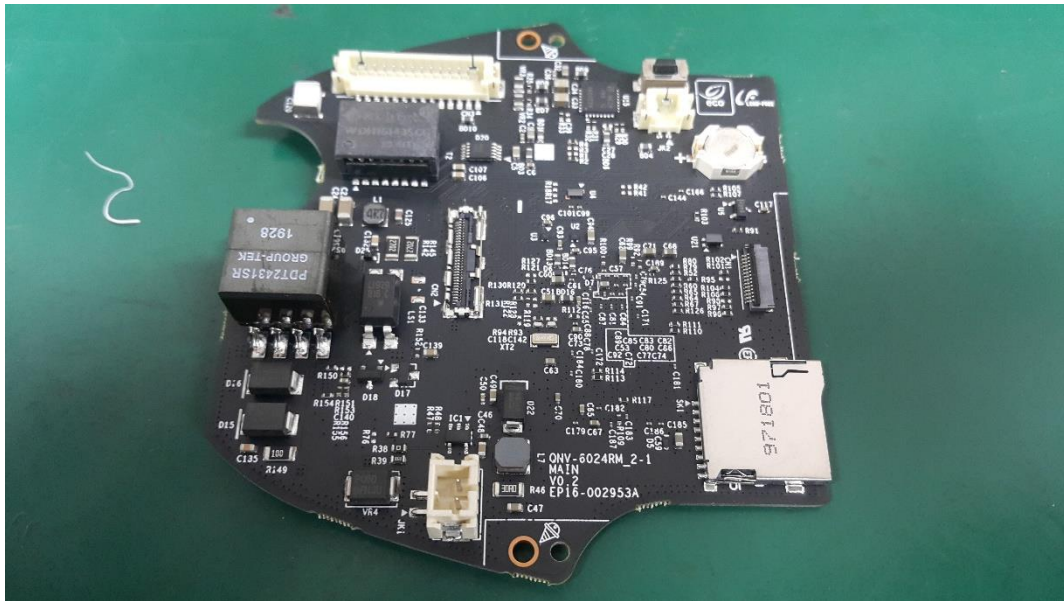

(Bottom)

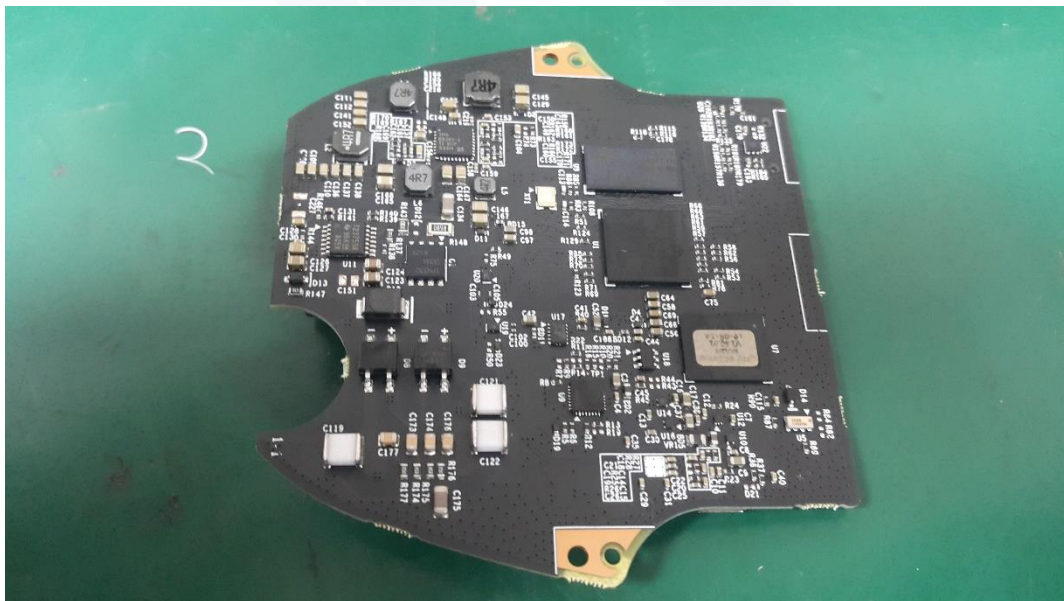




EUT Internal View – LENS Board

(Top)



(Bottom)

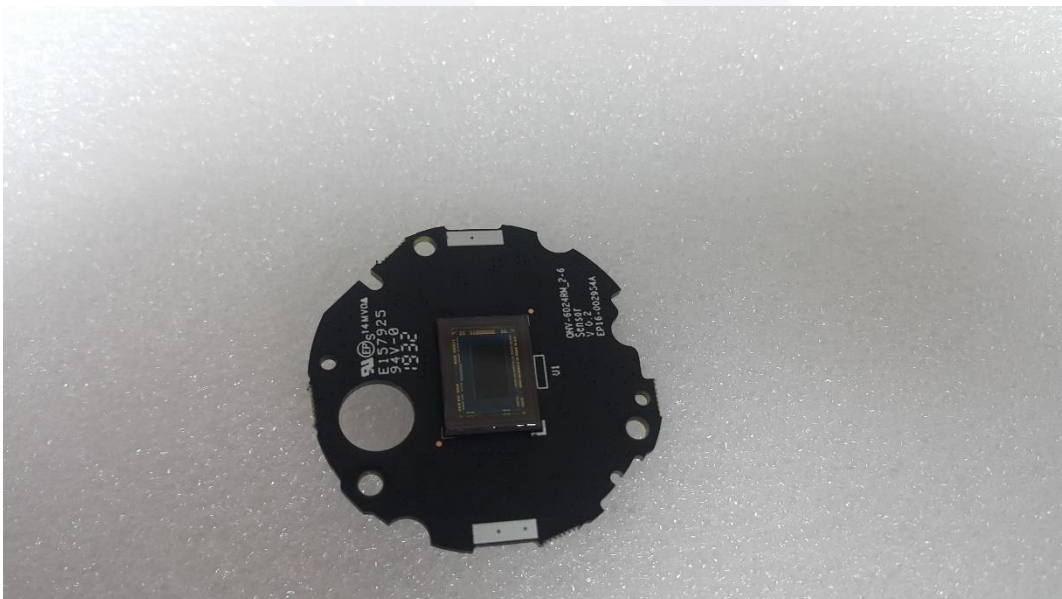



EUT Internal View – IR Board

(Top)



(Bottom)





Label and Location



NETWORK CAMERA

Model No : QNV-6024RM

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

