

EMC TEST REPORT


Test Report No. : KES-EM-23T0212
Date of Issue : Mar. 10, 2023
Product name : NVR
Model/Type No. : QRN-1630S
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Feb. 20, 2023
Test date : Mar. 02, 2023 ~ Mar. 08, 2023
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Min Seong, Kim
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (2) of (62)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 10, 2023	KES-EM-23T0212	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	4
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test	7
1.5	Support Equipments	8
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	10
1.8	Configuration	10
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance	19
3.1	Electrostatic Discharge	21
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	29
3.5	Conducted Disturbance	32
3.6	Voltage Dips and Short Interruptions	35
APPENDIX A – TEST DATA		37
Conducted Emissions at Mains Power Ports		37
Conducted Emissions at Telecommunication Ports		39
Radiated Electric Field Emissions(Below 1 GHz)		41
Radiated Electric Field Emissions(Above 1 GHz)		42
Harmonic Current Emissions and Voltage Fluctuations and Flicker		43
Test Setup Photos and Configuration		46
Conducted Emissions at Mains Power Ports		46
Conducted Emissions at Telecommunication Ports		47
Radiated Electric Field Emissions(Below 1 GHz)		48
Radiated Electric Field Emissions(Above 1 GHz)		49
Harmonic Current Emissions and Voltage Fluctuations and Flicker		50
Electrostatic Discharge		51
Radiated Electric Field Immunity		51
Electrical Fast Transients/Bursts		52
Surge Transients		52
Conducted Disturbance		53
Voltage Dips and Short Interruptions		53
EUT External Photographs		54
EUT Internal Photographs		55

1.0 General Product Description

Main Specifications of EUT are:

Display		
Network camera	Inputs	Max. 16CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	HDMI1: 3840x2160(30Hz), HDMI2: 1920x1080(60Hz)
	Multi Screen Display	Clone Mode : Dynamic layout Expand Mode : HDMI1 Dynamic layout, HDMI2 up to 16 Div. [Web] 1/ 2H/ 2V/ 3V/ 4/ 6/ 8/ 9
	Resolution	[Local Monitor] 8M(60fps), 1080p(240fps), 720P(480fps), D1(960fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 128Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 40CH(Local 16CH, Remote 8CH per user)
	Fisheye Dewarping	CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 8MP
Storage	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
	Supported HDD	Up to 10TB
Backup	HDD Slot	SATA 2ea(Max. 20TB)
	File backup	BU/Exe/AVI(GUI), JPG/AVI(Network)
Backup	Function	Multi channel(Up to 8CH) Play, Date-Time/Title display
Network		
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	
Transmission Bandwidth	Max. 128Mbps	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (5) of (62)

Audio	Input/Output	16 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware	
Web viewer	Supported OS	Windows 10, macOS 11
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software	WAVE, SSM, Webviewer, Smart Viewer, Wisenet Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS	
Functions		
Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live: Multi-Profile Support, Multi Channel Playback
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration	P2P(QR code)	
Interface		
Front	Indicator	Power, Record, Network
Storage	OK	
HDMI	2EA	
Audio	Out 1EA (RCA output)	
Ethernet	PoE RJ-45 16EA (LAN, 10/100), RJ-45 1ea (LAN/WAN 1Gbps)	
Alarm	In 4EA, Out 2EA	
USB	2EA(Front 2 x USB 2.0)	
Power inlet	AC 1EA	
System		
Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control	Mouse, Keyboard, Web	
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese	
Environmental		
Operating Temperature	0°C to +40°C(32°F to 104°F)	
Operating Humidity	20% ~ 85% RH	
Electrical		
Power Input	100 ~ 240 VAC ± 10%; 50/60 Hz	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (6) of (62)

Power Consumption	Max. 200W(682 BTU with 2HDD, PoE ON)
-------------------	--------------------------------------

PoE Budget	130W
------------	------

Mechanical

Color / Material	Black / Metal
------------------	---------------

Dimension (WxHxD)	370.0 x 50.7 x 320 mm (14.6 x 2.0 x 12.6 inch)
-------------------	--

Weight	2.87Kg (6.33 lb)
--------	------------------

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NVR	QRN-1630S	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
SWITCHING POWER SUPPLY	DPS-200PB-185 C	-	Delta Electronics Power(Dongguan) Co., Ltd.	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (8) of (62)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera	LND-6070R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Laptop	Latitude 5300	8C47BE45C060	DELL INC.	-
Laptop Adapter	HA65NM130	-	Chicony Power Technology(Suzhou)Co., Ltd.	-
Monitor	24M47VQ	-	LG	-
Monitor Adapter	LCAP26-E	-	Genmao Electronics (Suzhou) Co., Ltd	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
MIC	MP1000	-	-	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
HDD	810051	-	WESTERN DIGITAL TECHNOLOGIES, INC.	2 TB
USB Memory	-	-	Sandisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NVR (EUT)	USB	Mouse (EUT)	USB	1.4	U
	RJ-45 (PoE)	Camera	RJ-45 (PoE)	10.0	U
	RJ-45 (LAN)	Laptop	RJ-45 (LAN)	4.0	U
	HDMI	Monitor	HDMI	1.5	S
	Audio Output (RCA)	Speaker	Line-Out (RCA)	1.6	U
	Alarm Output (2 Pin)	Alarm	2 Pin	4.0	U
	Alarm Input (2 Pin)	Button Alarm	2 Pin	4.0	U
	SATA	HDD	SATA	-	-
	USB	USB Memory	USB	-	-
	Ground	Earth	Ground	1.6	-
Laptop	DC Jack	Laptop Adapter	DC Jack	2.0	U
	3.5 mm	MIC	XLR	2.0	U
Monitor	DC Jack	Monitor Adapter	DC Jack	2.0	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operating	- Check that the video from the cameras are displayed normally on the monitor. - Connect to the web viewer on your laptop and check if the video from the cameras are displayed normally. - Network ping test on the laptop - Check the status a moving color bars and 1 KHz tone - Check the operation of the alarm by pressing the button alarm and check if the alarm is displayed in the web viewer of the laptop. - Check the storage device for the recorded screen after the test.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

☒ AC Main
☐ DC Main

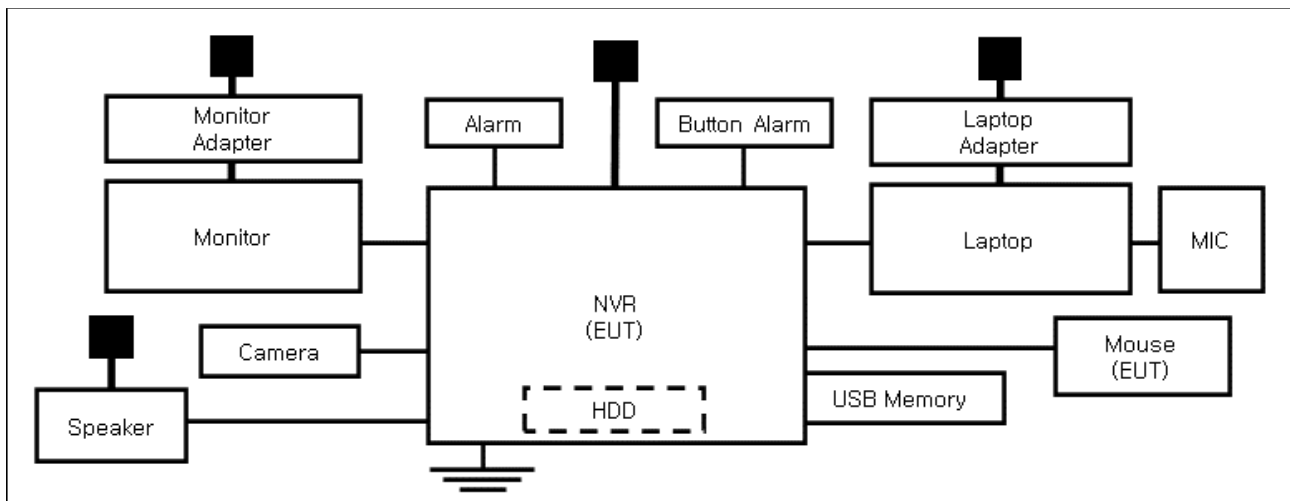

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 07, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Test Conditions

Temperature: (24,3 ± 0,2) °C

Relative Humidity: (43,0 ± 0,4) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Mar. 07, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	11, 22, 2023
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	11, 22, 2023

Test Conditions

Temperature: (24,3 ± 0,2) °C

Relative Humidity: (43,0 ± 0,4) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.

- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar. 07, 2023

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 03, 2024

Test Conditions

Temperature: (23,5 ± 0,2) °C
Relative Humidity: (42,7 ± 0,5) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar. 07, 2023

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
☒	ATTENUATOR	8491B	HP	23094	04, 21, 2023

Test Conditions

Temperature: (24,6 ± 0,1) °C
Relative Humidity: (42,8 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.

2.5 Harmonic Current Emissions

Test Date

Mar. 08, 2023

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,4 ± 0,2) °C
Relative Humidity: (44,6 ± 0,5) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Mar. 08, 2023

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,4 ± 0,2) °C
Relative Humidity: (44,6 ± 0,5) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Mar. 08, 2023

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	01, 31, 2024
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (23,8 ± 0,2) °C
Relative Humidity: (44,0 ± 0,3) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact

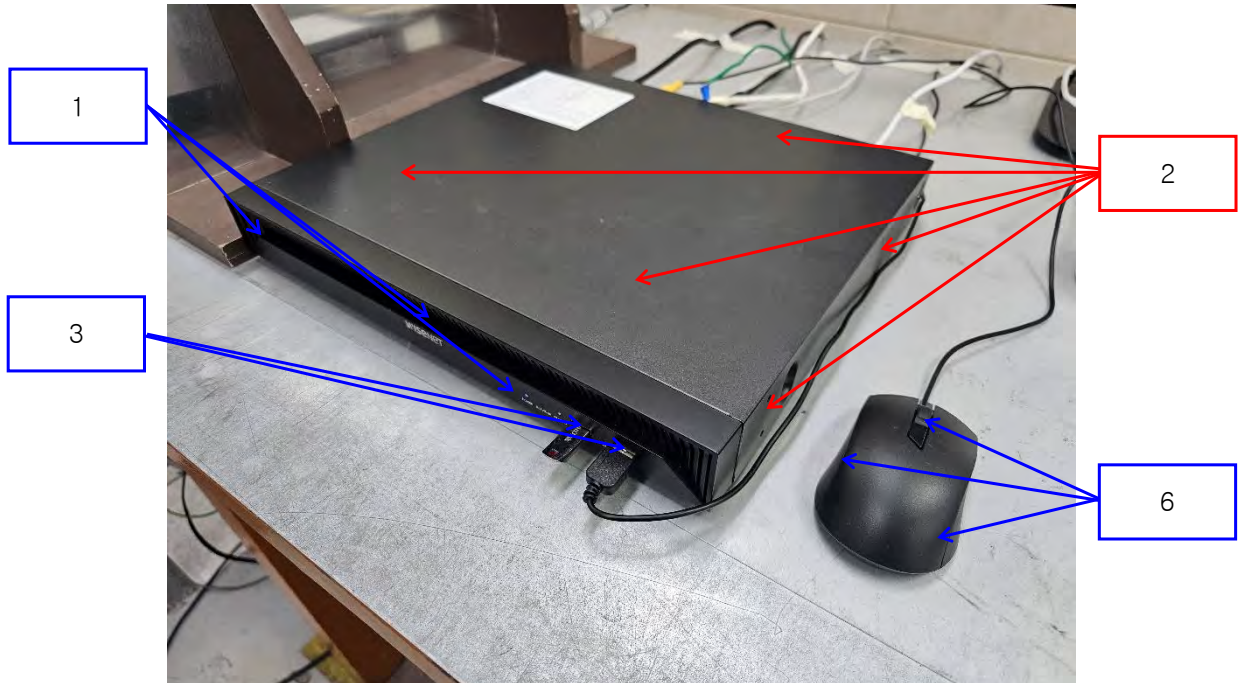

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (23) of (62)

Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Enclosure Metal, Screws	Contact Discharge	Complied	-
3	Front USB Ports	Air Discharge	Complied	-
4	Rear Ports, Rear Ports around	Contact Discharge	Complied	-
5	Rear Alarm Ports, Power Port, Power Button	Air Discharge	Complied	-
6	Mouse	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Mar. 02, 2023

Test LocationEMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 01, 2023
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	03, 31, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	04, 04, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	04, 04, 2023
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	03, 03, 2023

Test Conditions

Temperature: (23,6 ± 0,1) °C
Relative Humidity: (42,7 ± 0,2) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (25) of (62)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (26) of (62)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Mar. 08, 2023

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 28, 2023

Test Conditions

Temperature: (23,5 ± 0,2) °C
Relative Humidity: (44,6 ± 0,4) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (PoE)	Complied	Complied
RJ-45 (LAN)	Complied	Complied
Alarm Output (2 Pin)	Complied	Complied
Alarm Input (2 Pin)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Mar. 08, 2023

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 29, 2023

Test Conditions

Temperature: (23,9 ± 0,2) °C
Relative Humidity: (44,1 ± 0,4) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (30) of (62)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (PoE)	CDN	Complied	Complied
	LINE	Complied	Complied
RJ-45 (LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Mar. 06, 2023

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 10, 2023
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 10, 2023
☒	CDN	CDN M016	TESEQ	43694	11, 10, 2023
☒	CDN	CDN M016	TESEQ	43697	11, 10, 2023
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 01, 2023
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 14, 2023

Test Conditions

Temperature: (23,8 ± 0,1) °C
Relative Humidity: (43,1 ± 0,3) % R.H.
Atmospheric Pressure: (100,3 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (33) of (62)

Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☐ 1 s

☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (PoE)	CDN	Complied
RJ-45 (LAN)	CDN	Complied
Alarm Output (2 Pin)	Clamp	Complied
Alarm Input (2 Pin)	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.6 Voltage Dips and Short Interruptions

Reference Standard
EN IEC 61000-4-11:2020

Test Date
Mar. 08, 2023

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 29, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023

Test Conditions

Temperature: (23,7 ± 0,2) °C
Relative Humidity: (44,2 ± 0,3) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (36) of (62)

Test Specifications & Observations/Remarks**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks


During the test, EUT was turned off but after the test, it was recovered without operator's intervention.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports [HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	QRN-1630S
Phase:	L1
Mode:	-
Operator Name:	KES

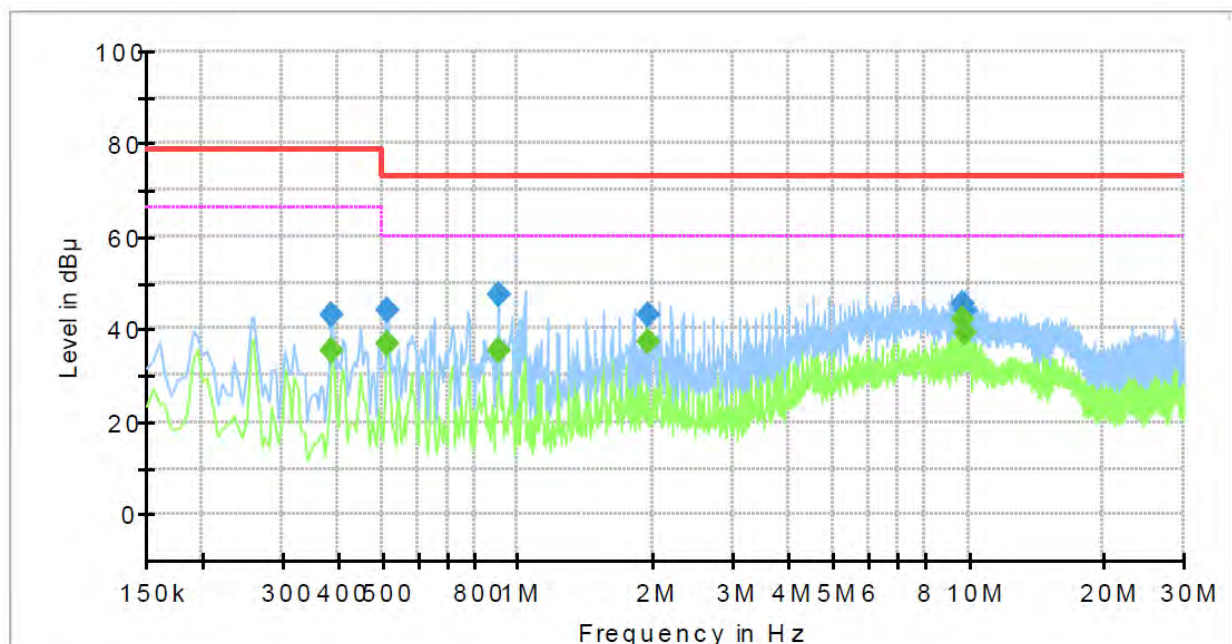


Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.385000	---	35.15	66.00	30.85	1000.0	9.000	L1	19.6
0.385000	43.13	---	79.00	35.87	1000.0	9.000	L1	19.6
0.515000	---	36.67	60.00	23.33	1000.0	9.000	L1	19.7
0.515000	44.08	---	73.00	28.92	1000.0	9.000	L1	19.7
0.905000	---	35.48	60.00	24.52	1000.0	9.000	L1	20.0
0.905000	47.35	---	73.00	25.65	1000.0	9.000	L1	20.0
1.940000	---	37.18	60.00	22.82	1000.0	9.000	L1	20.3
1.940000	43.25	---	73.00	29.75	1000.0	9.000	L1	20.3
9.700000	---	41.96	60.00	18.04	1000.0	9.000	L1	19.9
9.700000	45.64	---	73.00	27.36	1000.0	9.000	L1	19.9
9.800000	---	39.29	60.00	20.71	1000.0	9.000	L1	19.9
9.800000	44.23	---	73.00	28.77	1000.0	9.000	L1	19.9

[NEUTRAL]
Common Information

Test Description:	Conducted Emission
Model No.:	QRN-1630S
Phase:	N
Mode:	-
Operator Name:	KES

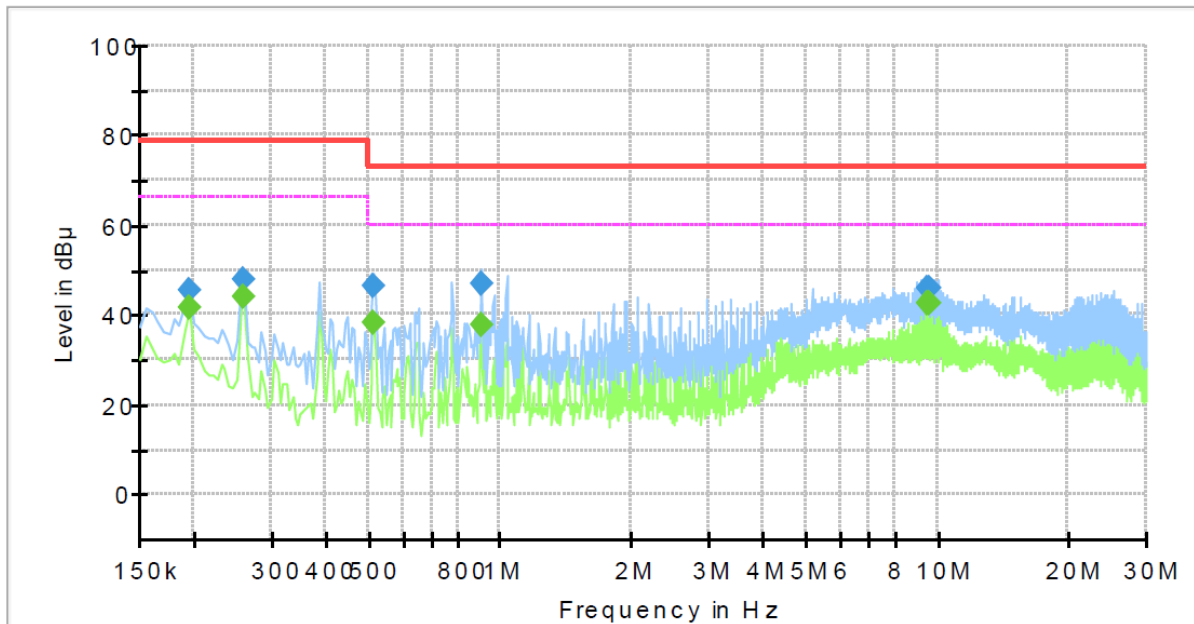
Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	41.80	66.00	24.20	1000.0	9.000	N	19.5
0.195000	45.31	---	79.00	33.69	1000.0	9.000	N	19.5
0.260000	---	43.89	66.00	22.11	1000.0	9.000	N	19.5
0.260000	47.87	---	79.00	31.13	1000.0	9.000	N	19.5
0.515000	---	38.23	60.00	21.77	1000.0	9.000	N	19.7
0.515000	46.52	---	73.00	26.48	1000.0	9.000	N	19.7
0.905000	---	37.67	60.00	22.33	1000.0	9.000	N	20.0
0.905000	47.15	---	73.00	25.85	1000.0	9.000	N	20.0
9.505000	---	42.58	60.00	17.42	1000.0	9.000	N	19.9
9.505000	45.81	---	73.00	27.19	1000.0	9.000	N	19.9
9.610000	---	42.55	60.00	17.45	1000.0	9.000	N	19.9
9.610000	45.79	---	73.00	27.21	1000.0	9.000	N	19.9

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ LAN

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QRN-1630S
Mode :	LAN
Speed :	1 000 Mbps
Operator Name:	KES

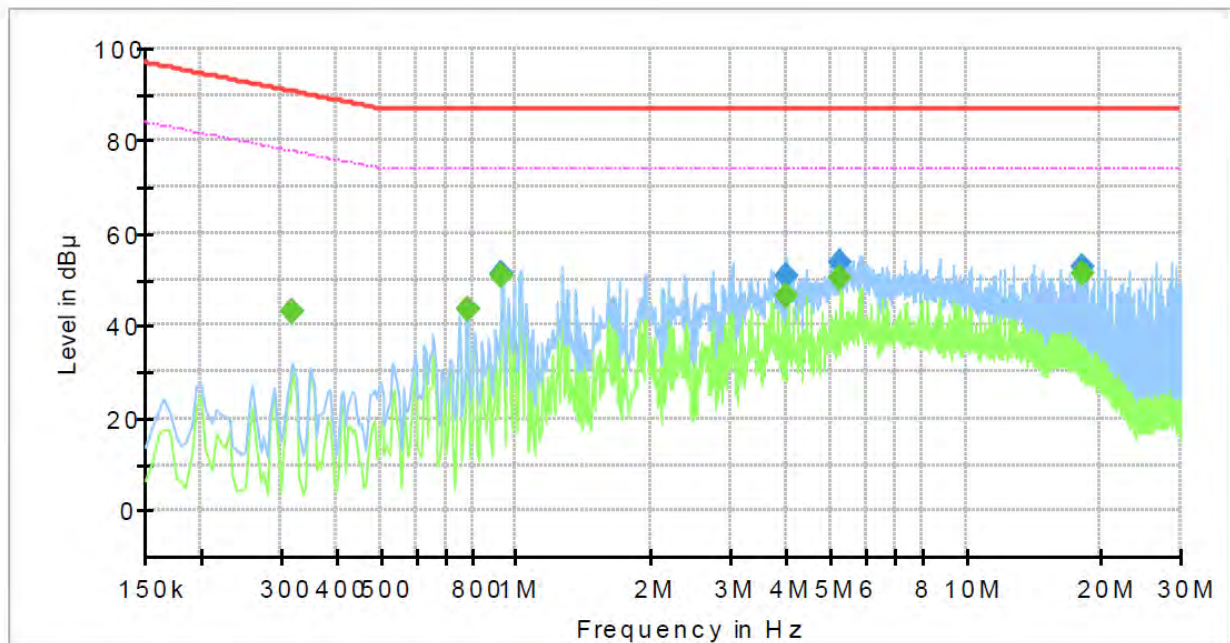

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.320000	---	43.01	77.71	34.70	1000.0	9.000	Single Line	19.6
0.320000	43.14	---	90.71	47.57	1000.0	9.000	Single Line	19.6
0.780000	---	43.52	74.00	30.48	1000.0	9.000	Single Line	19.9
0.780000	43.66	---	87.00	43.34	1000.0	9.000	Single Line	19.9
0.930000	---	50.67	74.00	23.33	1000.0	9.000	Single Line	20.0
0.930000	51.11	---	87.00	35.89	1000.0	9.000	Single Line	20.0
4.015000	---	46.64	74.00	27.36	1000.0	9.000	Single Line	19.7
4.015000	50.77	---	87.00	36.23	1000.0	9.000	Single Line	19.7
5.235000	---	50.12	74.00	23.88	1000.0	9.000	Single Line	19.4
5.235000	53.82	---	87.00	33.18	1000.0	9.000	Single Line	19.4
18.245000	---	51.13	74.00	22.87	1000.0	9.000	Single Line	19.8
18.245000	52.81	---	87.00	34.19	1000.0	9.000	Single Line	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ PoE

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QRN-1630S
Mode :	PoE
Speed :	100 Mbps
Operator Name:	KES

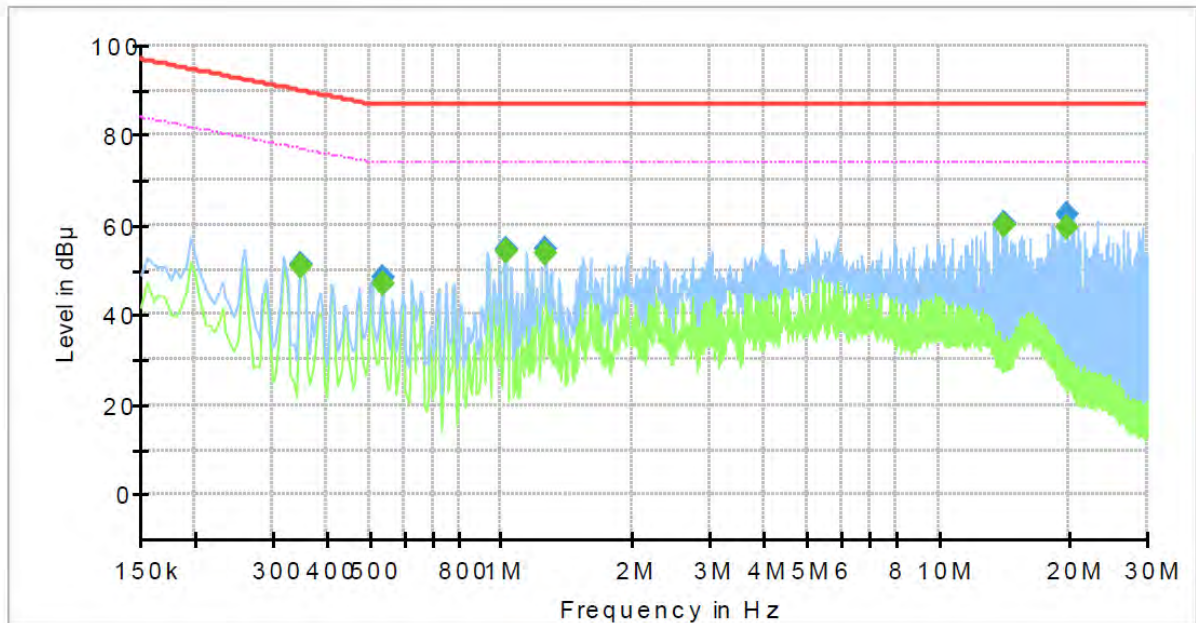

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.350000	---	50.71	76.96	26.25	1000.0	9.000	Single Line	19.7
0.350000	51.28	---	89.96	38.68	1000.0	9.000	Single Line	19.7
0.535000	---	47.07	74.00	26.93	1000.0	9.000	Single Line	19.8
0.535000	48.29	---	87.00	38.71	1000.0	9.000	Single Line	19.8
1.025000	---	54.05	74.00	19.95	1000.0	9.000	Single Line	20.1
1.025000	54.81	---	87.00	32.19	1000.0	9.000	Single Line	20.1
1.265000	---	53.79	74.00	20.21	1000.0	9.000	Single Line	20.1
1.265000	54.72	---	87.00	32.28	1000.0	9.000	Single Line	20.1
14.215000	---	60.07	74.00	13.93	1000.0	9.000	Single Line	19.7
14.215000	60.27	---	87.00	26.73	1000.0	9.000	Single Line	19.7
19.710000	---	59.55	74.00	14.45	1000.0	9.000	Single Line	20.0
19.710000	62.28	---	87.00	24.72	1000.0	9.000	Single Line	20.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

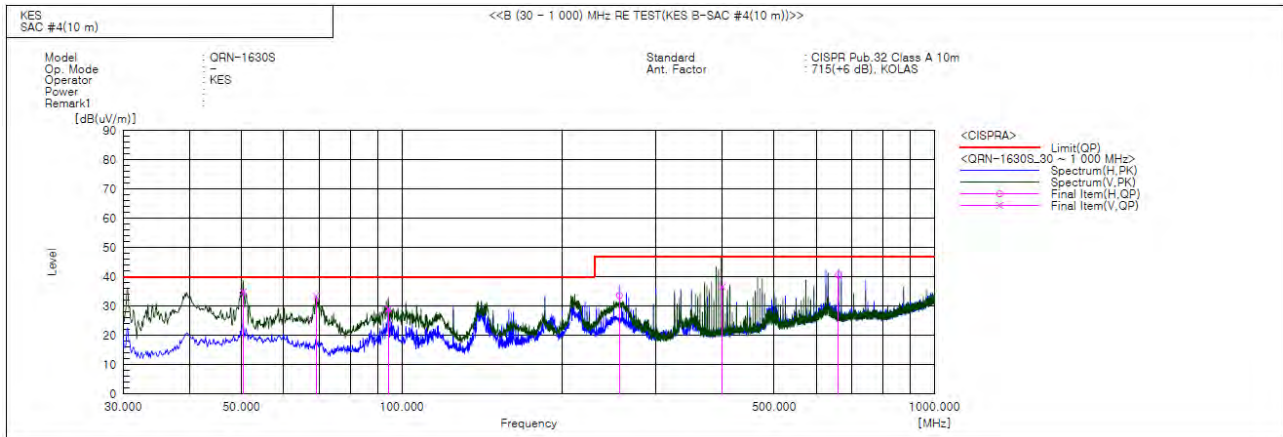

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.370	V	55.4	-20.6	34.8	40.0	5.2	100.0	230.0	
2	69.043	V	57.8	-24.4	33.4	40.0	6.6	100.0	244.0	
3	94.384	V	51.9	-22.9	29.0	40.0	11.0	142.0	244.0	
4	256.253	H	52.8	-19.2	33.6	47.0	13.4	400.0	282.0	
5	400.019	V	50.5	-13.9	36.6	47.0	10.4	134.0	62.0	
6	660.015	H	48.5	-7.9	40.6	47.0	6.4	337.0	344.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-23T0212

Page (42) of (62)

Radiated Electric Field Emissions(Above 1 GHz)

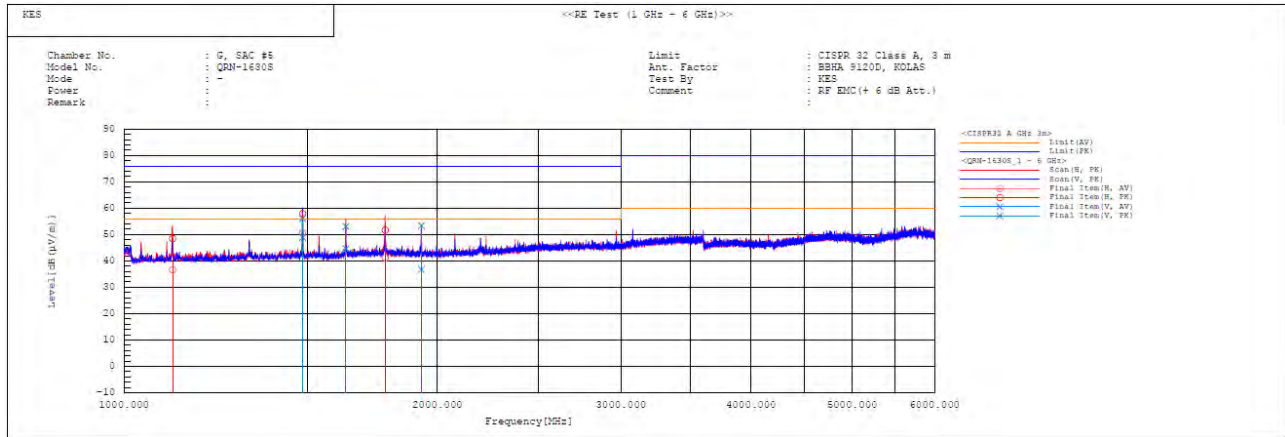

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1113.747	H	38.3	50.2	-1.7	36.6	48.5	56.0	76.0	19.4	27.5	100.0	327.1	
2	1484.971	H	50.5	57.8	0.2	50.7	58.0	56.0	76.0	5.3	18.0	100.0	44.6	
3	1484.976	V	48.7	55.9	0.2	48.9	56.1	56.0	76.0	7.1	19.9	100.0	148.7	
4	1633.470	V	43.9	52.4	0.6	44.5	53.0	56.0	76.0	11.5	23.0	100.0	15.9	
5	1781.955	H	39.5	50.0	1.7	41.2	51.7	56.0	76.0	14.8	24.3	100.0	346.3	
6	1930.461	V	34.9	51.5	1.9	36.8	53.4	56.0	76.0	19.2	22.6	100.0	357.7	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.138			
2	0.001	0.061	1.080	n/a
3	0.021	0.903	2.300	PASS
4	0.001	0.166	0.430	n/a
5	0.010	0.908	1.140	PASS
6	0.001	0.241	0.300	n/a
7	0.006	0.804	0.770	PASS
8	0.001	0.294	0.230	n/a
9	0.003	0.861	0.400	n/a
10	0.001	0.402	0.184	n/a
11	0.004	1.122	0.330	n/a
12	0.001	0.432	0.153	n/a
13	0.003	1.618	0.210	n/a
14	0.001	0.558	0.131	n/a
15	0.004	2.439	0.150	n/a
16	0.001	0.571	0.115	n/a
17	0.002	1.603	0.132	n/a
18	0.001	0.677	0.102	n/a
19	0.003	2.255	0.118	n/a
20	0.001	0.764	0.092	n/a
21	0.002	1.418	0.161	n/a
22	0.001	0.807	0.084	n/a
23	0.002	1.038	0.147	n/a
24	0.001	0.963	0.077	n/a
25	0.002	1.470	0.135	n/a
26	0.001	0.908	0.071	n/a
27	0.002	1.388	0.125	n/a
28	0.001	0.960	0.066	n/a
29	0.001	1.225	0.116	n/a
30	0.001	1.064	0.061	n/a
31	0.002	1.793	0.109	n/a
32	0.001	1.124	0.058	n/a
33	0.001	1.457	0.102	n/a
34	0.001	1.241	0.054	n/a
35	0.002	1.707	0.096	n/a
36	0.001	1.227	0.051	n/a
37	0.001	1.440	0.091	n/a
38	0.001	1.364	0.048	n/a
39	0.002	2.100	0.087	n/a
40	0.001	1.422	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.138			
2	0.001	0.053	1.620	n/a
3	0.021	0.608	3.450	PASS
4	0.001	0.137	0.645	n/a
5	0.010	0.613	1.710	PASS
6	0.001	0.205	0.450	n/a
7	0.006	0.551	1.155	PASS
8	0.001	0.242	0.345	n/a
9	0.004	0.608	0.600	n/a
10	0.001	0.310	0.276	n/a
11	0.004	0.822	0.495	n/a
12	0.001	0.348	0.230	n/a
13	0.004	1.117	0.315	n/a
14	0.001	0.412	0.197	n/a
15	0.004	1.682	0.225	n/a
16	0.001	0.418	0.173	n/a
17	0.002	1.129	0.199	n/a
18	0.001	0.498	0.153	n/a
19	0.003	1.587	0.178	n/a
20	0.001	0.580	0.138	n/a
21	0.002	1.481	0.161	n/a
22	0.001	0.610	0.125	n/a
23	0.002	1.104	0.147	n/a
24	0.001	0.712	0.115	n/a
25	0.002	1.572	0.135	n/a
26	0.001	0.678	0.106	n/a
27	0.002	1.454	0.125	n/a
28	0.001	0.725	0.099	n/a
29	0.002	1.314	0.116	n/a
30	0.001	0.797	0.092	n/a
31	0.002	1.890	0.109	n/a
32	0.001	0.826	0.086	n/a
33	0.002	1.546	0.102	n/a
34	0.001	0.938	0.081	n/a
35	0.002	1.797	0.096	n/a
36	0.001	0.900	0.077	n/a
37	0.002	1.739	0.091	n/a
38	0.001	1.049	0.073	n/a
39	0.002	2.219	0.087	n/a
40	0.001	1.074	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0212
Page (45) of (62)

Test Data - Voltage Fluctuations


Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

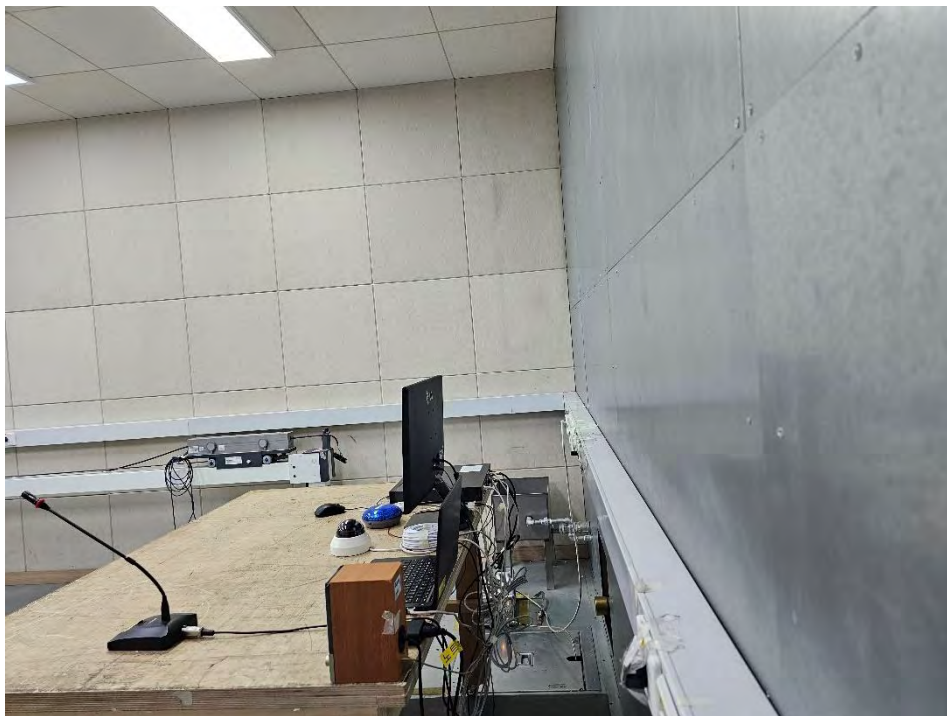



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

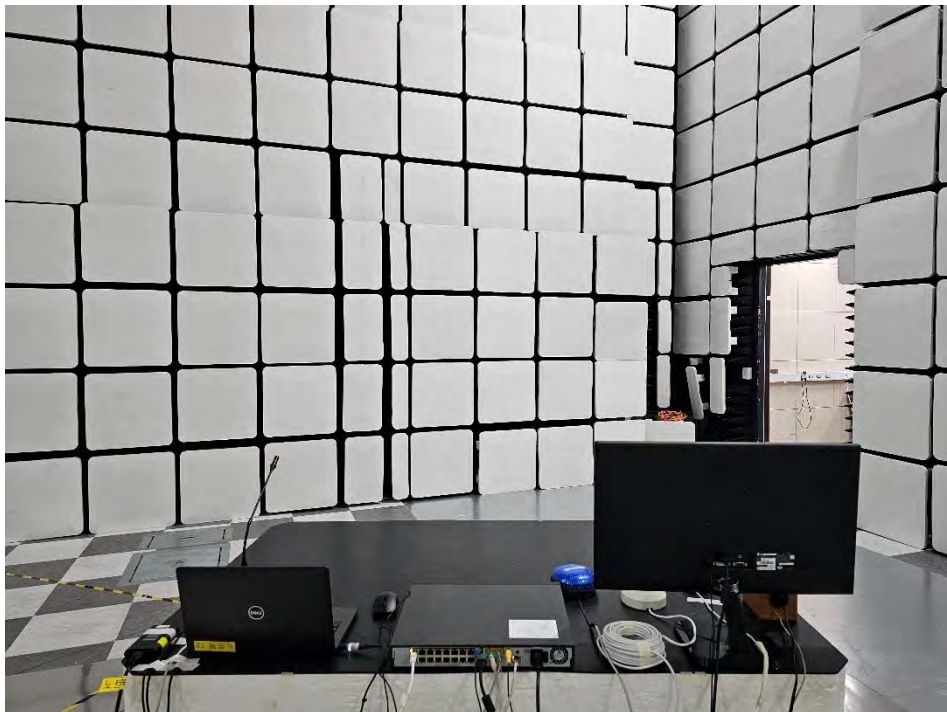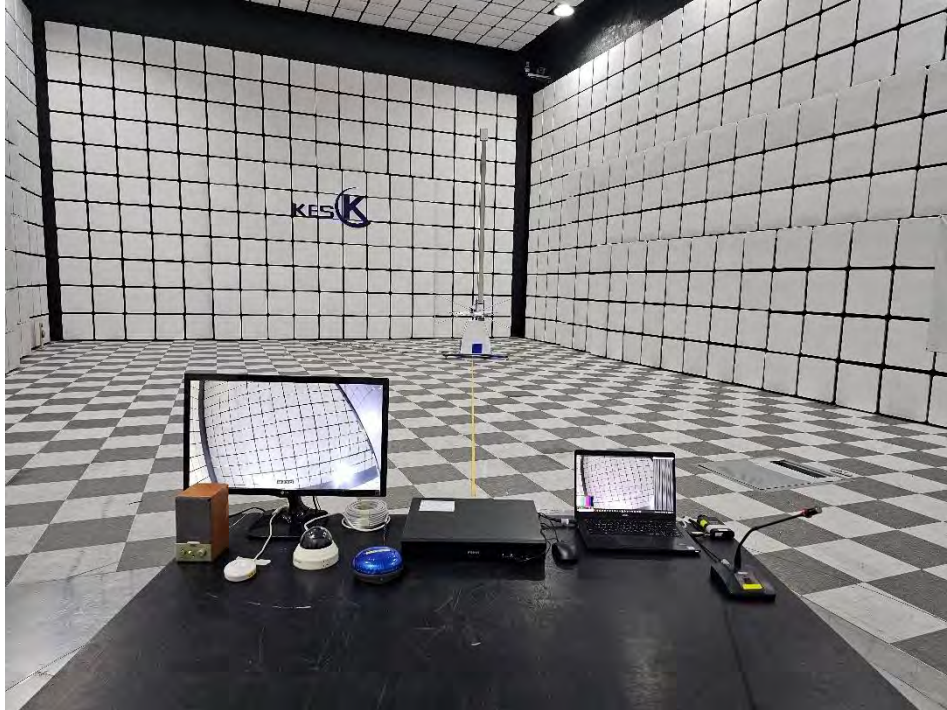

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

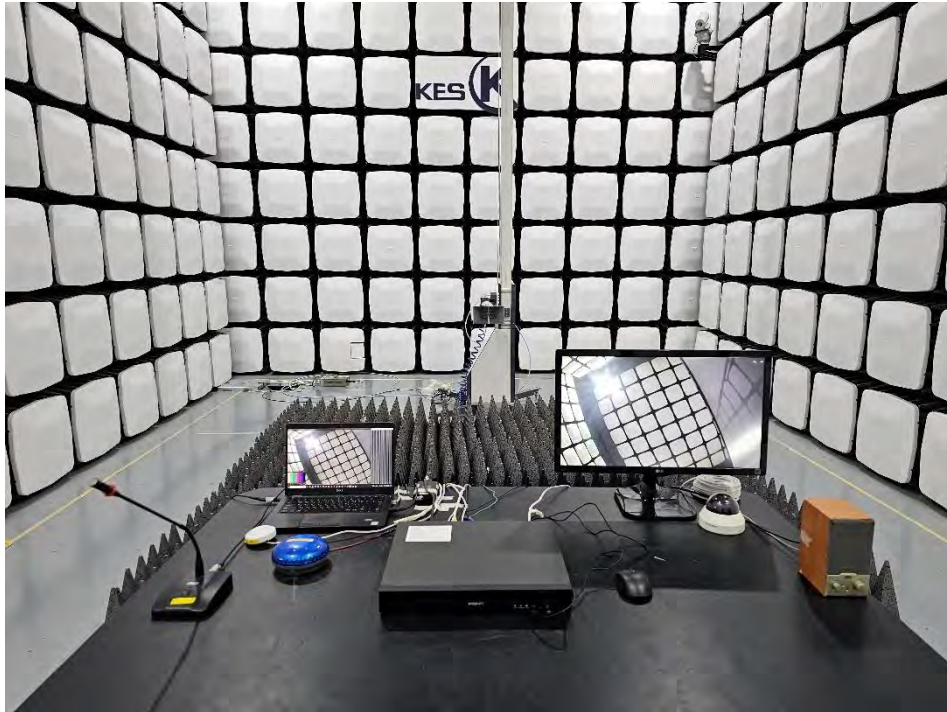

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Main Board

(Top)




(Bottom)

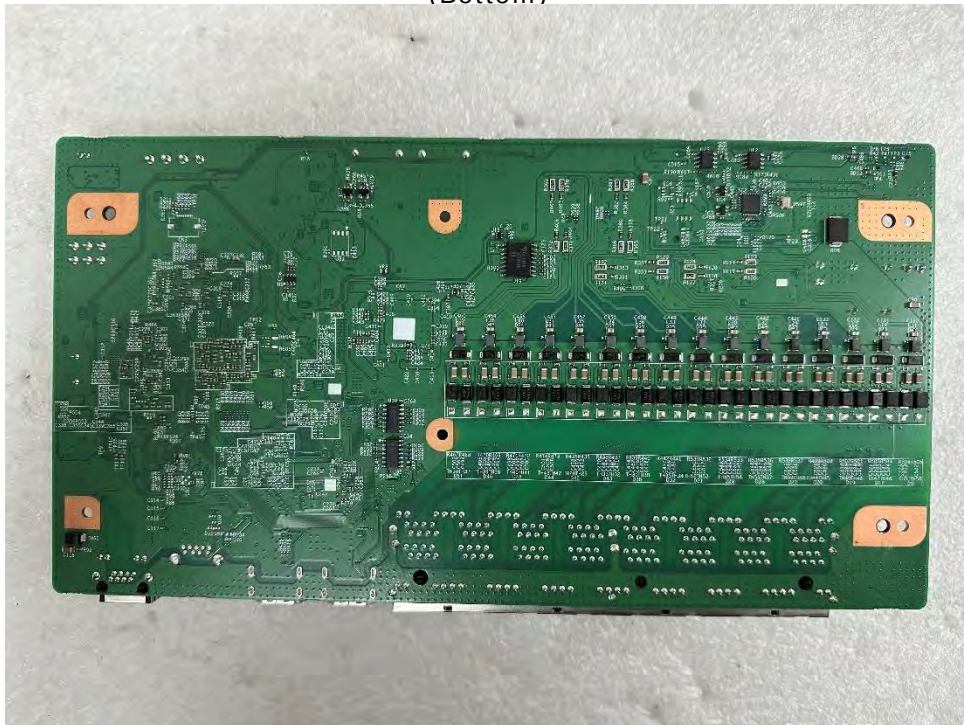

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board

(Top)

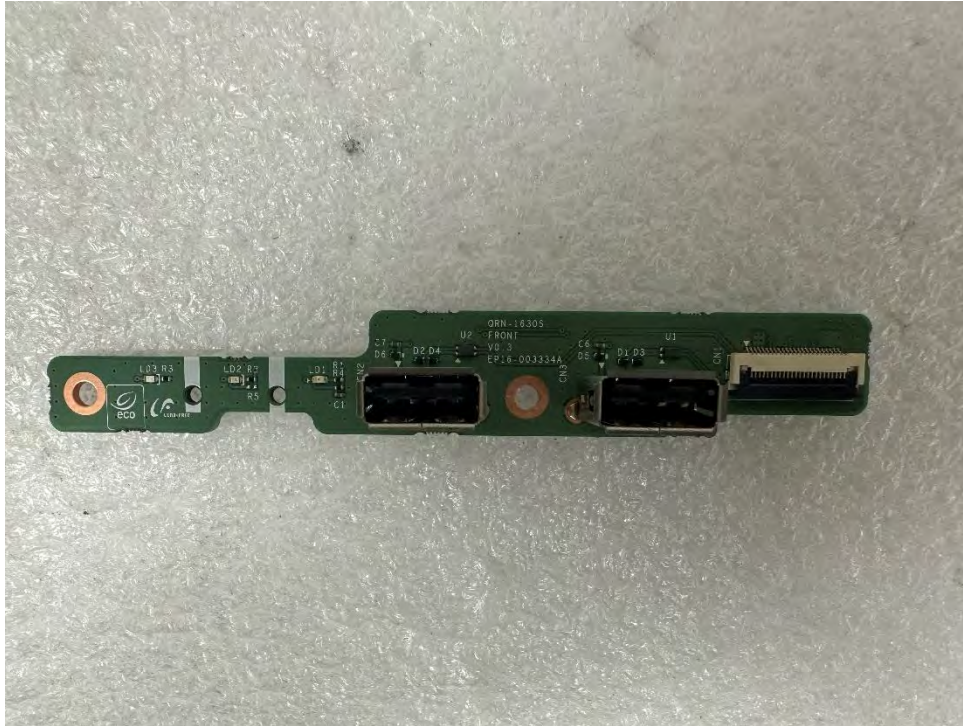

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Alarm Board

(Top)



(Bottom)

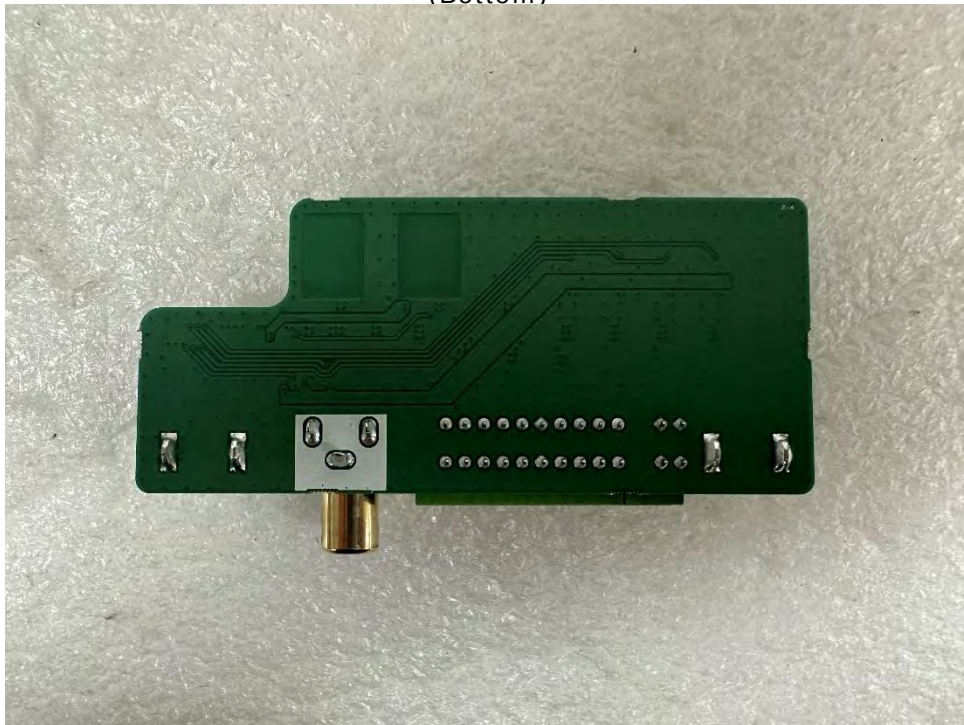

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Fan

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Mouse

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – SWITCHING POWER SUPPLY

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location

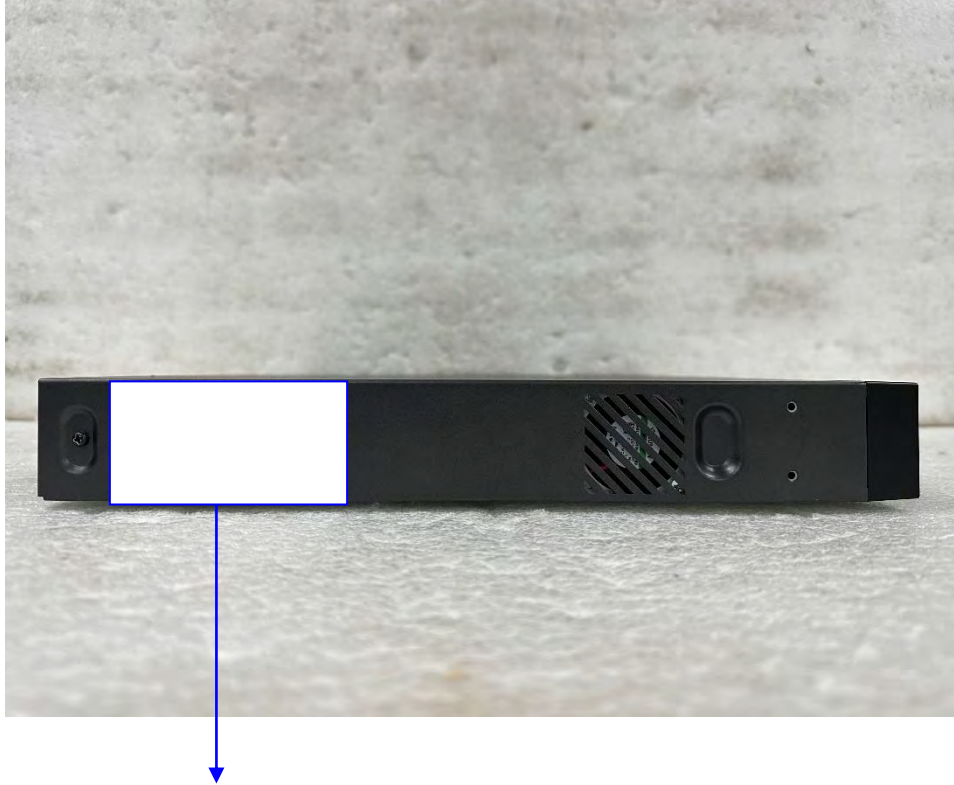

NVR

Model No : QRN-1630S

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

