



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (1) of (37)

EMC TEST REPORT For VCCI

Test Report No. : KES-EM-23T0305
Date of Issue : Apr. 12, 2023
Product name : Security LED MONITOR
Model/Type No. : SMT-2710
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : Weihai Daewoo Electronics Co., Ltd.
Manufacturer Address : No.26, Hongkong Road, Economic & Technical Development
Zone, 264205 Weihai City, Shandong Province, China
Date of Receipt : Mar. 28, 2023
Test date : Apr. 04, 2023
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

김종인

Dong In, Kim
EMC Test Engineer

Reviewed by

이종일

Dong Il, Lee
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (2) of (37)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 12, 2023	KES-EM-23T0305	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions Mains Power Ports.....	10
2.2	Conducted Emissions at Telecommunication Ports.....	11
2.3	Radiated Electric Field Emissions(Below 1 GHz)	12
2.4	Radiated Electric Field Emissions(Above 1 GHz)	13
APPENDIX A – TEST DATA.....		14
Conducted Emissions at Mains Power Ports.....		14
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz).....		24
Test Setup Photos and Configuration		27
Conducted Emissions at Mains Power Ports.....		27
Conducted Emissions at Telecommunication Ports		28
Radiated Electric Field Emissions(Below 1 GHz)		29
Radiated Electric Field Emissions(Above 1 GHz).....		30
EUT External Photographs		31
EUT Internal Photographs		32



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (4) of (37)

1.0 General Product Description

Main Specifications of EUT are:

Model		FHD 27" SMT-2710	Remark
Display			
Screen Size		27"	
Max. Resolution		1920*1080 60Hz (FHD)	
Brightness		250 cd/m ² (Typ)	
Contrast Ratio		3000:1 (Min) 4000:1 (Typ)	
Aspect Ratio		16:9	
Viewing Angle (H/V)		178°/178°	
Display Color		16.7M	
Response Time		6.5ms(Typ)	
Panel Life		30,000 hours	
Interface			
Video	Connector	VGA (1) HDMI 1.4(1), DP 1.2(1) Ain(1) Aout (1)	
	Connector	VGA	
VGA	Available Format	640 x 480@60Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz, 1024 x 768@60Hz/70Hz/75Hz, 1280 x 1024@60Hz/75Hz, 1440 x 900@60Hz, 1680 x 1050@60Hz, 1920 x 1080@50Hz/60Hz, 1280 x 800@60Hz, 1280 x 960@60Hz, 1280 x 720@60Hz	
	Connector	HDMI	
HDMI	Available Format	640 x 480@60Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz, 1024 x 768@60Hz/70Hz/75Hz, 1280 x 1024@60Hz/75Hz, 1440 x 900@60Hz, 1680 x 1050@60Hz, 1920 x 1080@50Hz/60Hz, 720 x 480P60Hz, 1280 x 720P@50Hz, 720 x 576P@50Hz, 1920x1080P@50/60Hz, 1280 x 800@60Hz, 1280 x 960@60Hz, 1280 x 720@60Hz	
	Connector	DP	
DP	Available Format	640 x 480@60Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz, 1024 x 768@60Hz/70Hz/75Hz, 1280 x 1024@60Hz/75Hz, 1440 x 900@60Hz, 1680 x 1050@60Hz, 1920 x 1080@50Hz/60Hz, 720 x 480P60Hz, 1280 x 720P@50Hz, 720 x 576P@50Hz, 1920x1080P@50/60Hz, 1280 x 800@60Hz, 1280 x 960@60Hz, 1280 x 720@60Hz	
	Connector	Audio in/out	
Audio	Output Signal	Loop-through line level(PC only), Speakers : 4Ω 2.5Wx 2	
	PIP/PBP	NO	
Remocon		N/A	
On Screen Display (OSD)			
Functions		VESA™ DPM Compatible	
Language		Korean, English, Русский, Deutsch, Français, Español, Italiano, Português, Chinese (Simplified), Chinese (Traditional), Japanese, Arabic	
General			
Electrical	Input Voltage	AC 100-240V, 50/60HZ, 1.0A	
	Power Consumption	<45W	
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)	
	Operating Humidity	10% ~ 80% (non-condensing)	
Mechanical	Dimensions with Stand	614.7*452.5*224.1mm	
	Dimensions without Stand	614.7*336.4*50.8mm	
	Bezel Size	3 Frameless : Top:2.2mm, Bottom:21mm, Side : 2.2mm	
	Cabinet Color	Black	
	VESA Mounts Interface	100*100mm	
Weight	Monitor with Stand	4.55kg	
	Monitor without Stand	4.14kg	
Stand		including	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Security LED MONITOR	SMT-2710	-	Weihai Daewoo Electronics Co., Ltd.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Laptop 1	LG15N54	507NZET040180	LG	-
Laptop 1 Adapter	PA-1900-14	OF4A263348701J247	LITE-ON TECHNOLOGY COPORATION	-
Laptop 2	P95G001	8KM8HT2	DELL INC.	-
Laptop 2 Adapter	HA65NM130	-	Chicony Power Technology(Suzhou)Co., Ltd.	-
Desktop	D32M	-	DELL	-
Keyboard	KB216t1	-	DELL	-
Mouse	SM-9023	-	LG	-
Headset	K550	-	Britz®	-

1.6 External I/O Cabling

■ DP, HDMI, D-SUB Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Security LED MONITOR (EUT)	D-SUB	Laptop 1	D-SUB	1.5	S
	3.5 mm		3.5 mm	1.4	U
	HDMI	Laptop 2	HDMI	1.5	S
	DP	Desktop	DP	1.5	S
	3.5 mm	Headset	3.5 mm	1.8	U
Laptop 1	DC Jack	Laptop 1 Adapter	DC Jack	1.4	U
Laptop 2	DC Jack	Laptop 2 Adapter	DC Jack	1.4	U
Desktop	USB	Keyboard	USB	1.4	U
	USB	Mouse	USB	1.4	U


* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)

Test mode	operating
DP	Play a includ 1 kHz tone moving color bar on the desktop. Check output of EUT and headset.
HDMI	Play a includ 1 kHz tone moving color bar on the laptop 2. Check output of EUT and headset.
D-SUB	Play a includ 1 kHz tone moving color bar on the laptop 1. Check output of EUT and headset.

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration

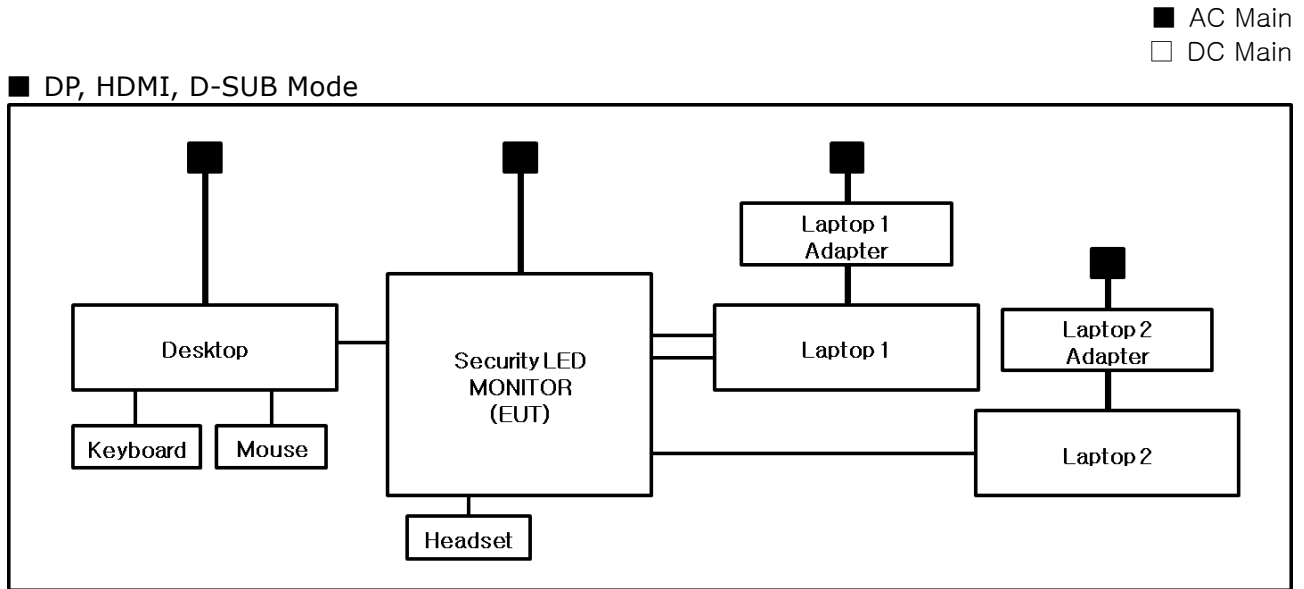

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (9) of (37)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date

Apr. 04, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Test Conditions

Temperature: (23,2 ± 0,0) °C

Relative Humidity: (42,9 ± 0,0) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☐	LISN	ENV216	R & S	101787	11, 10, 2023
☐	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	11, 22, 2023
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	11, 22, 2023
☐	CDN	CDNS502A	TESEQ	40431	11, 10, 2023

Test Conditions

Temperature: (±) °C

Relative Humidity: (±) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Does not apply because there is no signal line ports.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 04, 2023

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 21, 2024
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 03, 2024

Test Conditions

Temperature: (22,1 ± 0,0) °C

Relative Humidity: (42,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 04, 2023

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 01, 2023
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	03, 06, 2024
☒	ATTENUATOR	8491A	HP	35496	03, 03, 2024
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 06, 2024

Test Conditions

Temperature: (22,6 ± 0,0) °C

Relative Humidity: (43,4 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ DP Mode

HOT LINE

Common Information

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

SMT-2710

L1

DP

KES

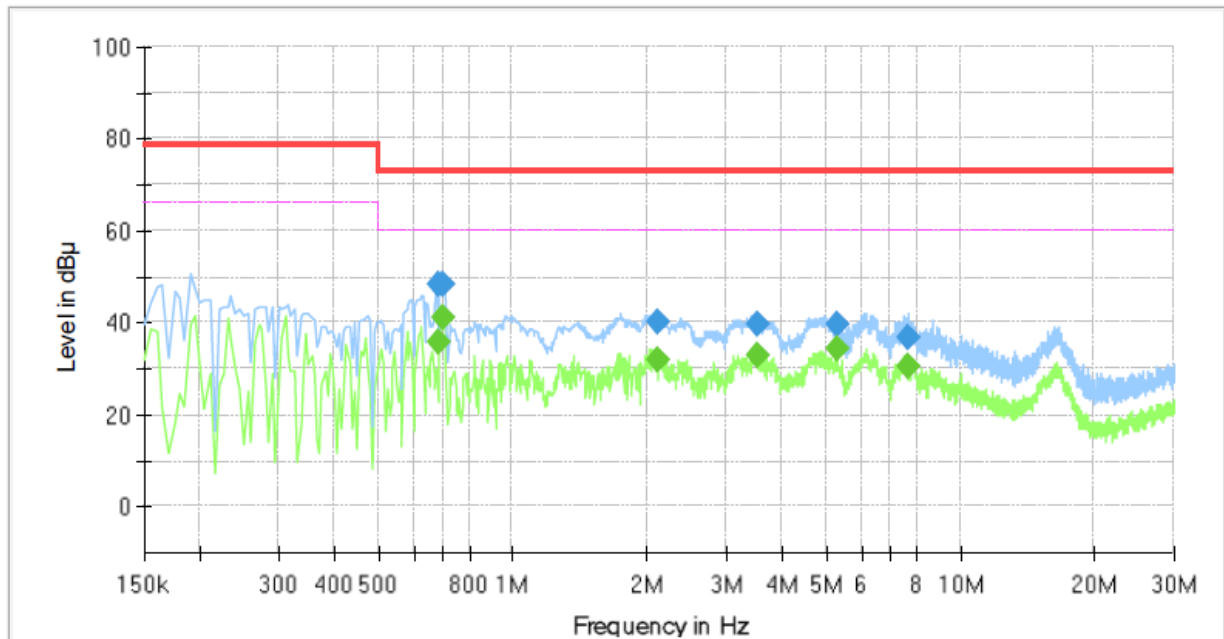

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.685000	---	35.86	60.00	24.14	5000.0	9.000	L1	19.9
0.685000	48.33	---	73.00	24.67	5000.0	9.000	L1	19.9
0.695000	---	40.94	60.00	19.06	5000.0	9.000	L1	19.9
0.695000	48.60	---	73.00	24.40	5000.0	9.000	L1	19.9
2.105000	---	31.81	60.00	28.19	5000.0	9.000	L1	20.3
2.105000	40.36	---	73.00	32.64	5000.0	9.000	L1	20.3
3.510000	---	32.75	60.00	27.25	5000.0	9.000	L1	20.0
3.510000	39.92	---	73.00	33.08	5000.0	9.000	L1	20.0
5.315000	---	34.39	60.00	25.61	5000.0	9.000	L1	19.6
5.315000	39.50	---	73.00	33.50	5000.0	9.000	L1	19.6
7.625000	---	30.57	60.00	29.43	5000.0	9.000	L1	19.6
7.625000	36.59	---	73.00	36.41	5000.0	9.000	L1	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-2710
Phase:	N
Mode:	DP
Operator Name:	KES

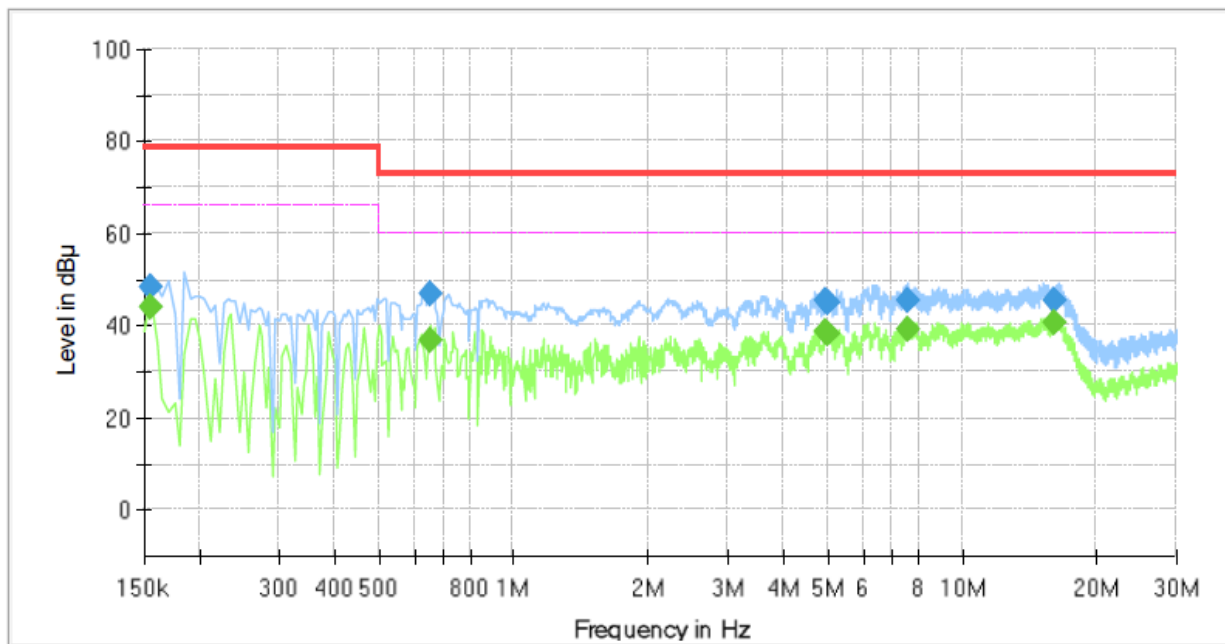

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	43.88	66.00	22.12	5000.0	9.000	N	19.4
0.155000	48.42	---	79.00	30.58	5000.0	9.000	N	19.4
0.650000	---	36.83	60.00	23.17	5000.0	9.000	N	19.9
0.650000	47.05	---	73.00	25.95	5000.0	9.000	N	19.9
4.980000	---	38.85	60.00	21.15	5000.0	9.000	N	19.7
4.980000	45.26	---	73.00	27.74	5000.0	9.000	N	19.7
5.040000	---	38.29	60.00	21.71	5000.0	9.000	N	19.7
5.040000	45.07	---	73.00	27.93	5000.0	9.000	N	19.7
7.565000	---	39.40	60.00	20.60	5000.0	9.000	N	19.6
7.565000	45.49	---	73.00	27.51	5000.0	9.000	N	19.6
16.040000	---	40.44	60.00	19.56	5000.0	9.000	N	19.9
16.040000	45.48	---	73.00	27.52	5000.0	9.000	N	19.9

■ HDMI Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-2710
Phase:	L1
Mode:	HDMI
Operator Name:	KES

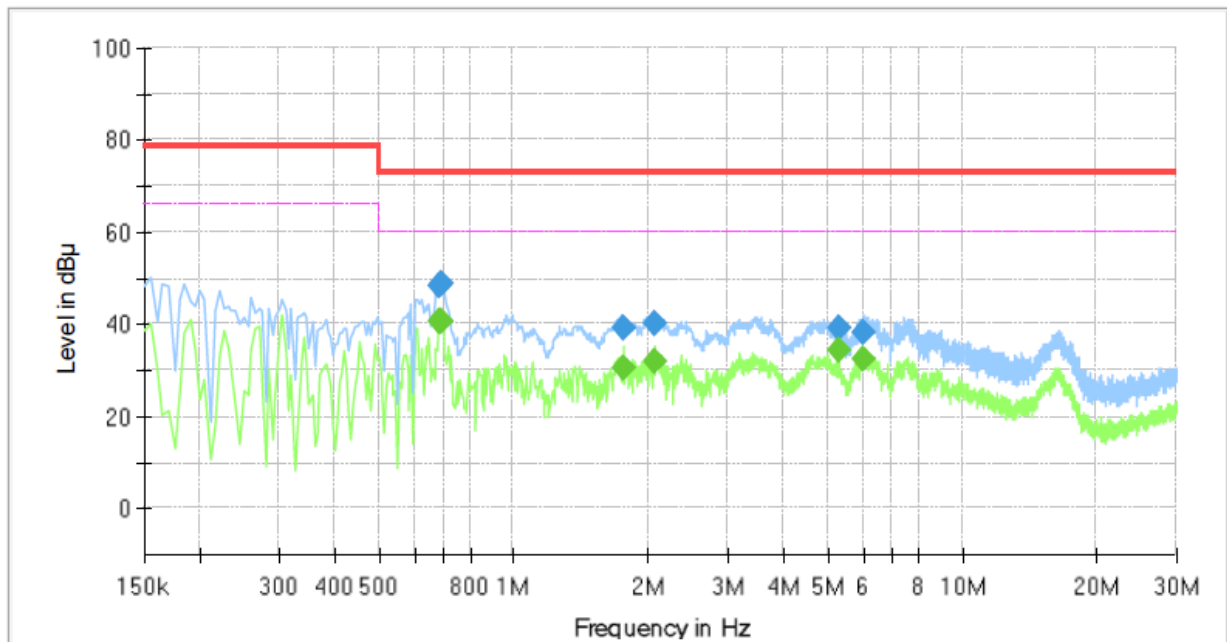


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.680000	---	40.47	60.00	19.53	5000.0	9.000	L1	19.9
0.680000	48.35	---	73.00	24.65	5000.0	9.000	L1	19.9
0.690000	---	40.48	60.00	19.52	5000.0	9.000	L1	19.9
0.690000	48.80	---	73.00	24.20	5000.0	9.000	L1	19.9
1.760000	---	30.29	60.00	29.71	5000.0	9.000	L1	20.3
1.760000	39.21	---	73.00	33.79	5000.0	9.000	L1	20.3
2.060000	---	31.99	60.00	28.01	5000.0	9.000	L1	20.3
2.060000	40.41	---	73.00	32.59	5000.0	9.000	L1	20.3
5.315000	---	34.26	60.00	25.74	5000.0	9.000	L1	19.6
5.315000	39.23	---	73.00	33.77	5000.0	9.000	L1	19.6
6.005000	---	32.35	60.00	27.65	5000.0	9.000	L1	19.6
6.005000	38.30	---	73.00	34.70	5000.0	9.000	L1	19.6

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-2710
Phase:	N
Mode:	HDMI
Operator Name:	KES

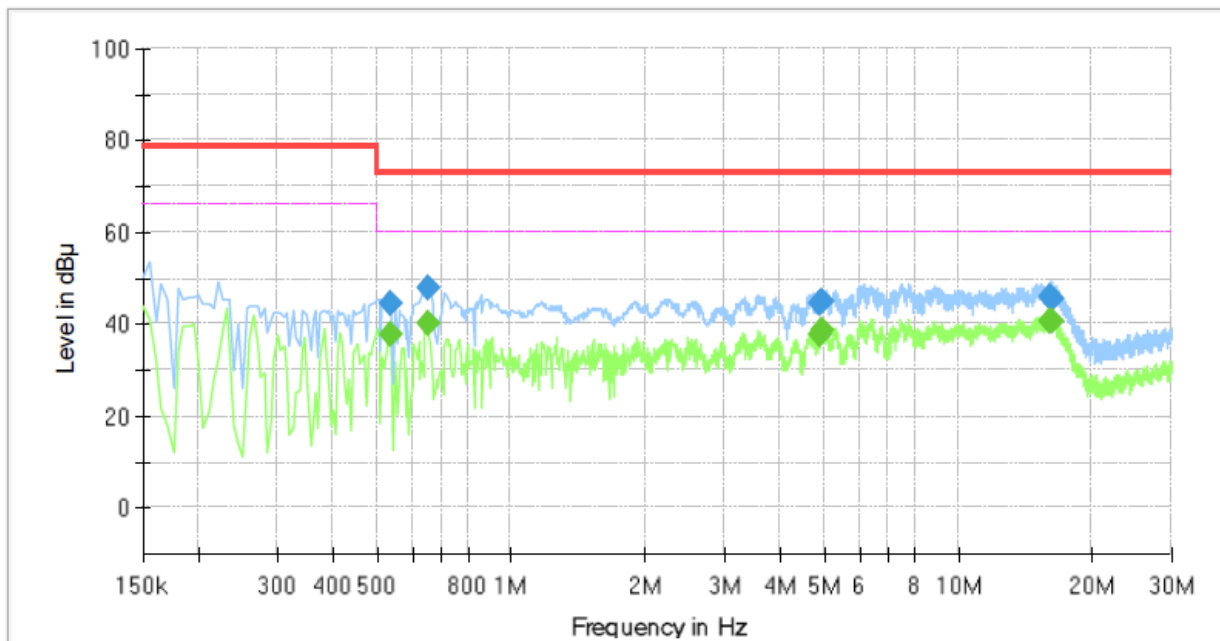

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.535000	---	37.94	60.00	22.06	5000.0	9.000	N	19.8
0.535000	44.42	---	73.00	28.58	5000.0	9.000	N	19.8
0.650000	---	40.32	60.00	19.68	5000.0	9.000	N	19.9
0.650000	47.81	---	73.00	25.19	5000.0	9.000	N	19.9
4.915000	---	37.67	60.00	22.33	5000.0	9.000	N	19.7
4.915000	44.51	---	73.00	28.49	5000.0	9.000	N	19.7
4.980000	---	38.62	60.00	21.38	5000.0	9.000	N	19.7
4.980000	45.06	---	73.00	27.94	5000.0	9.000	N	19.7
16.075000	---	40.76	60.00	19.24	5000.0	9.000	N	20.0
16.075000	45.79	---	73.00	27.21	5000.0	9.000	N	20.0
16.270000	---	40.57	60.00	19.43	5000.0	9.000	N	20.0
16.270000	45.67	---	73.00	27.33	5000.0	9.000	N	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ D-SUB Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-2710
Phase:	L1
Mode:	D-SUB
Operator Name:	KES

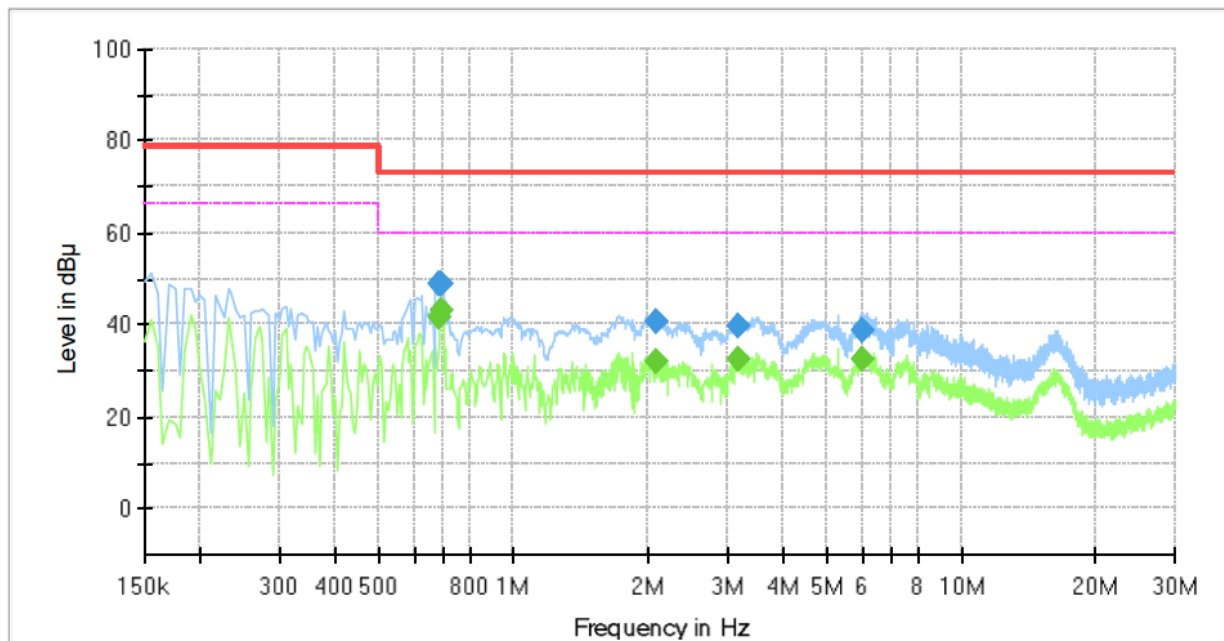


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.685000	---	41.49	60.00	18.51	5000.0	9.000	L1	19.9
0.685000	49.03	---	73.00	23.97	5000.0	9.000	L1	19.9
0.690000	---	42.89	60.00	17.11	5000.0	9.000	L1	19.9
0.690000	48.97	---	73.00	24.03	5000.0	9.000	L1	19.9
2.090000	---	31.79	60.00	28.21	5000.0	9.000	L1	20.3
2.090000	40.49	---	73.00	32.51	5000.0	9.000	L1	20.3
3.165000	---	32.44	60.00	27.56	5000.0	9.000	L1	20.1
3.165000	39.65	---	73.00	33.35	5000.0	9.000	L1	20.1
6.020000	---	32.68	60.00	27.32	5000.0	9.000	L1	19.6
6.020000	38.52	---	73.00	34.48	5000.0	9.000	L1	19.6

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-2710
Phase:	N
Mode:	D-SUB
Operator Name:	KES

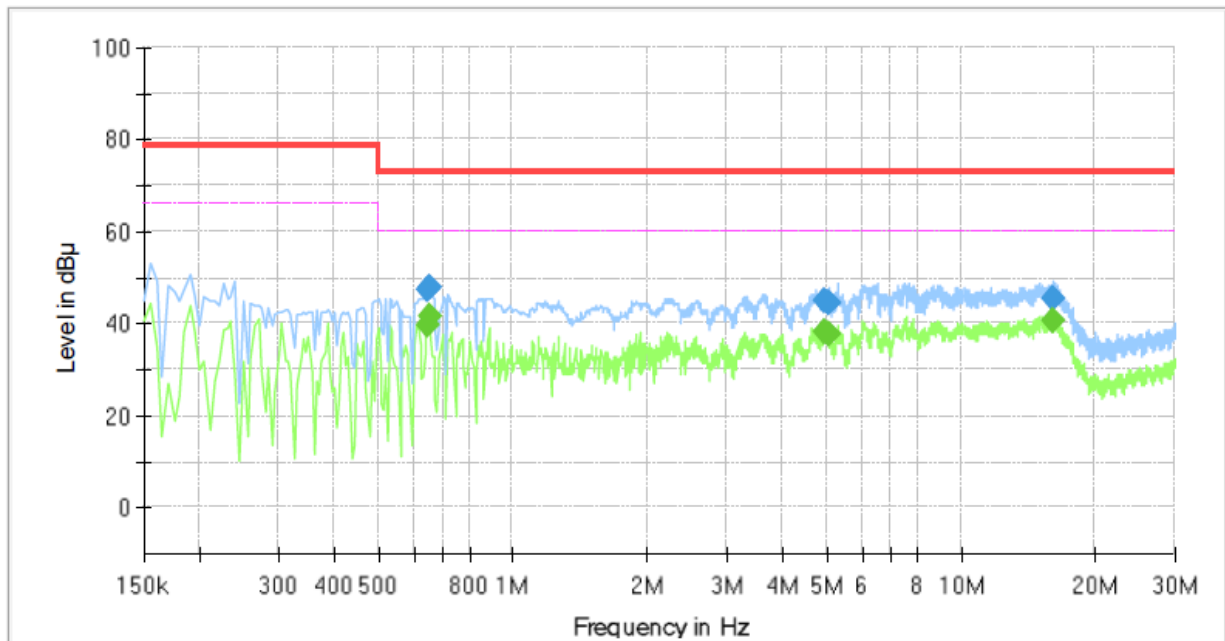

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	39.69	60.00	20.31	5000.0	9.000	N	19.9
0.645000	47.58	---	73.00	25.42	5000.0	9.000	N	19.9
0.650000	---	41.39	60.00	18.61	5000.0	9.000	N	19.9
0.650000	47.70	---	73.00	25.30	5000.0	9.000	N	19.9
4.965000	---	38.43	60.00	21.57	5000.0	9.000	N	19.7
4.965000	44.90	---	73.00	28.10	5000.0	9.000	N	19.7
5.060000	---	37.80	60.00	22.20	5000.0	9.000	N	19.7
5.060000	44.70	---	73.00	28.30	5000.0	9.000	N	19.7
16.120000	---	40.47	60.00	19.53	5000.0	9.000	N	20.0
16.120000	45.53	---	73.00	27.47	5000.0	9.000	N	20.0

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (20) of (37)

**Conducted Emissions at Telecommunication Ports
[100 Mbps]**

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

■ DP Mode

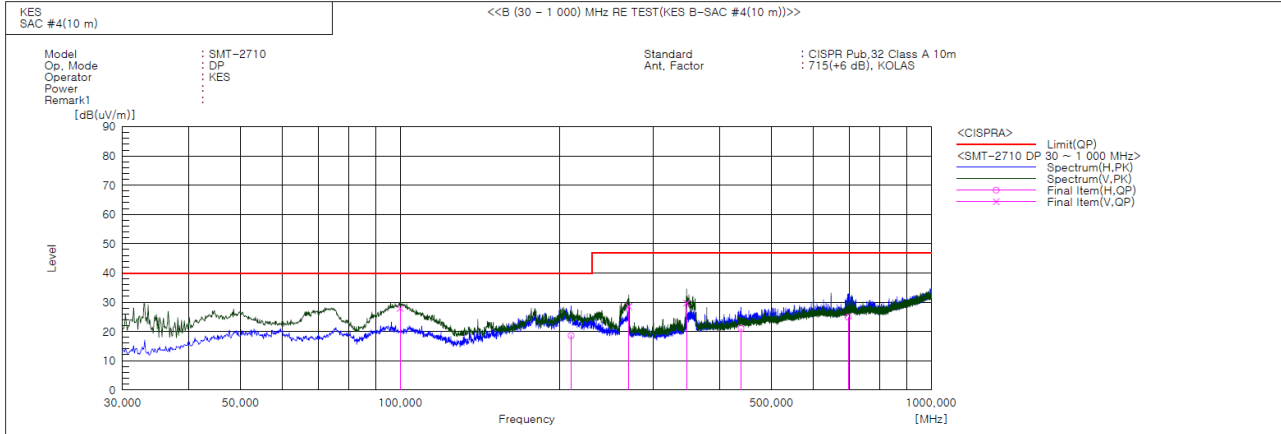

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	99.946	V	50.3	-22.4	27.9	40.0	12.1	105.0	129.0	
2	209.920	H	39.1	-20.5	18.6	40.0	21.4	388.0	264.0	
3	269.452	V	47.5	-18.9	28.6	47.0	18.4	122.0	177.0	
4	346.219	V	45.1	-15.4	29.7	47.0	17.3	132.0	162.0	
5	438.360	H	34.0	-13.0	21.0	47.0	26.0	371.0	316.0	
6	698.091	H	32.5	-7.6	24.9	47.0	22.1	359.0	52.0	


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



HDMI Mode

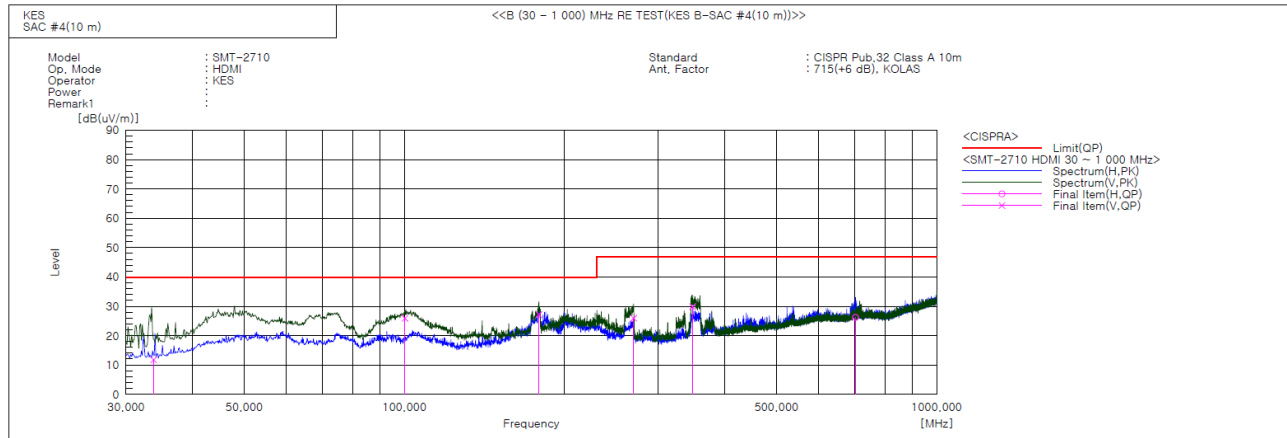


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	33.779	V	36.4	-24.6	11.8	40.0	28.2	100.0	200.0	
2	100.190	V	48.3	-22.4	25.9	40.0	14.1	113.0	134.0	
3	178.932	V	50.9	-23.7	27.2	40.0	12.8	108.0	326.0	
4	269.426	V	44.9	-18.9	26.0	47.0	21.0	128.0	186.0	
5	347.878	V	45.2	-15.3	29.9	47.0	17.1	133.0	8.0	
6	703.705	H	33.8	-7.6	26.2	47.0	20.8	355.0	124.0	



■ D-SUB Mode

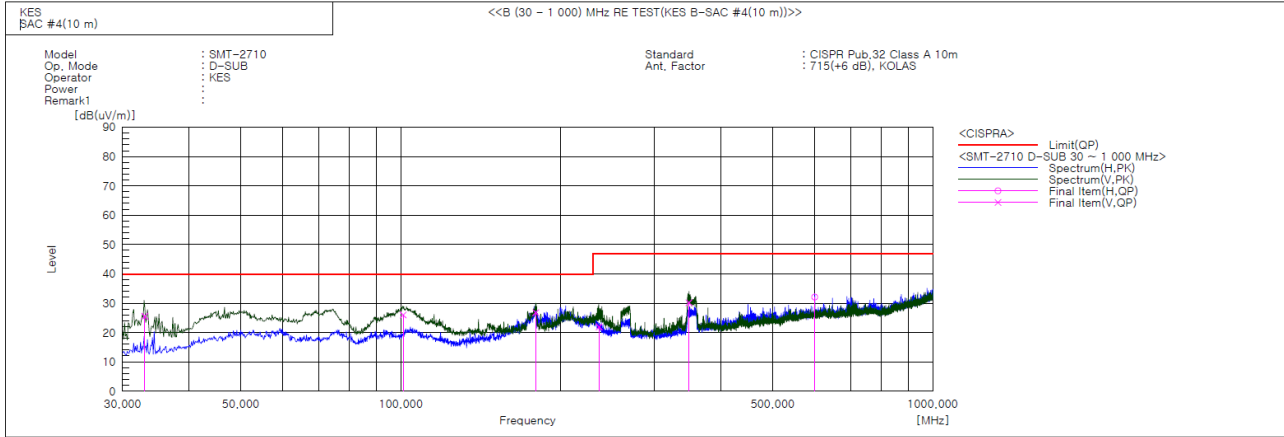

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	32.997	V	50.3	-24.7	25.6	40.0	14.4	100.0	233.0	
2	100.971	V	48.4	-22.4	26.0	40.0	14.0	109.0	135.0	
3	179.353	V	50.5	-23.7	26.8	40.0	13.2	121.0	319.0	
4	235.852	V	41.4	-19.5	21.9	47.0	25.1	122.0	200.0	
5	347.984	V	45.5	-15.3	30.2	47.0	16.8	118.0	8.0	
6	600.024	H	40.3	-8.2	32.1	47.0	14.9	356.0	240.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]


Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



Radiated Electric Field Emissions(Above 1 GHz)

■ DP Mode

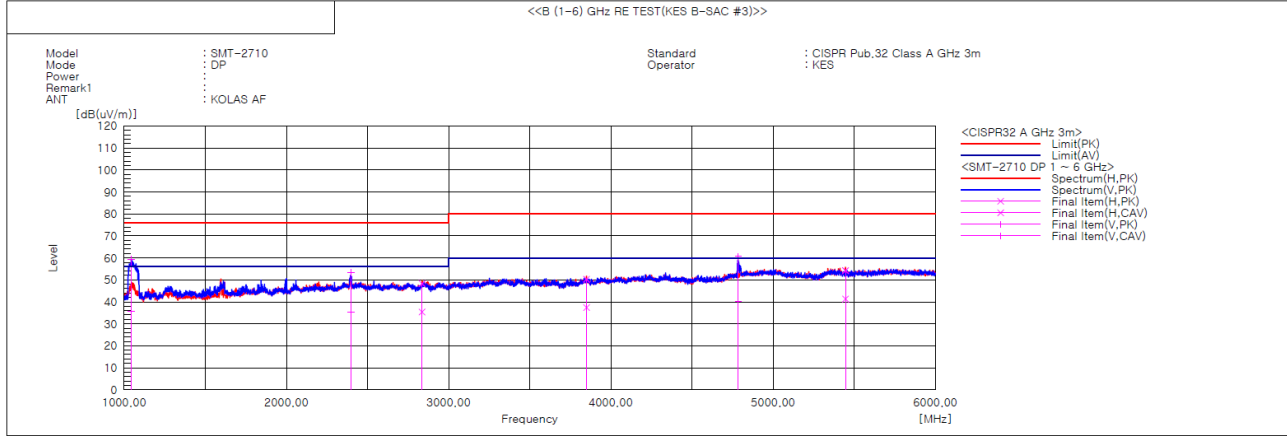

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1043.237	V	62.9	39.2	-3.5	59.4	35.7	76.0	56.0	16.6	20.3	100.0	197.5	
2	2396.239	V	47.4	29.3	6.1	53.5	35.4	76.0	56.0	22.5	20.6	100.0	140.2	
3	2836.158	H	41.1	28.2	7.2	48.3	35.4	76.0	56.0	27.7	20.6	100.0	351.7	
4	3849.749	H	40.1	27.2	10.2	50.3	37.4	80.0	60.0	29.7	22.6	100.0	352.5	
5	4784.912	V	47.1	26.6	13.6	60.7	40.2	80.0	60.0	19.3	19.8	100.0	172.1	
6	5445.545	H	38.3	25.4	15.9	54.2	41.3	80.0	60.0	25.8	18.7	100.0	291.8	




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (25) of (37)

HDMI Mode

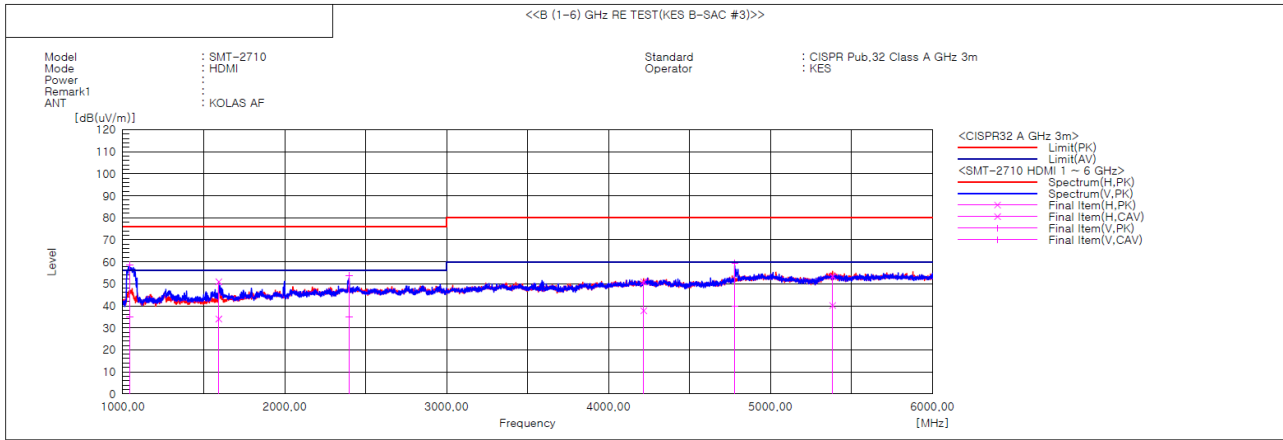

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1041.968	V	62.2	38.5	-3.5	58.7	35.0	76.0	56.0	17.3	21.0	100.0	191.7	
2	1592.840	H	50.4	33.5	0.5	50.9	34.0	76.0	56.0	25.1	22.0	100.0	299.7	
3	2398.210	V	47.6	28.7	6.1	53.7	34.8	76.0	56.0	22.3	21.2	100.0	58.4	
4	4216.776	H	39.1	26.1	11.7	50.8	37.8	80.0	60.0	29.2	22.2	100.0	81.8	
5	4779.176	V	45.8	26.2	13.5	59.3	39.7	80.0	60.0	20.7	20.3	100.0	169.2	
6	5383.609	H	37.6	24.3	15.8	53.4	40.1	80.0	60.0	26.6	19.9	100.0	242.3	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0305
Page (26) of (37)

D-SUB Mode

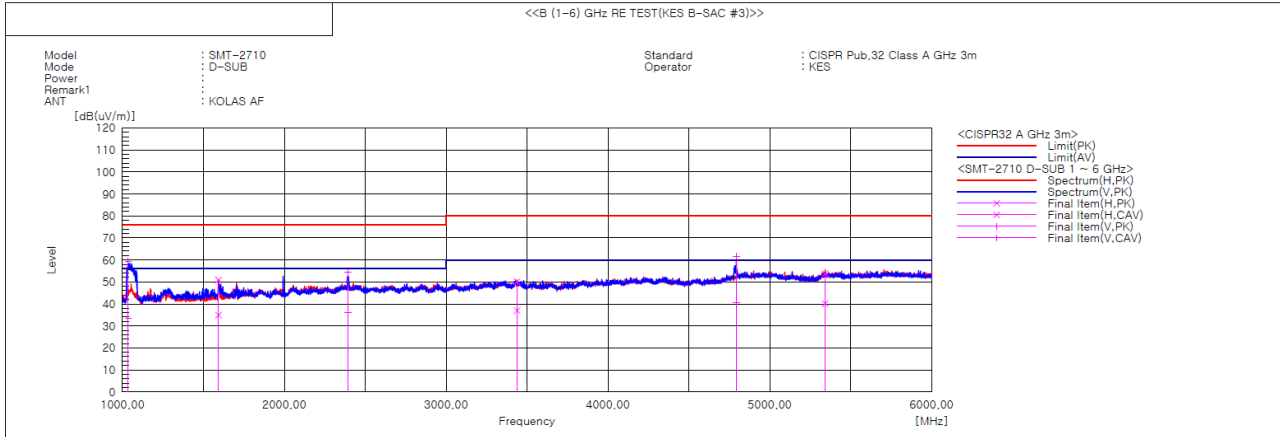

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1034.381	V	62.9	36.9	-3.5	59.4	33.4	76.0	56.0	16.6	22.6	100.0	15.4	
2	1593.270	H	50.4	34.5	0.5	50.9	35.0	76.0	56.0	25.1	21.0	100.0	302.5	
3	2391.834	V	48.3	29.9	6.0	54.3	35.9	76.0	56.0	21.7	20.1	100.0	51.0	
4	3437.767	H	40.8	27.7	9.3	50.1	37.0	80.0	60.0	29.9	23.0	100.0	174.9	
5	4792.639	V	48.0	26.8	13.7	61.7	40.5	80.0	60.0	18.3	19.5	100.0	33.5	
6	5341.927	H	38.2	24.5	15.6	53.8	40.1	80.0	60.0	26.2	19.9	100.0	302.5	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-23T0305
Page (28) of (37)

Conducted Emissions at Telecommunication Ports

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

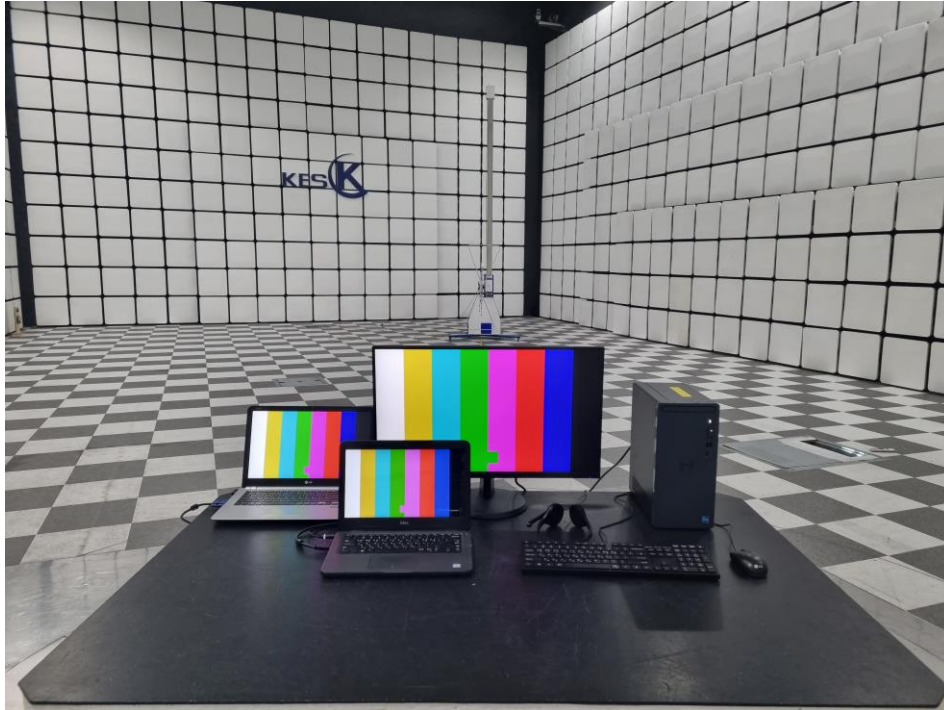

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)

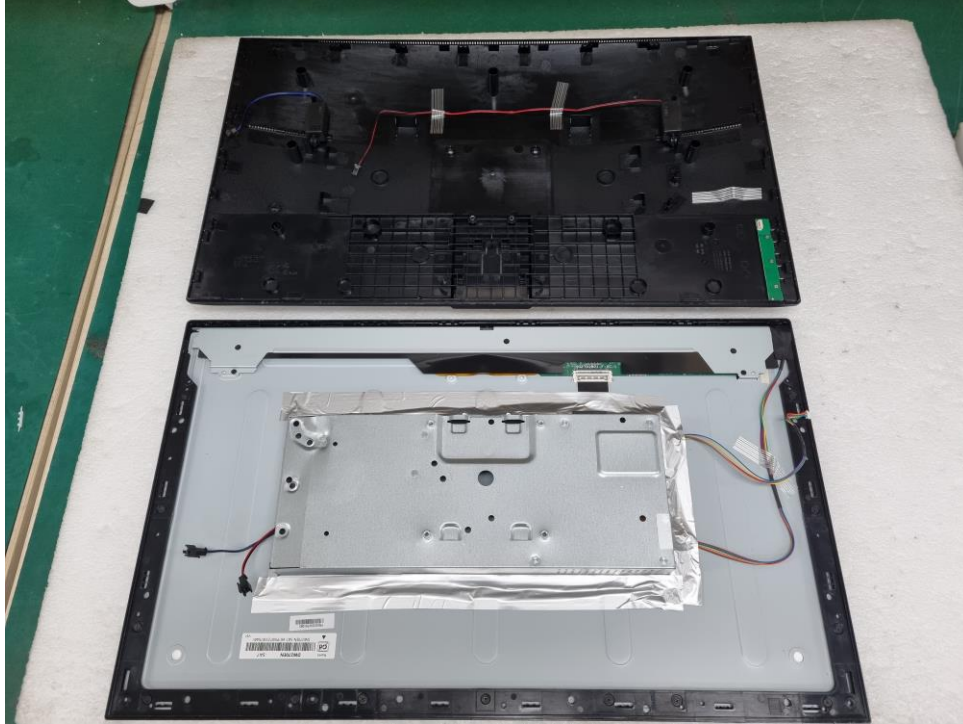


EUT Internal View – Main Board

(Top)

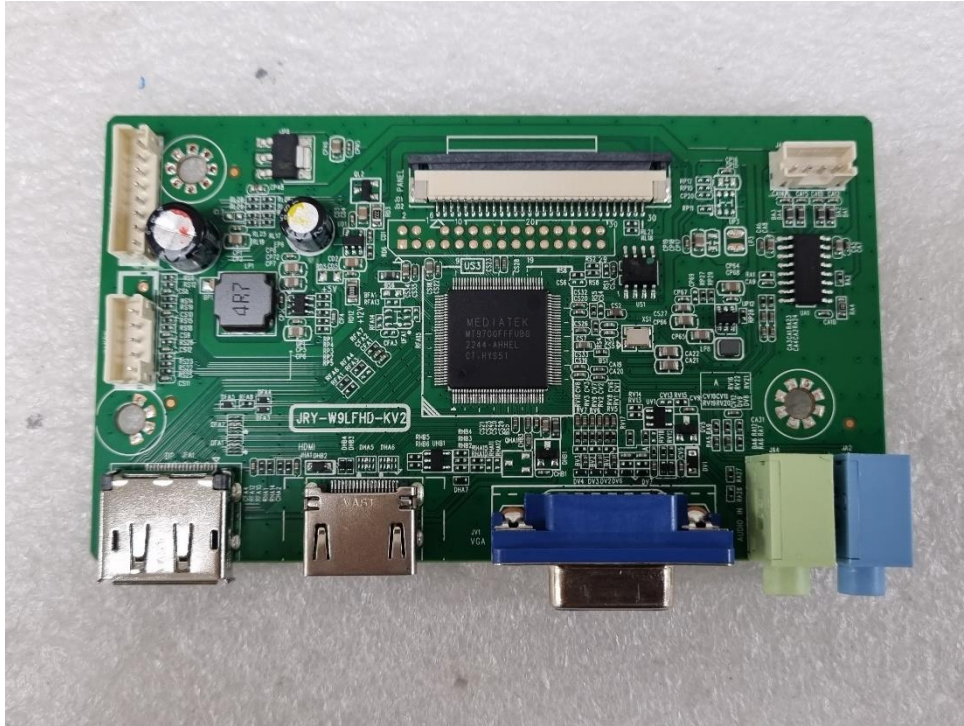

(Bottom)

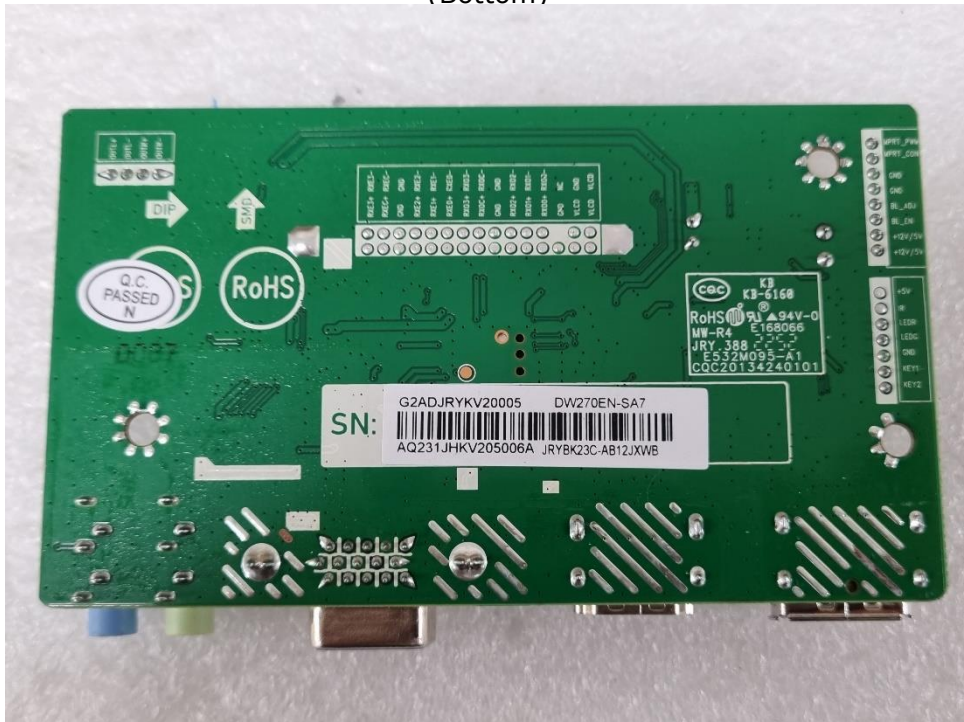


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Button Board

(Top)




(Bottom)

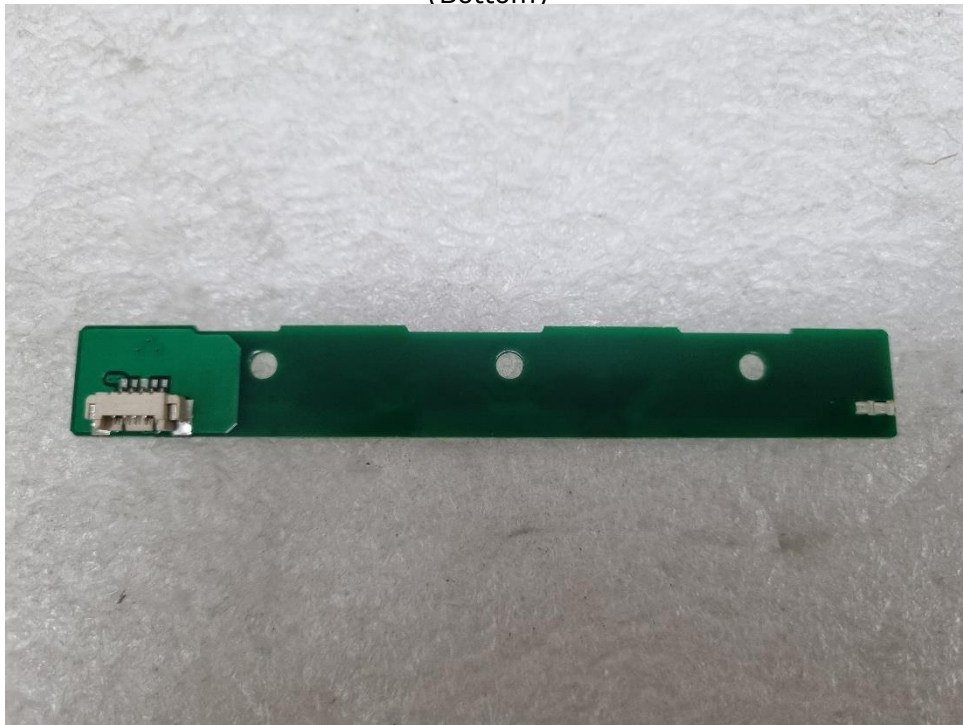


EUT Internal View – Power Board

(Top)

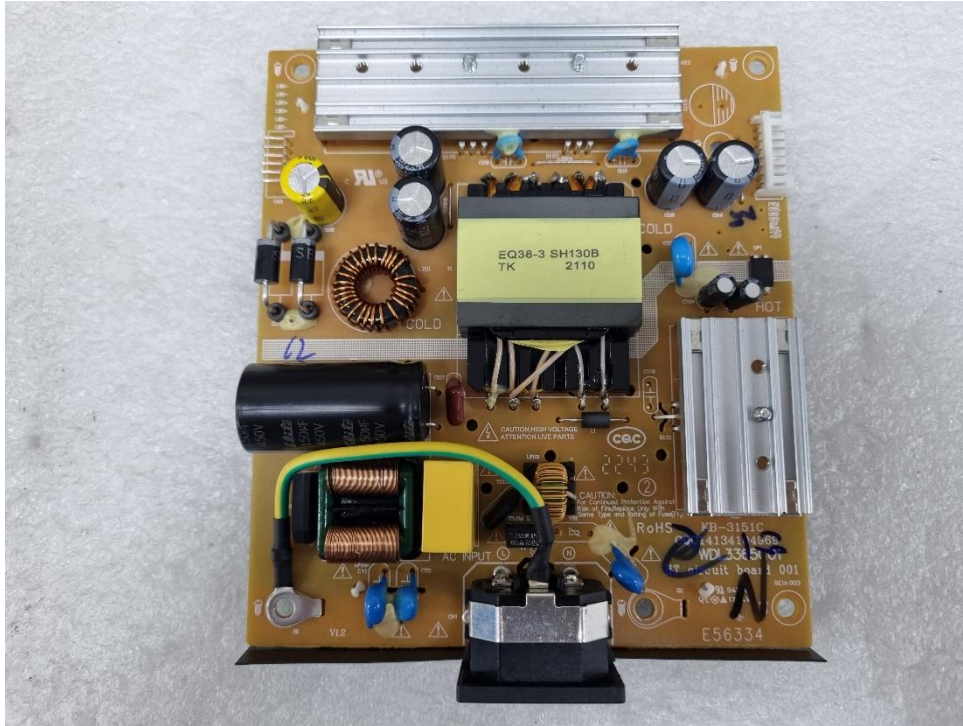

(Bottom)

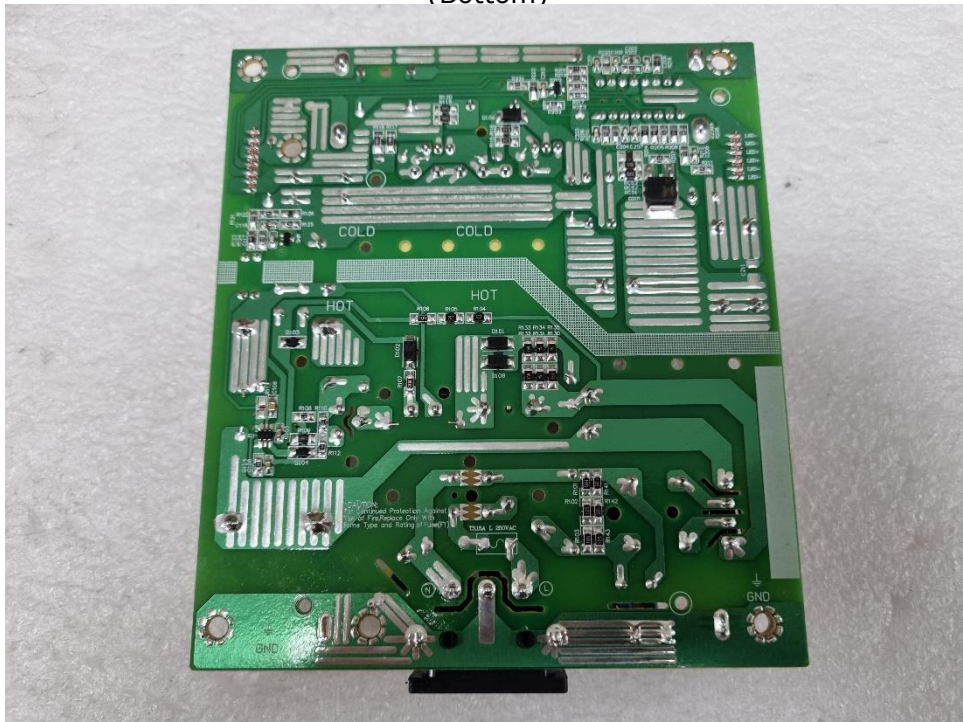

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Panel

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs



この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A