Test Report issued under the responsibility of:

TEST REPORT
IEC 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number.....:	C21IA029-M0A0
Date of issue .....:	2021-06-09
Total number of pages.....:	61
Name of Testing Laboratory preparing the Report.....:	CTK Co., Ltd.
Applicant's name .....:	Hanwha Techwin Co., Ltd.
Address .....:	6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA
Test specification:	
Standard.....:	IEC 62368-1:2018
Test procedure.....:	CB Scheme
Non-standard test method.....:	N/A
TRF template used.....:	IECEE OD-2020-F1:2020, Ed.1.3
Test Report Form No. .....:	IEC62368_1E
Test Report Form(s) Originator....:	UL(US)
Master TRF .....:	Dated 2021-02-04

Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Test item description..... :	LED Monitor		
Trade Mark(s) .....:	WISENET		
Manufacturer..... :	Hanwha Techwin Co., Ltd. 6 Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488 KOREA		
Model/Type reference..... :	SMT-4343		
Ratings..... :	AC 100-240 V~, 50/60 Hz, 1.0 A		
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):			
☒ **CB Testing Laboratory:**	CTK Co., Ltd.		
Testing location/ address..... :	(Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF		
Tested by (name, function, signature)..... :	ARa Jo, Project handler		
Approved by (name, function, signature).. :	JungKyu Yang, Reviewer		
☐ **Testing procedure: CTF Stage 1:**			
Testing location/ address..... :			
Tested by (name, function, signature)..... :			
Approved by (name, function, signature).. :			
☐ **Testing procedure: CTF Stage 2:**			
Testing location/ address..... :			
Tested by (name, function, signature)..... :			
Witnessed by (name, function, signature). :			
Approved by (name, function, signature).. :			
☐ **Testing procedure: CTF Stage 3:**			
☐ **Testing procedure: CTF Stage 4:**			
Testing location/ address..... :			
Tested by (name, function, signature)..... :			
Witnessed by (name, function, signature). :			
Approved by (name, function, signature).. :			
Supervised by (name, function, signature) :			

List of Attachments (including a total number of pages in each attachment):

Attachment 1: 23 pages (European group differences and national differences (EN IEC 62368-1:2020+A11:2020))

Attachment 2: 12 pages (European group differences and national differences (EN 62368-1:2014+A11:2017))

Attachment 3: 9 pages (National differences as CB bulletin)

Attachment 4: 7 pages (Photographs)

Summary of testing:

Tests performed (name of test and test clause):	**Testing location:**
- CLASSIFICATION OF ELECTRICAL ENERGY SOURCES (5.2, 5.7) - MAXIMUM OPERATING TEMPERATURE FOR MATERIALS, COMPONENTS AND SYSTEMS (5.4.1.4, ANNEX B.2) - DETERMINATION OF WORKING VOLTAGE (5.4.1.8) - CLEARANCE/ CREEPAGE DISTANCES MEASUREMENT (5.4.2, 5.4.3) - SEPARABLE THIN SHEET MATERIAL (5.4.4.6.2) - HUMIDITY CONDITIONING (5.4.8) - ELECTRIC STRENGTH TEST (5.4.9) - SAFEGUARDS AGAINST CAPACITOR DISCHARGE AFTER DISCONNECTION OF A CAPACITOR (5.5.2.2) - RESISTANCE OF PROTECTIVE CONDUCTORS AND TERMINATIONS (5.6.6) - EARTHED ACCESSIBLE CONDUCTIVE PART (5.7.5) - POWER MEASUREMENTS (6.2.2, 6.2.3) - NORMAL OPERATING CONDITIONS TEMPERATURE TEST (6.3) - STATIC STABILITY TEST (8.6.2.2) - GLASS SLIDE TEST (8.6.4) - WALL OR CEILING MOUNTING TESTS (8.7) - INPUT TEST: SINGLE PHASE (ANNEX B.2.5) - NORMAL OPERATING CONDITIONS TEMPERATURE MEASUREMENT (ANNEX B.1.5) - ABNORMAL OPERATION AND FAULT CONDITION TEST (ANNEX B.3, B.4) - TEST FOR THE PERMANENCE OF MARKINGS (ANNEX F.3.10)	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF

- METALLIZED COATINGS AND ADHESIVE SECURING PARTS (ANNEX P.4.2) - CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING (LPS) (ANNEX Q.1) - STEADY FORCE TEST (ANNEX T.2, T.3, T.4, T.5) - IMPACT TESTS (ANNEX T.6, T.9) - STRESS RELIEF TEST (ANNEX T.8)	

Summary of compliance with National Differences (List of countries addressed):

Canada/USA and European group differences and national differences.

☒ **The product fulfils the requirements of IEC 62368-1:2018 and EN IEC 62368-1:2020+A11:2020.**

Requirement of EN 62368-1:2014+A11:2017 was included based on manufacture's request.

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

No requirement by the client.

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

☐ **Statement not required by the standard used for type testing**

(Note: When IEC or ISO standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.








Security LED Monitor
MODEL: SMT-4343
INPUT: AC 100-240V~ 50/60Hz 1.0A (80W)
M/C: SMT-4343/KSA
2021.04 S/N:ZRQG71KR400001Z
HANWHA TECHWIN CO., LTD.
MADE IN CHINA
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
WARING : TO PREVENT FIRE OR SHOCK HAZARD
DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE
AVIS : RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR

Test item particulars:	
Product group ..... :	☒ end product ☐ built-in component
Classification of use by ..... :	☒ Ordinary person ☒ Children likely present ☐ Instructed person ☐ Skilled person
Supply connection ..... :	☒ AC mains ☐ DC mains ☐ not mains connected: ☐ ES1 ☐ ES2 ☐ ES3
Supply tolerance ..... :	☒ +10%/-10% ☐ +20%/-15% ☐ + %/ - % ☐ None
Supply connection – type ..... :	☒ pluggable equipment type A - ☐ non-detachable supply cord ☒ appliance coupler ☐ direct plug-in ☐ pluggable equipment type B - ☐ non-detachable supply cord ☐ appliance coupler ☐ permanent connection ☐ mating connector ☐ other:
Considered current rating of protective device ..... :	☒ 16 A or 20 A; Location: ☒ building ☐ equipment ☐ N/A
Equipment mobility ..... :	☒ movable ☐ hand-held ☐ transportable ☐ direct plug-in ☐ stationary ☐ for building-in ☒ wall/ceiling-mounted ☐ SRME/rack-mounted ☐ other:
Overvoltage category (OVC) ..... :	☐ OVC I ☒ OVC II ☐ OVC III ☐ OVC IV ☐ other:
Class of equipment ..... :	☒ Class I ☐ Class II ☐ Class III ☐ Not classified ☐
Special installation location ..... :	☒ N/A ☐ restricted access area ☐ outdoor location ☐
Pollution degree (PD) ..... :	☐ PD 1 ☒ PD 2 ☐ PD 3
Manufacturer's specified T_{ma} ..... :	40 °C ☐ Outdoor: minimum °C
IP protection class ..... :	☒ IPX0 ☐ IP___
Power systems ..... :	☒ TN ☐ TT ☐ IT - V_{L-L} ☐ not AC mains
Altitude during operation (m) ..... :	☐ 2000 m or less ☒ 5000 m
Altitude of test laboratory (m) ..... :	☒ 2000 m or less ☐ m
Mass of equipment (kg) ..... :	Max. 10.65 kg

Possible test case verdicts:

- test case does not apply to the test object ... : N/A

- test object does meet the requirement ..... : P (Pass)

- test object does not meet the requirement ... : F (Fail)

Testing:

Date of receipt of test item ..... : 2021-03-30

Date (s) of performance of tests..... : 2021-03-30 to 2021-06-08

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	☐ **Yes** ☒ **Not applicable**

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) ..... : 1. WEIHAI DAEWOO ELECTRONICS CO LTD ECONOMIC&TECHNICAL DEVELOPMENT ZONE, 26 HONGKONG RD, WEIHAI SHANDONG 264205, CHINA.

General product information and other remarks:

1. This equipment is LED monitor
2. Test samples are pre-production without serial number.
3. Maximum Specified ambient temperature is 40 °C.
4. Test condition: Full Screen, Max. Brightness, Contrast, Resolution 3840 x 2160.
5. For tropical climates, humidity treatment test has done under 94.7 %, 41.3 °C for 5 days (120 h).
6. Altitude during operation up to 5 000 m considered according to Table A.2 of IEC 60664-1 for china.

Model Differences –


N/A

OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	**Possible Hazard**			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES3: Primary circuit	Ordinary person	Basic Insulation	Supplementary Insulation and Metal enclosure	N/A
ES1: LCD board	Ordinary person	N/A	N/A	N/A
ES1: Secondary output port	Ordinary person	N/A	N/A	N/A
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1st S	2nd S
PS3: Primary and secondary circuit	Conductor and device (PWB, Wire insulation)	Complied with 6.3.1, 6.3.2	PWB of V-0 class material, Complied with VW-1	Fire enclosure
PS3: Primary and secondary circuit	All other components (PWB)	Complied with 6.3.1, 6.3.2	Mounted on V-0 PWB	Fire enclosure
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
N/A	N/A	N/A	N/A	N/A
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS2: Equipment mass (8.2 kg or 10.65 kg(Stand))	Ordinary person	N/A	Complied with 8.6	N/A
MS3: Equipment mounted > 2 m	Ordinary person	N/A	N/A	Complied with 8.7
MS1: All accessible parts (sharp edges and corners)	Ordinary person	N/A	N/A	N/A
9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS1: All accessible parts	Ordinary person	N/A	N/A	N/A
10	Radiation			
Class and Energy Source	Body Part	Safeguards		

(e.g. RS1: PMP sound output)	(e.g., Ordinary)	B	S	R
N/A	N/A	N/A	N/A	N/A
Supplementary Information: "B" – Basic Safeguard; "S" – Supplementary Safeguard; "R" – Reinforced Safeguard				

ENERGY SOURCE DIAGRAM
Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems. Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings

☒ ES ☒ PS ☒ MS ☒ TS ☐ RS

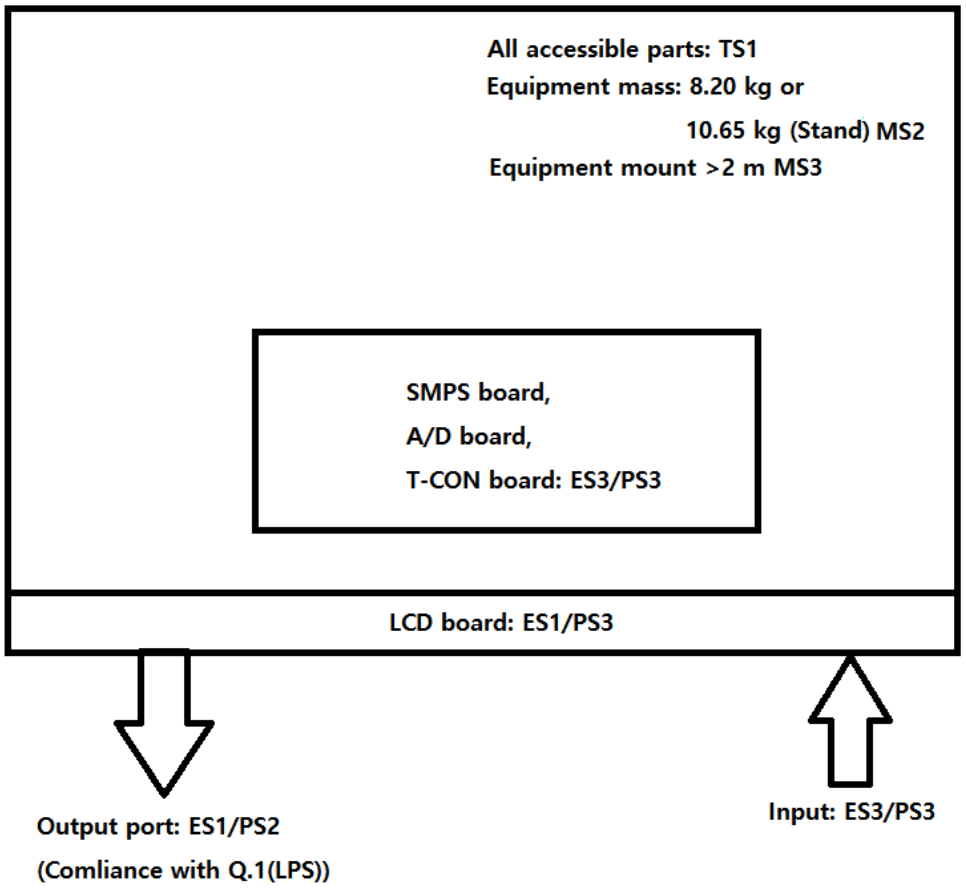

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4	**GENERAL REQUIREMENTS**		P
4.1.1	Acceptance of materials, components and subassemblies	(See appended table 4.1.2).	P
4.1.2	Use of components	(See appended table 4.1.2).	P
4.1.3	Equipment design and construction		P
4.1.4	Specified ambient temperature for outdoor use (^{o}C) ..... :	No outdoor used.	N/A
4.1.5	Constructions and components not specifically covered		N/A
4.1.8	Liquids and liquid filled components (LFC)		N/A
4.1.15	Markings and instructions	(See Annex F)	P
4.4.3	Safeguard robustness		P
4.4.3.1	General	External enclosure is comply with below	P
4.4.3.2	Steady force tests	No hazard (See Annex T.2, T.3, T.5)	P
4.4.3.3	Drop tests		N/A
4.4.3.4	Impact tests	No hazard (See Annex T.6)	P
4.4.3.5	Internal accessible safeguard tests		N/A
4.4.3.6	Glass impact tests	No Glass used.	N/A
4.4.3.7	Glass fixation tests		N/A
	Glass impact test (1J)		N/A
	Push/pull test (10 N)		N/A
4.4.3.8	Thermoplastic material tests	No hazard (See Annex T.8)	P
4.4.3.9	Air comprising a safeguard		N/A
4.4.3.10	Accessibility, glass, safeguard effectiveness	Except for PS3, class 3 energy sources can`t access to ordinary person. All other safeguards remain effective	P
4.4.4	Displacement of a safeguard by an insulating liquid		N/A
4.4.5	Safety interlocks		N/A
4.5	**Explosion**		N/A
4.5.1	General		N/A
4.5.2	No explosion during normal/abnormal operating condition		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	No harm by explosion during single fault conditions		N/A
4.6	**Fixing of conductors**		N/A
	Fix conductors not to defeat a safeguard		N/A
	Compliance is checked by test..... :		N/A
4.7	**Equipment for direct insertion into mains socket–outlets**		N/A
4.7.2	Mains plug part complies with relevant standard .. :	No direct plug-in equipment.	N/A
4.7.3	Torque (Nm) ..... :		N/A
4.8	**Equipment containing coin/button cell batteries**		N/A
4.8.1	General	No containing of batteries.	N/A
4.8.2	Instructional safeguard..... :		N/A
4.8.3	Battery compartment door/cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test		N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test		N/A
4.8.4.5	Impact test		N/A
4.8.4.6	Crush test		N/A
4.8.5	Compliance		N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	**Likelihood of fire or shock due to entry of conductive object**		N/A
4.10	**Component requirements**		P
4.10.1	Disconnect Device	(See Annex L)	P
4.10.2	Switches and relays		N/A

5	**ELECTRICALLY-CAUSED INJURY**		P
5.2	**Classification and limits of electrical energy sources**		P
5.2.2	ES1, ES2 and ES3 limits	5.2 TABLE: Classification of electrical energy sources	P
5.2.2.2	Steady-state voltage and current limits..... :	(See appended table 5.2)	P
5.2.2.3	Capacitance limits ..... :	(See appended table 5.2)	P
5.2.2.4	Single pulse limits..... :		N/A
5.2.2.5	Limits for repetitive pulses..... :		N/A
5.2.2.6	Ringing signals		N/A
5.2.2.7	Audio signals		N/A
5.3	**Protection against electrical energy sources**		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits	Under single fault condition in the circuit between Transformer secondary out pin (ES2) and the accessible output (ES1), the current or voltage levels did not exceed the ES1 limit	P
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards	Output port is ES1. Ordinary person cannot access ES3.	P
	Accessibility to outdoor equipment bare parts	No outdoor use	N/A
5.3.2.2	Contact requirements	No contact.	N/A
	Test with test probe from Annex V		—
5.3.2.2 a)	Air gap – electric strength test potential (V)..... :		N/A
5.3.2.2 b)	Air gap – distance (mm) ..... :		N/A
5.3.2.3	Compliance		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	**Insulation materials and requirements**		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Material is non-hygroscopic	(See clause 5.4.8)	P
5.4.1.4	Maximum operating temperature for insulating materials..... :	(See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
5.4.1.5	Pollution degrees ..... :	PD2	P
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage ..... :	(See appended table 5.4.1.8)	P
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat test..... :		N/A
5.4.1.10.3	Ball pressure test..... :	(See appended table 5.4.1.10.3)	P
5.4.2	Clearances		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.2.1	General requirements	For 5 000 m Procedure 1: (B)/(S) – 1.88 mm, (R) – 3.76 mm. Procedure 2: (B)/(S) – 2.22 mm, (R) – 4.44 mm. (See appended table 5.4.2 and 5.4.3)	P
	Clearances in circuits connected to AC Mains, Alternative method		N/A
5.4.2.2	Procedure 1 for determining clearance		N/A
	Temporary overvoltage ..... :		—
5.4.2.3	Procedure 2 for determining clearance		P
5.4.2.3.2.2	a.c. mains transient voltage ..... :	2 500 Vpk	—
5.4.2.3.2.3	d.c. mains transient voltage ..... :		—
5.4.2.3.2.4	External circuit transient voltage..... :		—
5.4.2.3.2.5	Transient voltage determined by measurement ..... :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test ..... :		N/A
5.4.2.5	Multiplication factors for clearances and test voltages ..... :		N/A
5.4.2.6	Clearance measurement ..... :	(See appended table 5.4.2)	P
5.4.3	Creepage distances		P
5.4.3.1	General		P
5.4.3.3	Material group ..... :	Material group IIIb was applied.	—
5.4.3.4	Creepage distances measurement..... :	(See appended table 5.4.3)	P
5.4.4	Solid insulation		P
5.4.4.1	General requirements		P
5.4.4.2	Minimum distance through insulation ..... :	(See appended table 5.4.4.2)	P
5.4.4.3	Insulating compound forming solid insulation	Certified Internal SMPS (WDL3353C09 DW430E)	P
5.4.4.4	Solid insulation in semiconductor devices	Certified Internal SMPS (WDL3353C09 DW430E)	P
5.4.4.5	Insulating compound forming cemented joints	Certified Internal SMPS (WDL3353C09 DW430E) Comply with IEC 60747-5-5.	N/A
5.4.4.6	Thin sheet material		P
5.4.4.6.1	General requirements		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.6.2	Separable thin sheet material		P
	Number of layers (pcs) ..... :	Min. 2 layers were used. (insulation tape)	P
5.4.4.6.3	Non-separable thin sheet material		N/A
	Number of layers (pcs) ..... :		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material..... :		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components	(See Clause G.5)	P
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P, K_R, d, V_{PW} (V) ..... :		N/A
	Alternative by electric strength test, tested voltage (V), K_R ..... :		N/A
5.4.5	Antenna terminal insulation		P
5.4.5.1	General	(See appended table 5.4.9)	P
5.4.5.2	Voltage surge test		P
5.4.5.3	Insulation resistance (MΩ) ..... :		N/A
	Electric strength test..... :	4 000 Vpk There was no insulation breakdown.	P
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		P
	Relative humidity (%), temperature (°C), duration (h) ..... :	94.7 %, 41.3 °C, 120 h	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.9	Electric strength test	Required test voltage by method 1 (using the required withstand voltage): 4 kVpeak for reinforced insulation Required test voltage by method 2 (using the peak working voltage 504 Vpeak): 1.28 kVpeak for reinforced insulation Required test voltage by method 3(using the nominal mains voltage 240 Vrms): 4 kVpeak for reinforced insulation To determine the electric strength voltage, method 1 are taken as highest value. (See appended table 5.4.9)	P
5.4.9.1	Test procedure for type test of solid insulation..... :	(See appended table 5.4.9)	P
5.4.9.2	Test procedure for routine test		N/A
5.4.10	Safeguards against transient voltages from external circuits		N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test ..... :		N/A
5.4.10.2.3	Steady-state test..... :		N/A
5.4.10.3	Verification for insulation breakdown for impulse test ..... :		N/A
5.4.11	Separation between external circuits and earth		N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V)..... :		—
	Nominal voltage U_{peak} (V) ..... :		—
	Max increase due to variation ΔU_{sp} ..... :		—
	Max increase due to ageing ΔU_{sa} ..... :		—
5.4.11.3	Test method and compliance ..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid ..... :		N/A
5.4.12.3	Compatibility of an insulating liquid ..... :		N/A
5.4.12.4	Container for insulating liquid..... :		N/A
5.5	**Components as safeguards**		P
5.5.1	General		P
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector..... :		N/A
5.5.3	Transformers	Comply with G.5.3	P
5.5.4	Optocouplers		N/A
5.5.5	Relays		N/A
5.5.6	Resistors		N/A
5.5.7	SPDs		N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable ..... :		N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment	No outdoor equipment.	N/A
	RCD rated residual operating current (mA) ..... :		—
5.6	**Protective conductor**		P
5.6.2	Requirement for protective conductors		P
5.6	**Protective conductor**		P
5.6.2	Requirement for protective conductors		P
5.6.2.1	General requirements	Appliance inlet used	P
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm^2) ..... :		
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		P
5.6.4.1	Protective bonding conductors		P
	Protective bonding conductor size (mm^2)..... :	Certified Internal SMPS (WDL3353C09 DW430E)	—
5.6.4.2	Protective current rating (A) ..... :	16 A or 20 A	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.5	Terminals for protective conductors		P
5.6.5.1	Terminal size for connecting protective earthing conductors (mm)..... :	The earthing of appliance inlet was considered as protective earthing terminal	N/A
	Terminal size for connecting protective bonding conductors (mm) ..... :		N/A
5.6.5.2	Corrosion		P
5.6.6	Resistance of the protective bonding system		P
5.6.6.1	Requirements		P
5.6.6.2	Test Method ..... :	Tested in method a) 16 A x 2 = 32 A, 2 min 20 A x 2 =40 A, 2 min.	P
5.6.6.3	Resistance (Ω) or voltage drop ..... :	(See appended table 5.6.6)	P
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm^2)..... :		N/A
	Class II with functional earthing marking ..... :		N/A
	Appliance inlet cl & cr (mm) ..... :		N/A
5.7	**Prospective touch voltage, touch current and protective conductor current**		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current	Peak voltage used except for Supply neutral to output. (non-sinusoidal waveform) Supply neutral to output: sinusoidal waveform. U2 : normal, abnormal U3 : single fault	P
5.7.2.2	Measurement of voltage		P
5.7.3	Equipment set-up, supply connections and earth connections	Single mains connection and Tests are performed with protective earthing connection (Class I equipment).	P
5.7.4	Unearthed accessible parts..... :	(See appended table 5.7.4)	P
5.7.5	Earthed accessible conductive parts ..... :	(See appended table 5.7.5)	P
5.7.6	Requirements when touch current exceeds ES2 limits	Not exceeds ES2 limits	N/A
	Protective conductor current (mA)..... :		N/A
	Instructional Safeguard..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to earthed external circuits, current (mA)..... :		N/A
	b) Equipment connected to unearthed external circuits, current (mA)..... :		N/A
5.8	**Backfeed safeguard in battery backed up supplies**		N/A
	Mains terminal ES ..... :		N/A
	Air gap (mm) ..... :		N/A
6	**ELECTRICALLY- CAUSED FIRE**		P
6.2	**Classification of PS and PIS**		P
6.2.2	Power source circuit classifications ..... :	All internal circuit is considered PS3. Output ports (DP, HDMI) are declared as PS2.	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS ..... :	All circuits are considered as Arcing PIS. (See appended table 6.2.3.1)	P
6.2.3.2	Resistive PIS ..... :	All circuits are considered as Resistive PIS. (See appended table 6.2.3.2)	P
6.3	**Safeguards against fire under normal operating and abnormal operating conditions**		P
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials..... :	(See appended table B.1.5 and B.3)	P
	Combustible materials outside fire enclosure..... :	Min. HB	P
6.4	**Safeguards against fire under single fault conditions**		P
6.4.1	Safeguard method	Method of 'control of fire spread' is used.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	Supplementary safeguards		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.3.2	Single Fault Conditions..... :		N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits		P
6.4.5.2	Supplementary safeguards	1. Conductor and devices (Made of V-0 PWB) 2. All components are mounted on V-0 class material of PWB 3. Comply with the requirements of the components. (Transformer)	P
6.4.6	Control of fire spread in PS3 circuits	All components in a PS3 complied with 6.4.5.2	P
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		P
6.4.8.2	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings	There is an opening in the fire enclosure, but there is a metal enclosure inside. The metal enclosure complied with the opening requirements.	P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties	Fire enclosure have top openings but covered inside metal enclosure.	P
	Openings dimensions (mm) ..... :	Less than 5 mm in any dimension.	N/A
6.4.8.3.4	Bottom openings and properties	Fire enclosure have bottom openings but PIS are covered by speakers and metal enclosure (There is no opening in the metal enclosure.)	P
	Openings dimensions (mm) ..... :		N/A
	Flammability tests for the bottom of a fire enclosure		N/A
	Instructional Safeguard..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.8.3.5	Side openings and properties	No side openings	N/A
	Openings dimensions (mm) ..... :		N/A
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c)..... :		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating..... :	PIS covered by metal enclosure	P
6.4.9	Flammability of insulating liquid..... :		N/A
6.5	**Internal and external wiring**		P
6.5.1	General requirements	Complies with IEC TS 60695-11-21 or UL 2556 VW-1	P
6.5.2	Requirements for interconnection to building wiring ..... :		N/A
6.5.3	Internal wiring size (mm^2) for socket-outlets ..... :		N/A
6.6	**Safeguards against fire due to the connection to additional equipment**		P
7	**INJURY CAUSED BY HAZARDOUS SUBSTANCES**		N/A
7.2	**Reduction of exposure to hazardous substances**		N/A
7.3	**Ozone exposure**		N/A
7.4	**Use of personal safeguards or personal protective equipment (PPE)**		N/A
	Personal safeguards and instructions..... :		—
7.5	**Use of instructional safeguards and instructions**		N/A
	Instructional safeguard (ISO 7010)..... :		—
7.6	**Batteries and their protection circuits**		N/A
8	**MECHANICALLY-CAUSED INJURY**		P
8.2	**Mechanical energy source classifications**		P
8.3	**Safeguards against mechanical energy sources**		P
8.4	**Safeguards against parts with sharp edges and corners**		P
8.4.1	Safeguards		N/A
	Instructional Safeguard..... :		N/A
8.4.2	Sharp edges or corners	Accessible edges and corners of the equipment are rounded and are Classified as MS1.	N/A
8.5	**Safeguards against moving parts**		N/A
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts		N/A
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard ..... :		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m) ..... :		N/A
	Space between end point and nearest fixed mechanical part (mm)..... :		N/A
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly ..... :		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts ..... :		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N)..... :		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps		N/A
	Explosion test..... :		N/A
8.5.5.3	Glass particles dimensions (mm) ..... :		N/A
8.6	**Stability of equipment**		P
8.6.1	General		P
	Instructional safeguard ..... :		P
8.6.2	Static stability		P
8.6.2.2	Static stability test..... :	All directions No hazards.	P
8.6.2.3	Downward force test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.3	Relocation stability		N/A
	Wheels diameter (mm) ..... :		—
	Tilt test		N/A
8.6.4	Glass slide test	No hazards.	P
8.6.5	Horizontal force test..... :		N/A
8.7	**Equipment mounted to wall, ceiling or other structure**		P
8.7.1	Mount means type..... :	The equipment evaluated and tested for use with mounting kits. (Length of screws 12 mm)	P
8.7.2	Test methods		P
	Test 1, additional downwards force (N)..... :		N/A
	Test 2, number of attachment points and test force (N)..... :	80.36 N applied each mounting holes (1~4) outward, inward and perpendicular four directions to its center axis. (Test item Weight 8.20 kg = 80.36 N)	P
	Test 3 Nominal diameter (mm) and applied torque (Nm)..... :	Screw 1~4 applied 1.2 Nm torque. (Diameter of screws 3.68 mm)	P
8.8	**Handles strength**		N/A
8.8.1	General		N/A
8.8.2	Handle strength test		N/A
	Number of handles..... :		—
	Force applied (N) ..... :		—
8.9	**Wheels or casters attachment requirements**		N/A
8.9.2	Pull test		N/A
8.10	**Carts, stands and similar carriers**		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions..... :		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N)..... :		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N) ..... :		—
8.10.6	Thermoplastic temperature stability		N/A
8.11	**Mounting means for slide-rail mounted equipment (SRME)**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.11.1	General		N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard..... :		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force (N) applied..... :		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	**Telescoping or rod antennas**		N/A
	Button/ball diameter (mm)..... :		—
9	**THERMAL BURN INJURY**		P
9.2	**Thermal energy source classifications**		P
9.3	**Touch temperature limits**		P
9.3.1	Touch temperatures of accessible parts ..... :	TS1(<60 °C) External surfaces that held for short periods of time or touched occasionally (> 10 s and < 1 min) for connection and disconnection (See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
9.3.2	Test method and compliance		P
9.4	**Safeguards against thermal energy sources**		N/A
9.5	**Requirements for safeguards**		N/A
9.5.1	Equipment safeguard		N/A
9.5.2	Instructional safeguard ..... :		N/A
9.6	**Requirements for wireless power transmitters**		N/A
9.6.1	General		N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance..... :		N/A
10	**RADIATION**		N/A
10.2	**Radiation energy source classification**		N/A
10.2.1	General classification	No Radiation energy source.	N/A
	Lasers ..... :		—
	Lamps and lamp systems ..... :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Image projectors ..... :		—
	X-Ray ..... :		—
	Personal music player..... :		—
10.3	**Safeguards against laser radiation**		N/A
	The standard(s) equipment containing laser(s) comply ..... :		N/A
10.4	**Safeguards against optical radiation from lamps and lamp systems (including LED types)**		N/A
10.4.1	General requirements	No lamp system used.	N/A
	Instructional safeguard provided for accessible radiation level needs to exceed		N/A
	Risk group marking and location ..... :		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure ..... :		N/A
10.4.3	Instructional safeguard..... :		N/A
10.5	**Safeguards against X-radiation**		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons..... :		—
10.5.3	Maximum radiation (pA/kg) ..... :		—
10.6	**Safeguards against acoustic energy sources**		N/A
10.6.1	General	No acoustic energy source used.	N/A
10.6.2	Classification		N/A
	Acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A
	Unweighted RMS output voltage (mV)..... :		N/A
	Digital output signal (dBFS) ..... :		N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30) ..... :		N/A
	Warning for MEL ≥ 100 dB(A) ..... :		N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards ..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV)..... :		N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A
10.6.6.3	Cordless listening devices		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A

B	**NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS**		P
B.1	**General**		P
B.1.5	Temperature measurement conditions	(See appended table B.1.5)	P
B.2	**Normal operating conditions**		P
B.2.1	General requirements ..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers..... :	No audio power amplifiers provided.	N/A
B.2.3	Supply voltage and tolerances	+10 % / -10 % applied.	P
B.2.5	Input test ..... :	(See appended table B.2.5)	P
B.3	**Simulated abnormal operating conditions**		P
B.3.1	General		P
B.3.2	Covering of ventilation openings	(See appended table B.3)	P
	Instructional safeguard..... :		N/A
B.3.3	DC mains polarity test	No power supplied from DC mains	N/A
B.3.4	Setting of voltage selector		N/A
B.3.5	Maximum load at output terminals	No supplying power to other equipment.	N/A
B.3.6	Reverse battery polarity	No battery used.	N/A
B.3.7	Audio amplifier abnormal operating conditions	(See appended table B.3)	P
B.3.8	Safeguards functional during and after abnormal operating conditions..... :	(See appended table B.3)	P
B.4	**Simulated single fault conditions**		P
B.4.1	General		P
B.4.2	Temperature controlling device	No Temperature controlling device.	N/A
B.4.3	Blocked motor test	No motor.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.4	Functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation		P
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnection of passive components		P
B.4.7	Continuous operation of components	No motor or relay coils for short time operation.	N/A
B.4.8	Compliance during and after single fault conditions ..... :	(See appended table B.4)	P
B.4.9	Battery charging and discharging under single fault conditions	No battery	N/A
C	**UV RADIATION**		N/A
C.1	**Protection of materials in equipment from UV radiation**		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	**UV light conditioning test**		N/A
C.2.1	Test apparatus ..... :		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	**TEST GENERATORS**		P
D.1	**Impulse test generators**		P
D.2	**Antenna interface test generator**		N/A
D.3	**Electronic pulse generator**		N/A
E	**TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS**		P
E.1	**Electrical energy source classification for audio signals**		N/A
	Maximum non-clipped output power (W)..... :		—
	Rated load impedance (Ω) ..... :		—
	Open-circuit output voltage (V)..... :		—
	Instructional safeguard..... :		—
E.2	**Audio amplifier normal operating conditions**		P
	Audio signal source type..... :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Audio output power (W) ..... :	2.26 W	—
	Audio output voltage (V) ..... :	4.25 V	—
	Rated load impedance (Ω) ..... :	8 Ω	—
	Requirements for temperature measurement		N/A
E.3	Audio amplifier abnormal operating conditions		N/A
F	**EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS**		P
F.1	**General**		P
	Language ..... :	English.	—
F.2	**Letter symbols and graphical symbols**		P
F.2.1	Letter symbols according to IEC60027-1	V, A, Hz for IEC 60027-1	P
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific	AC symbol (IEC 60417-5032)	P
F.3	**Equipment markings**		P
F.3.1	Equipment marking locations	External enclosure body	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification ..... :	(see copy of marking plates)	P
F.3.2.2	Model identification ..... :	(see copy of marking plates)	P
F.3.3	Equipment rating markings	(see copy of marking plates)	P
F.3.3.1	Equipment with direct connection to mains	(see copy of marking plates)	P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of the supply voltage ..... :	IEC 60417-5032 (2002-10) for AC, Markings immediately follow the equipment voltage rating.	P
F.3.3.4	Rated voltage ..... :	(see copy of marking plates)	P
F.3.3.5	Rated frequency ..... :	(see copy of marking plates)	P
F.3.3.6	Rated current or rated power ..... :	(see copy of marking plates)	P
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		P
F.3.5.1	Mains appliance outlet and socket-outlet markings ..... :	No appliance outlet or socket-outlet.	N/A
F.3.5.2	Switch position identification marking..... :	No Switch.	N/A
F.3.5.3	Replacement fuse identification and rating markings ..... :	Certified Internal SMPS (WDL3353C09 DW430E)	P
	Instructional safeguards for neutral fuse..... :	No neutral fuse	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.5.4	Replacement battery identification marking..... :	No battery	N/A
F.3.5.5	Neutral conductor terminal	No permanently connected equipment.	N/A
F.3.5.6	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I equipment	Class I equipment	P
F.3.6.1.1	Protective earthing conductor terminal ..... :	The symbol which complied with IEC 60417-5019 is marked beside protective earthing conductor terminal of appliance inlet. Certified Internal SMPS (WDL3353C09 DW430E)	P
F.3.6.1.2	Protective bonding conductor terminals ..... :	The symbol which complied with IEC 60417-5019 is marked the end of PWB bonding pattern	P
F.3.6.2	Equipment class marking..... :	Class I equipment	N/A
F.3.6.3	Functional earthing terminal marking ..... :		N/A
F.3.7	Equipment IP rating marking..... :	IPX0	N/A
F.3.8	External power supply output marking..... :		N/A
F.3.9	Durability, legibility and permanence of marking	Printed marking on PWB.	P
F.3.10	Test for permanence of markings	Rubbing the marking by hand for 15 s with a piece of cloth soaked with water and n-hexane spirit After each test, the marking has remained legible.	P
F.4	**Instructions**		P
	a) Information prior to installation and initial use		P
	b) Equipment for use in locations where children not likely to be present		N/A
	c) Instructions for installation and interconnection		P
	d) Equipment intended for use only in restricted access area		N/A
	e) Equipment intended to be fastened in place		N/A
	f) Instructions for audio equipment terminals		N/A
	g) Protective earthing used as a safeguard		N/A
	h) Protective conductor current exceeding ES2 limits		N/A
	i) Graphic symbols used on equipment		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	j) Permanently connected equipment not provided with all-pole mains switch		N/A
	k) Replaceable components or modules providing safeguard function		N/A
	l) Equipment containing insulating liquid		N/A
	m) Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards		N/A
G	**COMPONENTS**		P
G.1	**Switches**		N/A
G.1.1	General	No switches used.	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance		N/A
G.2	**Relays**		N/A
G.2.1	Requirements	No relays used.	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance		N/A
G.3	**Protective devices**		P
G.3.1	Thermal cut-offs	No Thermal cut-offs used.	N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links	No Thermal links used.	N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors	No PTC thermistors used.	N/A
G.3.4	Overcurrent protection devices	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions ..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4	**Connectors**		P
G.4.1	Spacings		P
G.4.2	Mains connector configuration ..... :	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	**Wound components**		P
G.5.1	Wire insulation in wound components	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.5.1.2	Protection against mechanical stress		P
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle)..... :		—
	Test temperature (°C)..... :		—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.5.3.1	Compliance method..... :		P
	Position ..... :		P
	Method of protection ..... :		P
G.5.3.2	Insulation		P
	Protection from displacement of windings ..... :		—
G.5.3.3	Transformer overload tests	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.5.3.3.1	Test conditions		P
G.5.3.3.2	Winding temperatures		P
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter ..... :		—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation..... :		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements		N/A
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days) ..... :		—
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature ..... :		N/A
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage ..... :		—
G.6	**Wire Insulation**		P
G.6.1	General	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.6.2	Enamelled winding wire insulation		N/A
G.7	**Mains supply cords**		N/A
G.7.1	General requirements		N/A
	Type..... :		—
G.7.2	Cross sectional area (mm^2 or AWG) ..... :		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)..... :		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm)..... :		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A
	Overall diameter or minor overall dimension, *D* (mm)..... :		—
	Radius of curvature after test (mm)..... :		—
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	**Varistors**		P
G.8.1	General requirements	Certified Internal SMPS (WDL3353C09 DW430E)	P
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test		N/A
G.8.2.3	Temporary overvoltage test		N/A
G.9	**Integrated circuit (IC) current limiters**		N/A
G.9.1	Requirements		N/A
	IC limiter output current (max. 5A)..... :		—
	Manufacturers' defined drift ..... :		—
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	**Resistors**		N/A
G.10.1	General	No resistor used as such clause purpose.	N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A
G.11	**Capacitors and RC units**		P
G.11.1	General requirements	Certified Internal SMPS (WDL3353C09 DW430E)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.11.2	Conditioning of capacitors and RC units		P
G.11.3	Rules for selecting capacitors		P
G.12	**Optocouplers**		P
	Optocouplers comply with IEC 60747-5-5 with specifics	Certified Internal SMPS (WDL3353C09 DW430E)	P
	Type test voltage $V_{ini,a}$ ..... :		—
	Routine test voltage, $V_{ini,b}$ ..... :		—
G.13	**Printed boards**		P
G.13.1	General requirements		P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation..... :		N/A
	Number of insulation layers (pcs) ..... :		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A
G.14	**Coating on components terminals**		N/A
G.14.1	Requirements ..... :		N/A
G.15	**Pressurized liquid filled components**		N/A
G.15.1	Requirements		N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A
G.15.2.6	Force test		N/A
G.15.3	Compliance		N/A
G.16	**IC including capacitor discharge function (ICX)**		N/A
G.16.1	Condition for fault tested is not required	No ICX used.	N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test..... :		—
	Mains voltage that impulses to be superimposed on ..... :		—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test..... :		—
G.16.3	Capacitor discharge test ..... :		N/A
H	**CRITERIA FOR TELEPHONE RINGING SIGNALS**		N/A
H.1	**General**		N/A
H.2	**Method A**		N/A
H.3	**Method B**		N/A
H.3.1	Ringing signal	No Ringing signal used.	N/A
H.3.1.1	Frequency (Hz) ..... :		—
H.3.1.2	Voltage (V) ..... :		—
H.3.1.3	Cadence; time (s) and voltage (V) ..... :		—
H.3.1.4	Single fault current (mA): ..... :		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)..... :		N/A
J	**INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION**		N/A
J.1	**General**		N/A
	Winding wire insulation ..... :		—
	Solid round winding wire, diameter (mm) ..... :		N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm^2) ..... :		N/A
J.2/J.3	Tests and Manufacturing		—
K	**SAFETY INTERLOCKS**		N/A
K.1	**General requirements**		N/A
	Instructional safeguard..... :	No safety interlocks used.	N/A
K.2	**Components of safety interlock safeguard mechanism**		N/A
K.3	**Inadvertent change of operating mode**		N/A
K.4	**Interlock safeguard override**		N/A
K.5	**Fail-safe**		N/A
K.5.1	Under single fault condition		N/A
K.6	**Mechanically operated safety interlocks**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance ..... :		N/A
K.7	**Interlock circuit isolation**		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm)..... :		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm)..... :		N/A
	Electric strength test before and after the test of K.7.2..... :		N/A
K.7.2	Overload test, Current (A)..... :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	**DISCONNECT DEVICES**		P
L.1	**General requirements**	Appliance coupler	P
L.2	**Permanently connected equipment**		N/A
L.3	**Parts that remain energized**		N/A
L.4	**Single-phase equipment**	The disconnect device shall disconnect both poles simultaneously	P
L.5	**Three-phase equipment**		N/A
L.6	**Switches as disconnect devices**		N/A
L.7	**Plugs as disconnect devices**		N/A
L.8	**Multiple power sources**		N/A
	Instructional safeguard..... :		N/A
M	**EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS**		N/A
M.1	**General requirements**		N/A
M.2	**Safety of batteries and their cells**		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards ..... :	No batteries used.	N/A
M.3	**Protection circuits for batteries provided within the equipment**		N/A
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance		N/A
M.4	**Additional safeguards for equipment containing a portable secondary lithium battery**		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance ..... :		N/A
M.4.3	Fire enclosure..... :		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%): .... :		N/A
M.4.4.4	Check of the charge/discharge function		N/A
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance		N/A
M.5	**Risk of burn due to short-circuit during carrying**		N/A
M.5.1	Requirement		N/A
M.5.2	Test method and compliance		N/A
M.6	**Safeguards against short-circuits**		N/A
M.6.1	External and internal faults		N/A
M.6.2	Compliance		N/A
M.7	**Risk of explosion from lead acid and NiCd batteries**		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
	Calculated hydrogen generation rate ..... :		N/A
M.7.2	Test method and compliance		N/A
	Minimum air flow rate, Q (m^3/h)..... :		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.4	Marking ..... :		N/A
M.8	**Protection against internal ignition from external spark sources of batteries with aqueous electrolyte**		N/A
M.8.1	General		N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V_Z (m^3/s) ..... :		—
M.8.2.3	Correction factors ..... :		—
M.8.2.4	Calculation of distance *d* (mm) ..... :		—
M.9	**Preventing electrolyte spillage**		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse		N/A
	Instructional safeguard..... :		N/A
N	**ELECTROCHEMICAL POTENTIALS**		P
	Material(s) used..... :	0.6 V or less.	—
O	**MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES**		P
	Value of *X* (mm)..... :	1.0 mm	—
P	**SAFEGUARDS AGAINST CONDUCTIVE OBJECTS**		P
P.1	**General**		P
P.2	**Safeguards against entry or consequences of entry of a foreign object**		P
P.2.1	General	There is an opening in the fire enclosure, but there is a metal enclosure inside. The metal enclosure complied with the opening requirements.	P
P.2.2	Safeguards against entry of a foreign object		N/A
	Location and Dimensions (mm) ..... :		—
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A
P.2.3.1	Safeguard requirements		N/A
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.2.3.2	Consequence of entry test ..... :		N/A
P.3	**Safeguards against spillage of internal liquids**		N/A
P.3.1	General		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance		N/A
P.4	**Metallized coatings and adhesives securing parts**		P
P.4.1	General		P
P.4.2	Tests		P
	Conditioning, T_C (°C) ..... :	100 °C	—
	Duration (weeks) ..... :	One week	—
Q	**CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING**		P
Q.1	**Limited power sources**		P
Q.1.1	Requirements		P
	a) Inherently limited output		P
	b) Impedance limited output		N/A
	c) Regulating network limited output		N/A
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance ..... :	(see appended table Q.1)	P
	Current rating of overcurrent protective device (A) ..... :		N/A
Q.2	**Test for external circuits – paired conductor cable**		N/A
	Maximum output current (A) ..... :		N/A
	Current limiting method..... :		—
R	**LIMITED SHORT CIRCUIT TEST**		N/A
R.1	**General**	Certified Internal SMPS (WDL3353C09 DW430E)	N/A
R.2	**Test setup**		N/A
	Overcurrent protective device for test..... :		—
R.3	**Test method**		N/A
	Cord/cable used for test..... :		—
R.4	**Compliance**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
S	**TESTS FOR RESISTANCE TO HEAT AND FIRE**		N/A
S.1	**Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W**		N/A
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	**Flammability test for fire enclosure and fire barrier integrity**		N/A
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
S.3	**Flammability test for the bottom of a fire enclosure**		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples ..... :		—
	Wall thickness (mm) ..... :		—
S.4	**Flammability classification of materials**		N/A
S.5	**Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W**		N/A
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
T	**MECHANICAL STRENGTH TESTS**		P
T.1	**General**		P
T.2	**Steady force test, 10 N ..... :**	(See appended table T.2)	P
T.3	**Steady force test, 30 N ..... :**	(See appended table T.3)	P
T.4	**Steady force test, 100 N ..... :**		N/A
T.5	**Steady force test, 250 N ..... :**	(See appended table T.5)	P
T.6	**Enclosure impact test**		P
	Fall test	(See appended table T.6)	P
	Swing test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
T.7	**Drop test ..... :**		N/A
T.8	**Stress relief test..... :**	(See appended table T.8)	P
T.9	**Glass Impact Test..... :**		N/A
T.10	**Glass fragmentation test**		N/A
	Number of particles counted ..... :		N/A
T.11	**Test for telescoping or rod antennas**		N/A
	Torque value (Nm) ..... :		N/A
U	**MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION**		N/A
U.1	**General**		N/A
	Instructional safeguard **:**	No CRT used.	N/A
U.2	**Test method and compliance for non-intrinsically protected CRTs**		N/A
U.3	**Protective screen**		N/A
V	**DETERMINATION OF ACCESSIBLE PARTS**		P
V.1	**Accessible parts of equipment**		P
V.1.1	General		P
V.1.2	Surfaces and openings tested with jointed test probes		N/A
V.1.3	Openings tested with straight unjointed test probes		N/A
V.1.4	Plugs, jacks, connectors tested with blunt probe		N/A
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		N/A
V.2	**Accessible part criterion**		N/A
X	**ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)**		N/A
	Clearance ..... :		N/A
Y	**CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES**		N/A
Y.1	**General**	Indoor use.	N/A
Y.2	**Resistance to UV radiation**		N/A
Y.3	**Resistance to corrosion**		N/A
Y.3	**Resistance to corrosion**		N/A
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by..... :		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.3.4	Test procedure..... :		N/A
Y.3.5	Compliance		N/A
Y.4	**Gaskets**		N/A
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests		N/A
	Alternative test methods ..... :		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance		N/A
Y.4.6	Securing means		N/A
Y.5	**Protection of equipment within an outdoor enclosure**		N/A
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3 ..... :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	**Mechanical strength of enclosures**		N/A
Y.6.1	General		N/A
Y.6.2	Impact test..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	**TABLE: Classification of electrical energy sources**						P
Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type[1)]	Additional Info [2)]	
264 Va.c.	Primary circuit	Normal operation	264 Vrms	N/A	N/A	N/A	ES3
		Abnormal	N/A	N/A	N/A	N/A	
		Single fault operation	N/A	N/A	N/A	N/A	
264 Va.c.	Secondary circuit (V+ to V-) *)	Normal operation	12 Vd.c.	N/A	N/A	DC	ES1
		Abnormal	N/A	N/A	N/A	N/A	
		Single fault operation	N/A	N/A	N/A	N/A	
264 Va.c.	Secondary circuit (V+ or V- to Earth) *)	Normal operation	216 Vpeak	0.35 mApeak	N/A	N/A	ES1
		Abnormal	N/A	N/A	N/A	N/A	
		Single fault operation	N/A	N/A	N/A	N/A	
264 Va.c.	Secondary output port **)	Normal operation	4.57 Vd.c.	N/A	N/A	DC	ES1
		Abnormal	4.57 Vd.c.	N/A	N/A	DC	
		Single fault operation	N/A	N/A	N/A	N/A	
264 Va.c.	VLCD output	Normal operation	8.65 Vd.c.	N/A	N/A	DC	ES1
		Abnormal	N/A	N/A	N/A	N/A	
		Single fault operation	N/A	N/A	N/A	N/A	

Supplementary information:

1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.

2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

*) Certified Internal SMPS. (WDL3353C09 DW430E).

**) Highest port of the secondary output ports (HDMI port)

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.8	TABLE: Working voltage measurement				P
Location		RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments
-		-	-	-	-
Supplementary information:					
Certified Internal SMPS. (WDL3353C09 DW430E).					

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Method..... :		ISO 306 / B50	—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)
-	-	-	-
Supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				N/A
Allowed impression diameter (mm)..... :			≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	
-	-	-	-	-	
Supplementary information:					
Certified Internal SMPS. (WDL3353C09 DW430E).					

5.4.2, 5.4.3	TABLE: Minimum Clearances/Creepage distance							P
Clearance (cl) and creepage distance (cr) at/of/between:	U_p (V)	U_{rms} (V)	Freq [1] (Hz)	Required cl (mm)	cl (mm)	E.S. [2] (V)	Required cr (mm)	cr (mm)
SMPS (WDL3353C09 DW430E) primary part and Metal chassis (B)	420	240	60	2.22	3.1	N/A	2.5	3.1
Supplementary information:								
1) Only for frequency above 30 kHz 2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied) Certified Internal SMPS. (WDL3353C09 DW430E).								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.4.2	TABLE: Minimum distance through insulation			P
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation	Required DTI (mm)	Measured DTI (mm)
-	-	-	-	-
Supplementary information:				
Certified Internal SMPS. (WDL3353C09 DW430E).				

5.4.4.9	TABLE: Solid insulation at frequencies >30 kHz					N/A
Insulation material	E_P	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{PW} (Vpk)
-	-	-	-	-	-	-
Supplementary information:						

5.4.9	TABLE: Electric strength tests		P
Test voltage applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No
Basic/supplementary:	-	-	-
Unit / Primary to Earthed metal part	DC	2 500	No
Unit / Primary to Earthed metal part after humidity test	DC	2 500	No
Unit / Primary to Earthed metal part after heating test	DC	2 500	No
Unit / Primary to Earthed metal part after fault test	DC	2 500	No
Reinforced:	-	-	-
Unit / Primary to Secondary	DC	4 000	No
Unit / Primary to Secondary after humidity test	DC	4 000	No
Unit / Primary to Secondary after heating test	DC	4 000	No
Unit / Primary to Secondary after fault test	DC	4 000	No
Supplementary information:			
- Humidity test performed for 120 h at temp. 41.3 °C and relative humidity 94.7 %			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.5.2.2	TABLE: Stored discharge on capacitors				P
Location	Supply voltage (V)	Operating and fault condition [1)]	Switch position	Measured voltage (Vpk)	ES Class
Line and Neutral	264 Vac, 60 Hz	N	N/A	4	ES1
Supplementary information:					
X-capacitors installed for testing: CX101=CX102=0.22uF [ ] bleeding resistor rating: R101= R102=R103=R104=R105=R106=2Mohm [ ] ICX: Certified Internal SMPS. (WDL3353C09 DW430E). 1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit					

5.6.6	TABLE: Resistance of protective conductors and terminations			P
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
AC Inlet GND pin to Metal Enclosure	32	2	0.384	0.012
AC Inlet GND pin to Metal Enclosure	40	2	0.480	0.012
Supplementary information:				

5.7.4	TABLE: Unearthed accessible parts					P
Location	Operating and fault conditions	Supply Voltage (V)	Parameters			ES class
			Voltage (V_{rms} or V_{pk})	Current (A_{rms} or A_{pk})	Freq. (Hz)	
Plastic enclosure wrap with metal foil	Normal operation	264 Vac	11.0 mV_{rms}	0.02 mA_{rms} *)	60	ES1
LCD surface wrap with metal foil	Normal operation	264 Vac	4.22 mV_{rms}	0.01 mA_{rms} *)	60	ES1
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit *) Measured highest touch current(Normal, Reverse), specified in Figure 4, IEC 60990:2016 or Figure 5, IEC 60990:2016						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.7.5	**TABLE: Earthed accessible conductive part**			P
Supply voltage (V).....:	264 Va.c.			—
Phase(s) .....:	[X] Single Phase; [ ] Three Phase: [ ] Delta [ ] Wye			
Power Distribution System .....:	[X] TN [ ]TT [ ] IT			
Location	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment	
Metal enclosure	1	0.258	e-Open, n-Close p-normal or reverse	
	2*	0.01	e-Close, n-Open p-normal or reverse	
Supplementary Information:				
Measured highest touch current (Normal, Reverse), specified in Figure4, IEC 60990:2016 or Figure 5, IEC 60990:2016.				

5.8	**TABLE: Backfeed safeguard in battery backed up supplies**					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
-	-	-	-	-	-	-
Supplementary information:						
Abbreviation: SC= short circuit, OC= open circuit						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power[1)] (W)	Time (S)	PS class
-	-	-	-	-	-	-
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit 1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3. 2) Internal primary and secondary circuits are declared as PS3. 3) Output ports (DVI, DP) are declared as PS2.						

6.2.3.1	TABLE: Determination of Arcing PIS			P
Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No
-	-	-	-	-
Supplementary information:				
All circuits are considered as Arcing PIS.				

6.2.3.2	TABLE: Determination of resistive PIS		P
Location	Operating and fault condition	Dissipate power (W)	Arcing PIS? Yes / No
-	-	-	-
Supplementary information:			
Abbreviation: SC= short circuit; OC= open circuit (See sub-clause 6.2.3.2.) All circuits are considered as Resistive PIS.			

8.5.5	TABLE: High pressure lamp			N/A
Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle (mm)	Particle found beyond 1 m Yes / No
-	-	-	-	-
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

9.6	TABLE: Temperature measurements for wireless power transmitters								N/A
Supply voltage (V) ..... :									—
Max. transmit power of transmitter (W) ..... :									—
Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	Object (^{o}C)	Ambient (^{o}C)	Object (^{o}C)	Ambient (^{o}C)	Object (^{o}C)	Ambient (^{o}C)	Object (^{o}C)	Ambient (^{o}C)
-	-	-	-	-	-	-	-	-
Supplementary information:									

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 9.3, B.1.5, B.2.6	**TABLE: Temperature measurements**				P
Supply voltage (V)..... :	90 Va.c., 50 Hz	90 Va.c., 50 Hz	264 Va.c., 60 Hz	264 Va.c., 60 Hz	—
Ambient temperature during test T_{amb} (°C) .... :	24.0 °C	40 °C	24.8 °C	40 °C	—
Maximum measured temperature *T* of part/at:	*T* (°C)				Allowed T_{max} (°C)
1. LF101 coil_SMPS board	53.2	69.2	41.6	56.8	130
2. LF102 coil_SMPS board	55.6	71.6	42.1	57.3	130
3. L103 coil_SMPS board	65.6	81.6	50.4	65.6	130
4. L104 coil_SMPS board	72.6	88.6	55.9	71.1	130
5. T1 primary coil_SMPS board	70.8	86.8	64.6	79.8	110*)
6. T1 secondary coil_SMPS board	70.3	86.3	64.3	79.5	110*)
7. T1 core_SMPS board	68.8	84.8	62.3	77.5	N/A
8. L201 coil_SMPS board	56.8	72.8	55.3	70.5	130
9. PCB near Heasink_A/D board	51.2	67.2	51.3	66.5	105
10. L7 body_A/D board	51.0	67.0	51.3	66.5	100
11. TC8 body_A/D board	52.4	68.4	52.2	67.4	105
12. PCB near IC101_T-CON board	59.0	75.0	58.4	73.6	105
13. L301 body_T-CON board	63.2	79.2	62.5	77.7	100
14. L305 body_T-CON board	55.0	71.0	54.2	69.4	100
15. Insulation sheet body for SMPS board	61.7	77.7	53.7	68.9	80
Ambient	24.0 °C	40 °C	24.8 °C	40 °C	N/A
Test duration	3 h 42 min	N/A	2 h 04 min	N/A	N/A
Touch Temperature Measurements “N”	Ambient (°C) : 24.0	25 °C	Ambient (°C) : 24.8	25 °C	N/A
16. Enclosure_Top (Plastic)	37.7	38.7	37.5	37.7	60
17. Enclosure_Side (Plastic)	30.7	31.7	30.8	31.0	60
18. Enclosure near SMPS board (Plastic)	34.8	35.8	33.9	34.1	60
19. LCD surface_Centre (Plastic)	31.7	32.7	31.5	31.7	60
20. LCD surface_Top (Plastic)	30.1	31.1	30.1	30.3	60
Touch Temperature Measurements “A-1”	Ambient (°C) : 22.0	25 °C	Ambient (°C)	25 °C	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

16. Enclosure_Top (Plastic)	34.3	37.3	N/A	N/A	70
17. Enclosure_Side (Plastic)	26.5	29.5	N/A	N/A	70
18. Enclosure near SMPS board (Plastic)	34.2	37.2	N/A	N/A	70
19. LCD surface_Centre (Plastic)	29.5	32.5	N/A	N/A	70
20. LCD surface_Top (Plastic)	28.3	31.3	N/A	N/A	70
Touch Temperature Measurements “A-2”	Ambient (°C) : 22.2	25 °C	Ambient (°C)	25 °C	N/A
16. Enclosure_Top (Plastic)	36.5	39.3	N/A	N/A	70
17. Enclosure_Side (Plastic)	28.7	31.5	N/A	N/A	70
18. Enclosure near SMPS board (Plastic)	33.6	36.4	N/A	N/A	70
19. LCD surface_Centre (Plastic)	29.9	32.7	N/A	N/A	70
20. LCD surface_Top (Plastic)	29.1	31.9	N/A	N/A	70

Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
-	-	-	-	-	-	-	-

Supplementary information:

Maximum temperature T at Tma (40 °C) is calculated. (T at Tma = T- t2+Tma)

Temperature test was performed with K-type thermo-couple.

Full Screen, Max. Brightness, Contrast, Resolution 3840 x 2160.

For Touch Temperature Measurements:

“N” – Normal Condition

“A” – Abnormal Condition

A-1: Ventilation openings blocked, 90 Va.cc, 60 Hz.

A-2: Audio Pmax, 90 Va.cc, 60 Hz.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	**TABLE: Input test**							P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
90	50	0.84	N/A	75.28	N/A	F1	0.84	Max. Normal Load
100	50	0.75	1.0	74.77	N/A	F1	0.75	Max. Normal Load
220	50	0.35	1.0	71.70	N/A	F1	0.35	Max. Normal Load
240	50	0.33	1.0	71.55	N/A	F1	0.33	Max. Normal Load
264	50	0.31	N/A	71.32	N/A	F1	0.31	Max. Normal Load
90	60	0.85	N/A	75.35	N/A	F1	0.85	Max. Normal Load
100	60	0.76	1.0	74.83	N/A	F1	0.76	Max. Normal Load
220	60	0.35	1.0	71.74	N/A	F1	0.35	Max. Normal Load
240	60	0.33	1.0	71.58	N/A	F1	0.33	Max. Normal Load
264	60	0.31	N/A	71.37	N/A	F1	0.31	Max. Normal Load
Supplementary information:								
Max. Normal Load: Full Screen, Max. Brightness, Contrast, Resolution 3840 x 2160.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.3, B.4	**TABLE: Abnormal operating and fault condition tests**						**P**
Ambient temperature T_{amb} (°C)..... :					20-25		—
Power source for EUT: Manufacturer, model/type, outputrating .. :					N/A		—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation	
1. C70 - A/D board	Short	264	20 min	F1	0.05	Unit IP, LCD off, NCD, NC, NT	
2. L16 - A/D board	Short	264	20 min	F1	0.31	Normal operation, NCD, NC, NT	
3. C821 – T-CON board	Short	264	20 min	F1	0.29	Normal operation, NCD, NC, NT	
4. R583 - T-CON board	Short	264	20 min	F1	0.31	Normal operation, NCD, NC, NT	
5.Ventilation openings *)	Blocked	90 Va.c.	3 h 18 min	F1	0.85	NCD, NC, NT. T1 primary coil: 88.9 °C, T1 secondary coil: 88.4 °C, T1 Core: 86.8 °C, Ambient: 22.0 °C (40.0)	
6. Audio *)	Pmax	90 Va.c.	1 h 26 min	F1	0.91	NCD, NC, NT. T1 primary coil: 87.3 °C, T1 secondary coil: 86.8 °C, T1 Core: 85.0 °C, Ambient: 22.2 °C (40.0)	
Supplementary information:							
*) means the calculated value at Tma 40 °C condition.							
FI – Final Input Current; IP – Internal protection operated;							
CD – Component Damaged (list damaged components); NCD – No Component Damaged;							
CT – Constant temperatures were obtained (list components: temperature);							
NB – No indication of dielectric breakdown; YB – Dielectric breakdown (indicate time and location);							
NC – Cheesecloth remained intact; YC – Cheesecloth charred or flamed;							
NT – Tissue paper remained intact; YT – Tissue paper charred or flamed;							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

M.3	**TABLE: Protection circuits for batteries provided within the equipment**						N/A
Is it possible to install the battery in a reverse polarity position?.....:							—
Equipment Specification	Charging						
	Voltage (V)			Current (A)			
Manufacturer/type	Battery specification						
	Non-rechargeable batteries		Rechargeable batteries				
	Discharging current (A)	Unintentional charging current (A)	Charging		Discharging current (A)	Reverse charging current (A)	
			Voltage (V)	Current (A)			
-	-	-	-	-	-	-	
Note: The tests of M.3.2 are applicable only when above appropriate data is not available.							
Specified battery temperature (°C) .....:							
Component No.	Fault condition	Charge/ discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation
-	-	-	-	-	-	-	-
Supplementary information:							
Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.							

M.4.2	**TABLE: Charging safeguards for equipment containing a secondary lithium battery**				**N/A**
Maximum specified charging voltage (V) ..... :					—
Maximum specified charging current (A) ..... :					—
Highest specified charging temperature (°C) ..... :					
Lowest specified charging temperature (°C) ..... :					
Battery manufacturer/type	Operating and fault condition	Measurement			Observation
		Charging voltage (V)	Charging current (A)	Temp. (°C)	
-	-	-	-	-	-
Supplementary information:					
Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Q.1	**TABLE: Circuits intended for interconnection with building wiring (LPS)**						P
Output Circuit	Condition	U_{oc} (V)	Time (s)	I_{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
HDMI port pin 1-3,5-7,9,11-17,19 to GND	Normal operation	0	5 s	0	8	0	100
HDMI port pin 4 to GND	Normal operation	4.57	5 s	0	8	0	100
HDMI port pin 8,10 to GND	Normal operation	3.3	5 s	0	8	0	100
HDMI port pin 18 to GND	Normal operation	0.58	5 s	0	8	0	100
DP port pin 1,3,4,6,7,9,10,12 to GND	Normal operation	1.12	5 s	0	8	0	100
DP port pin 2,5,8,13,14,16,17,19,20 to GND	Normal operation	0	5 s	0	8	0	100
DP port pin 11 to GND	Normal operation	3.04	5 s	0	8	0	100
DP port pin 15 to GND	Normal operation	0.65	5 s	0	8	0	100
DP port pin 18 to GND	Normal operation	3.3	5 s	0	8	0	100
Supplementary Information:							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.2, T.3, T.4, T.5	TABLE: Steady force test					P
Location/Part	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation
Component	-	-	-	10 N	5 s	No hazard
Adhesive for T-CON board	-	1.5	V.1 / V.2	30 N	5 s	Adhesive shall not fall off or partly dislodge
Enclosure	Acrylonitrile Butadiene Styrene (ABS)	1.5	*)	250 N	5 s	No hazard
Supplementary information:						
*) 30 mm diameter circular plane surface.						

T.6, T.9	TABLE: Impact test				P
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
Enclosure near Internal SMPS	Acrylonitrile Butadiene Styrene (ABS)	1.5	1 300	No hazard	
Supplementary information:					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.7	TABLE: Drop test				N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
-	-	-	-	-	
Supplementary information:					

T.8	TABLE: Stress relief test				P
Location/Part	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation
Enclosure near Internal SMPS	Acrylonitrile Butadiene Styrene (ABS)	1.5	71.3	7 h	No hazard
Supplementary information:					

X	TABLE: Alternative method for determining minimum clearances distances			N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)	
-	-	-	-	
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: Critical components information				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity[1)]
Internal SMPS	QINGDAO TICON ELECTRONICS CO.,LTD.	WDL3353C09 DW430E	Input: 100-240 Vac, 50/60 Hz, 3 A; Output: 12 Vdc, 5 A; 90-115 Vdc, 520-560 mA;	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 62368-1	DEMKO (DK-113836-UL) UL (E489915)
Plastic enclosure (Fire/Mech)	QINGDAO HAIER NEW MATERIAL R & D CO LTD	HRABS-HG, HRABS-RS	HB, Min. 1.5 mm thickness, 60 ºC	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 94 UL 746	Tested in equipment UL (E230779)
Metal enclosure (Eelc/Mech)	Interchangeable	Interchangeable	Metal, approximately 484.3 mm by 199.4 mm by 35.0 mm, Min. 1.0 mm thickness	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 62368-1	Tested in equipment
TFT LCD Panel	Weihai Daewoo Electronics Co.,LTD	DW430E	43 inch UHD TFT LCD, Rated 12 Vd.c., Max 1800 mA, Resolution 3840 by 2160, 60 Hz	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 62368-1	Tested in equipment
Adhesive for T-CON board	DONGGUAN QIKE ELECTRONICS PRODUCTS CO.,LTD	EVA double-side adhesive pad	Polyester film, Approx. overall size of 8.0 by 40.0 mm (2 EA)	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 62368-1	Tested in equipment
Power cord set (KR type)	Changzhou Hong Chang Electronics Co. Ltd.	DTIII-2P-05, H05VVH2-F, DTII-3P-04	16 A, 250 V~, 3 x 0.75 mm^2, 10 A, 250 V~	IEC 60884-1:2002/AMD1:2006 IEC 60227-5:2011 IEC 60320-1:2001/AMD1:2007	KC (HU01021-16006B)

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Power cord set (US type)	CHANGZHOU HONG CHANG ELECTRONICS CO LTD	DTII-3P-11+UL SVT 18AWG/3C +DTII-3P-04	Detachable, Min. 1.5 m, Max. 4.5 m long, rated 125 V, 10 A, 18/3 AWG, 105 ºC, SVT type flexible cord. One end with NEMA 5-15P other end with appliance coupler.	UL 817 UL 60320-1 UL62	UL (E205766)
Internal Wiring (Secondary)	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or marked VW-1; Min. 30 V, 80 ºC	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 758	Tested in equipment UL
Cable	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or marked VW-1; Min. 30 V, 80 ºC	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 758	Tested in equipment UL
Connectors and Receptacles (Secondary circuits)	Interchangeable	Interchangeable	-	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 1977	Tested in equipment UL
(Alternate)	Interchangeable	Interchangeable	Copper alloy pins housed in bodies of plastic rated Min. V-2	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 746	Tested in equipment UL
FPWB	Interchangeable	Interchangeable	Min. V-1, 80 °C.	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 758	Tested in equipment UL
PCB	SHENZHEN FUXIANG TECHNOLOGY CO LTD	FX-M	V-0, 130 °C.	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 94 UL 796	Tested in equipment UL (E302652)

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

(Alternate)	Interchangeable	Interchangeable	V-0, 130 °C.	IEC 62368-1: 2018 EN IEC 62368-1: 2020+A11:2020 UL 94 UL 796	Tested in equipment UL
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Customer's Testing Facility according to CTF stage 1 or CTF stage 2 procedure has been used.
Note: This page may be removed when CTF stage 1 or CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date

Attachment 1 – European Group Differences and National Differences

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT **IEC 62368-1** **EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES** (Audio/video, information and communication technology equipment - Part 1: Safety requirements)			
Differences according to.....: EN IEC 62368-1:2020+A11:2020			
Attachment Form No.....: EU_GD_IEC62368_1E **Attachment Originator .....**: UL(Demko) **Master Attachment**.....: 2021-02-04			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		
	Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018. Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".		
	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords		
1	**Modification to Clause 3 .**		
3.3.19	**Sound exposure** *Replace 3.3.19 of IEC 62368-1 with the following definitions:*		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.1	**momentary exposure level, MEL** metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2. Note 1 to entry: MEL is measured as A-weighted levels in dB. Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.		N/A
3.3.19.3	**sound exposure, *E*** A-weighted sound pressure (p) squared and integrated over a stated period of time, T Note 1 to entry: The SI unit is Pa^2 s. $E = \int_0^T p(t)^2 \, dt$		N/A
3.3.19.4	**sound exposure level, *SEL*** logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans. Note 1 to entry: *SEL* is measured as A-weighted levels in dB. $SEL = 10 \lg \left(\frac{E}{E_0}\right)$ dB Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.		N/A
3.3.19.5	**digital signal level relative to full scale, dBFS** levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.		N/A
2	**Modification to Clause 10**		
10.6	**Safeguards against acoustic energy sources** Replace 10.6 of IEC 62368-1 with the following:		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.1.1	**Introduction** **Safeguard** requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an **ordinary person**, that: – is designed to allow the user to listen to audio or audiovisual content / material; and – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment. Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3. NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360. NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible. Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to: – professional equipment; NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment. – hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players: • long distance radio receiver (for example, a multiband radio receiver or world band radio		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	receiver, an AM radio receiver), and • cassette player/recorder; NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies. – a player while connected to an external amplifier that does not allow the user to walk around while in use. For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply. The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.		
10.6.1.2	**Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz** The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.		N/A
10.6.2	**Classification of devices without the capacity to estimate sound dose**		N/A
10.6.2.1	**General** This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3. For classifying the acoustic output $L_{Aeq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period. For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	this case, *T* becomes the duration of the song. NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.		
10.6.2.2	**RS1 limits (to be superseded, see 10.6.3.2)** RS1 is a class 1 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed "programme simulation noise" described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1. – The RS1 limits will be updated for all devices as per 10.6.3.2.		N/A
10.6.2.3	**RS2 limits (to be superseded, see 10.6.3.3)** RS2 is a class 2 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed "programme simulation noise" as described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1.		
10.6.2.4	**RS3 limits** RS3 is a class 3 acoustic energy source that exceeds RS2 limits.		N/A
10.6.3	**Classification of devices (new)**		N/A
10.6.3.1	**General** Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.		N/A
10.6.3.2	**RS1 limits (new)** RS1 is a class 1 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.		N/A
10.6.3.3	**RS2 limits (new)** RS2 is a class 2 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1.		
10.6.4	**Requirements for maximum sound exposure**		N/A
10.6.4.1	**Measurement methods** All volume controls shall be turned to maximum during tests. Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.		N/A
10.6.4.2	**Protection of persons** Except as given below, protection requirements for parts **accessible** to **ordinary persons**, **instructed persons** and **skilled persons** are given in 4.3. NOTE 1 Volume control is not considered a **safeguard.** Between RS2 and an **ordinary person**, the **basic safeguard** may be replaced by an **instructional safeguard** in accordance with Clause F.5, except that the **instructional safeguard** shall be placed on the equipment, or on the packaging, or in the instruction manual. Alternatively, the **instructional safeguard** may be given through the equipment display during use. The elements of the **instructional safeguard** shall be as follows: – element 1a: the symbol , IEC 60417-6044 (2011-01) – element 2: "High sound pressure" or equivalent wording – element 3: "Hearing damage risk" or equivalent wording – element 4: "Do not listen at high volume levels for long periods." or equivalent wording An **equipment safeguard** shall prevent exposure of an **ordinary person** to an RS2 source without intentional physical action from the **ordinary person** and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time. NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed. NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off. A **skilled person** shall not be unintentionally exposed to RS3.		
10.6.5	**Requirements for dose-based systems**		N/A
10.6.5.1	**General requirements** Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause. The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration. The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.		N/A
10.6.5.2	**Dose-based warning and requirements** When a dose of 100 % *CSD* is reached, and at least at every 100 % further increase of *CSD*, the device shall warn the user and require an		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1. The warning shall at least clearly indicate that listening above 100 % *CSD* leads to the risk of hearing damage or loss.		
10.6.5.3	**Exposure-based requirements** With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at. The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3. The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster. Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface. NOTE In case the source is known not to be music (or test signal), the EL may be disabled.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

10.6.6	**Requirements for listening devices (headphones, earphones, etc.)**		N/A
10.6.6.1	**Corded listening devices with analogue input** With 94 dB L_{Aeq} acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed "programme simulation noise" as described in EN 50332-1 shall be ≥ 75 mV. NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.		N/A
10.6.6.2	**Corded listening devices with digital input** With any playing device playing the fixed "programme simulation noise" described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.		N/A
10.6.6.3	**Cordless listening devices** In cordless mode, – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.		N/A
10.6.6.4	**Measurement method** *Measurements shall be made in accordance with EN 50332-2 as applicable.*		N/A
3	**Modification to the whole document**		

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Delete all the "country" notes in the reference document according to the following list:

0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2
3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2
5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3
5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note
5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4
5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2
8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2
~~10.6.1~~	Note 3	F.3.3.6	Note 3	Y.4.1	Note
Y.4.5	Note				

P

4 **Modification to Clause 1**

1 ***Add*** *the following note:*

NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.

P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5	**Modification to 4.Z1**		
4.Z1	***Add*** *the following new subclause after 4.9:* To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. **mains**, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for **pluggable equipment type B** or **permanently connected equipment**, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for **pluggable equipment type A** the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		P
6	**Modification to 5.4.2.3.2.4**		
5.4.2.3.2.4	***Add*** *the following to the end of this subclause:* The requirement for interconnection with **external circuit** is in addition given in EN 50491-3:2009.		N/A
7	**Modification to 10.2.1**		
10.2.1	Add the following to [c] and [d] in table 39: For additional requirements, see 10.5.1.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

8	**Modification to 10.5.1**		
10.5.1	***Add** the following after the first paragraph:* For RS 1 compliance is checked by measurement under the following conditions: In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made. NOTE Z1 Soldered joints and paint lockings are examples of adequate locking. The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus. Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made. For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level. NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.		N/A
9	**Modification to G.7.1**		
G.7.1	***Add** the following note:* NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

10	**Modification to Bibliography**		
	Add the following notes for the standards indicated: IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5 NOTE Harmonized as EN 60664-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61643-1 NOTE Harmonized as EN 61643-1. IEC 61643-21 NOTE Harmonized as EN 61643-21. IEC 61643-311 NOTE Harmonized as EN 61643-311. IEC 61643-321 NOTE Harmonized as EN 61643-321. IEC 61643-331 NOTE Harmonized as EN 61643-331.		P
11	**ADDITION OF ANNEXES**		
ZB	**ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)**		N/A
4.1.15	**Denmark, Finland, Norway** and **Sweden** To the end of the subclause the following is added: **Class I pluggable equipment type A** intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and **accessible** parts, have a marking stating that the equipment shall be connected to an earthed **mains** socket-outlet. The marking text in the applicable countries shall be as follows: In **Denmark**: “Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord.” In **Finland**: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In **Norway**: “Apparatet må tilkoples jordet stikkontakt” In **Sweden**: “Apparaten skall anslutas till jordat uttag”	Equipment for building-in. Evaluation is to be considered in the end use product.	N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	**United Kingdom** To the end of the subclause the following is added: The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex		N/A
5.2.2.2	**Denmark** After the 2nd paragraph add the following: A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A
5.4.11.1 and Annex G	**Finland and Sweden** To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		
5.5.2.1	**Norway** After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
5.5.6	**Finland, Norway** and **Sweden** To the end of the subclause the following is added: Resistors used as **basic safeguard** or bridging **basic insulation** in **class I pluggable equipment type A** shall comply with G.10.1 and the test of G.10.2.		N/A
5.6.1	**Denmark** **Add** to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. *Justification:* In Denmark an existing 13 A socket outlet can be		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	protected by a 20 A fuse.		
5.6.4.2.1	**Ireland and United Kingdom** After the indent for **pluggable equipment type A**, the following is added: – the **protective current rating** is taken to be 13 A, this being the largest rating of fuse used in the **mains** plug.		N/A
5.6.4.2.1	**France** After the indent for **pluggable equipment type A**, the following is added: – in certain cases, the **protective current rating** of the circuit supplied from the mains is taken as 20 A instead of 16 A.		N/A
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm^2 to 1,5 mm^2 in cross-sectional area.		N/A
5.6.8	**Norway** To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as **class I equipment**. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.		N/A
5.7.6	**Denmark** To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the **protective conductor current** exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A
5.7.6.2	**Denmark** To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .		N/A
5.7.7.1	**Norway and Sweden** To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: “Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)” NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.” Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.		

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.2.3	**United Kingdom** Add the following after the 2nd dash bullet in 3rd paragraph: An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.		N/A
B.3.1 and B.4	**Ireland and United Kingdom** The following is applicable: To protect against excessive currents and short-circuits in the primary circuit of **direct plug-in equipment**, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the **direct plug-in equipment**, until the requirements of Annexes B.3.1 and B.4 are met	No direct plug-in equipment.	N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	**Denmark** To the end of the subclause the following is added: Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2. Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c. Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a *Justification:* Heavy Current Regulations, Section 6c		N/A
G.4.2	**United Kingdom** To the end of the subclause the following is added: The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	**United Kingdom** To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	**Ireland** To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	**Ireland and United Kingdom** To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm^2 is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ZC	**ANNEX ZC, NATIONAL DEVIATIONS (EN)**		
10.5.2	**Germany** The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking. *Justification*: German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM. **NOTE** Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 1 – European Group Differences and National Differences

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ZD	**IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)**	N/A
		N/A

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H
Cords insulated and sheathed with halogen-free thermoplastic compounds		
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT

IEC 62368-1
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES
(Audio/video, information and communication technology equipment - Part 1: Safety requirements)

Differences according to.....: EN 62368-1:2014+A11:2017

Attachment Form No.....: EU_GD_IEC62368_1D_II

Attachment Originator.....: Nemko AS

Master Attachment.....: Date 2021-02-04

Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

CENELEC COMMON MODIFICATIONS (EN)

Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2014 are prefixed "Z".

CONTENTS

Add the following annexes:

Annex ZA (normative) Normative references to international publications with their corresponding European publications
Annex ZB (normative) Special national conditions
Annex ZC (informative) A-deviations
Annex ZD (informative) IEC and CENELEC code designations for flexible cords

Delete all the "country" notes in the reference document (IEC 62368-1:2014) according to the following list:

0.2.1	Note	1	Note 3	4.1.15	Note
4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c
5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3
5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4
10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3

For special national conditions, see Annex ZB.

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1	**Add** the following note: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.		P
4.Z1	**Add** the following new subclause after 4.9: To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. **mains**, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for **pluggable equipment type B** or **permanently connected equipment**, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for **pluggable equipment type A** the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		N/A
5.4.2.3.2.4	**Add** the following to the end of this subclause: The requirement for interconnection with **external circuit** is in addition given in EN 50491-3:2009.		N/A
10.2.1	Add the following to [c] and [d] in table 39: For additional requirements, see 10.5.1.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	**Add** the following after the first paragraph: *For RS 1 compliance is checked by measurement under the following conditions:* *In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.* NOTE Z1 Soldered joints and paint lockings are examples of adequate locking. *The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.* *Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.* *For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.* NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.		N/A
10.6.1	**Add** the following paragraph to the end of the subclause: EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.		N/A
10.Z1	**Add** the following new subclause after 10.6.5. **10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz** The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	**Add** the following note: NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.		N/A
Bibliography	**Add** the following standards: **Add** the following notes for the standards indicated: IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5 NOTE Harmonized as EN 60664-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61643-1 NOTE Harmonized as EN 61643-1. IEC 61643-21 NOTE Harmonized as EN 61643-21. IEC 61643-311 NOTE Harmonized as EN 61643-311. IEC 61643-321 NOTE Harmonized as EN 61643-321. IEC 61643-331 NOTE Harmonized as EN 61643-331.		P
ZB	**ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)**		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.1.15	**Denmark, Finland, Norway** and **Sweden** To the end of the subclause the following is added: **Class I pluggable equipment type A** intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and **accessible** parts, have a marking stating that the equipment shall be connected to an earthed **mains** socket-outlet. The marking text in the applicable countries shall be as follows: In **Denmark**: “Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord.” In **Finland**: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In **Norway**: “Apparatet må tilkoples jordet stikkontakt” In **Sweden**: “Apparaten skall anslutas till jordat uttag”		N/A
4.7.3	**United Kingdom** To the end of the subclause the following is added: The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex		N/A
5.2.2.2	**Denmark** After the 2nd paragraph add the following: A warning (marking **safeguard**) for high **touch current** is required if the **touch current** exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.11.1 and Annex G	**Finland and Sweden** To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5kV. It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2.1	**Norway** After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
5.5.6	**Finland, Norway** and **Sweden** To the end of the subclause the following is added: Resistors used as **basic safeguard** or bridging **basic insulation** in **class I pluggable equipment type A** shall comply with G.10.1 and the test of G.10.2.		N/A
5.6.1	**Denmark** **Add** to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. *Justification:* In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		N/A
5.6.4.2.1	**Ireland and United Kingdom** After the indent for **pluggable equipment type A**, the following is added: – the **protective current rating** is taken to be 13 A, this being the largest rating of fuse used in the **mains** plug.		N/A
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm^2 to 1,5 mm^2 in cross-sectional area.		N/A
5.7.5	**Denmark** To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the **protective conductor current** exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A
5.7.6.1	**Norway and Sweden** To the end of the subclause the following is added: The screen of the television distribution system is		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: “Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)” NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.” Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.		

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	**Denmark** To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .		N/A
B.3.1 and B.4	**Ireland and United Kingdom** The following is applicable: To protect against excessive currents and short-circuits in the primary circuit of **direct plug-in equipment**, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the **direct plug-in equipment**, until the requirements of Annexes B.3.1 and B.4 are met		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	**Denmark** To the end of the subclause the following is added: Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2. Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c. Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a *Justification:* Heavy Current Regulations, Section 6c		N/A
G.4.2	**United Kingdom** To the end of the subclause the following is added: The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	**United Kingdom** To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	**Ireland** To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	**Ireland and United Kingdom** To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm^2 is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 2 – European Group Differences and National Differences

IEC62368_1D - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	**Germany** The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking. *Justification:* German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM. **NOTE** Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int +49-531-592-6320, Internet: http://www.ptb.de		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT

IEC 62368-1
U.S.A. AND CANADA NATIONAL DIFFERENCES
(Audio/video, information and communication technology equipment – Part 1: Safety requirements)

Differences according to .....: CSA/UL 62368-1:2019

TRF template used: ..... : IECEE OD-2020-F3, Ed. 1.1

Attachment Form No. .....: US_CA_ND_IEC62368_1E

Attachment Originator.....: UL(US)

Master Attachment .....: Dated 2021-02-04

Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

IEC 62368-1 - US and Canadian National Differences
Special National Conditions based on Regulations and Other National Differences

1 (1DV.1) (1.3)	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part 1, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.		P
1 (1DV.2.1)	This standard includes additional requirements for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities. See Annex DVB.		N/A
1 (1DV.2.2)	This standard includes additional requirements for equipment intended for mounting under cabinets. See Annex DVC.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1 (1DV.2.3)	IEC 62368-3 clause 5 for DC power transfer at ES1 or ES2 voltage levels is considered informative. IEC 62368-3 clause 6 for remote power feeding telecommunication (RFT) circuits is considered normative (see ITU K.50). Alternatively, equipment with RFT circuits are given in either UL 2391 or CSA/UL 60950-21. RFT-C circuits are not permitted unless the RFT-C circuit complies with RFT-V limits (≤ 200V per conductor to earth).	.	N/A
1 (1DV.3)	For protection against direct lightning strikes, reference is made to NFPA 780 and CAN/CSA-B72 for additional requirements.		N/A
1 (DV.5)	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		N/A
4.1 (4.1.17)	For lengths exceeding 3.05 m, external interconnecting cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.		N/A
	For lengths 3.05 m or less, external interconnecting cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.		N/A
4.6 (4.6.2)	Wire-wrap terminals have special construction and performance requirements.		N/A
4.8 (4.8.3, 4.8.4.5, 4.8.5)	Coin / button cell batteries have modified special construction and performance requirements.		N/A
5.4.2.3.2 (5.4.2.3.2.1)	Surge Arrestors and Transient Voltage Surge Suppressors installed external to the equipment are required to comply with the appropriate NEC and CEC requirements.		N/A
5.5.9	Receptacles, rated 125-V, single phase, 15- or 20-A accessible to either ordinary, instructed, or skilled persons are required to be provided with GFCI Protection for Personnel if the equipment containing the receptacles is installed outdoors. The protection devices are required to comply with UL 943, and CAN/CSA C22.2 No.144.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.7, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment.		N/A
5.7.8 (5.7.8.1)	Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.		N/A
6.5.1	PS3 wiring outside a fire enclosure is required to comply with single fault testing in B.4, or be current limited per one of the permitted methods.		N/A
Annex F (F.3.3.9)	Output terminals provided for supply of other equipment, except mains supply, are required to be marked with a maximum rating or reference to equipment permitted to be connected.		P
Annex F (F.3.7)	Outdoor Enclosures are required to be classified and marked in accordance with UL 50 or 50E, or CAN/CSA C22.2 No. 94.1 or 94.2.		N/A
Annex G (G.7)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.		N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.		N/A
	Power supply cords for outdoor equipment are required to be suitable outdoor use type as required by Section 400.4 of the NEC and Rule 4-012 of the CEC, i.e., marked “W.”		N/A
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 Vpeak or 60 Vd.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
Annex Q (Q.3)	Equipment with paired conductor and/or coax communications cables/wiring connected to building wiring are required to have special voltage, current, power and marking requirements.		N/A
Annex DVA (1)	Equipment that is designed such that it may be powered from a separate electrical service, is required to meet applicable requirements for service equipment for control and protection of services and their installation and complies with Article 230 of the National Electrical Code (NEC), NFPA 70 and Section 6 of the Canadian Electrical Code, Part I, CSA C22.1.		N/A
	Equipment intended for use in spaces used for environmental air (plenums) are subjected to special flammability requirements for heat and visible smoke release.		N/A
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m^3 (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. and Canadian Regulations.		N/A
	Baby monitors are required to additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Storage batteries and battery management equipment, other than associated with lead-acid batteries, and including battery backup systems that are not an integral part of stationary AV and ICT equipment, such as provided in separate cabinets, are required to be certified (listed) to the appropriate standard(s) for such storage batteries and equipment.		N/A
Annex DVA (5.6)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m^2 (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a minimum flammability classification of V-1.		N/A
Annex DVA (10.3)	Equipment with lasers is required to meet the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5)	Equipment that produces ionizing radiation is required to comply with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (F.3.3.4)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or that are lower than the “Normal Operating Condition” in Table 2 of CAN/CSA C22.2 No. 235.”		N/A
Annex DVA (F.3.3.6)	Equipment identified for ITE (computer) room installation is required to be marked with the rated current.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position.		N/A
Annex DVA (G.3.4)	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non- interchangeable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles is required to comply with NEC 250.146(D) and CEC 10-400 and 10-612.		N/A
Annex DVA (G.4.3)	Interconnection of units by conductors supplied by a limited power source, or a Class 2 circuit defined in the NEC/CEC may have field wiring connections other than specified in DVH.3, such as wire-wrap and crimp-on types, if the limited power source and Class 2 circuits are separated from all other circuits by barriers, routing or fixing.		N/A
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A
Annex DVA (G.7)	Flexible cords used outdoors are required to have the suffix “W” marked on the flexible cord.		N/A
Annex DVA (M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (Q)	If applicable per NEC 725.121(C), some limited power sources supplied from AV/ICT equipment are required to have a label indicating the maximum voltage and maximum current, or maximum voltage and nominal current output for each connection point. Where multiple connection points have the same rating, a single label is permitted to be used.		N/A
	Wiring terminals intended to supply Class 2 outputs in accordance with the NEC or CEC Part 1are required to be marked with the voltage rating and “Class 2” or equivalent. The marking is located adjacent to the terminals and visible during wiring.		N/A
	Applicable parts of Chapter 8 of the NEC, and Rules 54 and 60 of the CEC, may be applicable to ITE installed outdoors with connections to communication systems.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A
Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. These equipment and components include: appliance couplers, attachment plugs, battery backup systems, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultracapacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, modular data centers, power supply cords, some power distribution equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.		P
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are required to be in accordance with the NEC/CEC.		N/A
Annex DVH (DVH.3.2)	Terminals for permanent wiring, including protective earthing terminals, are required to be suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified.		N/A
	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm^2).		N/A
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.		N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 3 – National differences as CB bulletin

IEC62368_1E- ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A
Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version

Attachment 4 - Photographs

<Photo 1 > External view –front (With stand)



<Photo 2 > External view –rear (With stand)



Attachment 4 - Photographs

<Photo 3 > External view –front (Without stand)




<Photo 4 > External view –rear (Without stand)




Attachment 4 - Photographs

<Photo 5 > Internal view1

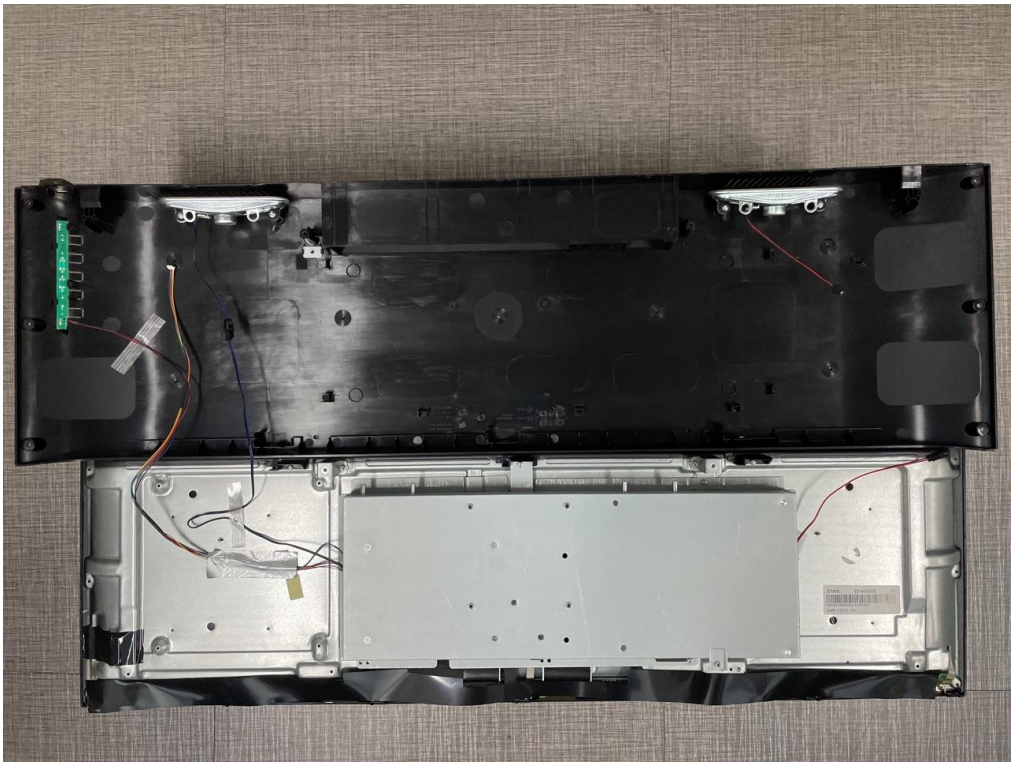


<Photo 6 > Internal view2

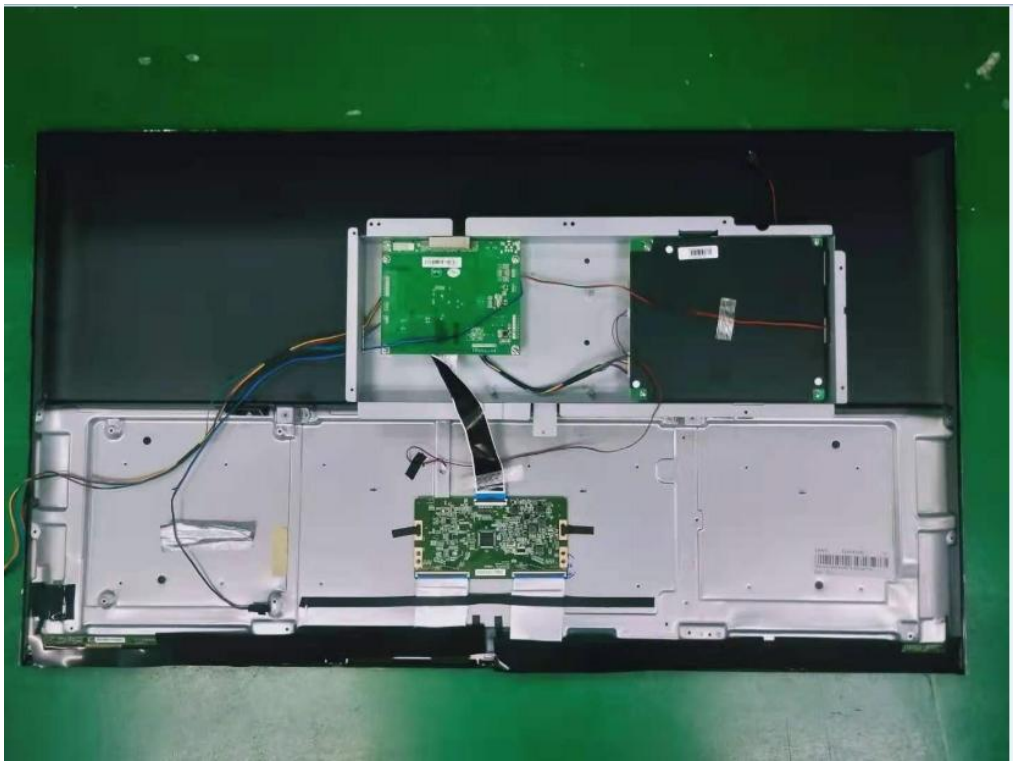


Attachment 4 - Photographs

<Photo 7 > SMPS Board top view

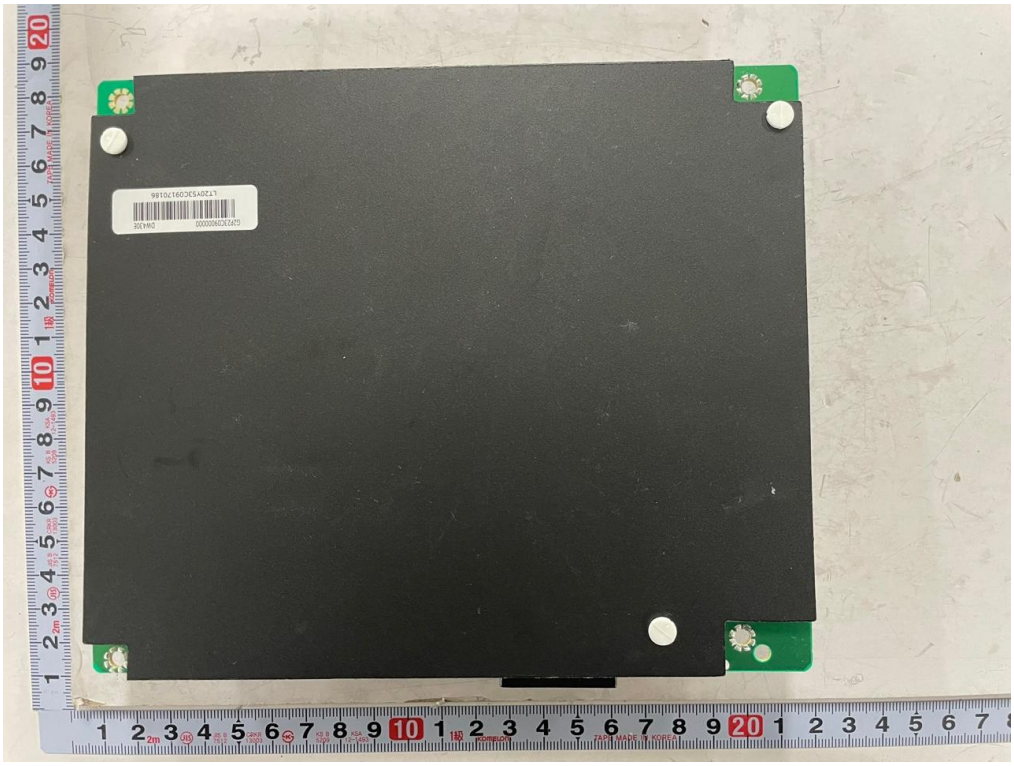


<Photo 8 > SMPS Board bottom view

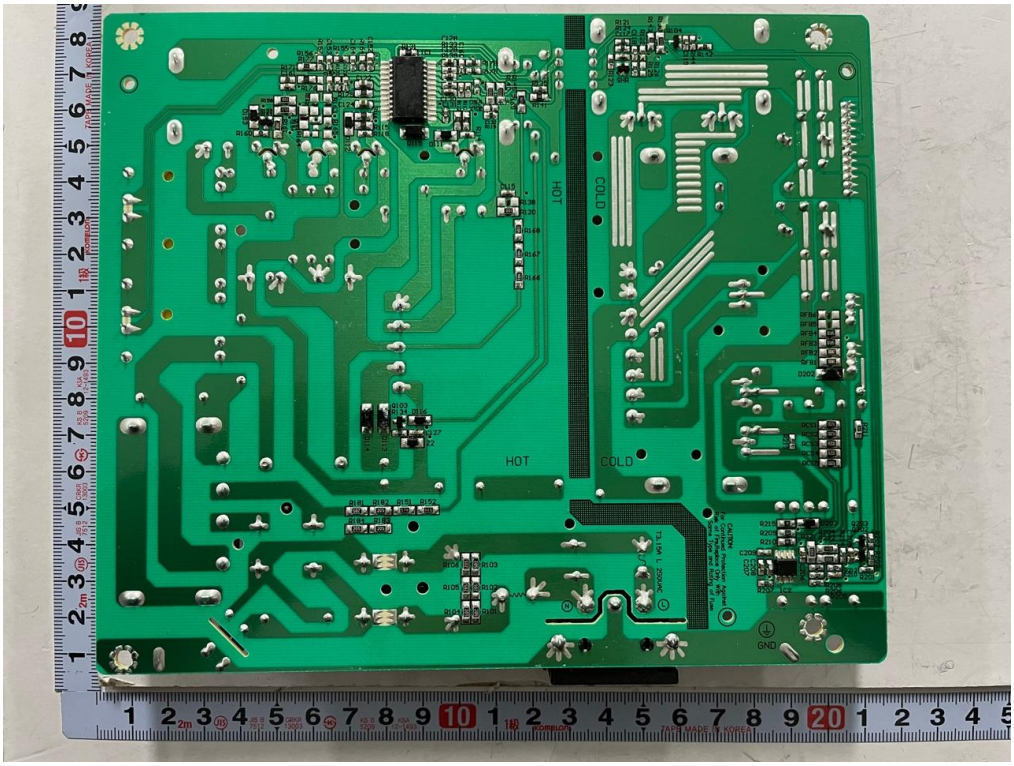


Attachment 4 - Photographs

<Photo 9 > A/D Board top view

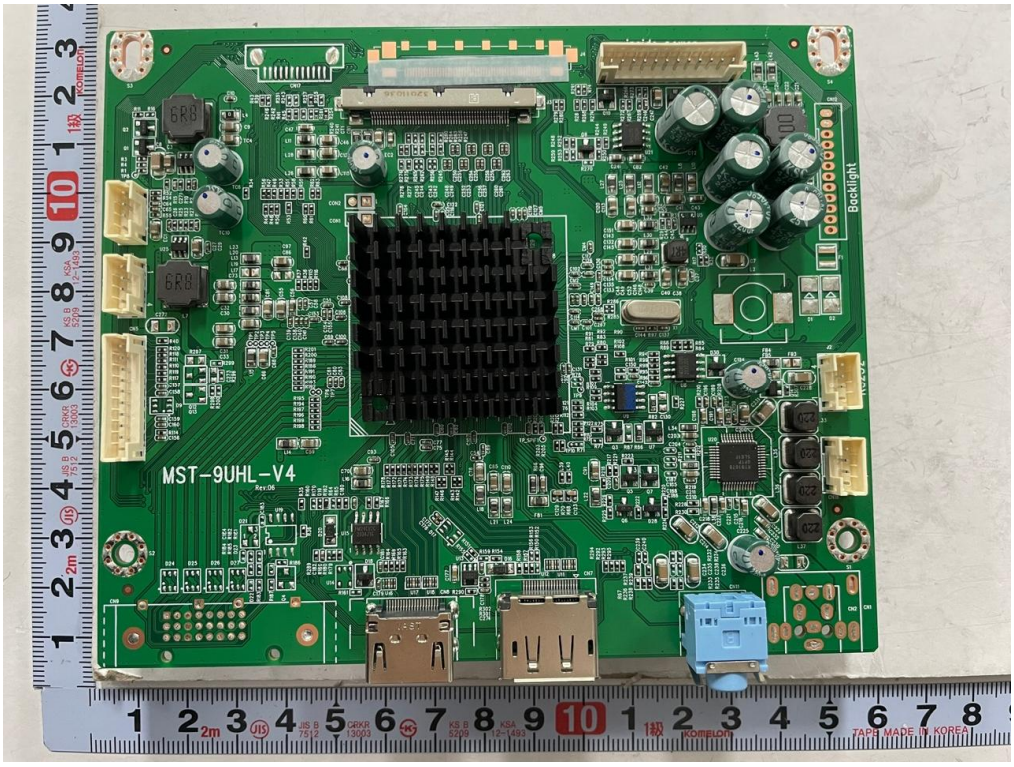


<Photo 10 > A/D Board bottom view

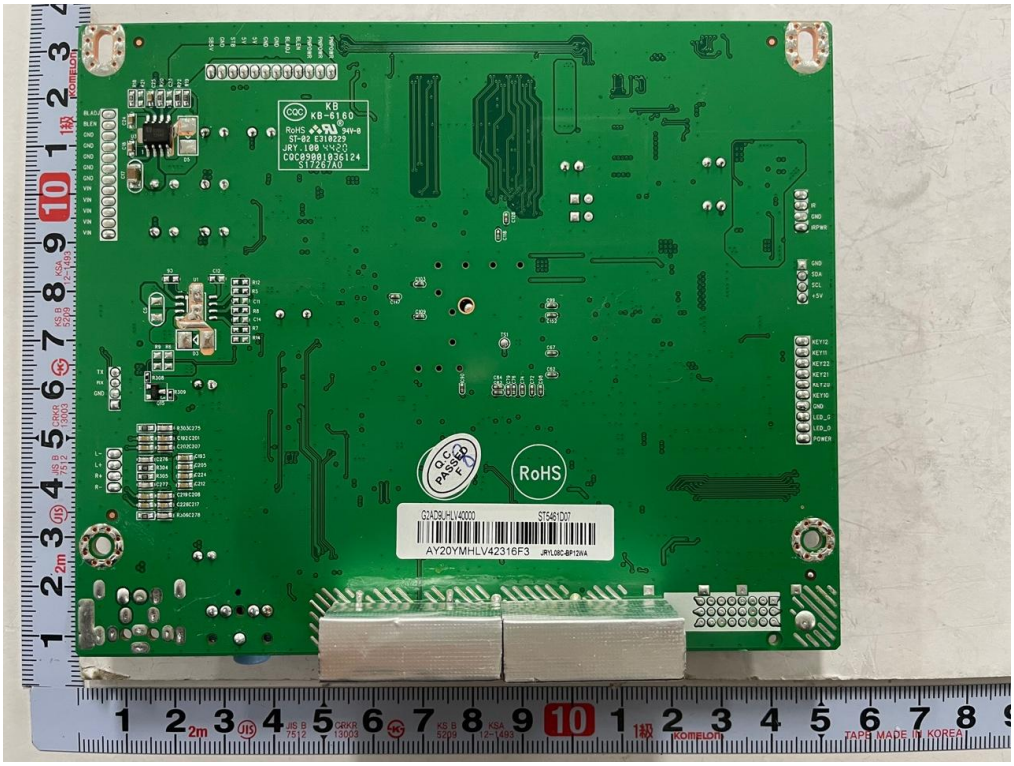


Attachment 4 - Photographs

<Photo 11 > T-CON board top view

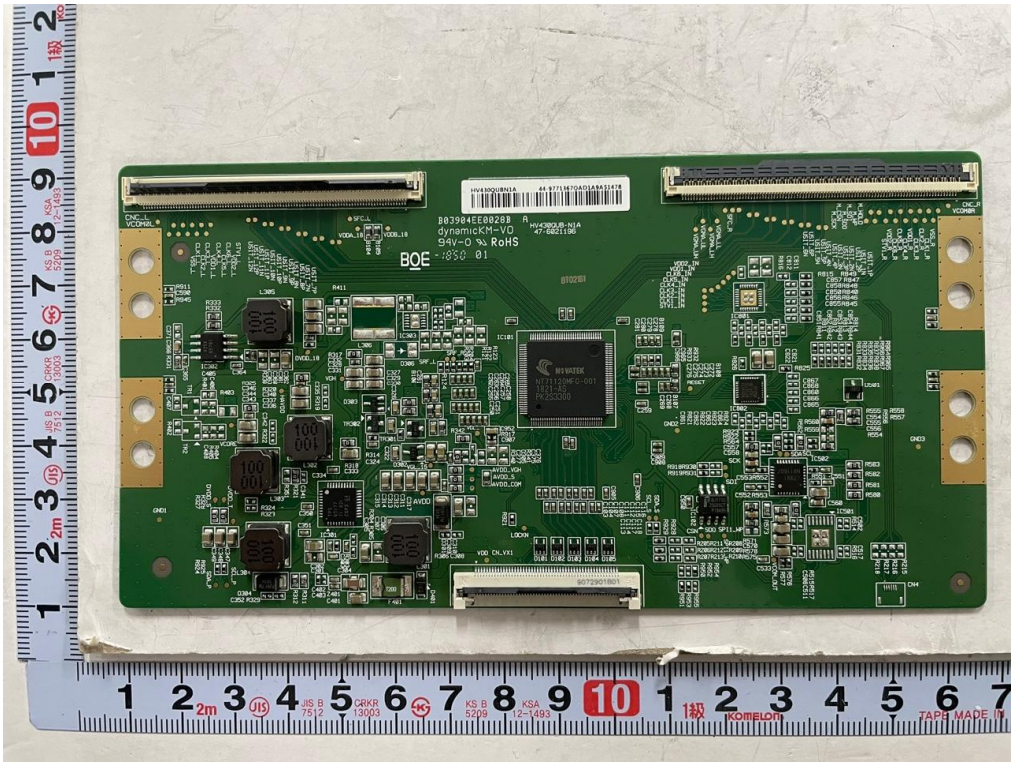

<Photo 12 > T-CON board bottom view

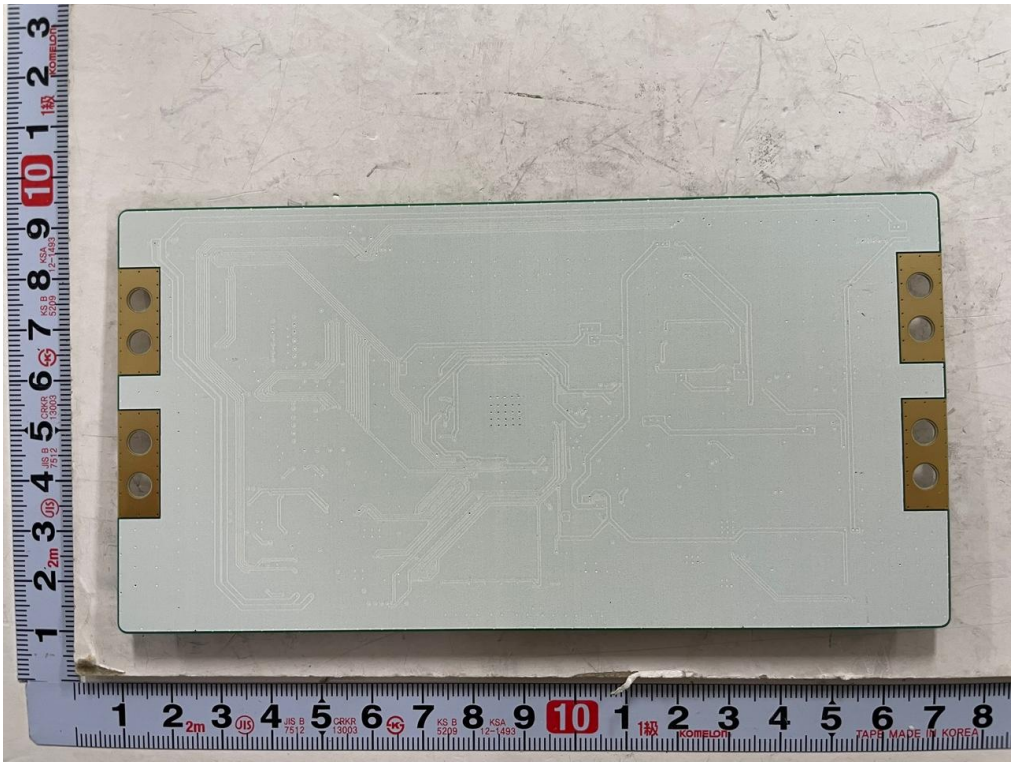

Attachment 4 - Photographs

<Photo 13 > Port view

