



EMC TEST REPORT For RCM

Test Report No. : KES-EM-21T0277-R1
Date of Issue : Feb. 24, 2023
Product name : LED MONITOR
Model/Type No. : SMT-4343
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : Weihai Daewoo Electronics Co., Ltd.
Manufacturer Address : No.26, Hongkong Road, Economic & Technical Development
Zone, 264205 Weihai City, Shandong Province, China
Date of Receipt : Mar. 30, 2021
Test date : Apr. 01, 2021 ~ Apr. 02, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 23, 2021	KES-EM-21T0277	Issued
Feb. 24, 2023	KES-EM-21T0277-R1	Change the Applicant at the request of the customer.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Conducted Emissions at Telecommunication Ports.....	12
2.3	Radiated Electric Field Emissions(Below 1 GHz)	13
2.4	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA.....		15
Conducted Emissions at Mains Power Ports.....		15
Conducted Emissions at Telecommunication Ports		19
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz).....		22
Test Setup Photos and Configuration		24
Conducted Emissions at Mains Power Ports.....		24
Conducted Emissions at Telecommunication Ports		25
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz).....		27
EUT External Photographs		28
EUT Internal Photographs		29

1.0 General Product Description

Main Specifications of EUT are:

SMT-4343		
Display		
Screen Size		42.5"
Max. Resolution		3840*2160
Brightness		300 cd/m ²
Contrast Ratio		800:1 (Min) 1000:1 (Typ)
Aspect Ratio		16:9
Viewing Angle (H/V)		178°/178°
Display Color		1.07G (8bits + FRC)
Response Time		8ms(G to G)
Panel Life		30,000 hours
Interface		
USB	Connector	USB2.0 hub x 1 (1 PC up , 2 down)
Video	Connector	HDMI 2.0(1) DP 1.2(1)
HDMI	Connector	HDMI
	Available Format	640 x 480@60Hz/70Hz/72Hz/75Hz (VGA), 720 x 400@50Hz/60Hz/70Hz, 720 x 576@50Hz , 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA), 832 x 624@75Hz, 1,024 x 768@60Hz/70Hz/75Hz (XGA), 1,152 x 864@60Hz/75Hz, 1,280 x 720@60Hz, 1,280 x 800@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA), 1,360 x 768@60Hz, 1,440 x 900@60Hz/75Hz, 1,600 x 900@60Hz, 1,680 x 1,050@60Hz, 1,920 x 1,080i@60Hz, 1,920 x 1,080p@60Hz, 1920 x 1440@60Hz , 2560 x 1440@60Hz 3840 x 2160p@30Hz/60Hz
DP	Connector	DP
	Available Format	640 x 480@60Hz/70Hz/72Hz/75Hz (VGA), 720 x 400@50Hz/60Hz/70Hz, 720 x 576@50Hz , 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA), 832 x 624@75Hz, 1,024 x 768@60Hz/70Hz/75Hz (XGA), 1,152 x 864@60Hz/75Hz, 1,280 x 720@60Hz, 1,280 x 800@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA), 1,360 x 768@60Hz, 1,440 x 900@60Hz/75Hz, 1,600 x 900@60Hz, 1,680 x 1,050@60Hz, 1,920 x 1,080i@60Hz, 1,920 x 1,080p@60Hz, 1920 x 1440@60Hz , 2560 x 1440@60Hz 3840 x 2160p@30Hz/60Hz
Audio	Connector	Audio Out
	Output Signal	Loop-through line level(PC only), Speakers : 2x10W
Application Support		Remote Controller
On Screen Display (OSD)		
Functions		VESA™ DPM Compatible
Language		Korean, English, Русский, Deutsch, Français, Español, Italiano, Português, Chinese (Simplified), Chinese (Traditional), Japanese, Arabic
General		
Electrical	Input Voltage	AC 100 ~ 240V(50/60Hz)
	Power Consumption	<80W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	10% ~ 80% (non-condensing)
Mechanical	Dimensions with Stand	967.0*640.5*235.0mm
	Dimensions without Stand	967.0*560*77.0mm
	Bezel Size	8.6/16.4mm(Top/Bottom/Side)
	Weight	TBD
	Cabinet Color	Black
	Rack Mount	N/A
	VESA Mounts Interface	100*100mm /400*200mm
Accessory		STAND

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 240 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
LED MONITOR	SMT-4343	-	Weihai Daewoo Electronics Co., Ltd.	EUT
Remote control	-	-	-	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MacBook 1	A1502	C02NH8TNG3QH	Apple Inc.	-
MacBook 1 adapter	A1435	-	Delta Electronics (Jiangsu) Ltd.	-
MacBook 2	A1708	C02W32TFHV22	Apple Inc.	-
MacBook 2 adapter	A1718	-	Apple Inc.	-
Headset	K550	-	Britz®	-
Keyboard	ABKO HACKER K945P	K945P17010003	AKKO	-
Mouse	M-U0026	1431HSO4U288	Logitech	-

1.6 External I/O Cabling

■ HDMI Mode, DP Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
LED MONITOR (EUT)	HDMI	MacBook 1	HDMI	1.5	S
	USB(Type B)		USB	1.8	U
	DP	MacBook 2	USB(Type C)	1.8	U
	3.5 mm	Headset	Line IN	1.6	U
	USB	Keyboard	USB	1.6	U
	USB	Mouse	USB	1.8	U


* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test Mode	operating
HDMI	The color bar image played on MacBook 1 was tested by checking whether the EUT screen is output normally and 1kHz tone sound is output normally on the headset.
DP	The color bar images played on MacBook 2 were tested by checking if they were normally printed on the EUT screen.

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration

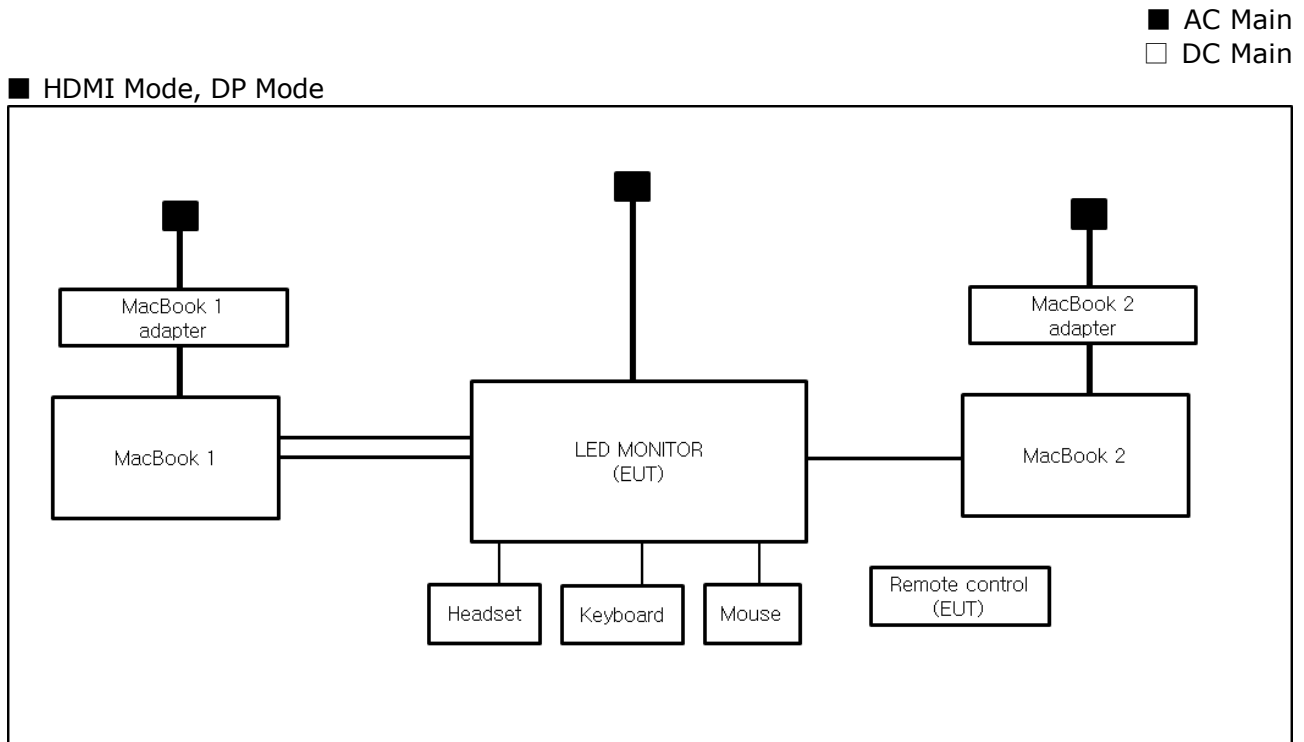

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0277-R1

Page (10) of (40)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR32:2015 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 01, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (24,3 ± 0,1) °C

Relative Humidity: (44,7 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☐	LISN	ENV216	R & S	101787	12, 29, 2021
☐	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☐	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 01, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (23,9 ± 0,1) °C

Relative Humidity: (44,8 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 02, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (23,6 ± 0,2) °C

Relative Humidity: (44,9 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ HDMI Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-4343
Phase:	L1
Mode:	HDMI
Operator Name:	KES

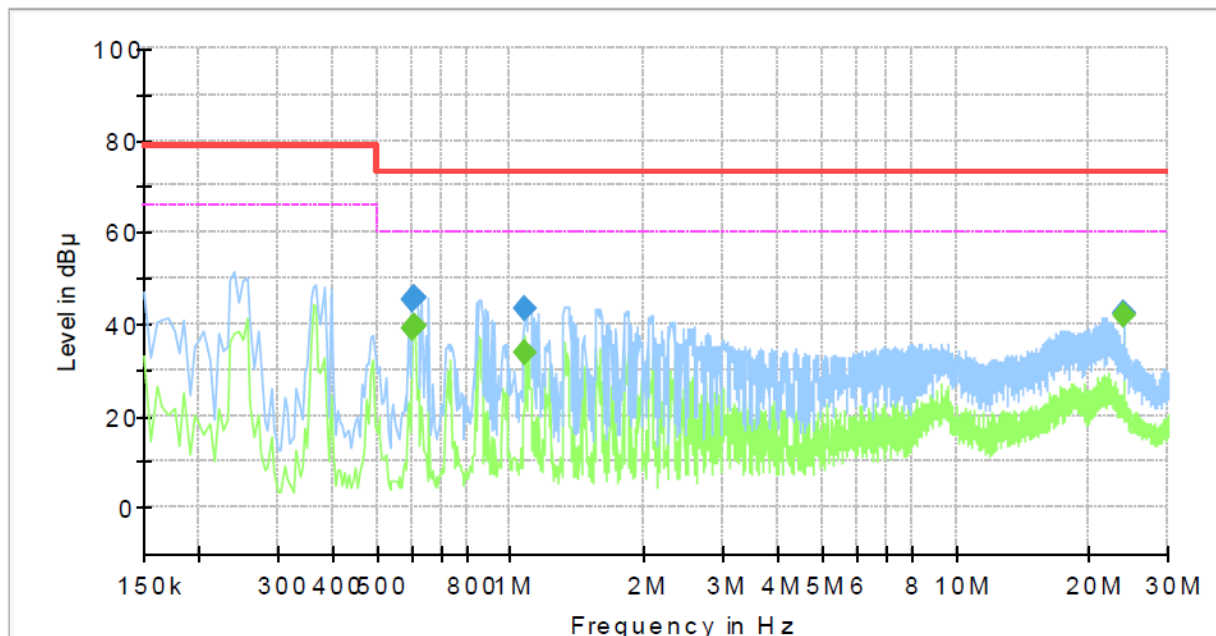

Final_Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.605000	---	39.14	60.00	20.86	1000.0	9.000	L1	19.8
0.605000	45.43	---	73.00	27.57	1000.0	9.000	L1	19.8
0.610000	---	39.38	60.00	20.62	1000.0	9.000	L1	19.8
0.610000	45.51	---	73.00	27.49	1000.0	9.000	L1	19.8
1.080000	---	33.88	60.00	26.12	1000.0	9.000	L1	20.0
1.080000	43.54	---	73.00	29.46	1000.0	9.000	L1	20.0
24.000000	---	41.84	60.00	18.16	1000.0	9.000	L1	20.1
24.000000	42.58	---	73.00	30.42	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-4343
Phase:	N
Mode:	HDMI
Operator Name:	KES

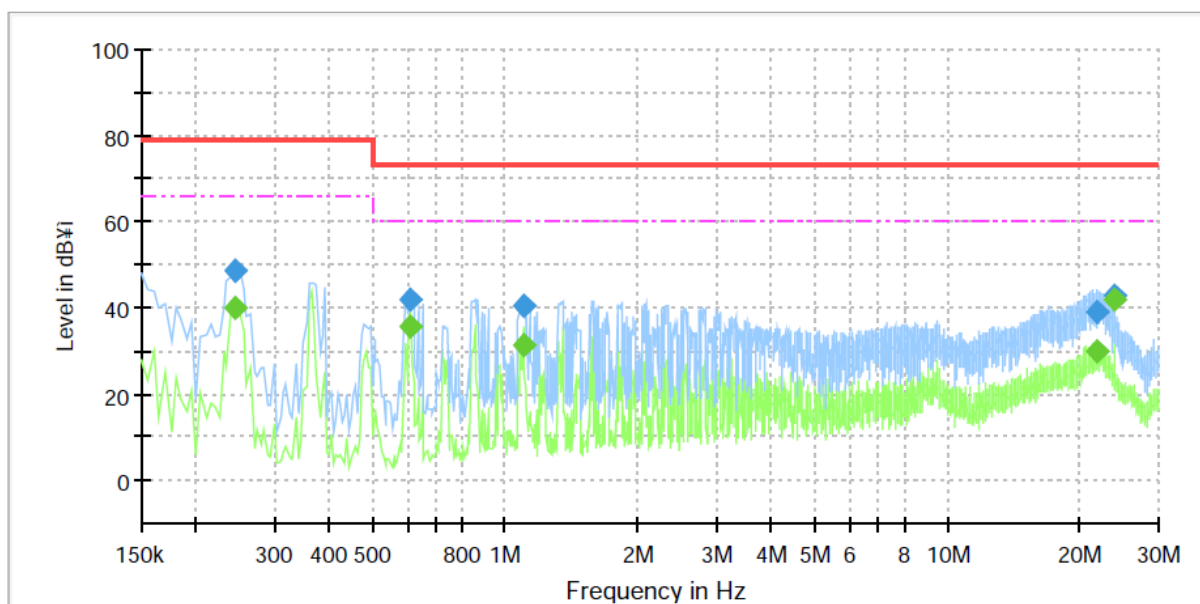

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.245000	---	39.77	66.00	26.23	1000.0	9.000	N	19.4
0.245000	48.64	---	79.00	30.36	1000.0	9.000	N	19.4
0.610000	---	35.85	60.00	24.15	1000.0	9.000	N	19.8
0.610000	41.91	---	73.00	31.09	1000.0	9.000	N	19.8
1.100000	---	31.42	60.00	28.58	1000.0	9.000	N	20.0
1.100000	40.44	---	73.00	32.56	1000.0	9.000	N	20.0
21.825000	---	29.80	60.00	30.20	1000.0	9.000	N	20.2
21.825000	39.01	---	73.00	33.99	1000.0	9.000	N	20.2
24.000000	---	41.73	60.00	18.27	1000.0	9.000	N	20.1
24.000000	42.84	---	73.00	30.16	1000.0	9.000	N	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ DP Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-4343
Phase:	L1
Mode:	DP
Operator Name:	KES

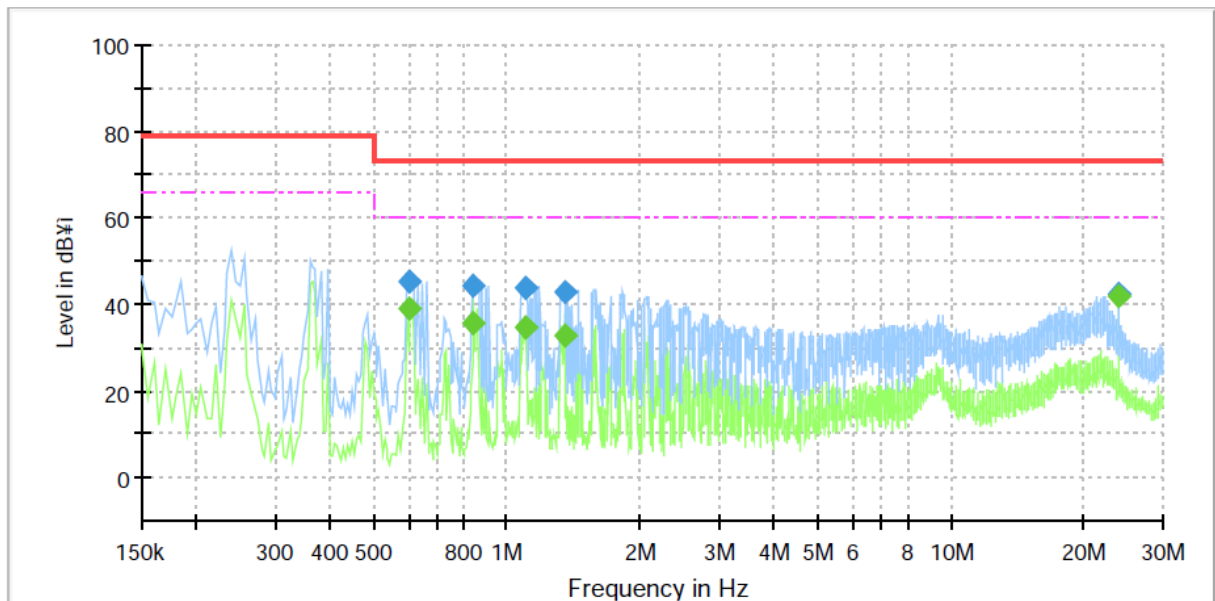

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.605000	---	39.00	60.00	21.00	1000.0	9.000	L1	19.8
0.605000	45.42	---	73.00	27.58	1000.0	9.000	L1	19.8
0.840000	---	35.42	60.00	24.58	1000.0	9.000	L1	19.9
0.840000	44.27	---	73.00	28.73	1000.0	9.000	L1	19.9
1.100000	---	34.67	60.00	25.33	1000.0	9.000	L1	20.0
1.100000	43.75	---	73.00	29.25	1000.0	9.000	L1	20.0
1.345000	---	32.91	60.00	27.09	1000.0	9.000	L1	20.1
1.345000	42.94	---	73.00	30.06	1000.0	9.000	L1	20.1
24.000000	---	41.77	60.00	18.23	1000.0	9.000	L1	20.1
24.000000	42.48	---	73.00	30.52	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	SMT-4343
Phase:	N
Mode:	DP
Operator Name:	KES

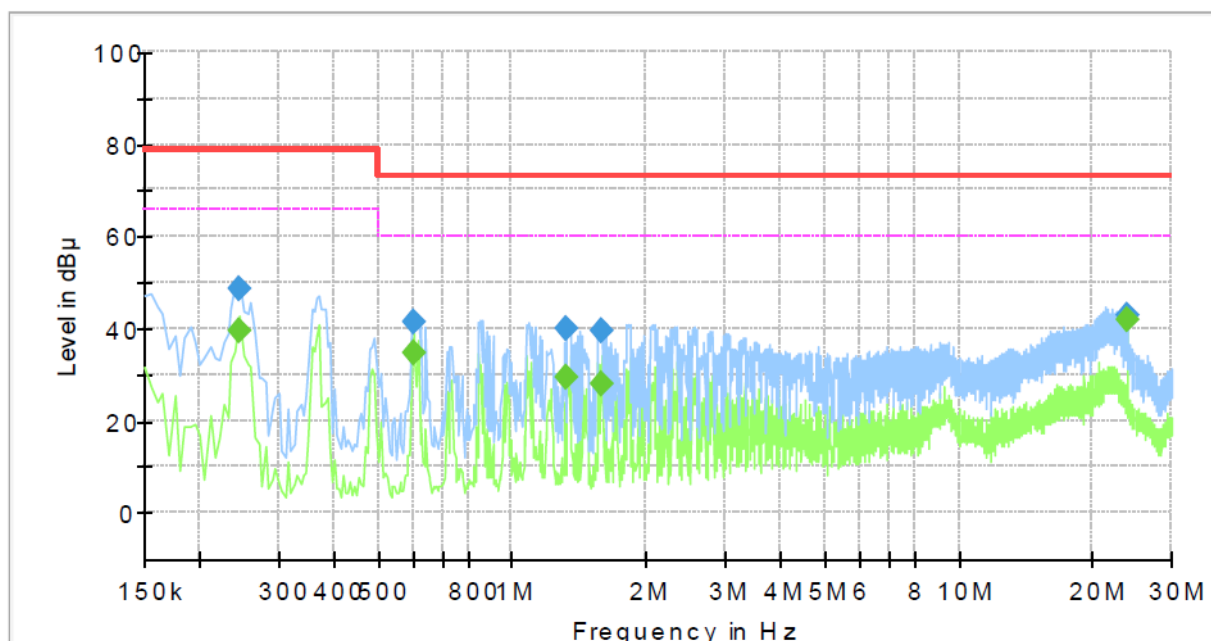

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.245000	---	39.61	66.00	26.39	1000.0	9.000	N	19.4
0.245000	48.76	---	79.00	30.24	1000.0	9.000	N	19.4
0.600000	---	34.68	60.00	25.32	1000.0	9.000	N	19.8
0.600000	41.60	---	73.00	31.40	1000.0	9.000	N	19.8
1.320000	---	29.46	60.00	30.54	1000.0	9.000	N	20.0
1.320000	39.73	---	73.00	33.27	1000.0	9.000	N	20.0
1.580000	---	27.91	60.00	32.09	1000.0	9.000	N	20.1
1.580000	39.49	---	73.00	33.51	1000.0	9.000	N	20.1
24.000000	---	41.64	60.00	18.36	1000.0	9.000	N	20.1
24.000000	42.80	---	73.00	30.20	1000.0	9.000	N	20.1

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0277-R1

Page (19) of (40)

Conducted Emissions at Telecommunication Ports

[100 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)


■ HDMI Mode

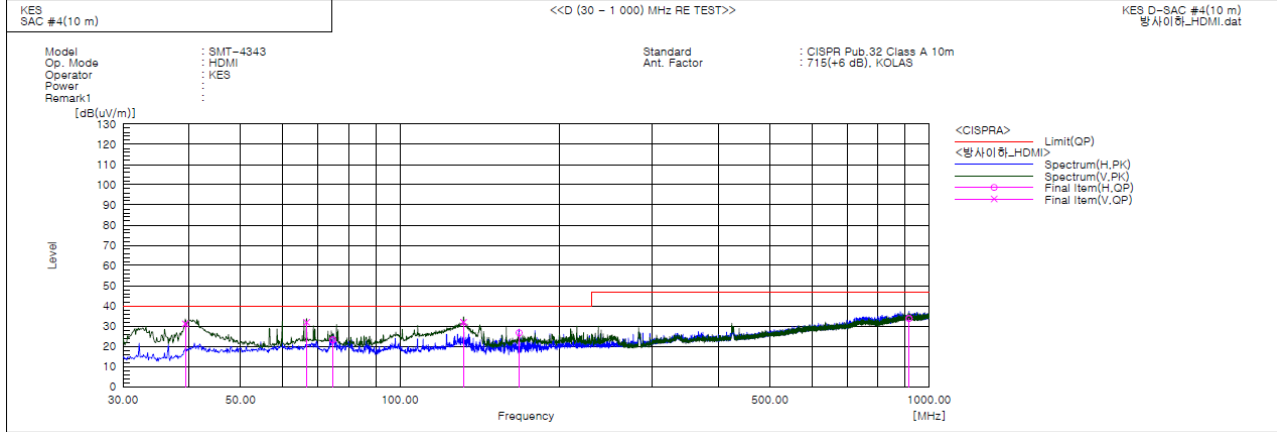

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.336	V	54.2	-23.0	31.2	40.0	8.8	117.0	109.0	
2	66.618	V	55.6	-23.7	31.9	40.0	8.1	107.0	90.0	
3	74.741	H	50.0	-26.8	23.2	40.0	16.8	385.0	266.0	
4	131.850	V	57.1	-25.2	31.9	40.0	8.1	100.0	154.0	
5	167.983	H	50.9	-24.2	26.7	40.0	13.3	392.0	33.0	
6	916.216	H	37.5	-3.8	33.7	47.0	13.3	400.0	216.0	

DP Mode

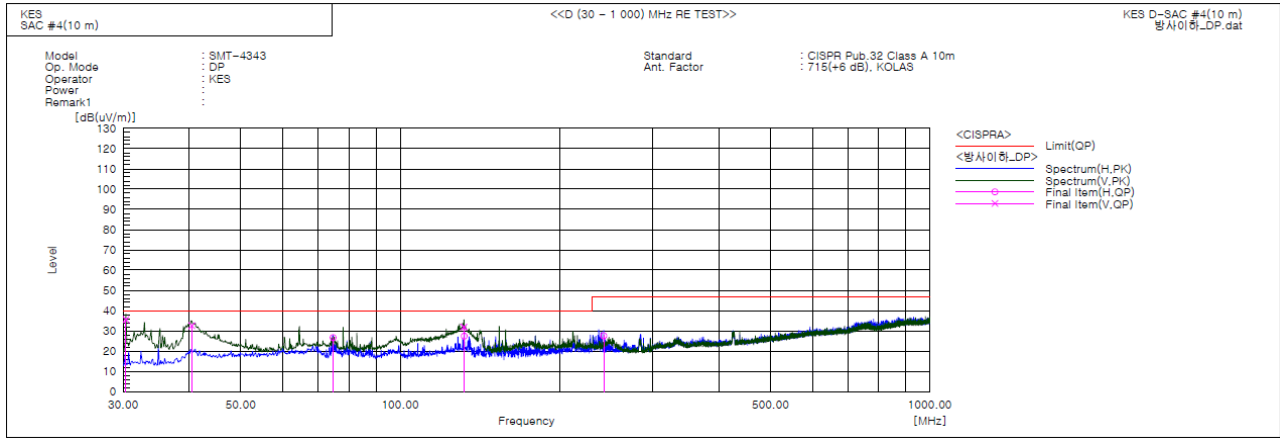

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.364	V	61.0	-25.3	35.7	40.0	4.3	100.0	176.0	
2	40.428	V	55.0	-22.5	32.5	40.0	7.5	104.0	203.0	
3	74.741	H	53.5	-26.8	26.7	40.0	13.3	391.0	268.0	
4	131.850	V	57.1	-25.2	31.9	40.0	8.1	100.0	142.0	
5	132.093	H	52.6	-25.2	27.4	40.0	12.6	367.0	154.0	
6	242.188	H	46.9	-19.3	27.6	47.0	19.4	400.0	45.0	

Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-21T0277-R1

Page (22) of (40)

Radiated Electric Field Emissions(Above 1 GHz)

HDMI Mode

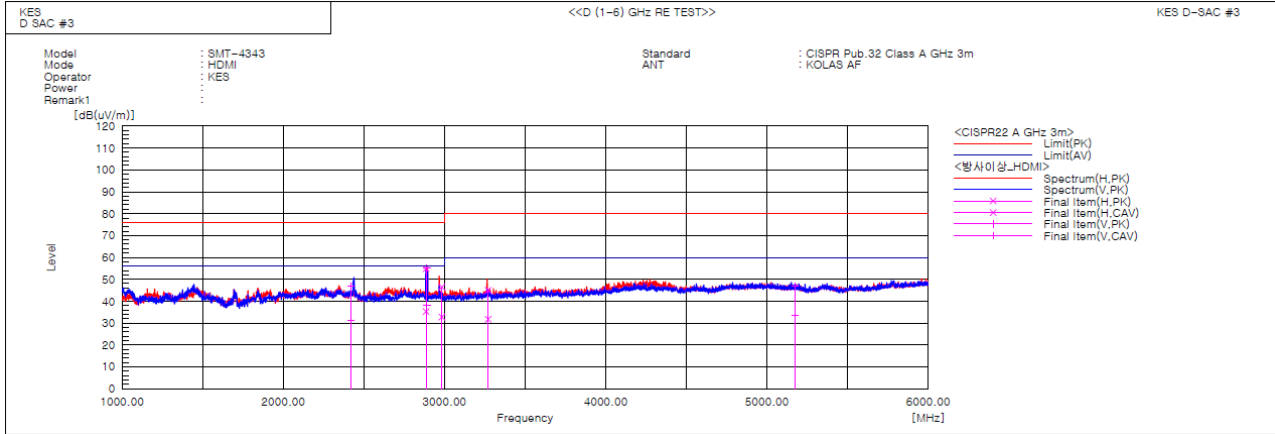


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2418.454	V	47.0	30.9	0.1	47.1	31.0	76.0	56.0	28.9	25.0	100.0	10.2	
2	2884.601	H	52.8	33.3	2.0	54.8	35.3	76.0	56.0	21.2	20.7	100.0	340.2	
3	2890.479	V	53.0	36.3	2.0	55.0	38.3	76.0	56.0	21.0	17.7	100.0	28.3	
4	2982.227	H	44.9	31.1	1.6	46.5	32.7	76.0	56.0	29.5	23.3	100.0	190.2	
5	3270.309	H	42.3	29.1	2.7	45.0	31.8	80.0	60.0	35.0	28.2	100.0	213.2	
6	5173.076	V	38.3	25.0	8.4	46.7	33.4	80.0	60.0	33.3	26.6	100.0	11.8	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

DP Mode

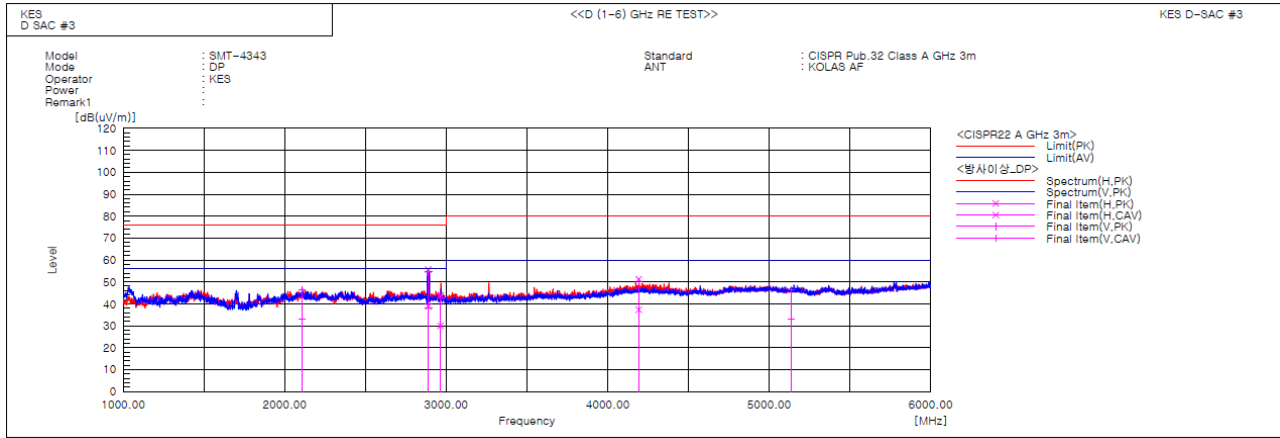

Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T0277-R1
Page (25) of (40)

Conducted Emissions at Telecommunication Ports

N/A


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

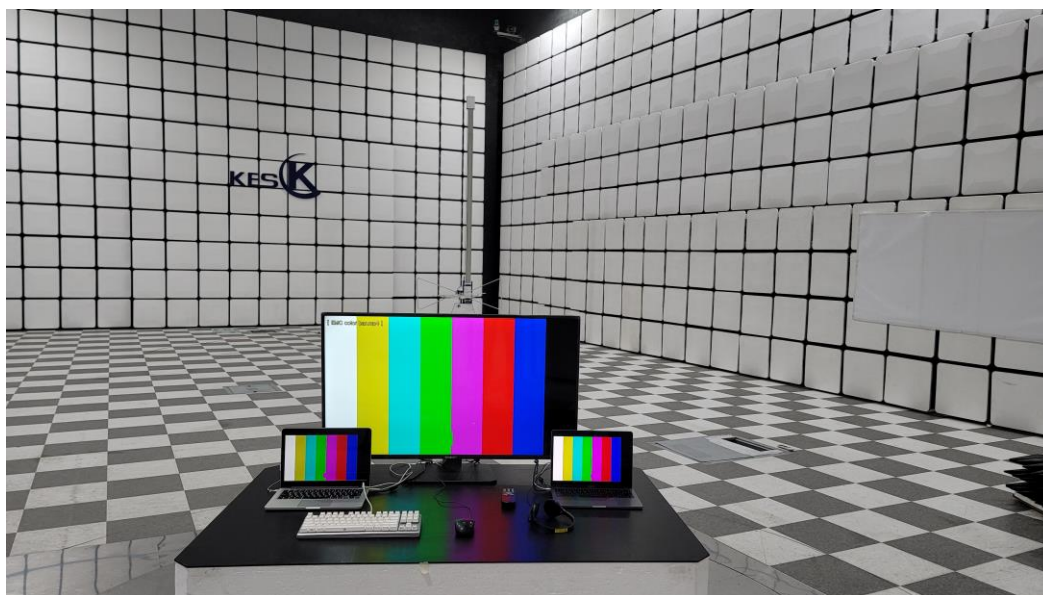

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

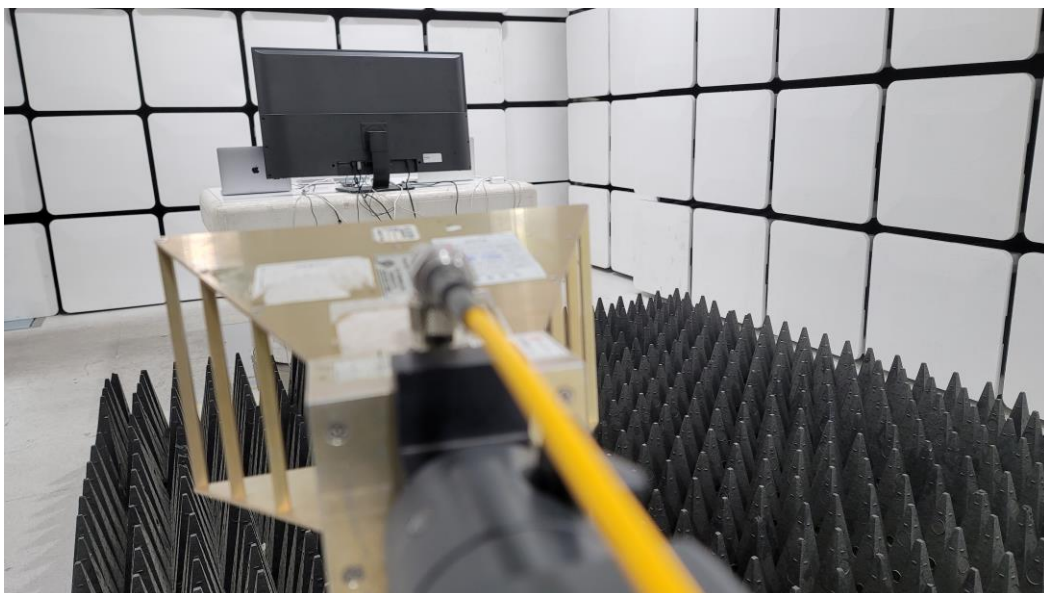

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 1

(Top)

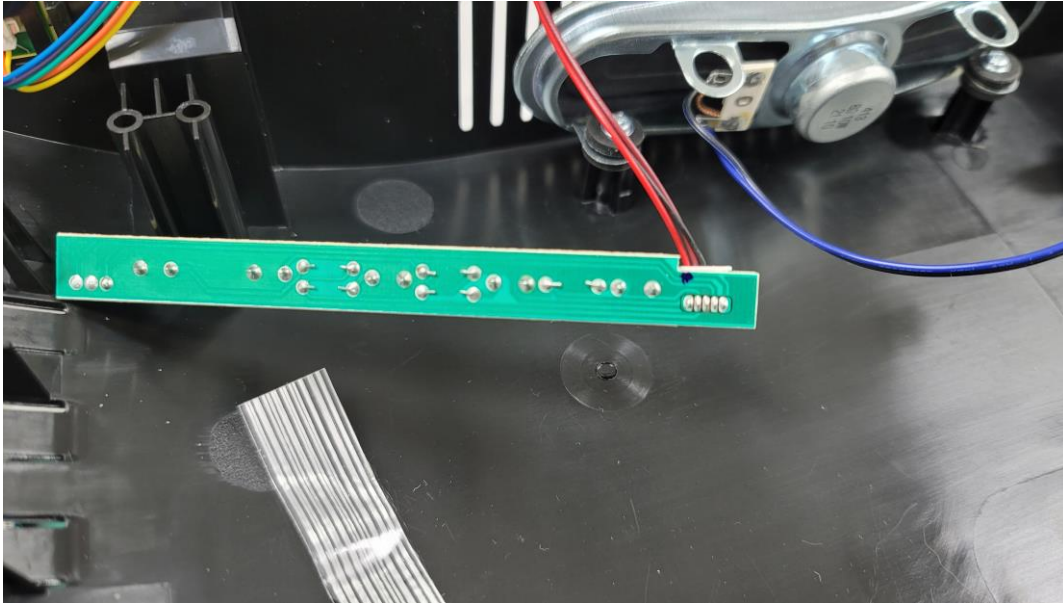

(Bottom)

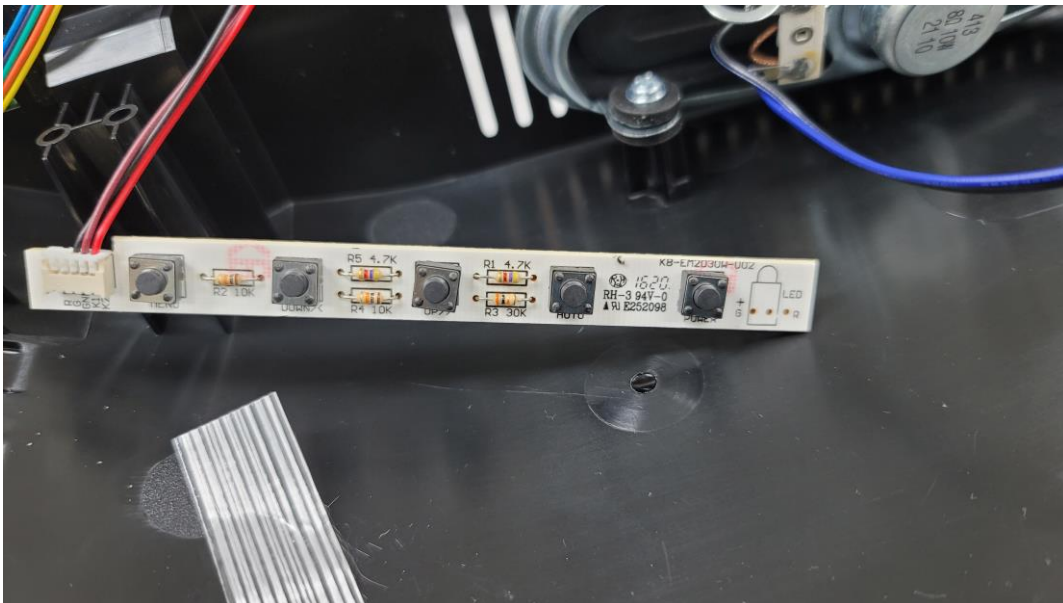


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)




(Bottom)

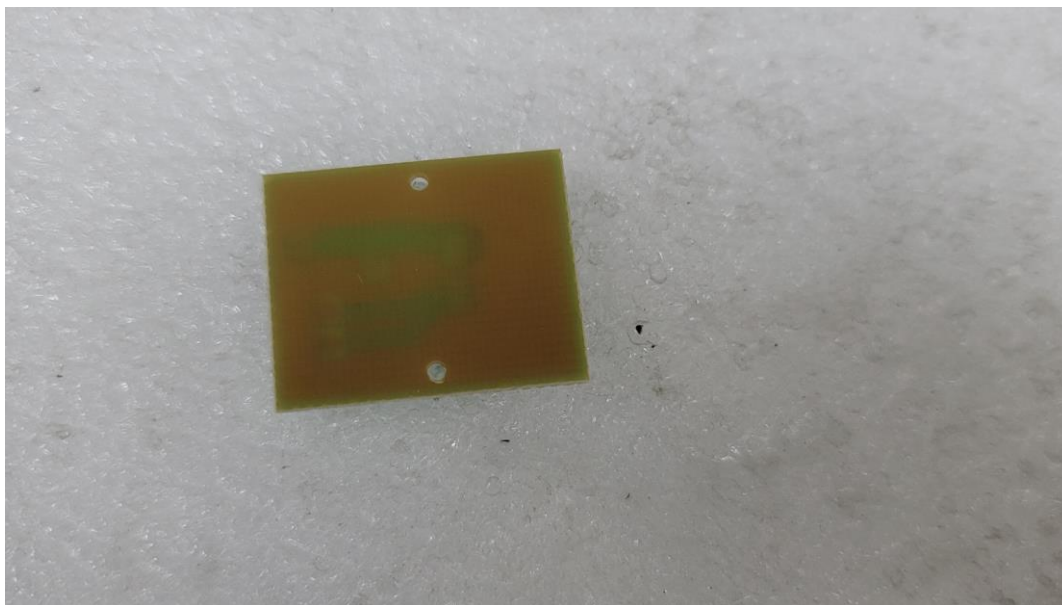


EUT Internal View – Board 3

(Top)

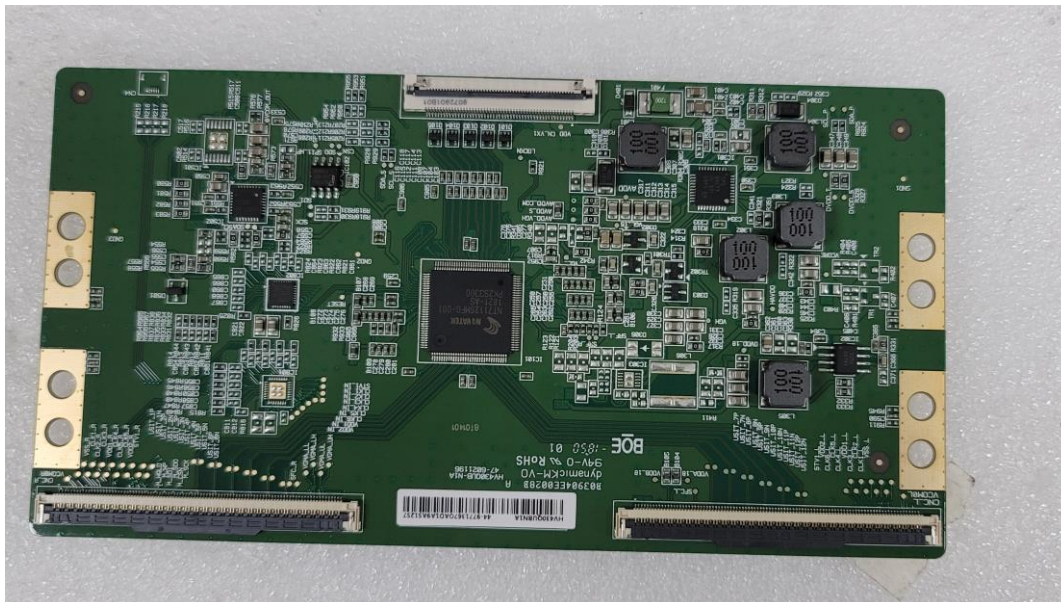

(Bottom)

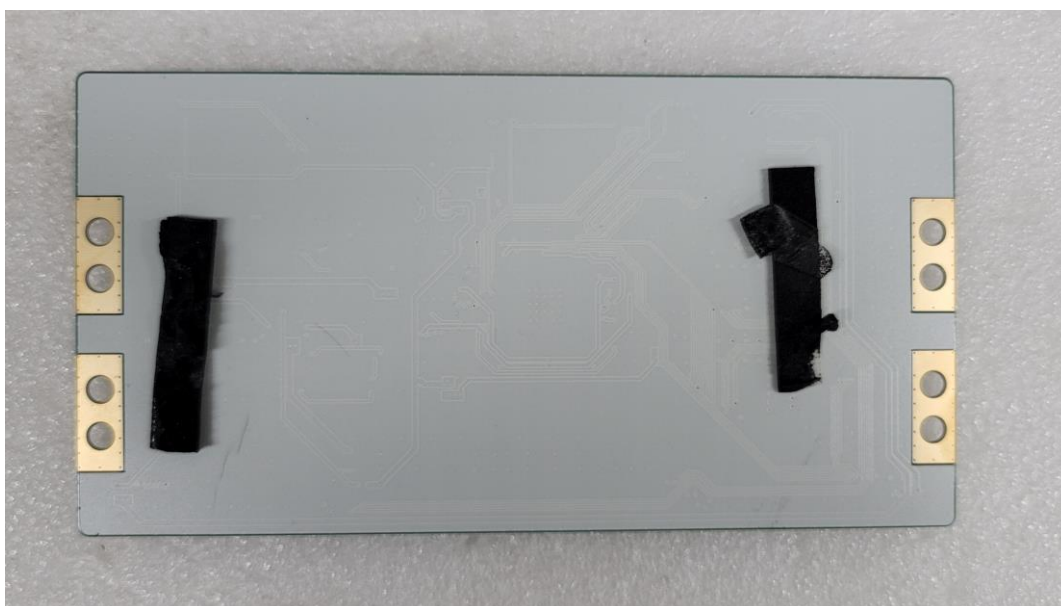


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)



(Bottom)

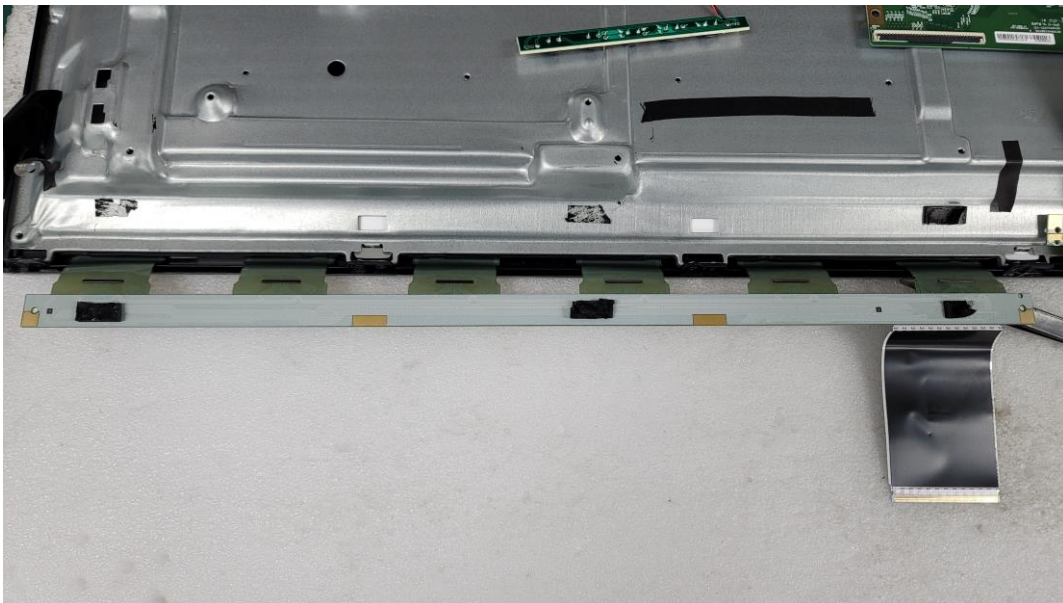

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 5

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 6

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 7

(Top)

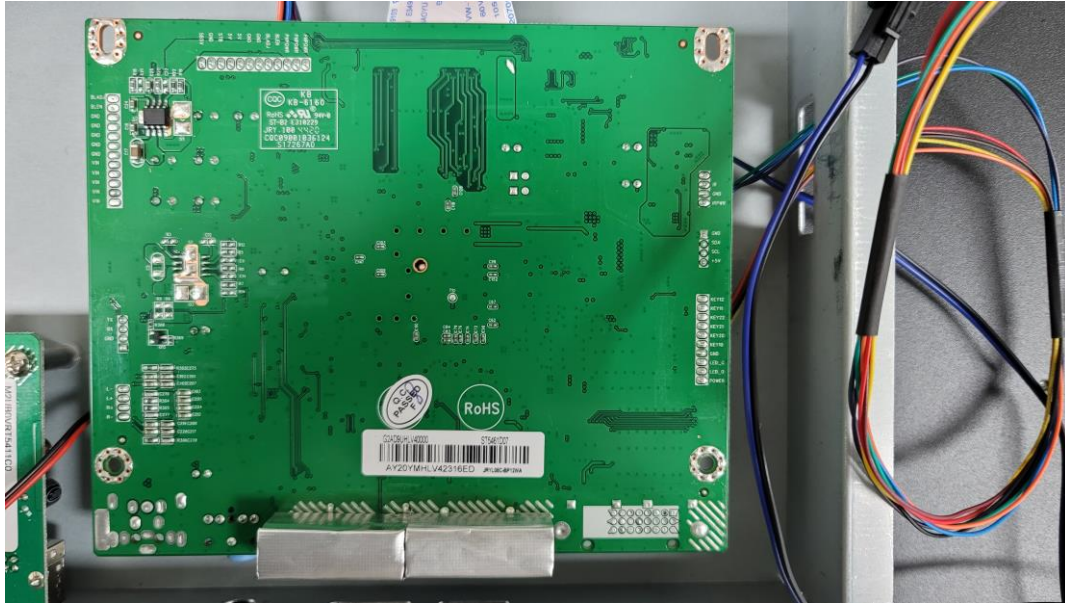


(Bottom)

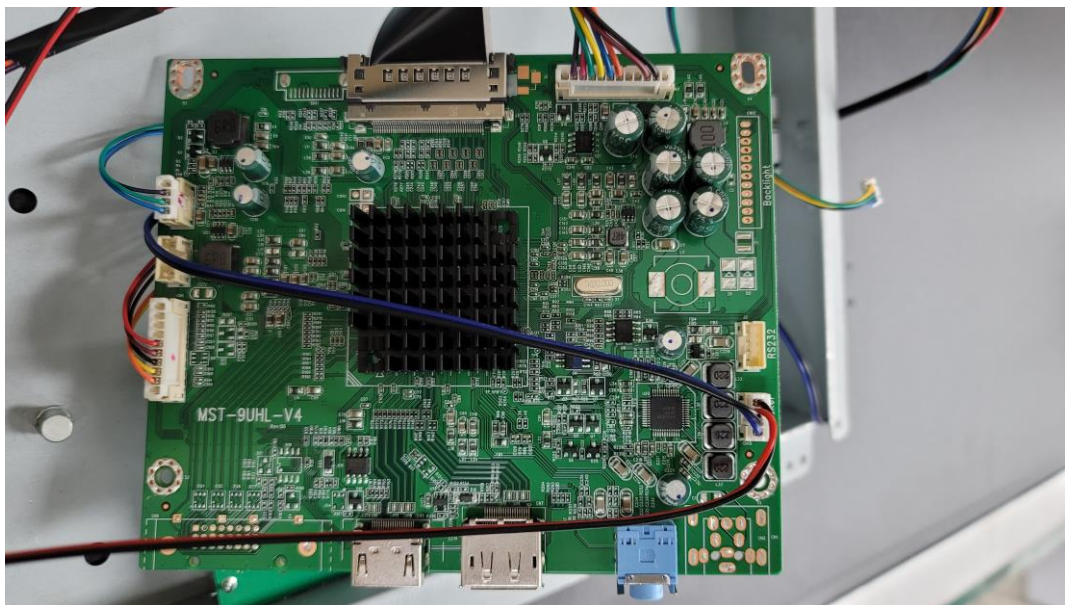


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Speaker

(Top)

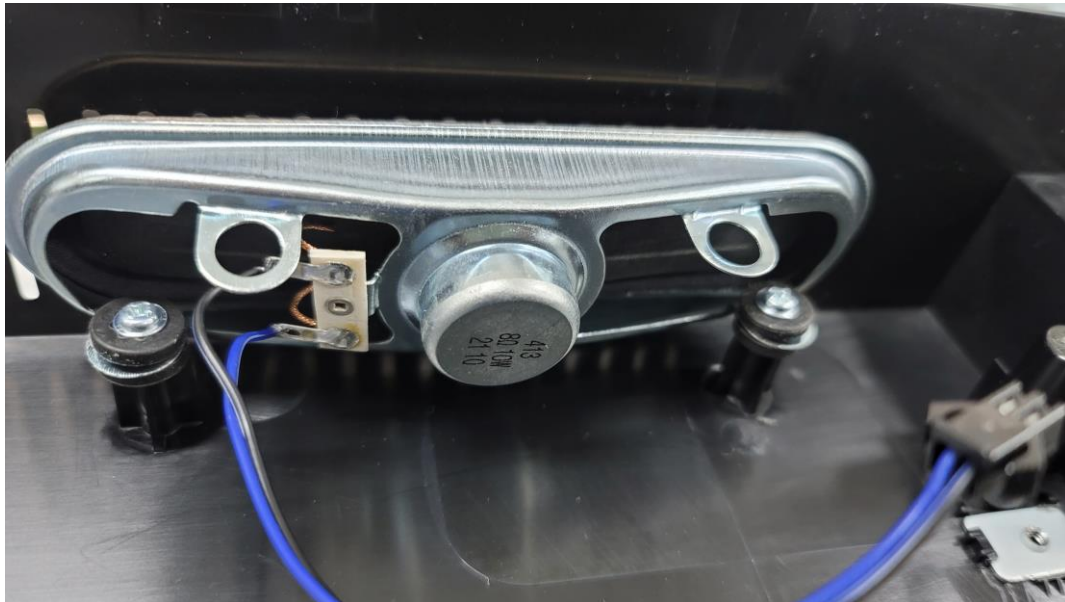


(Bottom)

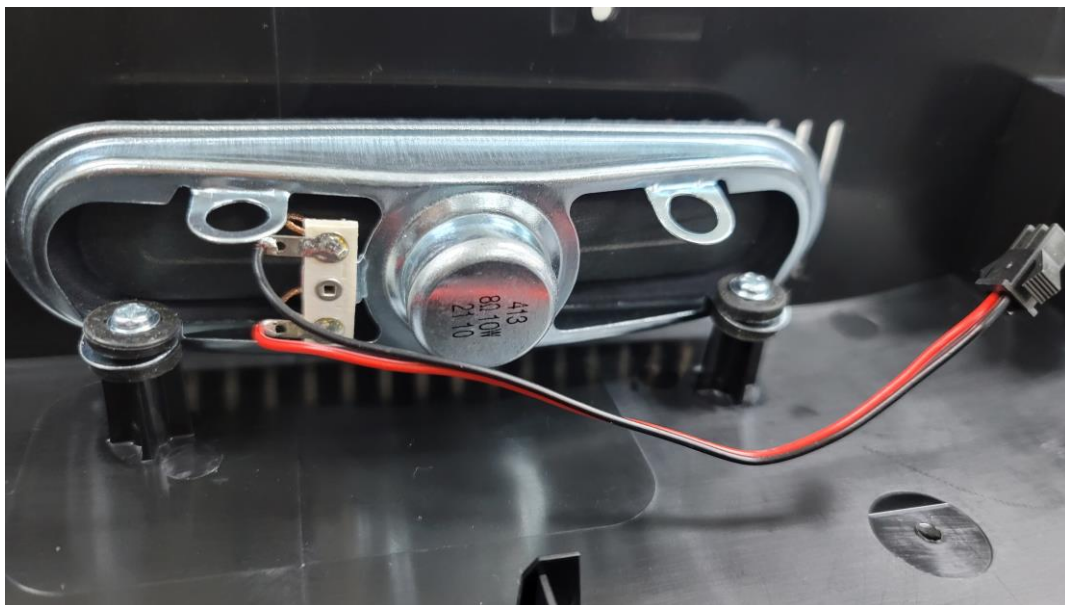


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power Board

(Top)

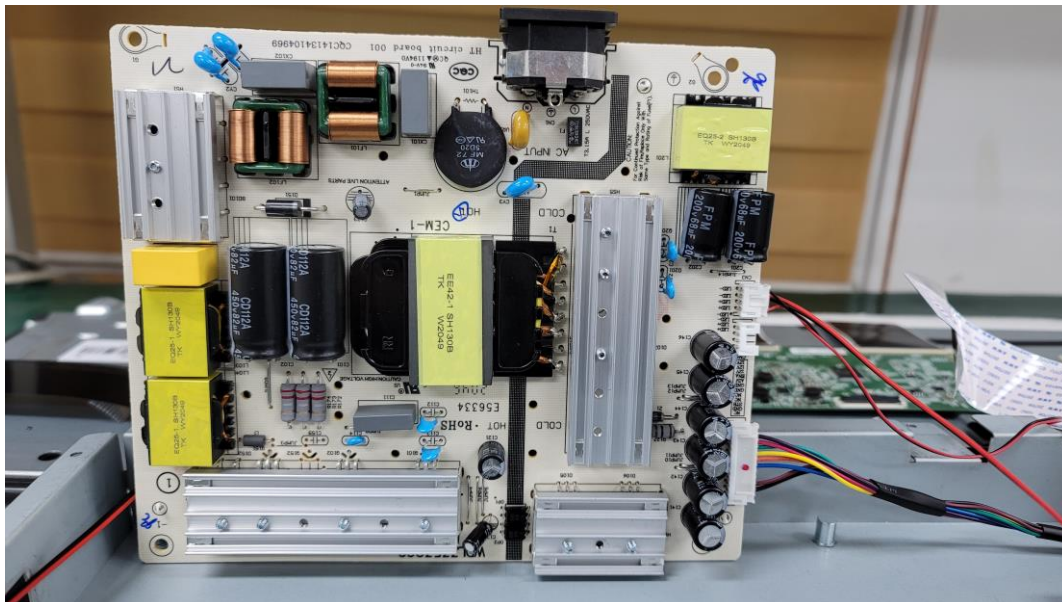

(Bottom)

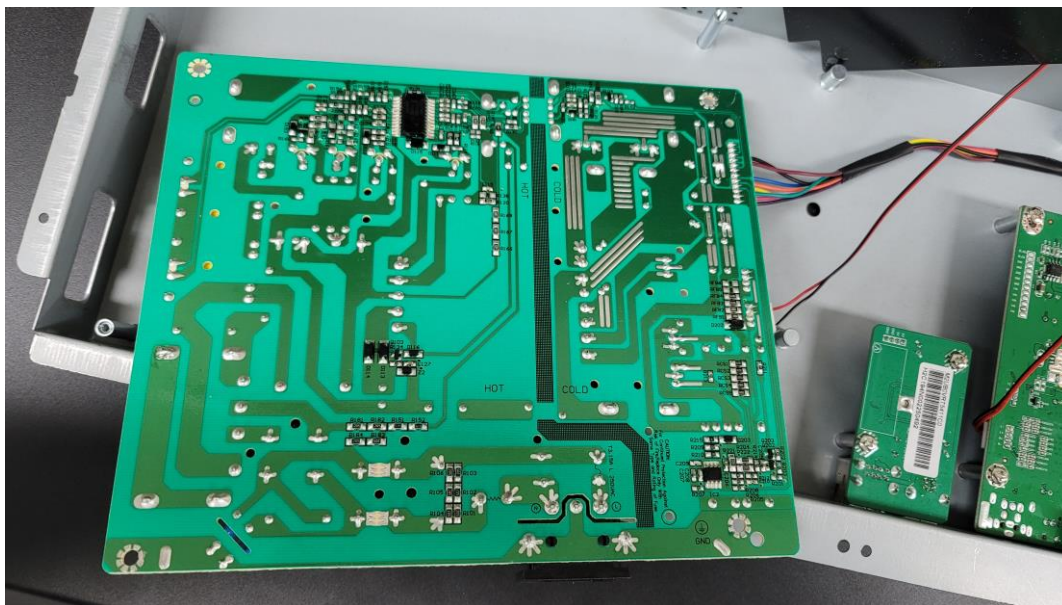

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Display panel

(Top)




(Bottom)



EUT Internal View – Remote Control Board

(Top)

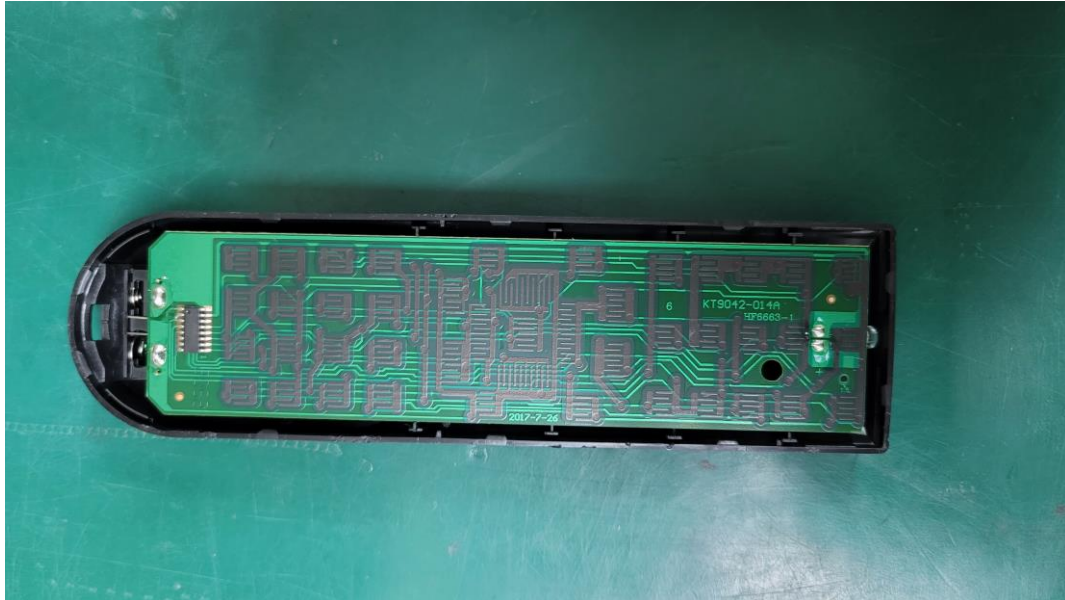

(Bottom)

