



EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0741-R2

Date of Issue : Aug. 12, 2019

Product name : THERMAL CAMERA

Model/Type No. : TNO-4051T

Variant Model : TNO-4041T

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. HANWHA TECHWIN(TIANJIN) CO., LTD
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Oct. 26, 2017

Test date : Nov. 05, 2017 ~ Nov. 09, 2017

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (2) of (81)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 14, 2017	KES-E1-17T0741	Issued
Jun. 26, 2018	KES-E1-17T0741-R1	Re-issue due to manufacturer change
Aug. 12, 2019	KES-E1-17T0741-R2	Re-issue due to Applicant Address change

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	E.U.T Operating Mode(s)	7
1.8	Configuration	8
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance	19
3.1	Electrostatic Discharge	21
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	32
3.5	Conducted Disturbance	36
3.6	Voltage Dips and Short Interruptions	39
APPENDIX A	– TEST DATA	41
	Conducted Emissions at Mains Power Ports	41
	Conducted Emissions at Telecommunication Ports	43
	Radiated Electric Field Emissions(Below 1 GHz)	49
	Radiated Electric Field Emissions(Above 1 GHz)	51
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	63
	Test Setup Photos and Configuration	64
	Conducted Voltage Emissions	64
	Conducted Telecommunication Emissions	65
	Radiated Electric Field Emissions(Below 1 GHz)	66
	Radiated Electric Field Emissions(Above 1 GHz)	67
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	68
	Electrostatic Discharge	69
	Radiated Electric Field Immunity	69
	Electrical Fast Transients/Bursts	70
	Surge Transients	70
	Conducted Disturbance	71
	Voltage Dips and Short Interruptions	71
	EUT External Photographs	72
	EUT Internal Photographs	73



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (4) of (81)

1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	Uncooled Micro volometer
Pixel size	17µm
Effective Pixels	640x480(Scale up 800x600)
Sensitivity	NETD < 50mK
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation
Lens	
Focal Length (Zoom Ratio)	35mm fixed
Max. Aperture Ratio	1.0
Angular Field of View	H: 17°
Min. Object Distance	TBD
Focus Control	Fixed
Lens Type	TBD
Mount Type	Board-in type
Operational	
Camera Title	Off / On - WW : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Digital Image Stabilization	Off / On(with Gyro)
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Pan/Tilt	Pelco D/P, Samsung T/E, Honeywell, Bosch, Panasonic, Sungin, AD, Vicon, GE
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Virtual Line, Fence detection, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Sound Classification, Shock detection, drastic temperature swings
Alarm I/O	Input 2ea / Output 2ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio In	Line out, Max output level: 1 Vrms
Audio out	support
Pixel count	-
Digital zoom	-
Remote control	RS485, RS422
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	800x600, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles) G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Compression Format	Bi-directional (2-Way)
Audio Communication	IPv4, IPv6
IP	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Protocol	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Security	Unicast / Multicast
Streaming Method	20 users at Unicast Mode SD/SDHC/SDXC (up to 256 GB) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Max. User Access	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Edge Storage	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Application Programming Interface	TBD
Webpage Language	TBD
Web Viewer	SmartViewer, SSM
Central Management Software	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-40°C ~ +60°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	TBD
Dimension (WxHxD)	TBD
Weight	TBD
기타	Palette 7mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Lens size difference

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THERMAL CAMERA	TNO-4051T	-	HANWHA TECHWIN (TIANJIN) CO., LTD.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Notebook	ProBook4430s	-	HP	-
Notebook Adapter	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Alarm Jig	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
PTZ CONTROLLER	SPC-1010	-	-	
AC/DC Adapter	RS-AB1000	-	XEGPIS	
Phone	A1429	-	Apple	
Micro SD Card	-	-	Sandisk	



1.6 External I/O Cabling

■ AC 24 V, DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (E.U.T)	RJ-45(LAN)	Notebook	RJ-45(LAN)	3.0	U
	Audio In (2 Pin)	Phone	3.5 mm	1.6	U
	Audio Out (2 Pin)	Speaker	3.5 mm	1.5	U
	Alarm (2 Pin)	Alarm Jig	Alarm	3.0	U
	RS-485 (2 Pin)	PTZ CONTROLLER	RS-485	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (E.U.T)	RJ-45(PoE)	PoE Adapter	RJ-45(PoE)	3.0	U
PoE Adapter	RJ-45(LAN)	Notebook	RJ-45(LAN)	1.6	U
THERMAL CAMERA (E.U.T)	Audio In (2 Pin)	Phone	3.5 mm	1.6	U
	Audio Out (2 Pin)	Speaker	3.5 mm	1.5	U
	Alarm (2 Pin)	Alarm Jig	Alarm	3.0	U
	RS-485 (2 Pin)	PTZ CONTROLLER	RS-485	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-

* Unshielded=U, Shielded=S



1.7 E.U.T Operating Mode(s)


Test mode	operating
AC 24 V	E.U.T Monitoring, Ping test
DC 12 V	
PoE	

E.U.T Test operating S / W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

■ AC Main
 □ DC Main


■ AC 24 V Mode

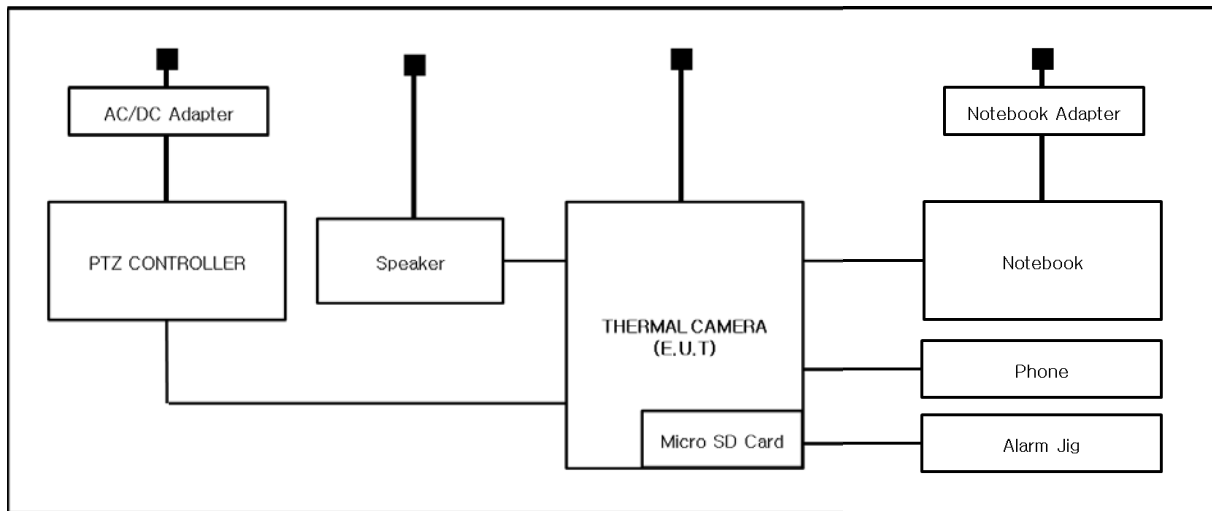

■ DC 12 V Mode

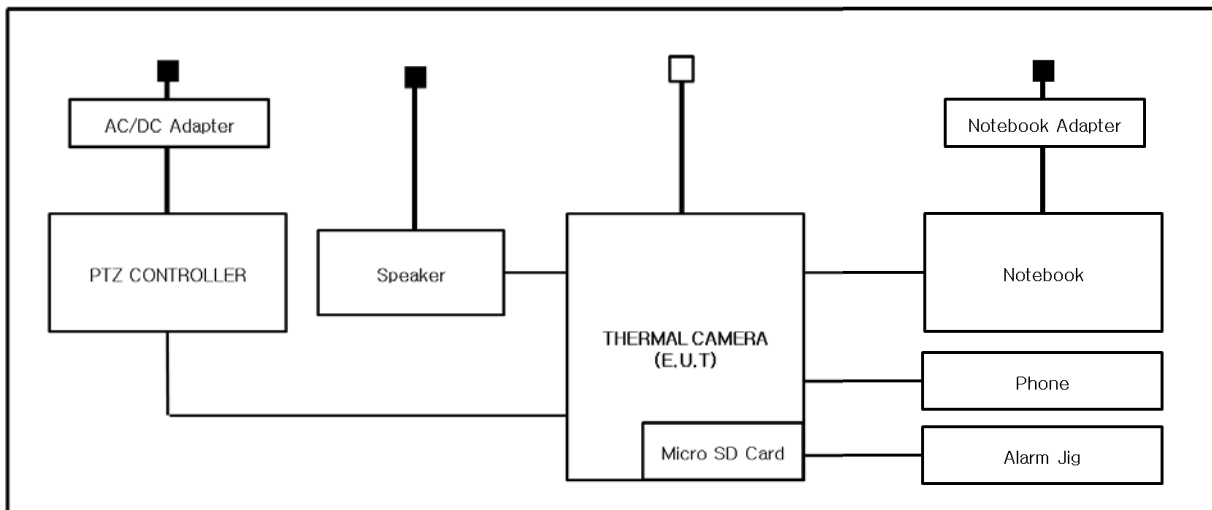

■ PoE Mode

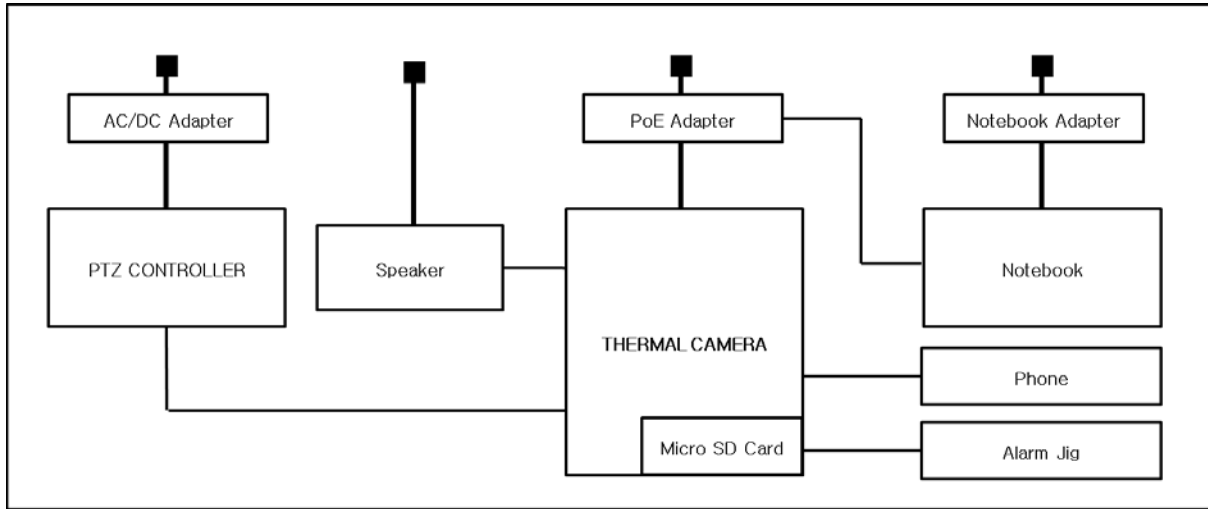

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber, and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0003

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (12) of (81)

-
- | | | |
|--|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS / NZS CISPR22:2009 + A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014 / 53 / EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Nov. 06, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017

Test Conditions

Temperature: 20,2 °C

Relative Humidity: 42,0 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov. 06, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017
☒	8-WIRE ISN CAT3,5	ENY81	SCHWARZBECK	100174	01, 11, 2018

Test Conditions

Temperature: 20,2 °C

Relative Humidity: 42,0 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 05, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 20,2 °C

Relative Humidity: 41,3 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 05, 2017

Test Location

SEMI ANECHOIC CHAMBER #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	e3	AUDIX	8.083b	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01729	05, 31, 2018
☐	ATTENUATOR	8491A	HP	35496	03, 24, 2018
☒	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018

Test Conditions

Temperature: 19,3 °C

Relative Humidity: 52,1 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Nov. 06, 2017

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 11, 2018
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 20,9 °C
Relative Humidity: 47,3 %
Atmospheric Pressure: 100,1 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (22) of (81)

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane




VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:

Air
Contact

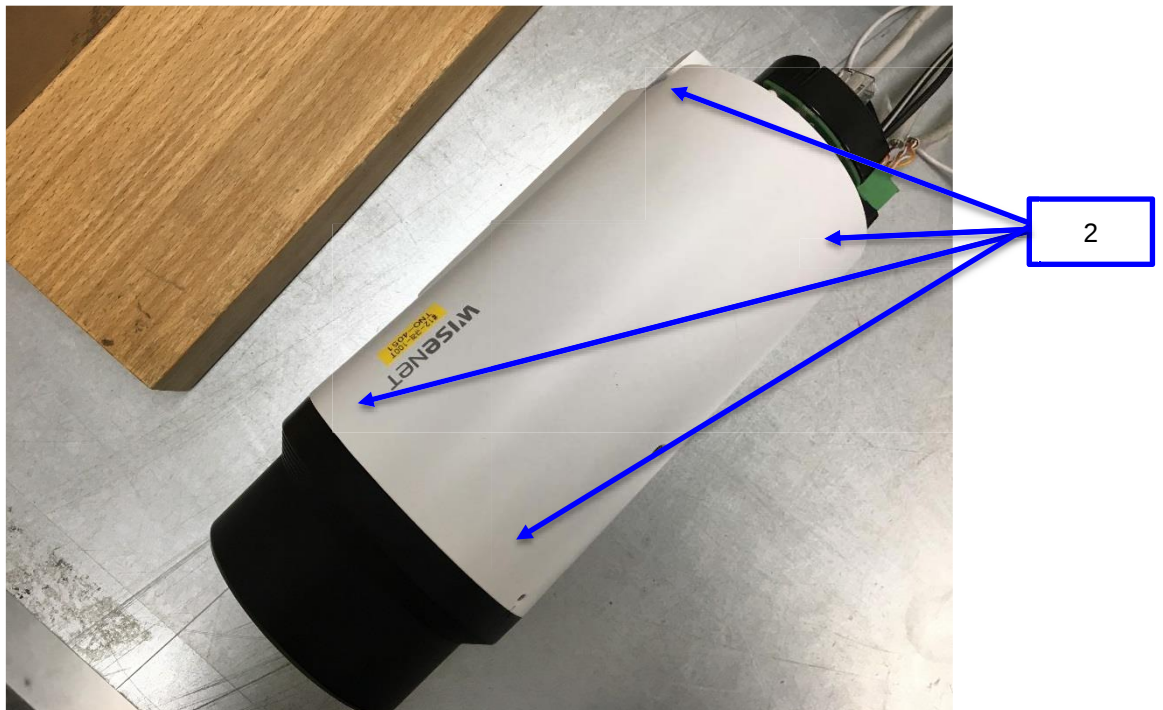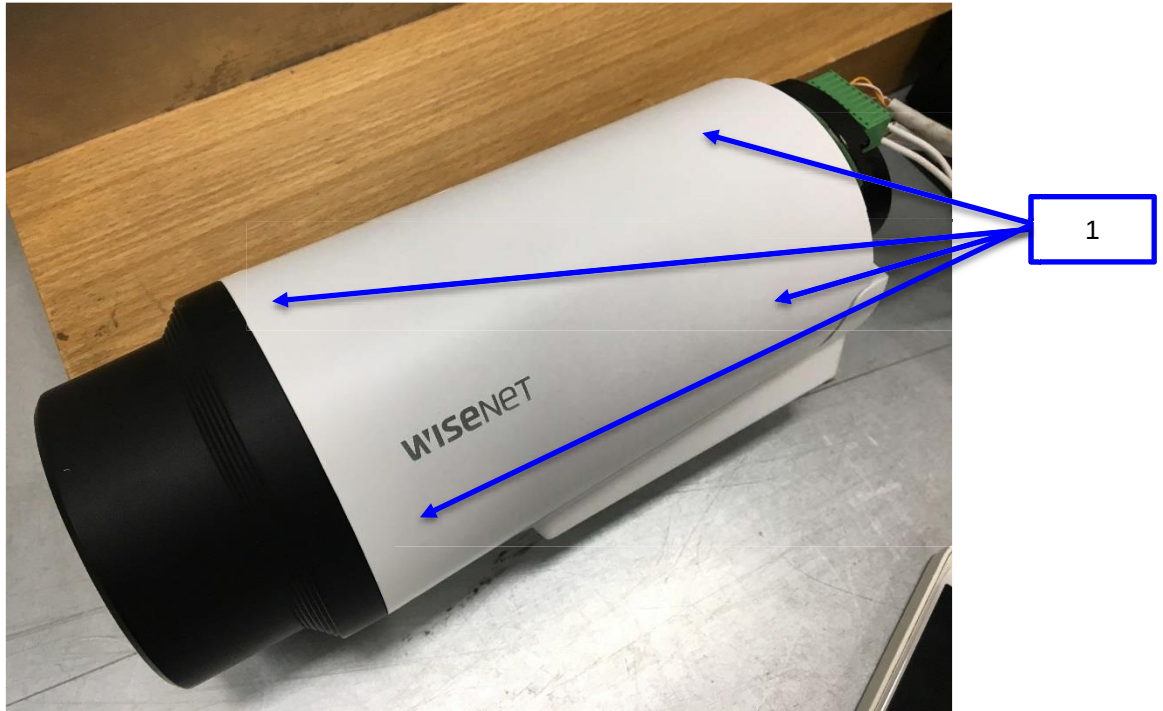

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (24) of (81)

Test Data

■ AC 24 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Contact Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-

■ DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Contact Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (25) of (81)

■ PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Contact Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Nov. 09, 2017

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 07, 2018
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 07, 2018
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 07, 2018
☒	POWER METER	NRP2	R & S	103475	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 07, 2018
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 07, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 20,8 °C
Relative Humidity: 41,9 %
Atmospheric Pressure: 100,1 kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied



Test Data

■ AC 24 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.3 Electrical Fast Transients / Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Nov. 07, 2017

Test Location

EMS-EFT: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2018
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2018
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 26, 2018

Test Conditions

Temperature: 19,8 °C
Relative Humidity: 53,1 %
Atmospheric Pressure: 99,9 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

■ AC 24 V Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45(LAN)	Complied	Complied
Alam	Complied	Complied
RS-485	Complied	Complied

■ DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45(LAN)	Complied	Complied
Alam	Complied	Complied
RS-485	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (31) of (81)

■ PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45(POE)	Complied	Complied
Alam	Complied	Complied
RS-485	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Nov. 07, 2017

Test Location

EMS-Surge: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	10, 16, 2018
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2018
☐	CDN	CNV 508N1	EM TEST	P1551168979	04, 26, 2018
☒	CDN	CNV 508T5	EM TEST	P1549168422	04, 26, 2018

Test Conditions

Temperature: 19,8 °C
Relative Humidity: 53,1 %
Atmospheric Pressure: 99,9 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied



Test Data

■ AC 24 V Mode

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	Complied	Complied

■ DC 12 V Mode

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (35) of (81)

■ PoE Mode

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45(POE)	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Nov. 09, 2017

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 28, 2017
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 28, 2017
☒	CDN	CDN M016	TESEQ	43694	11, 28, 2017
☒	CDN	CDN T800	TESEQ	42800	11, 28, 2017
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 30, 2017

Test Conditions

Temperature: 21,0 °C
Relative Humidity: 42,7 %
Atmospheric Pressure: 100,0 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Data

■ AC 24 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45(LAN)	CDN T800	Complied
Alam	Clamp	Complied
RS-485	Clamp	Complied

■ DC 12 V Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45(LAN)	CDN T800	Complied
Alam	Clamp	Complied
RS-485	Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (38) of (81)

■ PoE Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45(POE)	CDN T800	Complied
Alam	Clamp	Complied
RS-485	Clamp	Complied

Notes: CDN = Coupling Decoupling Network

"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Nov. 07, 2017

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2018
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2018

Test Conditions

Temperature: 19,8 °C

Relative Humidity: 53,1 %

Atmospheric Pressure: 99,9 kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (40) of (81)

Test Specifications & Observations / Remarks

(Test Voltage :)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ AC 24 V Mode
[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	TNO-4051TP
Mode	AC 24 V
Operator Name:	KES

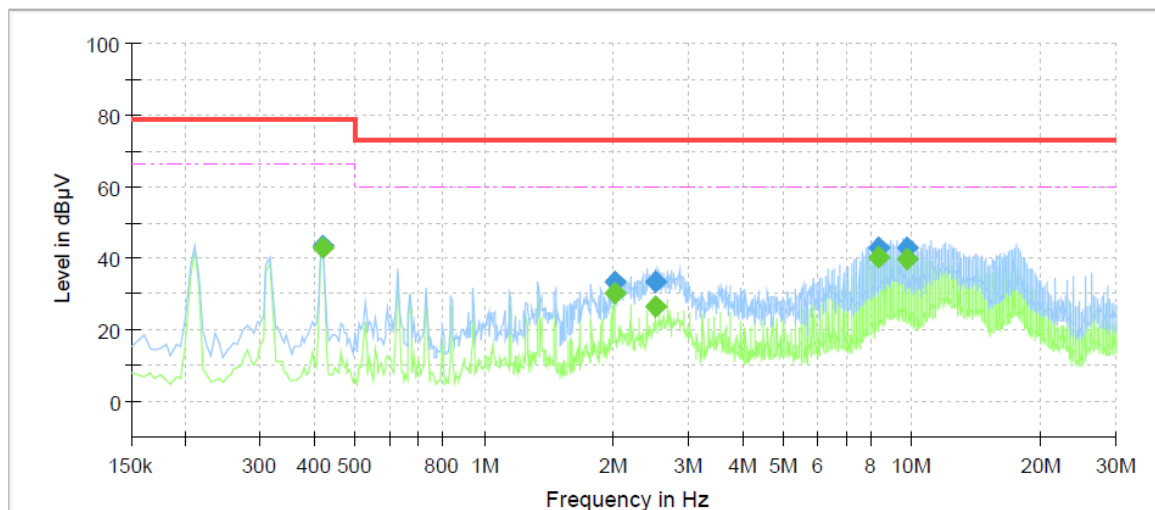


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.420000	---	42.75	66.00	23.25	1000.0	9.000	L1	19.7
0.420000	43.24	---	79.00	35.76	1000.0	9.000	L1	19.7
2.010000	---	30.38	60.00	29.62	1000.0	9.000	L1	20.3
2.010000	33.56	---	73.00	39.44	1000.0	9.000	L1	20.3
2.510000	---	26.40	60.00	33.60	1000.0	9.000	L1	20.2
2.510000	33.41	---	73.00	39.59	1000.0	9.000	L1	20.2
8.375000	---	40.28	60.00	19.72	1000.0	9.000	L1	19.9
8.375000	42.99	---	73.00	30.01	1000.0	9.000	L1	19.9
9.735000	---	39.64	60.00	20.36	1000.0	9.000	L1	20.0
9.735000	42.66	---	73.00	30.34	1000.0	9.000	L1	20.0

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: TNO-4051TP
Mode: AC 24 V
Operator Name: KES

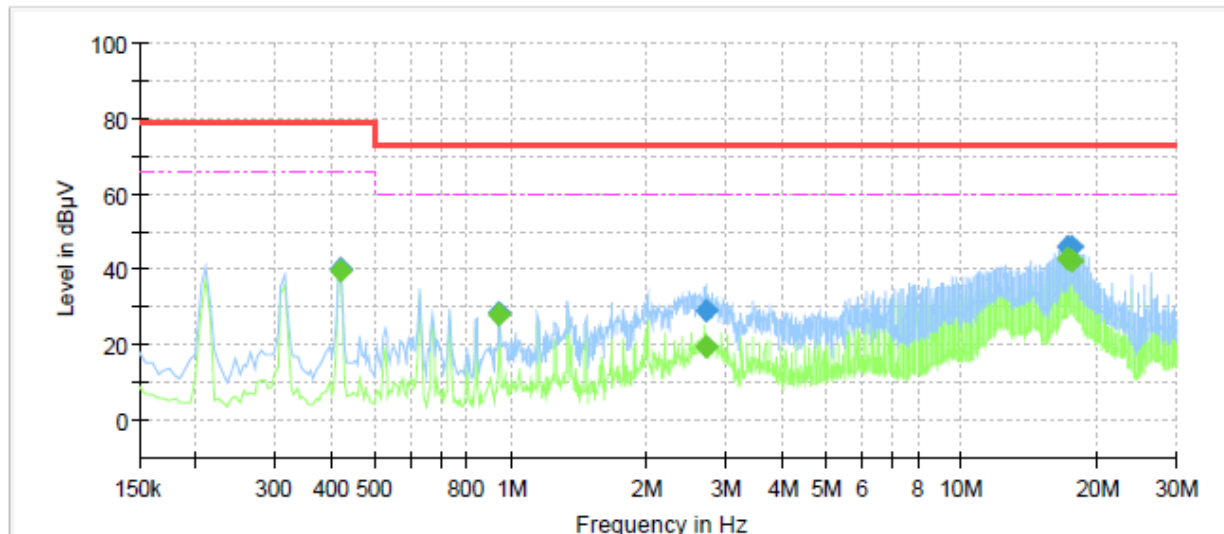

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.420000	---	39.75	66.00	26.25	1000.0	9.000	N	19.7
0.420000	40.18	---	79.00	38.82	1000.0	9.000	N	19.7
0.940000	---	28.24	60.00	31.76	1000.0	9.000	N	20.1
0.940000	28.78	---	73.00	44.22	1000.0	9.000	N	20.1
2.700000	---	19.87	60.00	40.13	1000.0	9.000	N	20.2
2.700000	29.17	---	73.00	43.83	1000.0	9.000	N	20.2
17.270000	---	42.78	60.00	17.22	1000.0	9.000	N	20.2
17.270000	46.05	---	73.00	26.95	1000.0	9.000	N	20.2
17.480000	---	42.54	60.00	17.46	1000.0	9.000	N	20.3
17.480000	46.03	---	73.00	26.97	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




Conducted Emissions at Telecommunication Ports

■ AC 24 V Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4051TP
Mode: AC 24 V_10 Mbps
Operator Name: KES

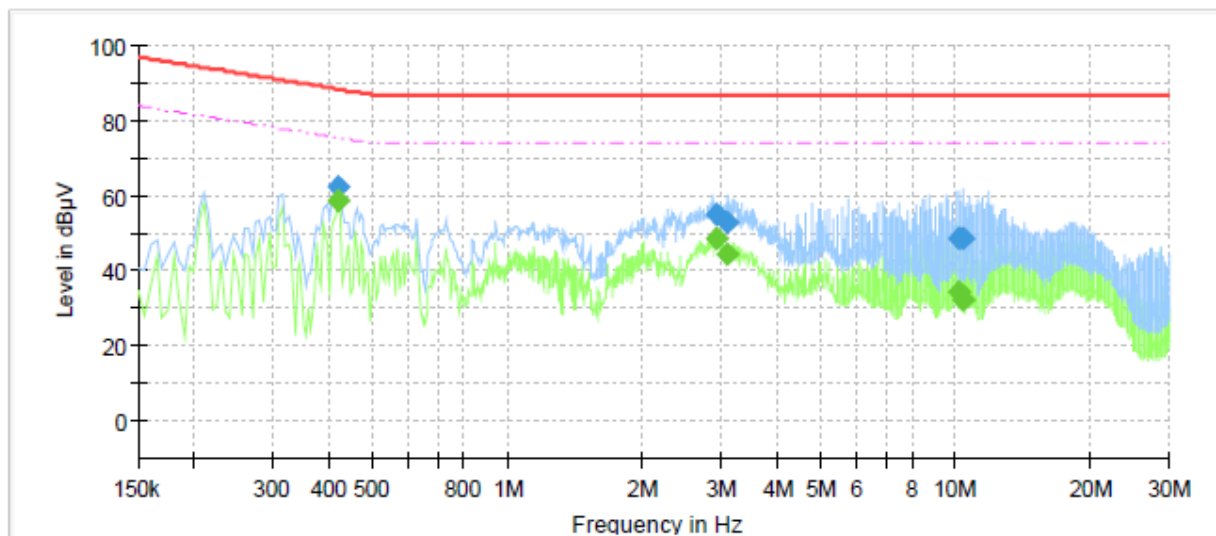

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.420000	---	58.51	75.45	16.94	1000.0	9.000	Single Line	19.6
0.420000	62.33	---	88.45	26.12	1000.0	9.000	Single Line	19.6
2.930000	---	48.48	74.00	25.52	1000.0	9.000	Single Line	19.9
2.930000	55.24	---	87.00	31.76	1000.0	9.000	Single Line	19.9
3.105000	---	44.55	74.00	29.45	1000.0	9.000	Single Line	19.9
3.105000	53.07	---	87.00	33.93	1000.0	9.000	Single Line	19.9
10.190000	---	34.18	74.00	39.82	1000.0	9.000	Single Line	19.8
10.190000	48.74	---	87.00	38.26	1000.0	9.000	Single Line	19.8
10.405000	---	32.16	74.00	41.84	1000.0	9.000	Single Line	19.8
10.405000	48.77	---	87.00	38.23	1000.0	9.000	Single Line	19.8



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:


KES-E1-17T0741-R2

Page (44) of (81)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4051TP
Mode: AC 24 V_100 Mbps
Operator Name: KES

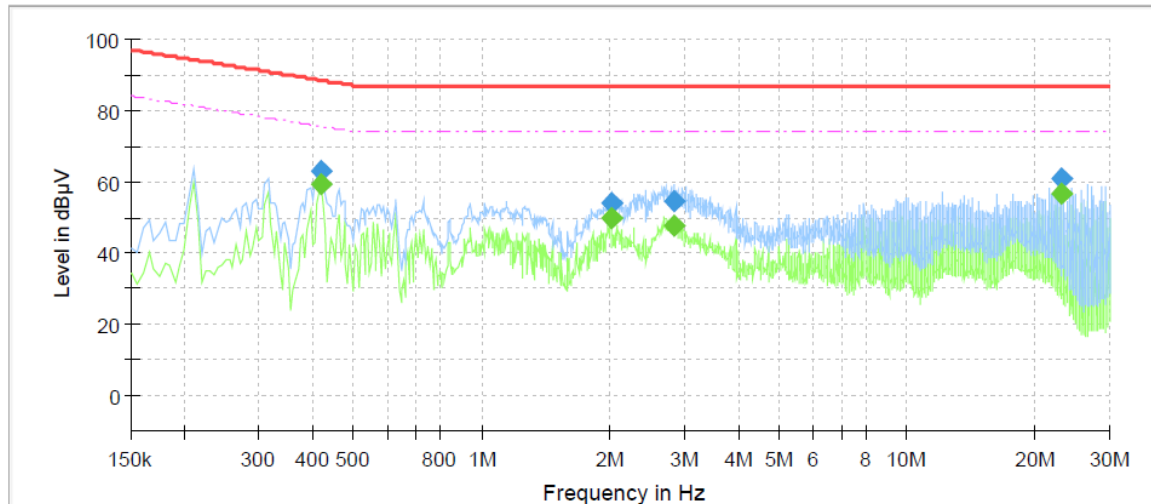

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.420000	---	59.34	75.45	16.11	1000.0	9.000	Single Line	19.9
0.420000	63.10	---	88.45	25.35	1000.0	9.000	Single Line	19.9
2.010000	---	49.57	74.00	24.43	1000.0	9.000	Single Line	20.3
2.010000	53.91	---	87.00	33.09	1000.0	9.000	Single Line	20.3
2.840000	---	47.45	74.00	26.55	1000.0	9.000	Single Line	20.2
2.840000	54.53	---	87.00	32.47	1000.0	9.000	Single Line	20.2
23.130000	---	56.85	74.00	17.15	1000.0	9.000	Single Line	20.6
23.130000	60.71	---	87.00	26.29	1000.0	9.000	Single Line	20.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (45) of (81)


■ DC 12 V Mode

[10 Mbps]

Common Information

Test Description:
Model No.:
Mode
Operator Name:

Telecommunication Emission
TNO-4051TP
DC 12 V_10 Mbps
KES

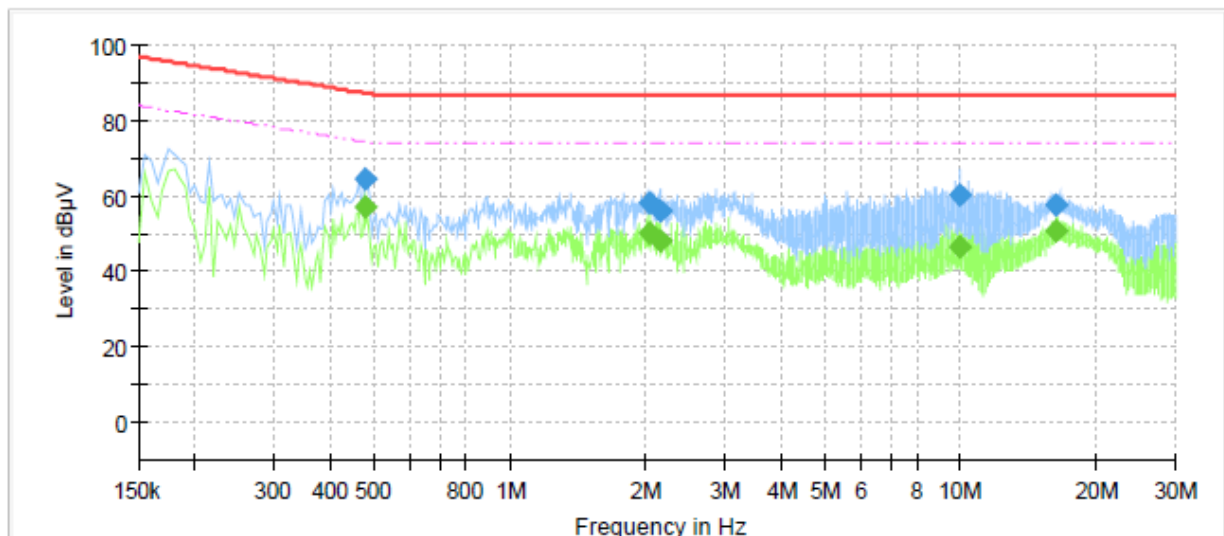

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.475000	---	57.38	74.43	17.05	1000.0	9.000	Single Line	19.7
0.475000	64.66	---	87.43	22.77	1000.0	9.000	Single Line	19.7
2.040000	---	50.49	74.00	23.51	1000.0	9.000	Single Line	20.0
2.040000	57.96	---	87.00	29.04	1000.0	9.000	Single Line	20.0
2.145000	---	48.14	74.00	25.86	1000.0	9.000	Single Line	20.0
2.145000	56.06	---	87.00	30.94	1000.0	9.000	Single Line	20.0
9.990000	---	46.35	74.00	27.65	1000.0	9.000	Single Line	19.8
9.990000	60.14	---	87.00	26.86	1000.0	9.000	Single Line	19.8
16.265000	---	50.98	74.00	23.02	1000.0	9.000	Single Line	20.0
16.265000	57.51	---	87.00	29.49	1000.0	9.000	Single Line	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (46) of (81)

[100 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

TNO-4051TP

DC 12 V_100 Mbps

KES

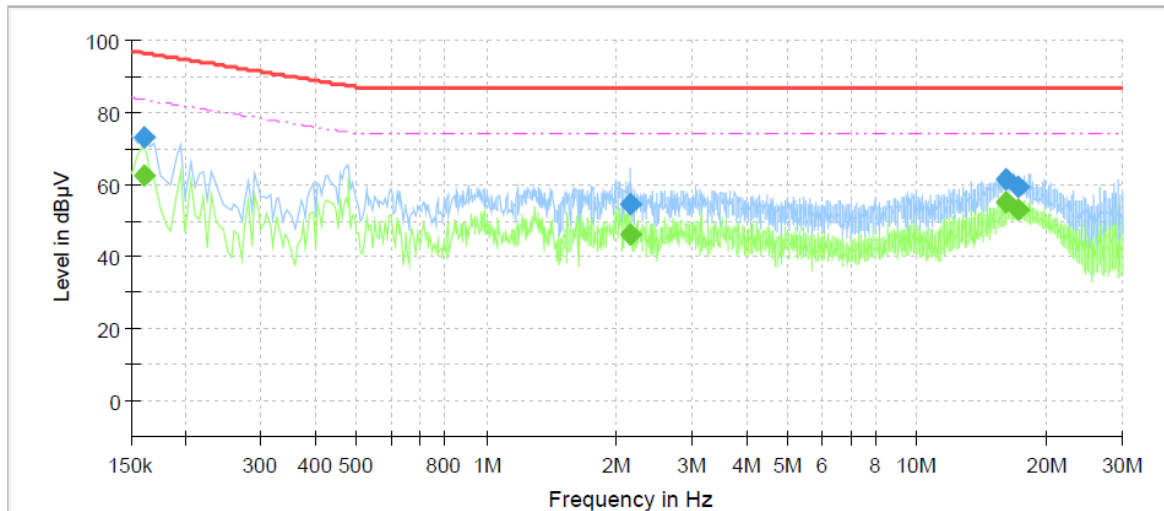

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	62.34	83.46	21.12	1000.0	9.000	Single Line	20.1
0.160000	73.20	---	96.46	23.26	1000.0	9.000	Single Line	20.1
2.160000	---	46.19	74.00	27.81	1000.0	9.000	Single Line	20.3
2.160000	54.62	---	87.00	32.38	1000.0	9.000	Single Line	20.3
16.165000	---	55.16	74.00	18.84	1000.0	9.000	Single Line	20.2
16.165000	61.32	---	87.00	25.68	1000.0	9.000	Single Line	20.2
17.195000	---	52.95	74.00	21.05	1000.0	9.000	Single Line	20.3
17.195000	59.10	---	87.00	27.90	1000.0	9.000	Single Line	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:


KES-E1-17T0741-R2

Page (47) of (81)

■ PoE Mode [10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4051TP
Mode: PoE_10 Mbps
Operator Name: KES

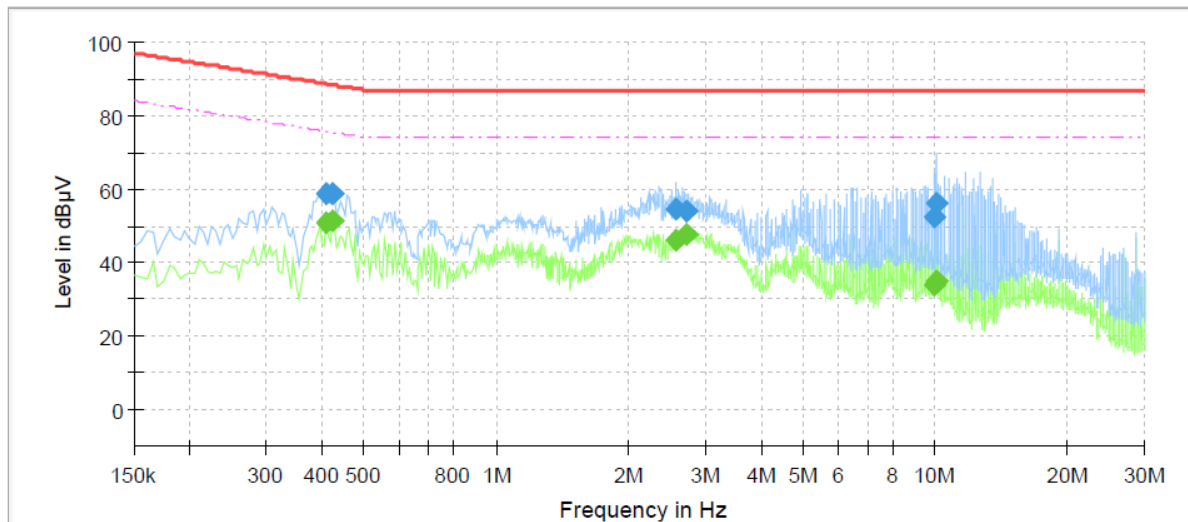

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.410000	---	50.64	75.65	25.01	1000.0	9.000	Single Line	19.6
0.410000	58.79	---	88.65	29.86	1000.0	9.000	Single Line	19.6
0.425000	---	51.24	75.35	24.11	1000.0	9.000	Single Line	19.6
0.425000	58.57	---	88.35	29.78	1000.0	9.000	Single Line	19.6
2.570000	---	45.90	74.00	28.10	1000.0	9.000	Single Line	19.9
2.570000	54.47	---	87.00	32.53	1000.0	9.000	Single Line	19.9
2.720000	---	47.48	74.00	26.52	1000.0	9.000	Single Line	19.9
2.720000	54.17	---	87.00	32.83	1000.0	9.000	Single Line	19.9
9.960000	---	33.71	74.00	40.29	1000.0	9.000	Single Line	19.8
9.960000	52.53	---	87.00	34.47	1000.0	9.000	Single Line	19.8
10.010000	---	35.07	74.00	38.93	1000.0	9.000	Single Line	19.8
10.010000	56.19	---	87.00	30.81	1000.0	9.000	Single Line	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4051TP
Mode: PoE_100 Mbps
Operator Name: KES

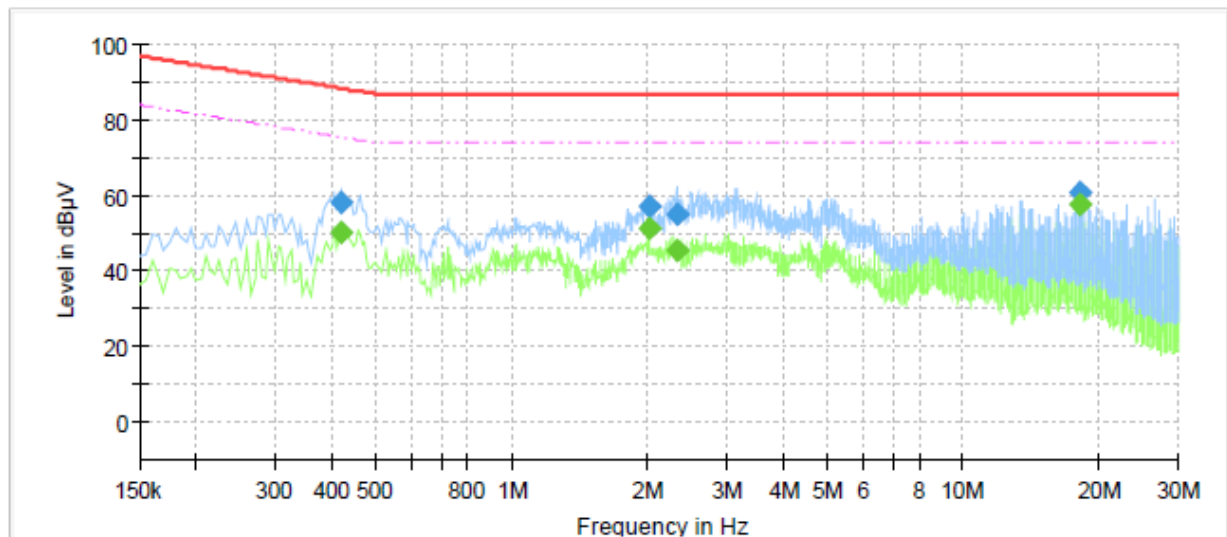

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.420000	---	50.38	75.45	25.07	1000.0	9.000	Single Line	19.9
0.420000	58.34	---	88.45	30.11	1000.0	9.000	Single Line	19.9
2.010000	---	51.35	74.00	22.65	1000.0	9.000	Single Line	20.3
2.010000	57.25	---	87.00	29.75	1000.0	9.000	Single Line	20.3
2.320000	---	45.75	74.00	28.25	1000.0	9.000	Single Line	20.2
2.320000	55.14	---	87.00	31.86	1000.0	9.000	Single Line	20.2
18.245000	---	57.46	74.00	16.54	1000.0	9.000	Single Line	20.3
18.245000	60.74	---	87.00	26.26	1000.0	9.000	Single Line	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:

KES-E1-17T0741-R2

Page (49) of (81)

Radiated Electric Field Emissions(Below 1 GHz)


AC 24 V Mode

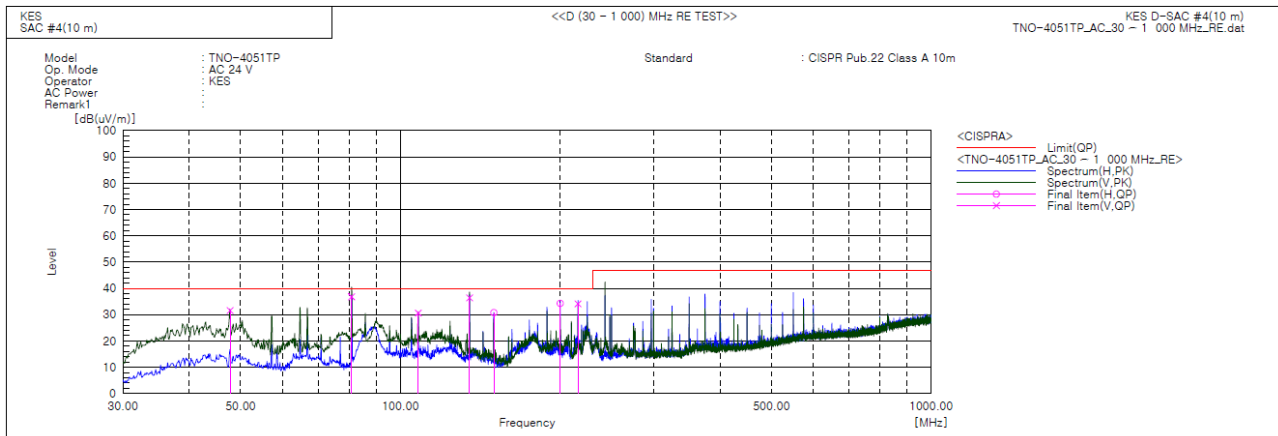

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.762	V	59.4	-27.8	31.6	40.0	8.4	118.0	75.0	
2	80.894	V	70.4	-33.6	36.8	40.0	3.2	108.0	199.0	
3	108.062	V	59.5	-28.9	30.6	40.0	9.4	172.0	340.0	
4	135.006	V	68.2	-31.8	36.4	40.0	3.6	124.0	246.0	
5	149.992	H	62.1	-31.3	30.8	40.0	9.2	200.0	210.0	
6	200.030	H	61.0	-26.7	34.3	40.0	5.7	284.0	236.0	
7	216.097	V	60.5	-26.4	34.1	40.0	5.9	156.0	318.0	

DC 12 V Mode

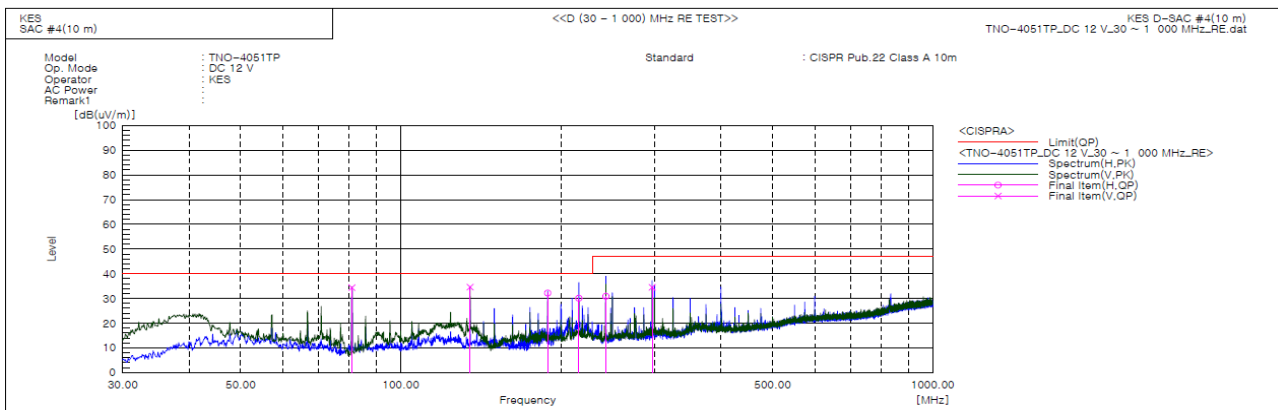

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	80.925	V	68.0	-33.6	34.4	40.0	5.6	131.0	239.0	
2	135.003	V	66.4	-31.8	34.6	40.0	5.4	100.0	181.0	
3	188.959	H	60.2	-28.0	32.2	40.0	7.8	191.0	217.0	
4	216.162	H	56.5	-26.4	30.1	40.0	9.9	200.0	71.0	
5	243.066	H	56.4	-25.5	30.9	47.0	16.1	200.0	200.0	
6	296.993	V	58.4	-23.9	34.5	47.0	12.5	194.0	237.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0741-R2

Page (50) of (81)

■ PoE Mode

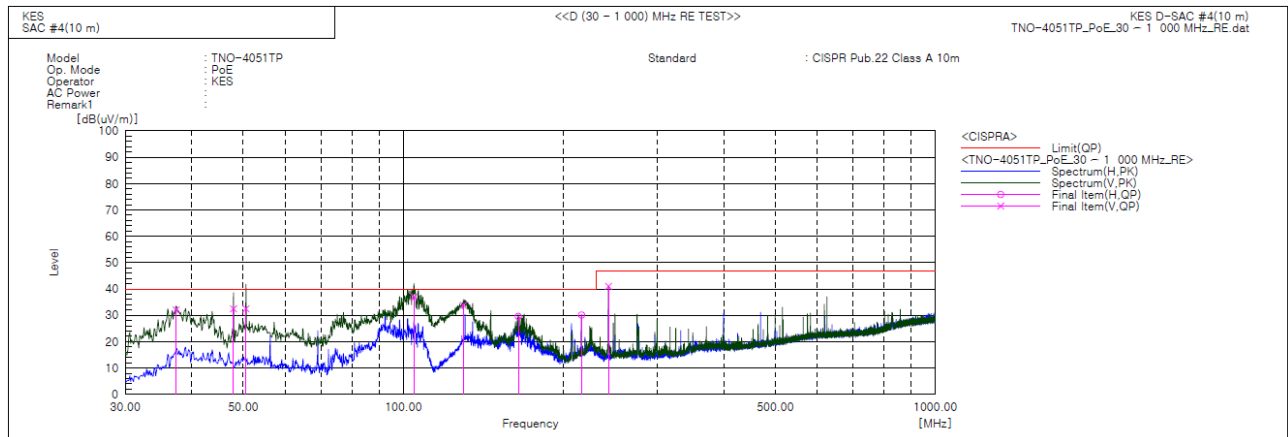

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	37.396	V	62.5	-30.4	32.1	40.0	7.9	126.0	333.0	
2	47.945	V	60.3	-27.8	32.5	40.0	7.5	100.0	12.0	
3	50.613	V	60.2	-27.7	32.5	40.0	7.5	150.0	23.0	
4	104.662	V	65.5	-28.5	37.0	40.0	3.0	192.0	158.0	
5	129.668	V	65.5	-31.7	33.8	40.0	6.2	220.0	132.0	
6	164.466	H	60.2	-30.6	29.6	40.0	10.4	226.0	4.0	
7	216.240	H	56.5	-26.4	30.1	40.0	9.9	400.0	218.0	
8	243.036	V	66.5	-25.5	41.0	47.0	6.0	100.0	33.0	

◆ Calculation

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:

KES-E1-17T0741-R2

Page (51) of (81)

Radiated Electric Field Emissions(Above 1 GHz)

■ AC 24 V Mode

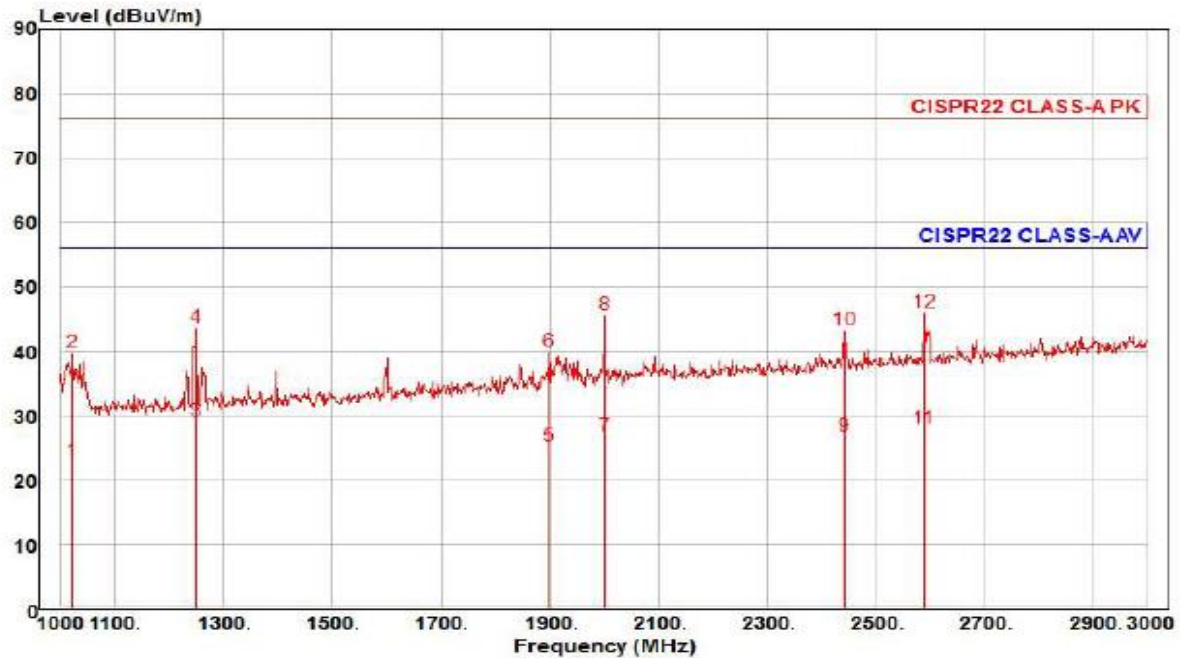

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1022.00	29.87	22.57	6.71	36.16	155	56.00	-33.01	horizontal	Average
2	1022.00	46.62	22.57	6.71	36.16	155	76.00	-36.26	horizontal	Peak
3 pp	1248.00	34.29	23.25	7.44	35.79	63	56.00	-26.81	horizontal	Average
4	1248.00	48.80	23.25	7.44	35.79	63	76.00	-32.30	horizontal	Peak
5	1898.00	24.96	25.60	9.36	34.70	239	56.00	-30.78	horizontal	Average
6	1898.00	39.75	25.60	9.36	34.70	239	76.00	-35.99	horizontal	Peak
7	2000.00	25.79	26.01	9.65	34.53	257	56.00	-29.08	horizontal	Average
8	2000.00	44.54	26.01	9.65	34.53	257	76.00	-30.33	horizontal	Peak
9	2442.00	23.13	27.35	10.69	34.23	206	56.00	-29.06	horizontal	Average
10	2442.00	39.54	27.35	10.69	34.23	206	76.00	-32.65	horizontal	Peak
11	2590.00	23.23	27.93	11.04	34.12	54	56.00	-27.92	horizontal	Average
12 pk	2590.00	41.18	27.93	11.04	34.12	54	76.00	-29.97	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (52) of (81)

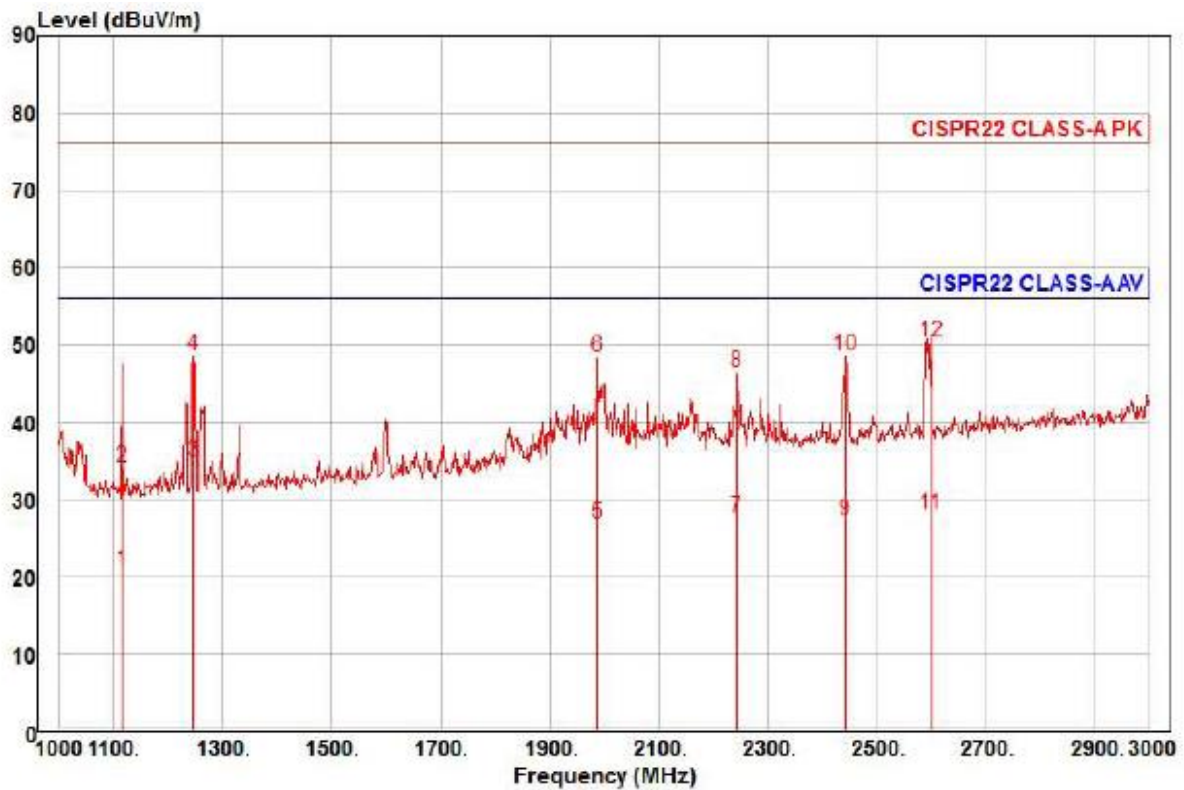

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preampl Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1116.00	26.99	22.85	7.01	36.01	213	56.00	-35.16	vertical	Average
2	1116.00	40.29	22.85	7.01	36.01	213	76.00	-41.86	vertical	Peak
3 pp	1246.00	39.99	23.25	7.43	35.79	186	56.00	-21.12	vertical	Average
4	1246.00	53.75	23.25	7.43	35.79	186	76.00	-27.36	vertical	Peak
5	1988.00	25.80	25.96	9.61	34.55	359	56.00	-29.18	vertical	Average
6	1988.00	47.48	25.96	9.61	34.55	359	76.00	-27.50	vertical	Peak
7	2244.00	24.94	26.75	10.23	34.36	166	56.00	-28.44	vertical	Average
8	2244.00	43.90	26.75	10.23	34.36	166	76.00	-29.48	vertical	Peak
9	2442.00	23.54	27.35	10.69	34.23	237	56.00	-28.65	vertical	Average
10	2442.00	44.82	27.35	10.69	34.23	237	76.00	-27.37	vertical	Peak
11	2600.00	23.11	27.97	11.06	34.12	220	56.00	-27.98	vertical	Average
12 pk	2600.00	45.41	27.97	11.06	34.12	220	76.00	-25.68	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (53) of (81)

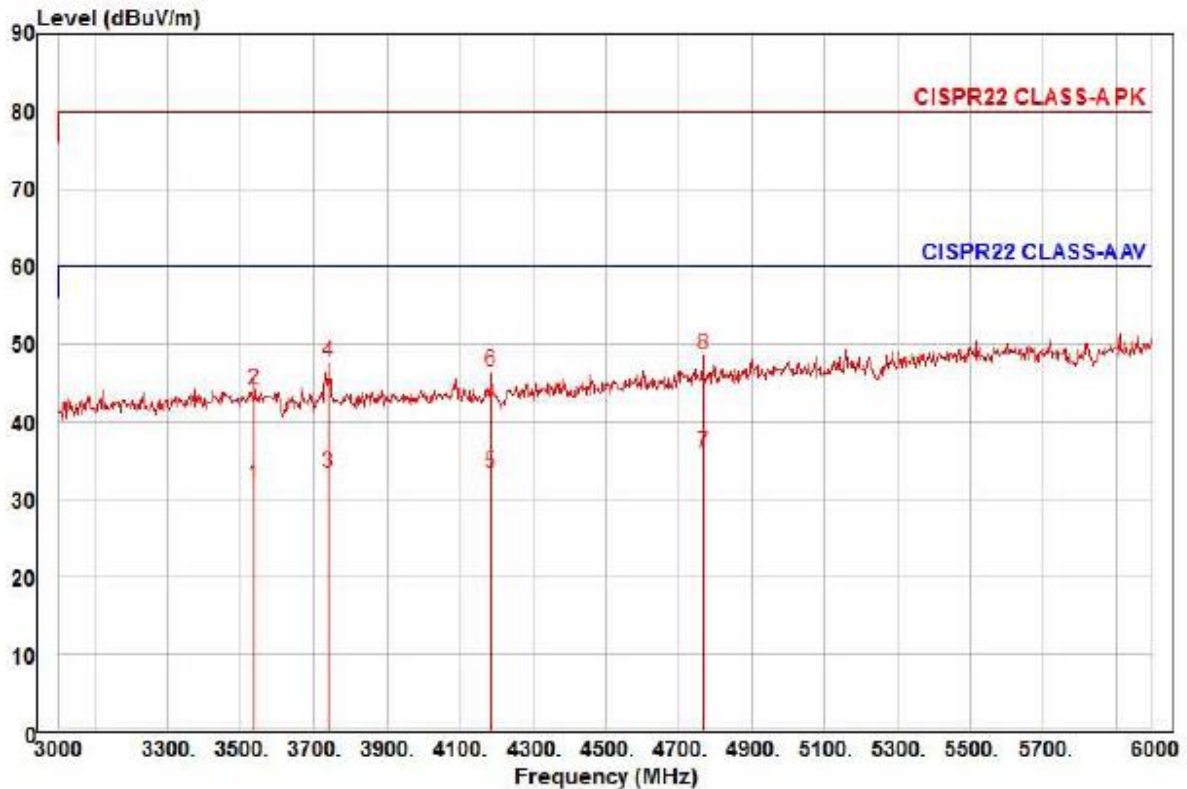

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3537.00	21.76	31.25	13.19	34.45	44	60.00	-28.25	horizontal	Average
2	3537.00	34.20	31.25	13.19	34.45	44	80.00	-35.81	horizontal	Peak
3	3738.00	22.75	31.79	13.52	34.67	85	60.00	-26.61	horizontal	Average
4	3738.00	36.97	31.79	13.52	34.67	85	80.00	-32.39	horizontal	Peak
5	4185.00	21.20	32.45	14.38	34.64	172	60.00	-26.61	horizontal	Average
6	4185.00	34.23	32.45	14.38	34.64	172	80.00	-33.58	horizontal	Peak
7 pp	4767.00	21.14	32.92	15.45	33.62	66	60.00	-24.11	horizontal	Average
8 pk	4767.00	33.86	32.92	15.45	33.62	66	80.00	-31.39	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (54) of (81)

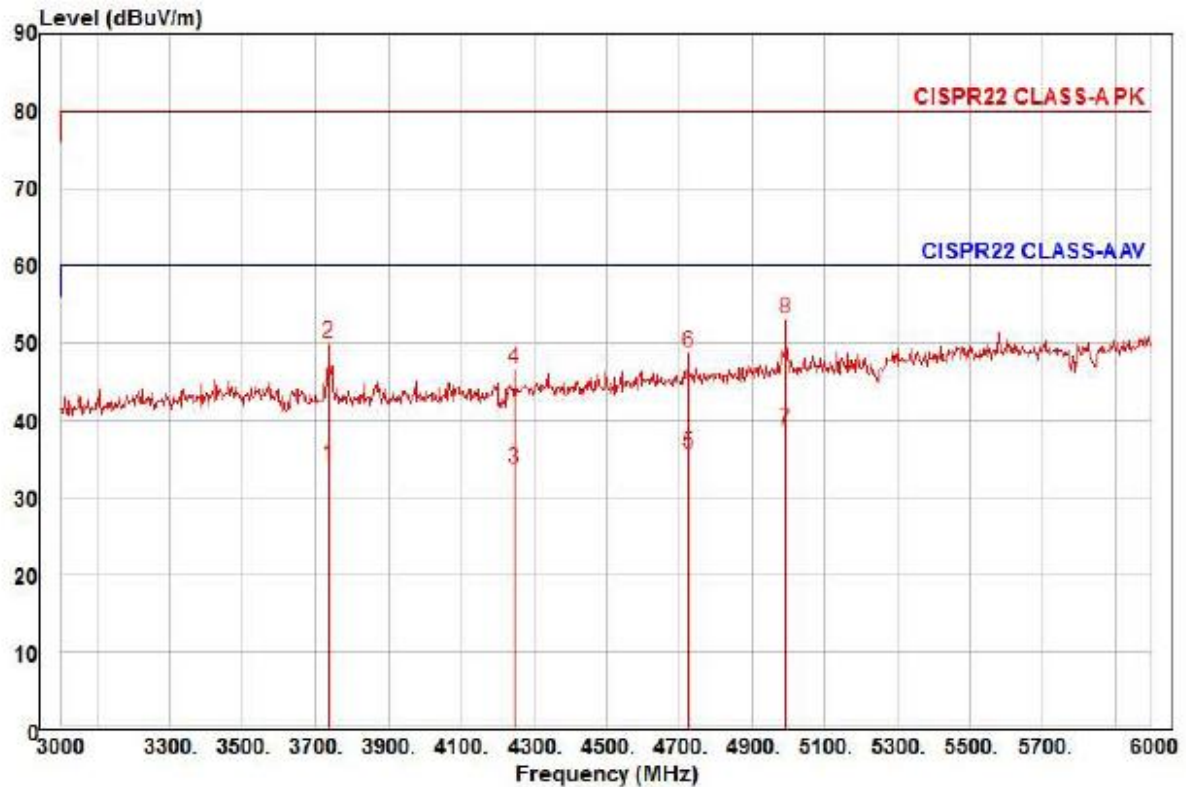


Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3735.00	23.49	31.78	13.52	34.67	96	60.00	-25.88	vertical	Average
2	3735.00	39.47	31.78	13.52	34.67	96	80.00	-29.90	vertical	Peak
3	4248.00	21.43	32.43	14.50	34.53	126	60.00	-26.17	vertical	Average
4	4248.00	34.25	32.43	14.50	34.53	126	80.00	-33.35	vertical	Peak
5	4725.00	21.20	32.83	15.37	33.69	131	60.00	-24.29	vertical	Average
6	4725.00	34.33	32.83	15.37	33.69	131	80.00	-31.16	vertical	Peak
7 pp	4995.00	22.66	33.40	15.76	33.22	69	60.00	-21.40	vertical	Average
8 pk	4995.00	37.23	33.40	15.76	33.22	69	80.00	-26.83	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ DC 12 V Mode

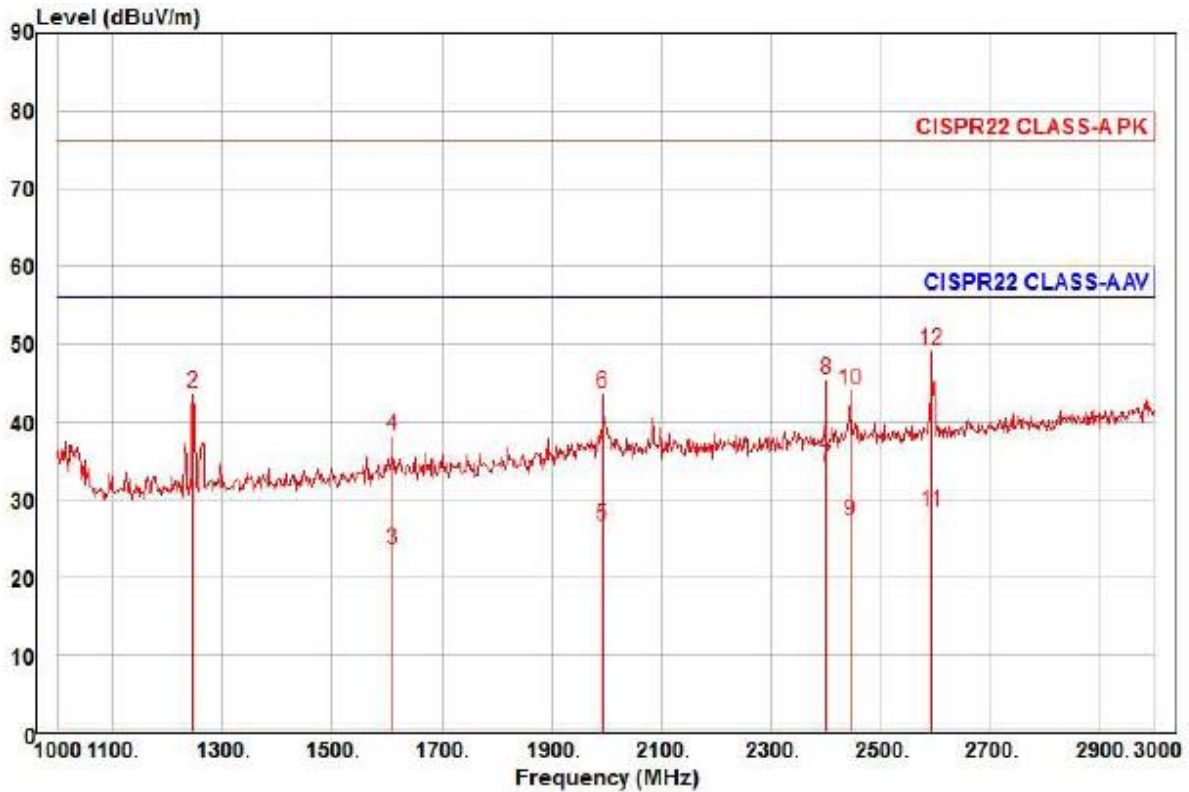

Site : YEOJU_C 3 m SAC

Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : TNO-4051TP

Mode : DC 12 V

Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1246.00	34.66	23.25	7.43	35.79	136	56.00	-26.45	horizontal	Average
2	1246.00	48.83	23.25	7.43	35.79	136	76.00	-32.28	horizontal	Peak
3	1610.00	25.70	24.46	8.54	35.18	347	56.00	-32.48	horizontal	Average
4	1610.00	40.52	24.46	8.54	35.18	347	76.00	-37.66	horizontal	Peak
5	1994.00	25.61	25.99	9.63	34.54	249	56.00	-29.31	horizontal	Average
6	1994.00	42.70	25.99	9.63	34.54	249	76.00	-32.22	horizontal	Peak
7 pp	2400.00	30.58	27.23	10.59	34.25	36	56.00	-21.85	horizontal	Average
8	2400.00	41.95	27.23	10.59	34.25	36	76.00	-30.48	horizontal	Peak
9	2446.00	23.36	27.37	10.70	34.22	294	56.00	-28.79	horizontal	Average
10	2446.00	40.25	27.37	10.70	34.22	294	76.00	-31.90	horizontal	Peak
11	2594.00	23.62	27.95	11.05	34.12	220	56.00	-27.50	horizontal	Average
12 pk	2594.00	44.33	27.95	11.05	34.12	220	76.00	-26.79	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (56) of (81)

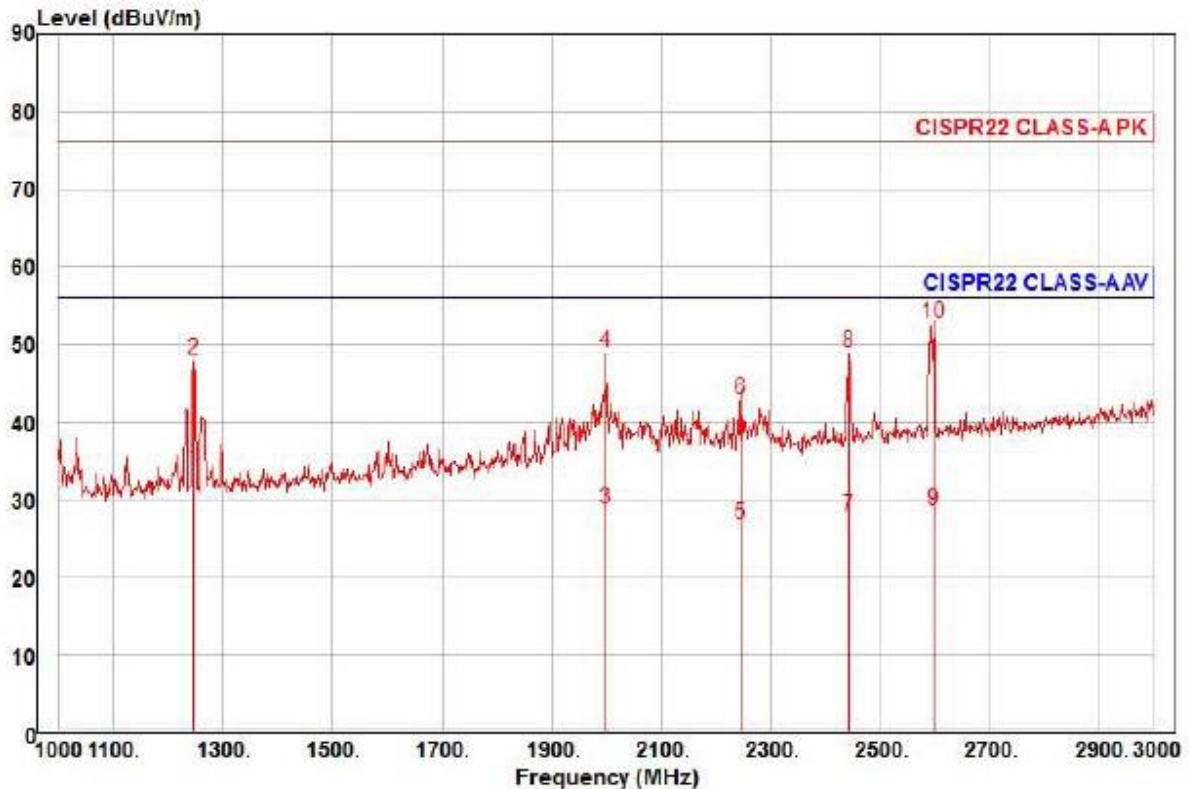

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : DC 12 V
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1246.00	39.10	23.25	7.43	35.79	174	56.00	-22.01	vertical	Average
2	1246.00	53.13	23.25	7.43	35.79	174	76.00	-27.98	vertical	Peak
3	1998.00	27.74	26.00	9.64	34.53	359	56.00	-27.15	vertical	Average
4	1998.00	48.01	26.00	9.64	34.53	359	76.00	-26.88	vertical	Peak
5	2246.00	24.21	26.76	10.23	34.36	40	56.00	-29.16	vertical	Average
6	2246.00	40.23	26.76	10.23	34.36	40	76.00	-33.14	vertical	Peak
7	2444.00	24.08	27.36	10.70	34.22	192	56.00	-28.08	vertical	Average
8	2444.00	45.19	27.36	10.70	34.22	192	76.00	-26.97	vertical	Peak
9	2598.00	23.80	27.96	11.06	34.12	246	56.00	-27.30	vertical	Average
10 pk	2598.00	47.78	27.96	11.06	34.12	246	76.00	-23.32	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (57) of (81)

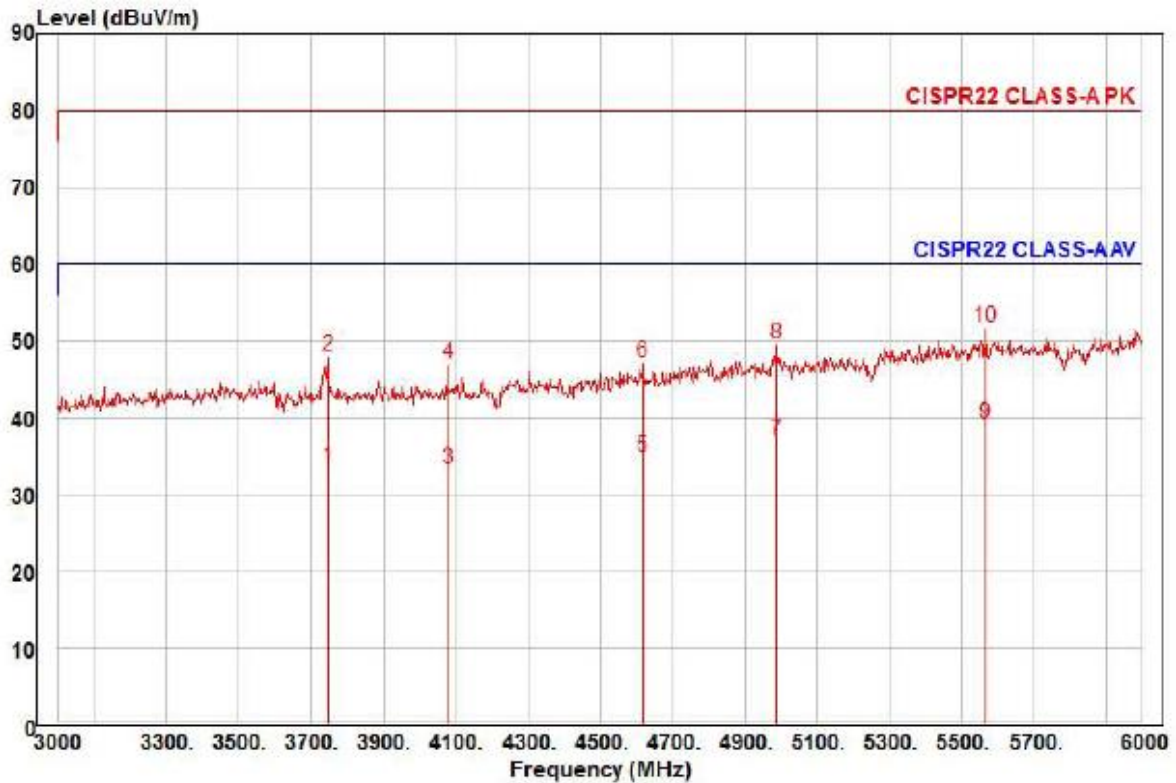

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3747.00	22.92	31.82	13.54	34.68	90	60.00	-26.40	horizontal	Average
2	3747.00	37.35	31.82	13.54	34.68	90	80.00	-31.97	horizontal	Peak
3	4080.00	21.42	32.48	14.20	34.83	66	60.00	-26.73	horizontal	Average
4	4080.00	35.15	32.48	14.20	34.83	66	80.00	-33.00	horizontal	Peak
5	4620.00	21.03	32.61	15.16	33.88	291	60.00	-25.08	horizontal	Average
6	4620.00	33.35	32.61	15.16	33.88	291	80.00	-32.76	horizontal	Peak
7	4989.00	21.11	33.39	15.75	33.23	108	60.00	-22.98	horizontal	Average
8	4989.00	33.70	33.39	15.75	33.23	108	80.00	-30.39	horizontal	Peak
9 pp	5568.00	20.24	35.47	16.72	33.29	161	60.00	-20.86	horizontal	Average
10 pk	5568.00	32.95	35.47	16.72	33.29	161	80.00	-28.15	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (58) of (81)

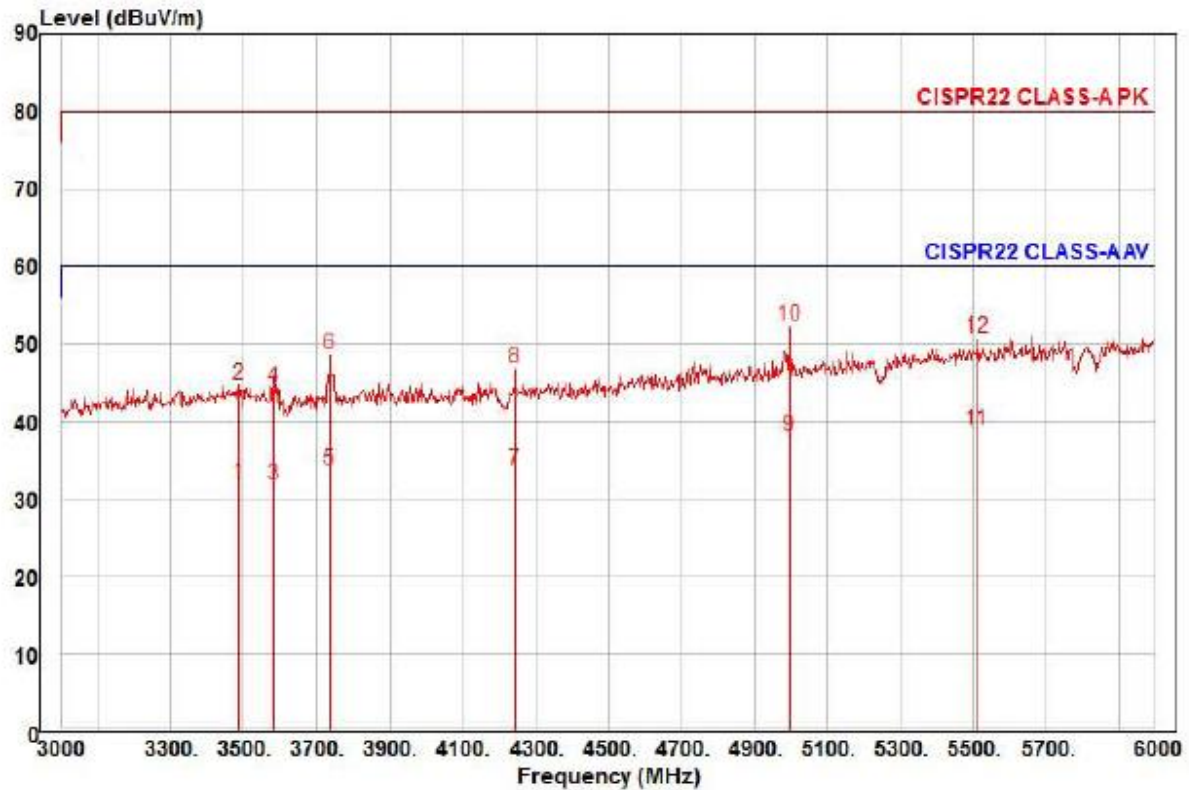

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preampl Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3486.00	22.06	31.11	13.13	34.39	62	60.00	-28.09	vertical	Average
2	3486.00	34.79	31.11	13.13	34.39	62	80.00	-35.36	vertical	Peak
3	3582.00	21.70	31.37	13.25	34.50	187	60.00	-28.18	vertical	Average
4	3582.00	34.17	31.37	13.25	34.50	187	80.00	-35.71	vertical	Peak
5	3735.00	23.04	31.78	13.52	34.67	130	60.00	-26.33	vertical	Average
6	3735.00	37.91	31.78	13.52	34.67	130	80.00	-31.46	vertical	Peak
7	4242.00	21.38	32.43	14.49	34.54	127	60.00	-26.24	vertical	Average
8	4242.00	34.51	32.43	14.49	34.54	127	80.00	-33.11	vertical	Peak
9	4998.00	22.00	33.41	15.76	33.21	74	60.00	-22.04	vertical	Average
10 pk	4998.00	36.37	33.41	15.76	33.21	74	80.00	-27.67	vertical	Peak
11 pp	5514.00	20.07	35.39	16.63	33.28	45	60.00	-21.19	vertical	Average
12	5514.00	32.02	35.39	16.63	33.28	45	80.00	-29.24	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (59) of (81)

PoE Mode

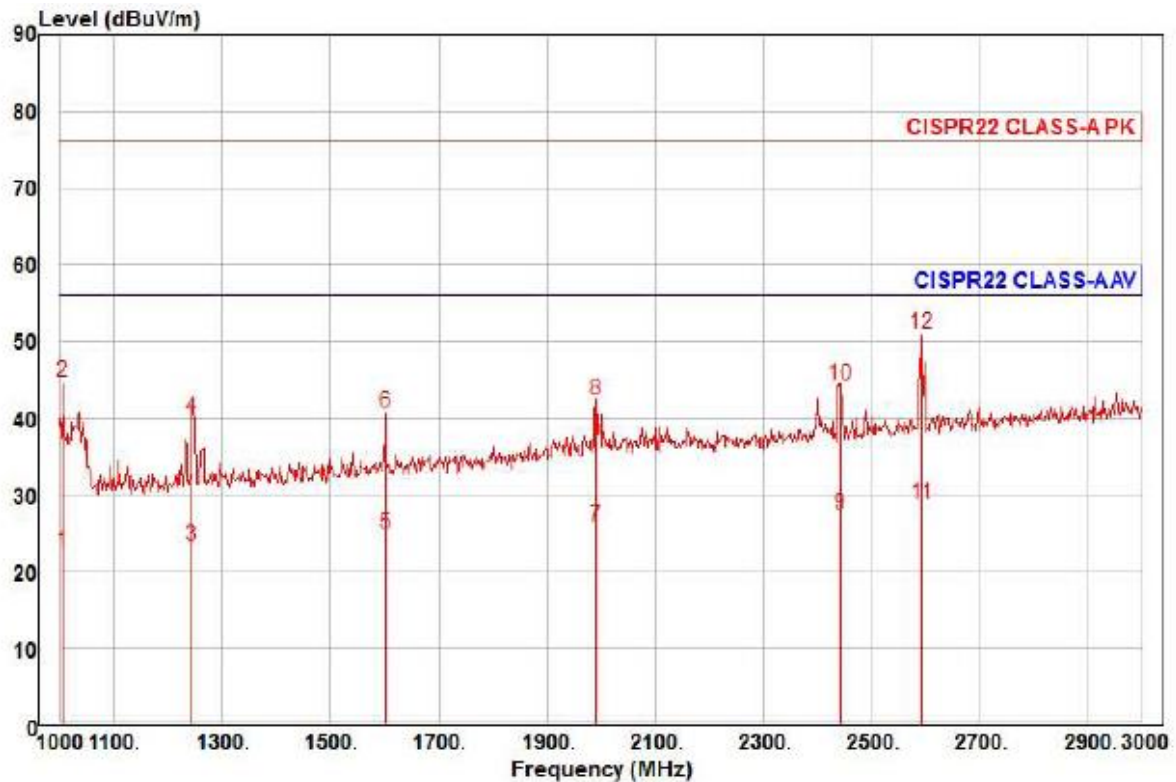

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : PoE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1004.00	29.68	22.51	6.65	36.19	198	56.00	-33.35	horizontal	Average
2	1004.00	51.72	22.51	6.65	36.19	198	76.00	-31.31	horizontal	Peak
3	1244.00	28.43	23.24	7.42	35.79	145	56.00	-32.70	horizontal	Average
4	1244.00	45.23	23.24	7.42	35.79	145	76.00	-35.90	horizontal	Peak
5	1600.00	27.10	24.42	8.51	35.20	311	56.00	-31.17	horizontal	Average
6	1600.00	42.99	24.42	8.51	35.20	311	76.00	-35.28	horizontal	Peak
7	1990.00	24.76	25.97	9.62	34.55	246	56.00	-30.20	horizontal	Average
8	1990.00	41.41	25.97	9.62	34.55	246	76.00	-33.55	horizontal	Peak
9	2444.00	23.55	27.36	10.70	34.22	360	56.00	-28.61	horizontal	Average
10	2444.00	40.40	27.36	10.70	34.22	360	76.00	-31.76	horizontal	Peak
11 av	2594.00	24.03	27.95	11.05	34.12	237	56.00	-27.09	horizontal	Average
12 pp	2594.00	46.09	27.95	11.05	34.12	237	76.00	-25.03	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (60) of (81)

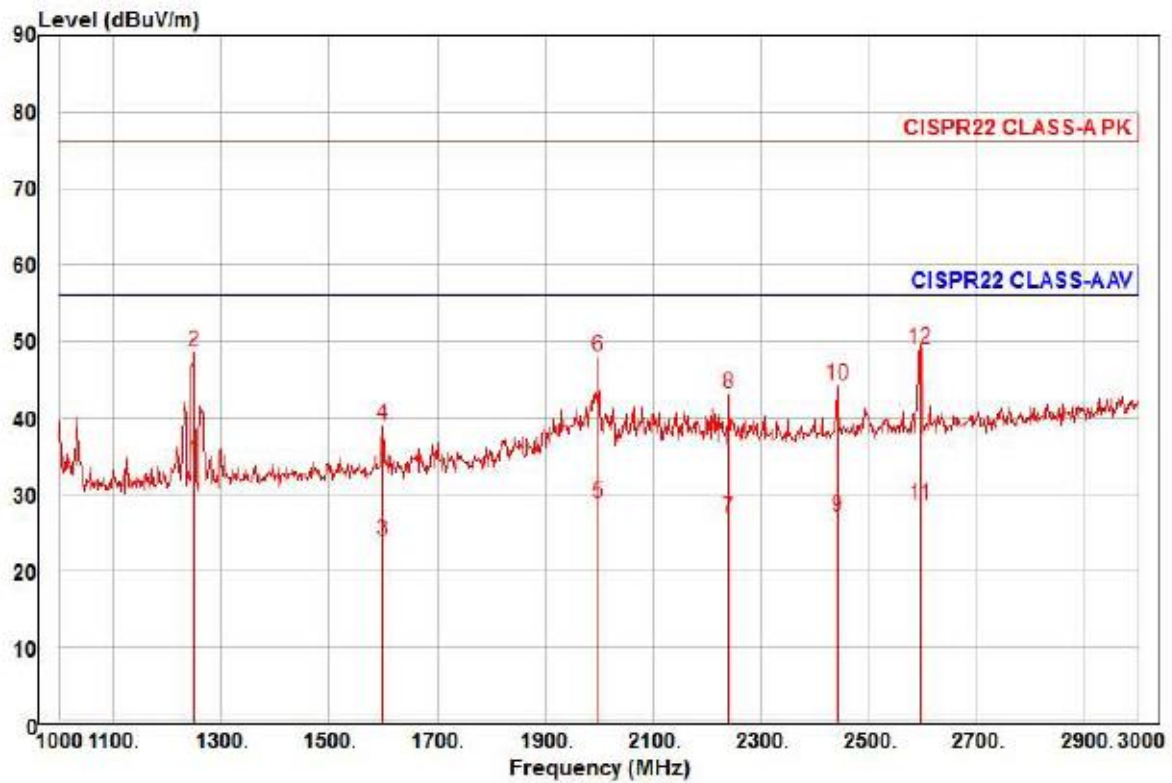

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : PoE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1248.00	39.36	23.25	7.44	35.79	176	56.00	-21.74	vertical	Average
2	1248.00	53.73	23.25	7.44	35.79	176	76.00	-27.37	vertical	Peak
3	1598.00	26.31	24.41	8.50	35.20	159	56.00	-31.98	vertical	Average
4	1598.00	41.33	24.41	8.50	35.20	159	76.00	-36.96	vertical	Peak
5	1998.00	27.70	26.00	9.64	34.53	6	56.00	-27.19	vertical	Average
6	1998.00	46.87	26.00	9.64	34.53	6	76.00	-28.02	vertical	Peak
7	2240.00	24.28	26.74	10.22	34.36	213	56.00	-29.12	vertical	Average
8	2240.00	40.60	26.74	10.22	34.36	213	76.00	-32.80	vertical	Peak
9	2442.00	23.33	27.35	10.69	34.23	6	56.00	-28.86	vertical	Average
10	2442.00	40.49	27.35	10.69	34.23	6	76.00	-31.70	vertical	Peak
11	2596.00	23.82	27.95	11.05	34.12	359	56.00	-27.30	vertical	Average
12 pk	2596.00	44.15	27.95	11.05	34.12	359	76.00	-26.97	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (61) of (81)

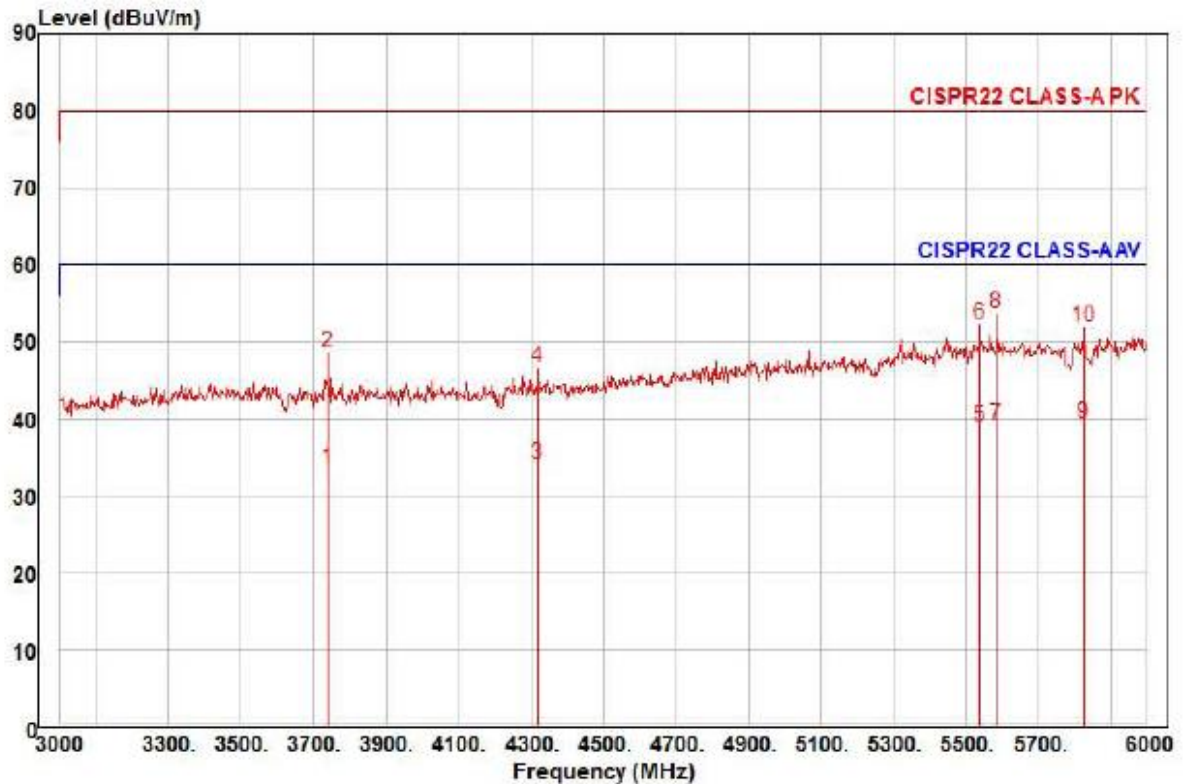

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3738.00	22.95	31.79	13.52	34.67	76	60.00	-26.41	horizontal	Average
2	3738.00	37.97	31.79	13.52	34.67	76	80.00	-31.39	horizontal	Peak
3	4320.00	21.52	32.41	14.64	34.41	188	60.00	-25.84	horizontal	Average
4	4320.00	34.06	32.41	14.64	34.41	188	80.00	-33.30	horizontal	Peak
5	5541.00	20.20	35.43	16.67	33.29	264	60.00	-20.99	horizontal	Average
6	5541.00	33.64	35.43	16.67	33.29	264	80.00	-27.55	horizontal	Peak
7	5586.00	20.28	35.50	16.74	33.29	261	60.00	-20.77	horizontal	Average
8 pk	5586.00	34.83	35.50	16.74	33.29	261	80.00	-26.22	horizontal	Peak
9 pp	5826.00	19.70	35.86	17.12	33.33	291	60.00	-20.65	horizontal	Average
10	5826.00	32.41	35.86	17.12	33.33	291	80.00	-27.94	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (62) of (81)

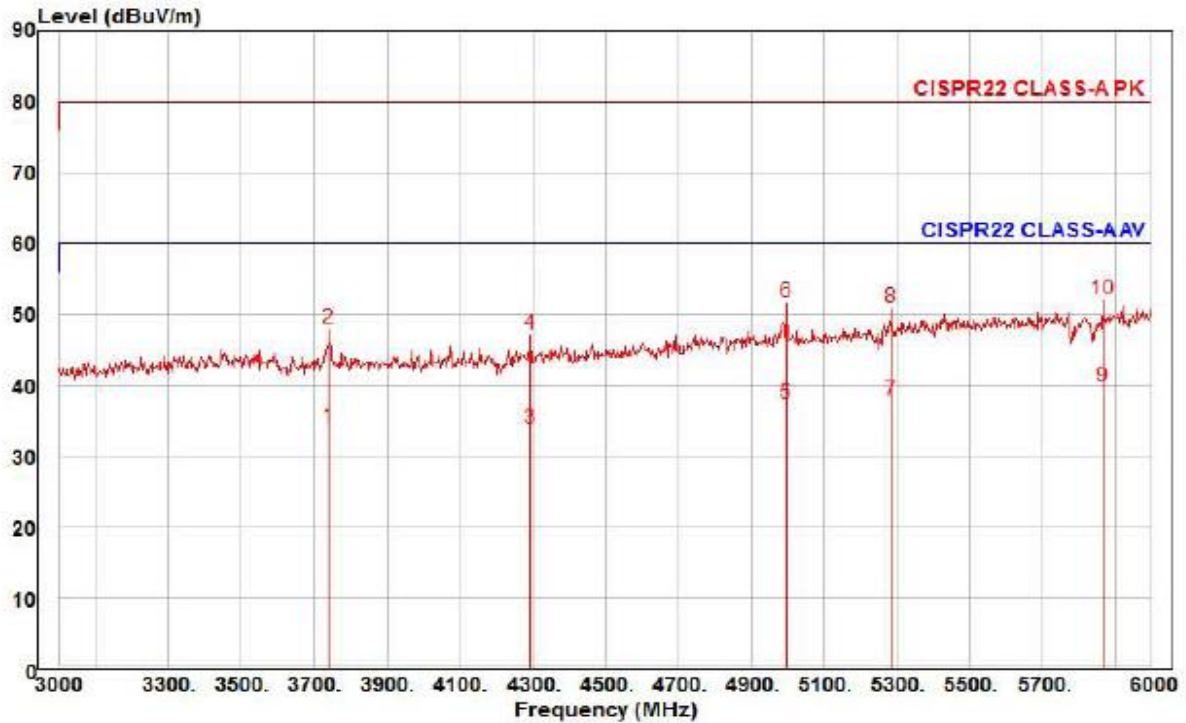

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : TNO-4051TP
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3741.00	23.49	31.80	13.53	34.68	129	60.00	-25.86	vertical	Average
2	3741.00	37.39	31.80	13.53	34.68	129	80.00	-31.96	vertical	Peak
3	4293.00	21.38	32.42	14.59	34.45	338	60.00	-26.06	vertical	Average
4	4293.00	34.72	32.42	14.59	34.45	338	80.00	-32.72	vertical	Peak
5	4998.00	21.59	33.41	15.76	33.21	81	60.00	-22.45	vertical	Average
6	4998.00	35.72	33.41	15.76	33.21	81	80.00	-28.32	vertical	Peak
7	5286.00	20.43	34.53	16.23	33.25	204	60.00	-22.06	vertical	Average
8	5286.00	33.42	34.53	16.23	33.25	204	80.00	-29.07	vertical	Peak
9 pp	5868.00	19.88	35.92	17.25	33.33	147	60.00	-20.28	vertical	Average
10 pk	5868.00	32.24	35.92	17.25	33.33	147	80.00	-27.92	vertical	Peak

◆ Calculation - SAC #3

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (63) of (81)

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value
Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Telecommunication Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

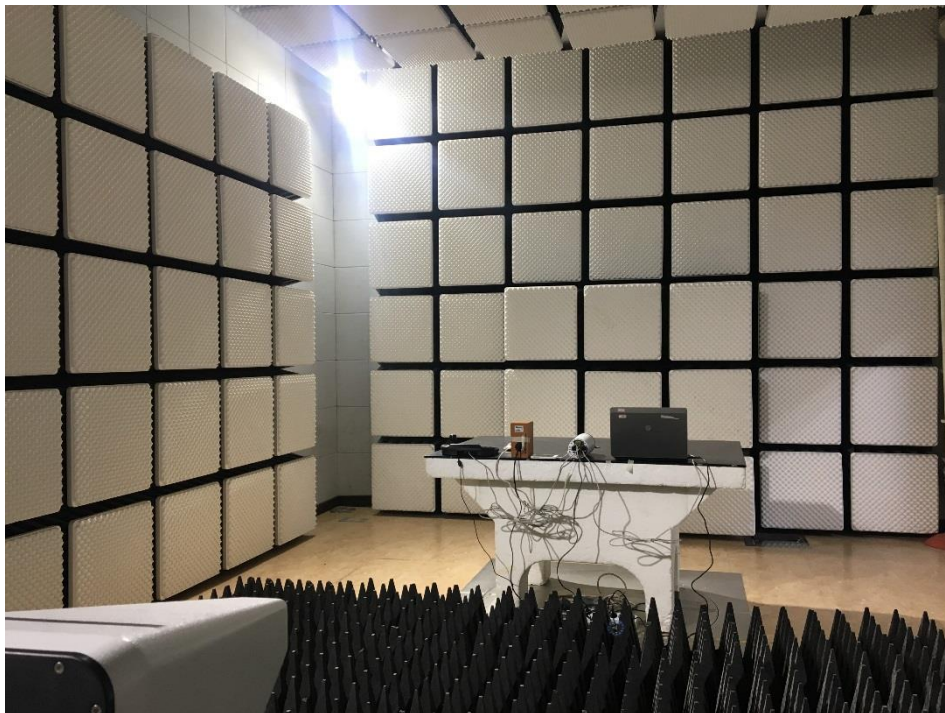

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0741-R2
Page (68) of (81)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients / Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs

(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 1

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 2

(Top)




(Bottom)

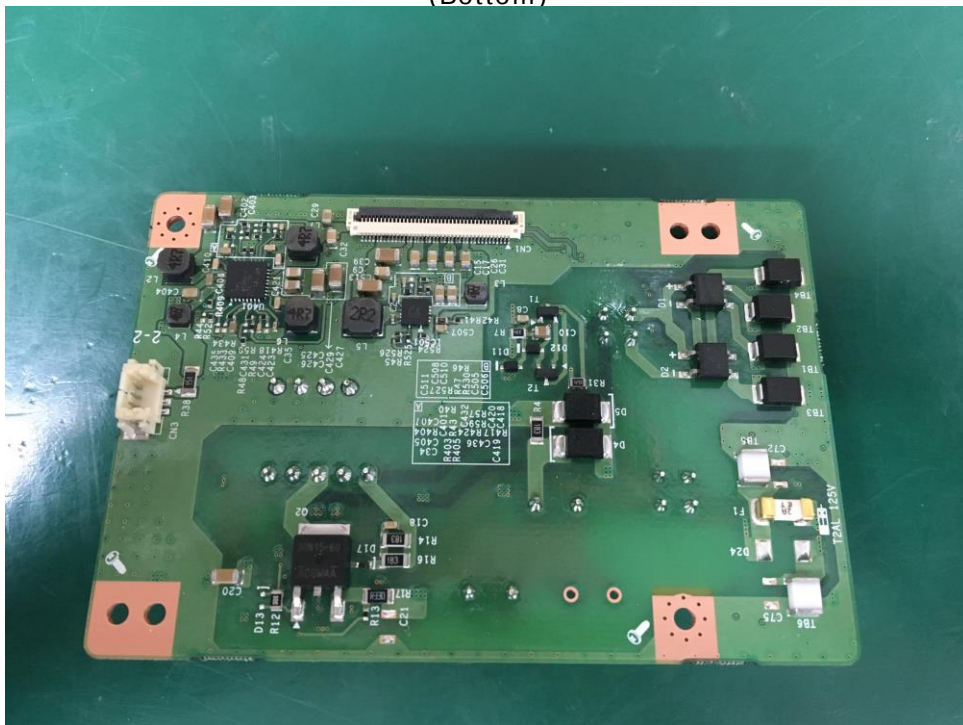


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 3

(Top)

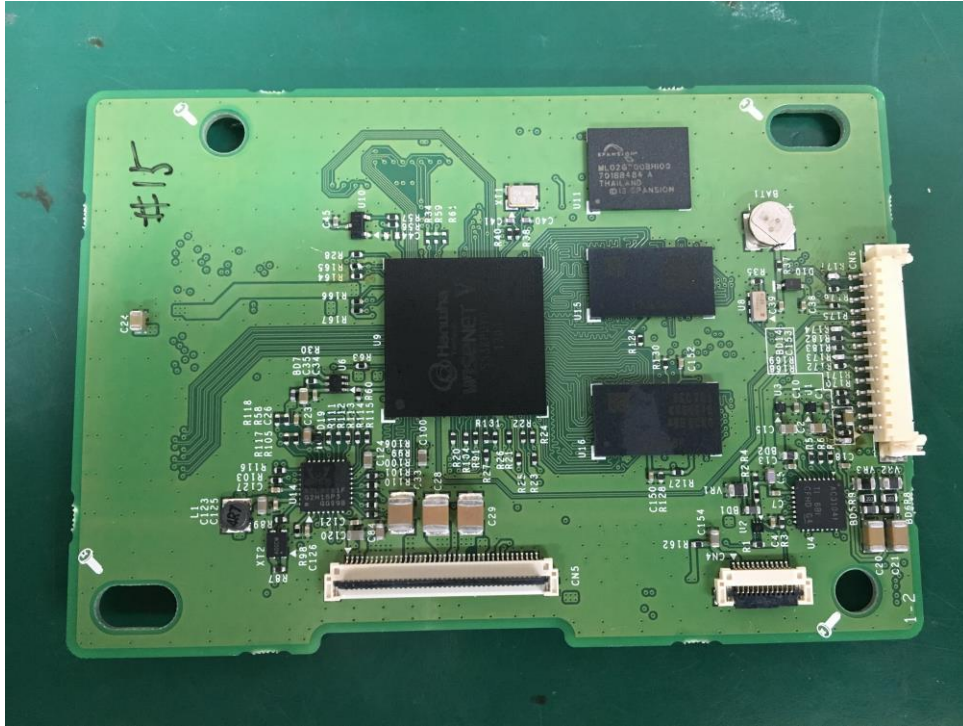


(Bottom)

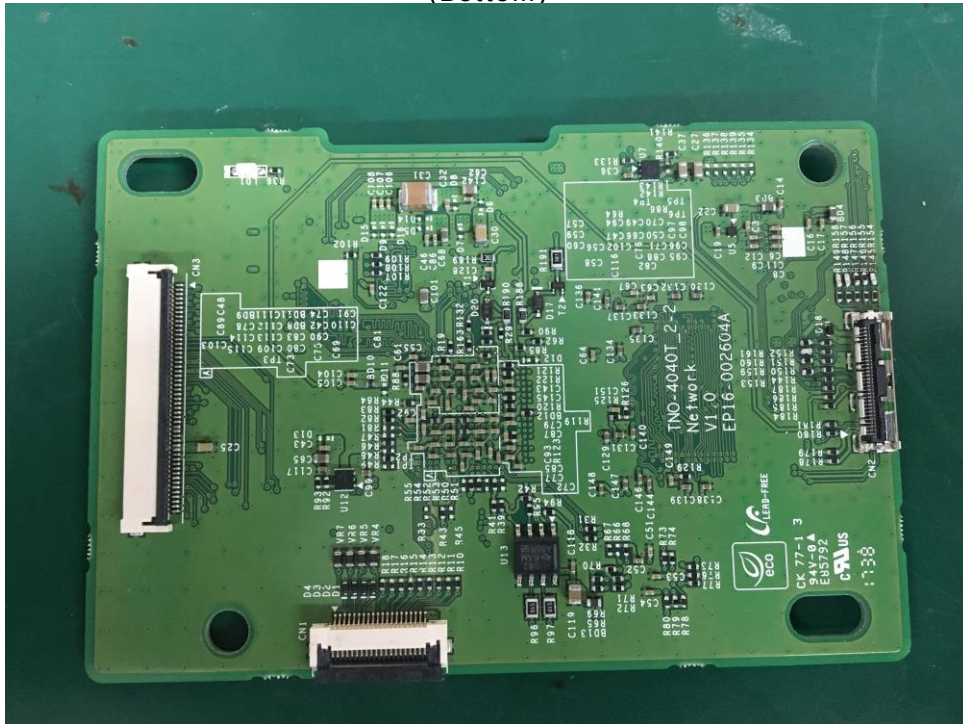


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 4

(Top)

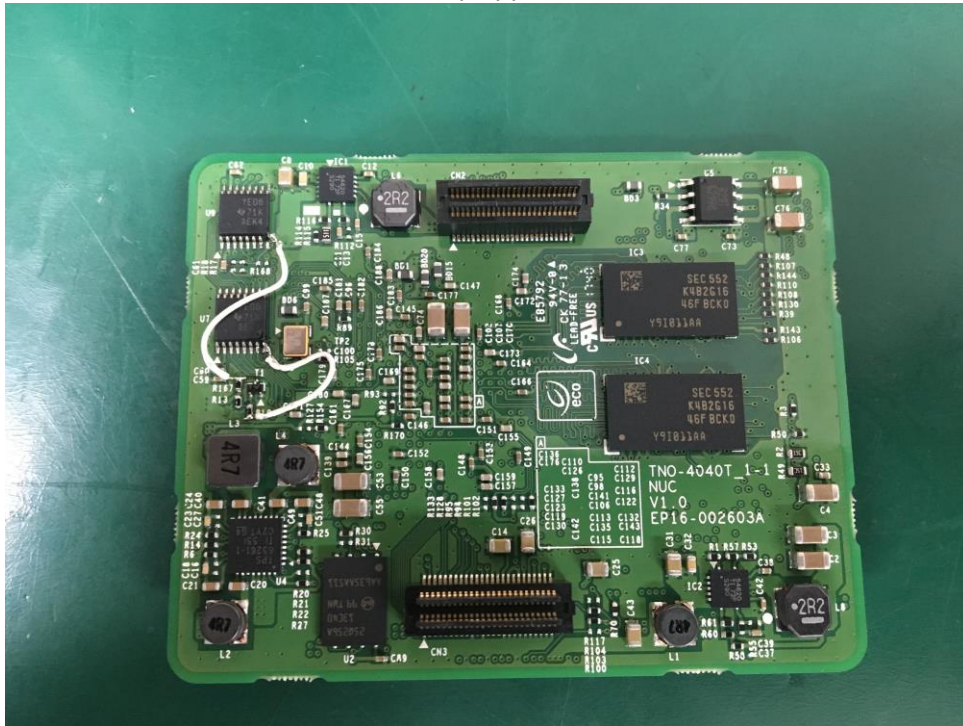


(Bottom)

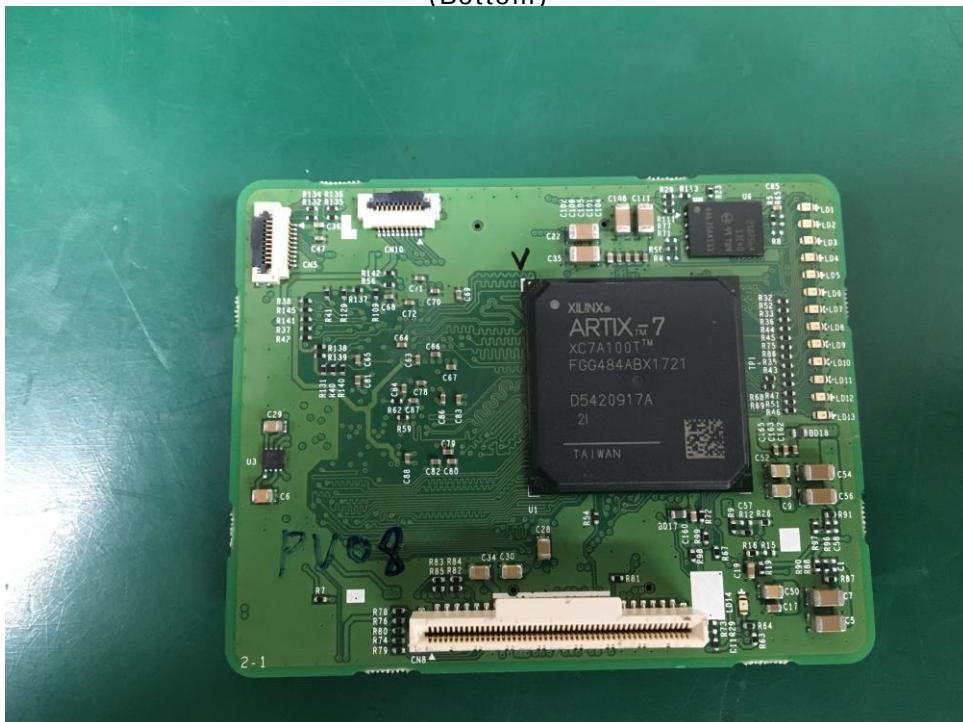

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 5

(Top)

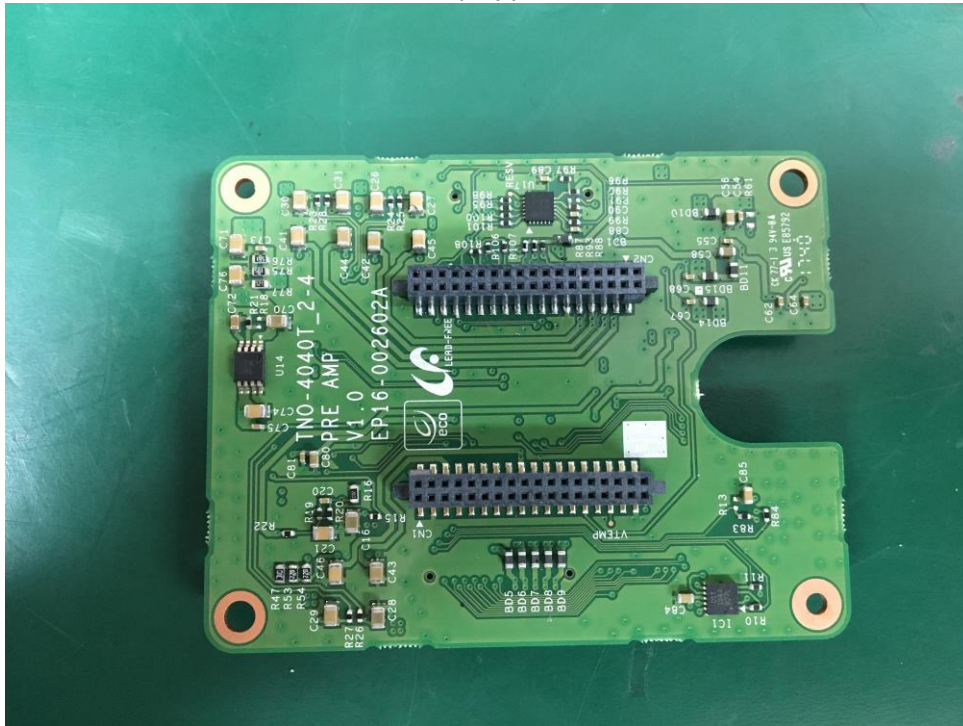

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens 1

(Top)




(Bottom)




EUT Internal View – Lens 2


(Top)

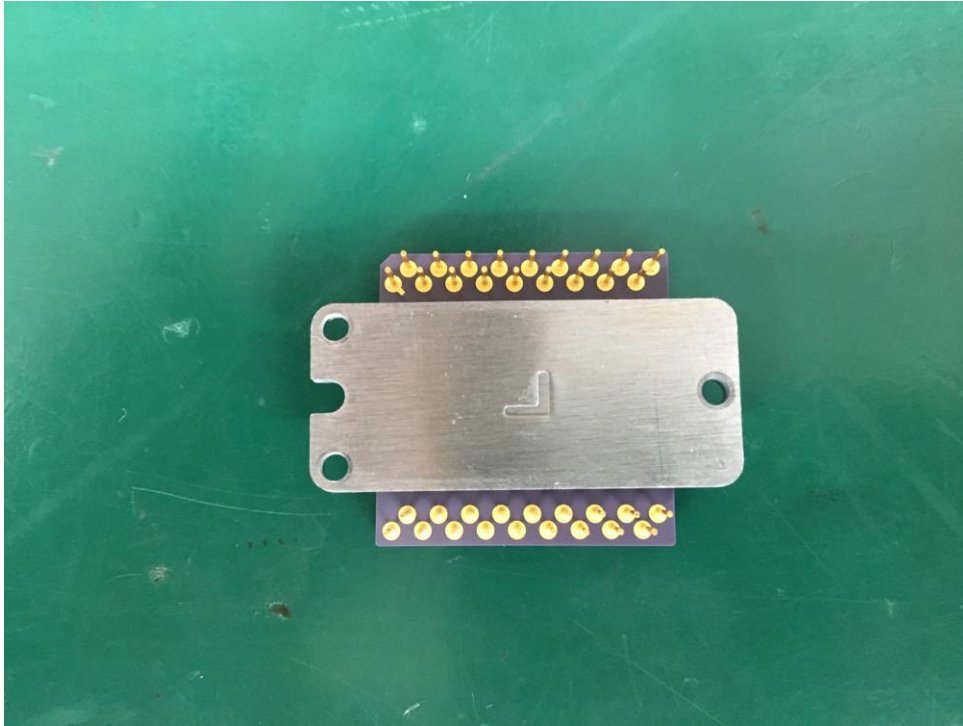

(Bottom)

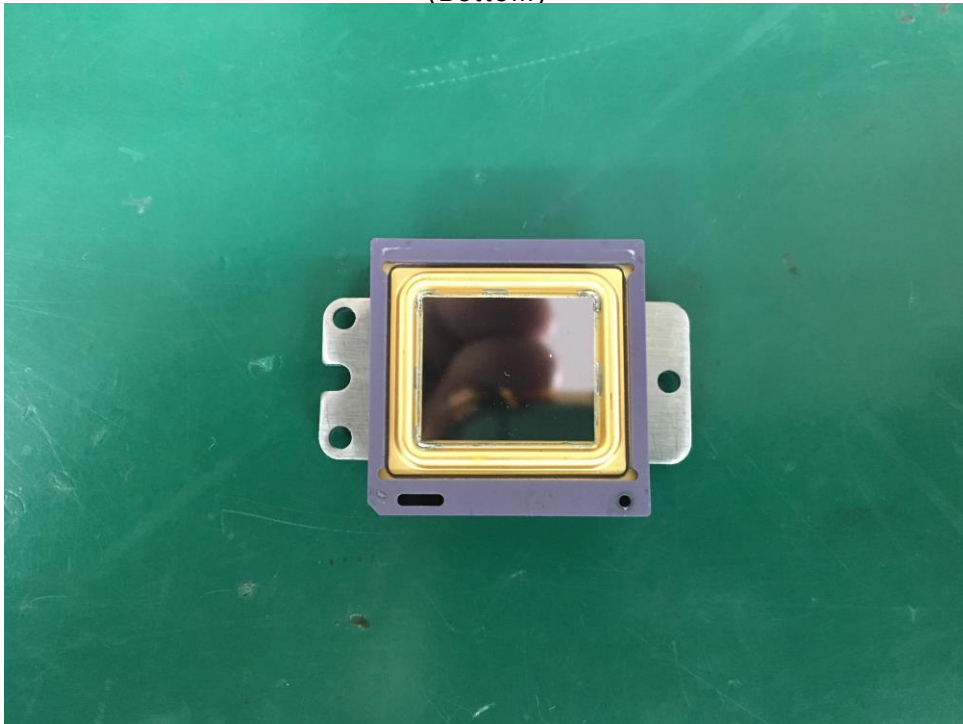

Label and Location

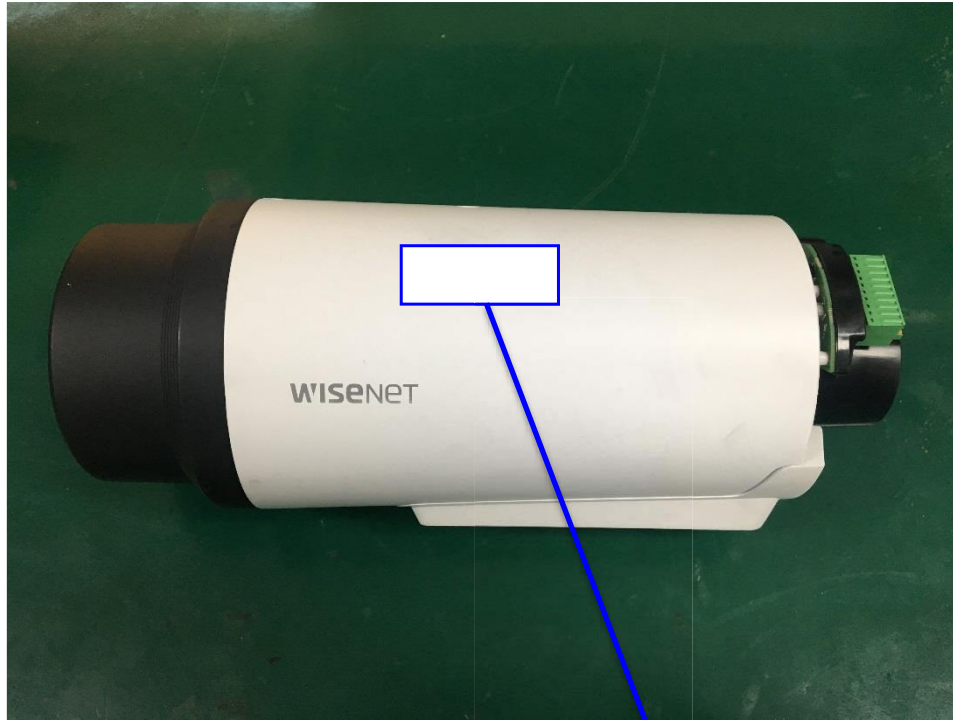

THERMAL CAMERA

Model No : TNO-4051T

Manufacturer : HANWHA TECHWIN(TIANJIN) CO., LTD

Made in China

