

TEST REPORT

EN 301 893 V2.1.1

Equipment under test NETWORK VIDEO RECORDER

Model name TRM-1610S

Derivative model TRM-1610M

Applicant Hanwha Techwin Co., Ltd.

Manufacturer HANWHA TECHWIN(TIANJIN) CO., LTD.
HANWHA TECHWIN SECURITY
VIETNAM CO., LTD.
D-TECH CO.,LTD.

Date of test(s) 2018.02.06 ~ 2018.02.19

Date of issue 2018.05.01

Issued to

Hanwha Techwin Co., Ltd.

6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, Korea
Tel: +82-70-7147-8753 / Fax: +82-31-8108-3717

Issued by

KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Young-Jin, Lee Test engineer	Hyeon-Su, Jang Technical manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Revision history

Revision	Date of issue	Test report No.	Description
-	2018.02.21	KES-RF-18T0023	Initial
R1	2018.05.01	KES-RF-18T0023-R1	Change applicant address and add manufacturer

TABLE OF CONTENTS

1.	General information.....	4
1.1.	EUT description.....	4
1.2.	Information about derivative model	5
1.3.	Accessory information	5
1.4.	Device modifications.....	5
1.5.	Frequency/channel operations.....	6
1.6.	Maximum output power	6
1.7.	Using antenna information	6
2.	Summary of tests	7
3.	Application form for testing	8
3.1.	Information as required by EN 301 893 V2.1.1, clause 5.4.1	8
3.2.	Additional information provided by the manufacturer.....	22
3.3.	List of ancillary and/or support equipment provided by the manufacturer	22
4.	Test results	23
4.1.	Transmitter unwanted emissions outside the 5 GHz RLAN bands.....	23
4.2.	Receiver spurious emissions.....	28
4.3.	Centre frequencies.....	33
4.4.	Nominal channel bandwidth and Occupied channel bandwidth.....	37
4.5.	RF output power, Transmit Power Control (TPC) and power density	40
4.5.1	RF output power	40
4.5.2	Power spectral density	45
4.6.	Transmitter unwanted emissions within the 5 GHz RLAN bands	51
4.7.	DFS (Dynamic Frequency Selection).....	60
4.8.	Adaptivity.....	69
4.9.	Receiver blocking.....	77
	Appendix A.....	80
	Appendix B.....	82
	Appendix C.....	84

1. General information

Applicant: Hanwha Techwin Co., Ltd.
Applicant address: 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, Korea
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Rule part(s): EN 301 893 V2.1.1
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test NETWORK VIDEO RECORDER
Frequency range 2 412 MHz ~ 2 472 MHz (11n_HT20)
2 422 MHz ~ 2 4652 MHz (11n_HT40)
5 180 MHz ~ 5 240 MHz (11ac_VHT20)
5 190 MHz ~ 5 230 MHz (11ac_VHT40)
5 210 MHz (11ac_VHT80)
5 260 MHz ~ 5 320 MHz (11ac_VHT20)
5 270 MHz ~ 5 310 MHz (11ac_VHT40)
5 290 MHz (11ac_VHT80)
5 500 MHz ~ 5 700 MHz (11ac_VHT20)
5 510 MHz ~ 5 670 MHz (11ac_VHT40)
5 530 MHz ~ 5 610 MHz (11ac_VHT80)
1 575.42 MHz (GPS)
Model: TRM-1610S
Derivative model TRM-1610M
Modulation technique OFDM
Antenna specification 2.4 GHz // Dipole Antenna & 3.14 dBi
5 GHz_UNII 1, 2A // Dipole Antenna & 2.72 dBi
5 GHz_UNII 2C // Dipole Antenna & 3.45 dBi
Power source DC 9V~36V
H/W version TRM-1610S
S/W version Rev 01

Number of channels	2 412 MHz ~ 2 462 MHz (11n_HT20) : 11ch,
	2 422 MHz ~ 2 452 MHz (11n_HT40) : 7ch
	5 180 MHz ~ 5 240 MHz (11ac_VHT20) : 4ch
	5 190 MHz ~ 5 230 MHz (11ac_VHT40) : 2ch,
	5 210 MHz (11ac_VHT80) : 1ch
	5 260 MHz ~ 5 320 MHz (11ac_VHT20) : 4ch
	5 270 MHz ~ 5 310 MHz (11ac_VHT40) : 2ch,
	5 290 MHz (11ac_VHT80) : 1ch
	5 500 MHz ~ 5 720 MHz (11ac_VHT20) : 12ch
	5 510 MHz ~ 5 670 MHz (11ac_VHT40) : 6ch
	5 530 MHz ~ 5 610 MHz (11ac_VHT80) : 3ch
	1 575.42 MHz (GPS) : 1ch

1.2. Information about derivative model

The difference between basic model and derivative is part of rear side, the other circuit diagram and software are fundamentally the same. Please refer to the figure below for details.

Basic model	Derivative model
	

Note.

- The output power of the Basic model is worse than derivative model. Conducted and radiated emission were performed with the basic model.

1.3. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Control Box	Hanwha Techwin(Tianjin) Co., Ltd.	-	-	-

1.4. Device modifications

N/A

1.5. Frequency/channel operations

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5 180	52	5 260	100	5 500
44	5 220	56	5 280	116	5 580
48	5 240	64	5 320	140	5 700

Table 1.2-1. 802.11ac_HT20/VHT20 mode

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5 190	54	5 270	102	5 510
46	5 230	62	5 310	118	5 590
				134	5 670

Table 1.2-2. 802.11ac_HT40/VHT40 mode

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5 210	58	5 290	106	5 530
				122	5 610

Table 1.2-3. 802.11ac_VHT80 mode

1.6. Maximum output power

Refer to the output power.

Note.

1. Radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
2. Worst-case data rates were:
802.11ac_VHT20 mode : VHT2MCS0 (MIMO)
802.11ac_VHT40 mode : VHT2MCS0 (MIMO)
802.11ac_VHT80 mode : VHT2MCS0 (MIMO)

1.7. Using antenna information

Mode	Bandwidth (MHz)	Antenna 0	Antenna 1	Antenna 0+1
ac	20	×	×	✓
	40	×	×	✓
	80	×	×	✓

2. Summary of tests

Reference	Parameter	Test results
EN 301 893 4.2.4.1	Transmitter unwanted emissions outside the 5 GHz RLAN bands	Pass
EN 301 893 4.2.5	Receiver spurious emissions	Pass
EN 301 893 4.2.1	Nominal Centre frequencies	Pass
EN 301 893 4.2.2	Nominal Channel Bandwidth and Occupied Channel Bandwidth	Pass
EN 301 893 4.2.3	RF Output Power, TPC and Power density	Pass
EN 301 893 4.2.4.2	Transmitter unwanted emissions within the 5 GHz RLAN bands	Pass
EN 301 893 4.2.6	Dynamic Frequency Selection (DFS)	Pass
EN 301 893 4.2.7	Adaptivity	Pass
EN 301 893 4.2.8	Receiver Blocking	Pass
EN 301 893 4.2.10	Geo-location capability	N/A ^{Note.1}

Note:

1. This device has not support geo-location capability.

3. Application form for testing

3.1. Information as required by EN 301 893 V2.1.1, clause 5.4.1

In accordance with EN 301 893, clause 5.4.1, the following information is provided by the manufacturer.

a) The Nominal Channel Bandwidth(s):

Nominal Channel Bandwidth 1: 20 MHz

Nominal Channel Bandwidth 2: 40 MHz

Nominal Channel Bandwidth 3: 80 MHz

The associated centre frequencies:

For Nominal Channel Bandwidth 1:

for the band 5 150 - 5 350 MHz: 5 180 MHz ~ 5 320 MHz

for the band 5 470 - 5 725 MHz: 5 500 MHz ~ 5 700 MHz

For Nominal Channel Bandwidth 2:

for the band 5 150 - 5 350 MHz: 5 190 MHz ~ 5 310 MHz

for the band 5 470 - 5 725 MHz: 5 510 MHz ~ 5 670 MHz

For Nominal Channel Bandwidth 3:

for the band 5 150 - 5 350 MHz: 5 210 MHz ~ 5 290 MHz

for the band 5 470 - 5 725 MHz: 5 530 MHz ~ 5 610 MHz

b) For Load Based Equipment that supports multi-channel operation: (N/A)

☐ The LBE equipment supports Option 1 as described in clause 4.2.7.3.2.3

☐ The LBE equipment supports Option 2 as described in clause 4.2.7.3.2.3

The (maximum) number of channels used for multi-channel operation: (N/A)

These channels are adjacent channels:

☐ Yes

☐ No

In case of non-adjacent channels, whether or not these channels are in different sub-bands:

☐ Yes

☐ No

for LBE equipment implementing option 1 (see clause 4.2.7.3.2.3), the number of channels used for multi-channel operation when performing the test described in clause 5.4.9.3.2.3.1

In case of multi-channel operation, further information defining the channels used for these simultaneous Transmissions may be required.

c) The different transmit operating modes (see clause 5.3.3.2) (tick all that apply):

- ☐ **Operating mode 1:** Single Antenna Equipment
- ☐ a) Equipment with only 1 antenna
 - ☐ b) Equipment with diversity antennas but only 1 antenna active at any moment in time
 - ☐ c) Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used.
- ☒ **Operating mode 2:** Smart Antenna Systems - Multiple Antennas without beamforming
- ☒ a) Single spatial stream/Standard throughput
 - ☐ b) High Throughput (>1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ c) High Throughput (>1 spatial stream) using Nominal Channel Bandwidth 2
- ☐ **Operating mode 3:** Smart Antenna Systems - Multiple Antennas with beamforming
- ☐ a) Single spatial stream/Standard throughput
 - ☐ b) High Throughput (>1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ c) High Throughput (>1 spatial stream) using Nominal Channel Bandwidth 2

d) In case of Smart Antenna Systems or multiple antenna systems

- The number of Receive chains: 2
- The number of Transmit chains: 2
- Equal power distribution among the transmit chains: ☒ Yes ☐ No
- In case of beamforming, the maximum (additional) beamforming gain: **(N/A)**

NOTE : Beamforming gain does not include the basic gain of a single antenna (assembly).

e) TPC feature available:

- ☐ Yes
☒ No

f) For equipment with TPC range: (N/A)

The lowest and highest power level (or lowest and highest e.i.r.p. level in case of integrated antenna equipment), intended antenna assemblies and corresponding operating frequency range for the TPC range (or for each of the TPC ranges if more than one is implemented).

TPC range 1: Applicable Frequency Range:

- ☐ 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz (Indoor)
Simultaneous transmissions in both sub-bands: ☐ Yes ☐ No
- ☐ 5 470 MHz to 5 725 MHz only (Outdoor only)

Indicate whether the power levels specified are Transmitter Output Power levels or e.i.r.p. levels in case of integrated antenna equipment.

Power levels are specified for: ☐ Tx out ☐ e.i.r.p

If more than one transmit chain is present (e.g. in the case of smart antenna systems), the power levels below represent the power settings per active transmit chain (and per sub-band in case of multi-channel operation).

Table G.1: Power levels for TPC range 1

	Sub-band (MHz)	Operating mode 1 (dBm)	Operating mode 2 (dBm)	Operating mode 3 (dBm)
Lowest setting (P _{low})	5 150 to 5 350			
	5 470 to 5 725			
Highest setting (P _{high})	5 150 to 5 350			
	5 470 to 5 725			

Beamforming possible: ☐ Yes ☐ No

Intended Antenna Assemblies:

Table G.2: Intended Antenna Assemblies for TPC range 1

Antenna assembly name	Antenna gain (dBi)	Operating mode	Sub-band (MHz)	Beam forming gain (dB)	e.i.r.p. for P _{low} (dBm)	e.i.r.p. for P _{high} (dBm)
<Antenna 1>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			
<Antenna 2>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			
<Antenna 3>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			

DFS Threshold level:

- ☐ at the antenna connector
☐ in front of the antenna

TPC range 2: Applicable Frequency Range: (N/A)

☐ 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz (Indoor)

Simultaneous transmissions in both sub-bands: ☐ Yes ☐ No

☐ 5 470 MHz to 5 725 MHz only (Outdoor only)

Indicate whether the power levels specified are Transmitter Output Power levels or e.i.r.p. levels in case of integrated antenna equipment.

Power levels are specified for: ☐ Tx out ☐ e.i.r.p

If more than 1 transmit chain is present (e.g. in the case of smart antenna systems), the power levels below represent the power settings per active transmit chain (and per sub-band in case of simultaneous transmissions).

Table G.3: Power levels for TPC range 2

	Sub-band (MHz)	Operating mode 1 (dBm)	Operating mode 2 (dBm)	Operating mode 3 (dBm)
Lowest setting (P_{low})	5 150 to 5 350			
	5 470 to 5 725			
Highest setting (P_{high})	5 150 to 5 350			
	5 470 to 5 725			

Beamforming possible: ☐ Yes ☐ No

Intended Antenna Assemblies:

Table G.4: Intended Antenna Assemblies for TPC range 2

Antenna assembly name	Antenna gain (dBi)	Operating mode	Sub-band (MHz)	Beam forming gain (dB)	e.i.r.p. for P _{low} (dBm)	e.i.r.p. for P _{high} (dBm)
<Antenna 1>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			
<Antenna 2>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			
<Antenna 3>		Mode 1	5 150 to 5 350			
			5 470 to 5 725			
		Mode 2	5 150 to 5 350			
			5 470 to 5 725			
		Mode 3	5 150 to 5 350			
			5 470 to 5 725			

DFS Threshold level: dBm ☐ at the antenna connector
 ☐ in front of the antenna

g) For equipment without a TPC range:

Power Setting 1: Applicable Frequency Range:

☒ 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz (Indoor)

Simultaneous transmissions in both sub-bands: ☐ Yes ☒ No

☐ 5 470 MHz to 5 725 MHz only (Outdoor only)

Indicate whether the power levels specified are Transmitter Output Power levels or e.i.r.p. levels in case of integrated antenna equipment.

Power levels are specified for: ☐ Tx out ☒ e.i.r.p



If more than 1 transmit chain is present (e.g. in the case of smart antenna systems), the power levels below represent the power settings per active transmit chain (and per sub-band in case of simultaneous transmissions)

Table G.5: Maximum Transmitter Output Power for Power Setting 1

Sub-band (MHz)	Operating mode 1 (dBm)	Operating mode 2 (dB m)	Operating mode 3 (dB m)
5 150 to 5 350	17.15	-	-
5 470 to 5 725	16.95	-	-

Beamforming possible: ☐ Yes ☒ No

Intended Antenna Assemblies:

Table G.6: Intended Antenna Assemblies for Power Setting 1

Antenna assembly name	Antenna gain (dBi)	Operating mode	Sub-band (MHz)	Beam forming gain (dB)	e.i.r.p. (dBm)
<Antenna 1>	Please refer to page 4	Mode 1	5 150 to 5 350	-	17.15
			5 470 to 5 725	-	16.95
		Mode 2	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
		Mode 3	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
<Antenna 2>	-	Mode 1	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
		Mode 2	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
		Mode 3	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
<Antenna 3>	-	Mode 1	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
		Mode 2	5 150 to 5 350	-	-
			5 470 to 5 725	-	-
		Mode 3	5 150 to 5 350	-	-
			5 470 to 5 725	-	-

DFS Threshold level: dBm ☐ at the antenna connector
☐ in front of the antenna



Power Setting 2: Applicable Frequency Range: (N/A)

☐ 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz (Indoor)

Simultaneous transmissions in both sub-bands: ☐ Yes ☐ No

☐ 5 470 MHz to 5 725 MHz only (Outdoor only)

Indicate whether the power levels specified are Transmitter Output Power levels or e.i.r.p. levels in case of integrated antenna equipment.

Power levels are specified for: ☐ Tx out ☐ e.i.r.p.

If more than one transmit chain is present (e.g. in the case of smart antenna systems), the power levels below represent the power settings per active transmit chain (and per sub-band in case of simultaneous transmissions).

Table G.7: Maximum Transmitter Output Power for Power Setting 2

Sub-band (MHz)	Operating Mode 1 (dBm)	Operating Mode 2 (dB m)	Operating Mode 3 (dB m)
5 150 to 5 350			
5 470 to 5 725			

Beamforming possible: ☐ Yes ☐ No

Intended Antenna Assemblies:

Table G.8: Intended Antenna Assemblies for Power Setting 2

Antenna assembly name	Antenna gain (dBi)	Operating mode	Sub-band (MHz)	Beam forming gain (dB)	e.i.r.p. (dBm)
<Antenna 1>		Mode 1	5 150 to 5 350		
			5 470 to 5 725		
		Mode 2	5 150 to 5 350		
			5 470 to 5 725		
		Mode 3	5 150 to 5 350		
			5 470 to 5 725		
<Antenna 2>		Mode 1	5 150 to 5 350		
			5 470 to 5 725		
		Mode 2	5 150 to 5 350		
			5 470 to 5 725		
		Mode 3	5 150 to 5 350		
			5 470 to 5 725		
<Antenna 3>		Mode 1	5 150 to 5 350		
			5 470 to 5 725		
		Mode 2	5 150 to 5 350		
			5 470 to 5 725		
		Mode 3	5 150 to 5 350		
			5 470 to 5 725		

DFS Threshold level: dBm ☐ at the antenna connector
 ☐ in front of the antenna

h) The DFS related operating mode(s) of the equipment (N/A)

- ☐ Master
☐ Slave with radar detection
☐ Slave without radar detection

If the equipment has more than 1 operating mode, tick all that apply.

i) User access restrictions (please check box below to confirm)

- ☒ the equipment is constructed to comply with the requirements contained in clause 4.2.9 in
ETSI EN 301 893 V2.1.1

j) For equipment with Off-Channel CAC functionality

The equipment has an "Off-Channel CAC" function: ☐ Yes ☒ No

If yes, specify the "Off-Channel CAC Time"

- For channels outside the 5 600 MHz to 5 650 MHz range: hours
- If applicable, for channels (partially) within the 5 600 MHz to 5 650 MHz range: hours

k) The equipment can operate in ad-hoc mode

- ☐ no ad-hoc operation
- ☒ ad-hoc operation in the frequency range 5 150 MHz to 5 250 MHz without DFS
- ☐ ad-hoc operation with DFS

If more than 1 is applicable, tick all that apply.

l) Operating Frequency Range(s):

Range 1: ☒ 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz

Range 2: ☐ 5 470 MHz to 5 725 MHz

Range 3: ☐ 5 150 MHz to 5 250 MHz (ad-hoc without DFS)

Range 4: ☐ other, please specify:

If the equipment has more than one Operating Frequency Range, tick all that apply.

m) The extreme operating temperature and supply voltage range that apply to the equipment:

- ☐ -20 °C to +55 °C (Outdoor & Indoor usage)
☐ 0 °C to +35 °C (Indoor usage only)
☒ Other: -10 °C to +50 °C

The supply voltages of the stand-alone radio equipment or the supply voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

Supply Voltage ☐ AC mains State AC voltage: Minimum: ...Nominal: ... Maximum: ...
☒ DC State DC voltage Minimum: 9.0 V Nominal: 24.0 V Maximum: 36.0 V

In case of DC, indicate the type of power source:

- ☐ Internal Power Supply
☒ External Power Supply or AC/DC adapter
☐ Battery ☐ Nickel Cadmium
☐ Alkaline
☐ Nickel-Metal Hydride
☐ Lithium-Ion
☐ Lead acid (Vehicle regulated)
☐ Other

n) The test sequence/test software used (see also ETSI EN 301 893 (V2.1.1), clause 5.3.1.2):

N/A

o) Type of Equipment

- ☒ Stand-alone
☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
☐ Plug-in radio device (Equipment intended for a variety of host systems)
☐ Other

p) Adaptivity (Channel Access Mechanism)

- ☐ Frame Based Equipment
☒ Load Based Equipment

q) With regards to Adaptivity for Frame Based Equipment/ (N/A)

- ☐ The Frame Based Equipment operates as an Initiating Device
☐ The Frame Based Equipment operates as an Responding Device
☐ The Frame Based Equipment can operate as an Initiating Device and as a Responding Device

The Frame Based Equipment has implemented the following Fixed Frame Period(s)

..... ms
..... ms
..... ms

r) With regards to Adaptivity for Load Based Equipment

- ☐ The Load Based Equipment operates as a Supervising Device
☒ The Load Based Equipment operates as a Supervised Device
☐ The Load Based Equipment can operate as a Supervising and as a Supervised Device
☐ The Load Based Equipment makes use of note 1 in table 7 or note 1 in table 8 of ETSI EN 301 893 V2.1.1
☐ The Load Based Equipment, when operating as a Supervising Device, makes use of note 2 in Table 7 of ETSI EN 301 893 V2.1.1

The Priority Classes implemented by the Load Based Equipment

- When operating as a Supervising Device
 - ☐ Priority Class 4 (Highest priority)
 - ☐ Priority Class 3
 - ☐ Priority Class 2
 - ☐ Priority Class 1 (Lowest priority)
- When operating as a Supervised Device
 - ☒ Priority Class 4 (Highest priority)
 - ☐ Priority Class 3
 - ☐ Priority Class 2
 - ☐ Priority Class 1 (Lowest priority)

With regard to Energy Detection Threshold, the Load Based Equipment has implemented either option 1 of clause 4.2.7.3.2.5 of ETSI EN 301 893 V2.1.1 or option 2 of clause 4.2.7.3.2.5 of ETSI EN 301 893 V2.1.1:

☒ Option 1

☐ Option 2

Specify which protocol has been implemented: ☒ IEEE 802.11™ ☐ Other:

s) **The equipment supports a geo-location capability as defined in clause 4.2.10 of ETSI EN 301 893 v2.1.1 :**

☐ Yes

☒ No

t) **The minimum performance criteria (see ETSI EN 301 893 V2.1.1, clause 4.2.8.3) that corresponds to the intended use of the equipment:**

N/A

q) **The theoretical maximum radio performance of the equipment (e.g. maximum throughput) (see ETSI EN 301 893 V2.1.1, clause 5.4.9.3.1):**

N/A

4. Test results

4.1. Transmitter unwanted emissions outside the 5 GHz RLAN bands

Measurement Condition

Ambient temperature : 20.5 °C
Relative humidity : 46.5 % R.H.

Test procedure

EN 301 893 clause 5.4.5.2

5.4.5.2.1.1 Pre-scan

Step 2 :

The unwanted emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyser settings:

1. RBW : 100 kHz
2. VBW : 300 kHz
3. Detector mode : Peak
4. Trace mode : Max hold
5. Sweep points : $\geq 9\,700$

For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented. For spectrum analysers capable of supporting twice this number of sweep points, the frequency adjustment in clause 5.4.5.2.1.2 (step 1, last bullet) may be omitted.

6. Sweep time : For non-continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT.

Step 3 :

The unwanted emissions over the range 1 GHz to 26 GHz shall be identified.

Spectrum analyser settings:

1. RBW : 1 MHz
2. VBW : 3 MHz
3. Detector mode : Peak
4. Trace mode : Max hold
5. Sweep points : $\geq 25\,000$

For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented. For spectrum analysers capable of supporting twice this number of sweep points, the frequency adjustment in clause 5.4.5.2.1.2 (step 1, last bullet) may be omitted.

6. Sweep time : For non-continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 1 MHz frequency step, the measurement time is greater than two transmissions of the UUT.

5.4.5.2.1.2 Measurement of the emissions identified during the pre-scan

Step 1:

The level of the emissions shall be measured in the time domain, using the following spectrum analyser settings:

1. Centre frequency : Frequency of emission identified during the pre-scan
2. RBW : 100 kHz (< 1 GHz) / 1 MHz (>1 GHz)
3. VBW : 300 kHz (< 1 GHz) / 3 MHz (>1 GHz)
4. Frequency span : 0 Hz
5. Sweep mode : Single sweep
6. Sweep time : Suitable to capture one transmission burst. Additional measurements may be needed to identify the length of the transmission burst. In case of continuous signals, the Sweep Time shall be set to 30 ms
7. Sweep point : Sweep time [μ s] / 1 μ s with a maximum of 30 000
8. Trigger : Video (Burst signals) or Manual (continuous signals)
9. Detector : RMS
10. Trace mode : Clear/Write

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0023-R1
Page (25) of (92)

Test results

Mode: 802.11ac(VHT20)
Distance of measurement: 3 meter

Lowest frequency (5 180 MHz)				Highest frequency (5 320 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT20)
Distance of measurement: 3 meter

Lowest frequency (5 500 MHz)				Highest frequency (5 700 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT40)
Distance of measurement: 3 meter

Lowest frequency (5 190 MHz)				Highest frequency (5 310 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT40)
Distance of measurement: 3 meter

Lowest frequency (5 510 MHz)				Highest frequency (5 670 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0023-R1
Page (26) of (92)

Mode: 802.11ac(VHT80)
Distance of measurement: 3 meter

Lowest frequency (5 210 MHz)				Highest frequency (5 290 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT80)
Distance of measurement: 3 meter

Lowest frequency (5 530 MHz)				Highest frequency (5 610 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Limit (Clause 4.2.4.1.2)

The level of transmitter unwanted emissions outside the 5 GHz RLAN bands shall not exceed the limits given in table 4.
In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted).
For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Table 4: Transmitter unwanted emission limits outside the 5 GHz RLAN bands

Frequency Range	Maximum power,	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 5.15 GHz	-30 dBm	1 MHz
5.35 GHz to 5.47 GHz	-30 dBm	1 MHz
5.725 GHz to 26 GHz	-30 dBm	1 MHz

4.2. Receiver spurious emissions

Measurement Condition

Ambient temperature : 20.5 °C
Relative humidity : 46.5 % R.H.

Test procedure

EN 301 893 clause 5.4.7.2

5.4.7.2.1 Pre-scan

Step 2:

The emissions shall be measured over the range 30 MHz to 1 000 MHz.

Spectrum analyser settings:

1. RBW : 100 kHz
2. VBW : 300 kHz
3. Detector mode : Peak
4. Trace mode : Max hold
5. Sweep points : $\geq 9\,700$

For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented. For spectrum analysers capable of supporting twice this number of sweep points, the frequency adjustment in clause 5.4.7.2.1.2 (step 1, last bullet) may be omitted.

6. Sweep time : Auto

Wait for the trace to stabilize. Any emissions identified that have a margin of less than 6dB with respect to the limits given in clause 4.2.5.2, table 5, shall be individually measured using the procedure in clause 5.4.7.2.1.2 and compared to the limits given in clause 4.2.5.2, table 5.

Step 3:

The emissions shall now be measured over the range 1 GHz to 26 GHz.

Spectrum analyser settings:

1. RBW : 1 MHz
2. VBW : 3 MHz
3. Detector mode : Peak
4. Trace mode : Max hold
5. Sweep points : $\geq 25\,000$

For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented. For spectrum analysers capable of supporting twice this number of sweep points, the frequency adjustment in clause 5.4.7.2.1.2 (step 1, last bullet) may be omitted.

6. Sweep time : Auto

Wait for the trace to stabilize. Any emissions identified that have a margin of less than 6dB with respect to the limits given in clause 4.2.5.2, table 5, shall be individually measured using the procedure in clause 5.4.7.2.1.2 and compared to the limits given in clause 4.2.5.2, table 5.

5.4.7.2.1.2 Measurement of the emissions identified during the pre-scan

Step 1:

The level of the emissions shall be measured using the following spectrum analyser settings:

1. Measurement mode : Time domain power
2. Centre frequency : Frequency of the emission identified during the pre-scan
3. RBW : 100 kHz (emissions < 1 GHz) / 1 MHz (emissions > 1 GHz)
4. VBW : 300 kHz (emissions < 1 GHz) / 3 MHz (emissions > 1 GHz)
5. Frequency span : Zero span
6. Sweep mode : Single sweep
7. Sweep time : 30 ms
8. Sweep points : $\geq 30\,000$
9. Trigger : Video (for burst signals) or Manual (for continuous signals)
10. Detector : RMS



Test results

Mode: 802.11ac(VHT20)
Distance of measurement: 3 meter

Lowest frequency (5 180 MHz)				Highest frequency (5 320 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT20)
Distance of measurement: 3 meter

Lowest frequency (5 500 MHz)				Highest frequency (5 720 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT40)
Distance of measurement: 3 meter

Lowest frequency (5 190 MHz)				Highest frequency (5 310 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT40)
Distance of measurement: 3 meter

Lowest frequency (5 510 MHz)				Highest frequency (5 710 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0023-R1
Page (31) of (92)

Mode: 802.11ac(VHT80)
Distance of measurement: 3 meter

Lowest frequency (5 210 MHz)				Highest frequency (5 290 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

Mode: 802.11ac(VHT80)
Distance of measurement: 3 meter

Lowest frequency (5 530 MHz)				Highest frequency (5 690 MHz)			
Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)	Frequency(MHz)	Ant Pol	Bandwidth(kHz)	Level(dBm)
Emission levels are not reported much lower than the limits by over 20 dB							

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Limit (Clause 4.2.5.2)

The spurious emissions of the receiver shall not exceed the limits given in table 5.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted).

For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Table 5: Spurious radiated emission limits

Frequency Range	Maximum power	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 26 GHz	-47 dBm	1 MHz

4.3. Centre frequencies

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.2.2 – 5.4.2.2.1.1 or 5.4.2.2.1.2
Used test method is 5.4.2.2.1.1

5.4.2.2.1.1 Equipment operating without modulation

This test method requires that the UUT can be operated in an unmodulated test mode.
The UUT shall be connected to a suitable frequency measuring device (e.g. a frequency counter or a spectrum analyser) and operated in an unmodulated mode.
The result shall be recorded.

5.4.2.2.1 Equipment operating with modulation

This method is an alternative to the above method in case the UUT cannot be operated in an un-modulated mode.
The UUT shall be connected to spectrum analyser.
Max Hold shall be selected and the centre frequency adjusted to that of the UUT.

The peak value of the power envelope shall be measured and noted. The span shall be reduced and the marker moved in a positive frequency increment until the upper, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f1.

The marker shall then be moved in a negative frequency increment until the lower, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f2.

The centre frequency is calculated as $(f1 + f2) / 2$.



Test results

Mode: 802.11ac_HT20

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 180 MHz)	High Frequency (5 320 MHz)
T min = -10	V nom = 24.0	5 180.008 1	5 320.001 5
		1.56 ppm	0.28 ppm
T nom = 23.5		5 180.008 9	5 319.990 0
		1.72 ppm	-1.38 ppm
T max = 50		5 180.007 2	5 319.981 5
		1.39 ppm	-3.48 ppm

Mode: 802.11ac_HT40

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 190 MHz)	High Frequency (5 310 MHz)
T min = -10	V nom = 24.0	5 190.020 0	5 310.034 5
		3.85 ppm	6.50 ppm
T nom = 23.5		5 190.030 5	5 310.030 1
		5.88 ppm	5.67 ppm
T max = 50		5 190.032 5	5 310.028 4
		6.26 ppm	5.35 ppm

Mode: 802.11ac_HT80

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 210 MHz)	High Frequency (5 290 MHz)
T min = -10	V nom = 24.0	5 210.044 5	5 290.055 9
		8.54 ppm	10.57 ppm
T nom = 23.5		5 210.049 5	5 290.063 8
		9.50 ppm	12.06 ppm
T max = 50		5 210.052 6	5 290.070 5
		10.10 ppm	13.33 ppm



Mode: 802.11ac_HT20

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 550 MHz)	High Frequency (5 700 MHz)
T min = -10	V nom = 24.0	5 500.012 0	5 699.980 0
		2.18 ppm	-3.51 ppm
T nom = 23.5		5 500.015 6	5 699.991 5
		2.84 ppm	-1.49 ppm
T max = 50		5 500.020 1	5 700.003 8
		3.65 ppm	0.67 ppm

Mode: 802.11ac_HT40

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 510 MHz)	High Frequency (5 670 MHz)
T min = -10	V nom = 24.0	5 510.029 5	5 670.044 0
		5.35 ppm	7.76 ppm
T nom = 23.5		5 510.037 7	5 670.050 2
		6.84 ppm	8.85 ppm
T max = 50		5 510.041 6	5 670.052 9
		7.55 ppm	9.33 ppm

Mode: 802.11ac_HT80

Test Temp.(°C)	Voltage(V _{a.c.})	Carrier frequencies	
		Low Frequency (5 530 MHz)	High Frequency (5 610 MHz)
T min = -10	V nom = 24.0	5 530.064 5	5 610.058 4
		11.66 ppm	10.41 ppm
T nom = 23.5		5 530.060 5	5 610.070 1
		10.94 ppm	12.50 ppm
T max = 50		5 530.057 5	5 610.077 5
		10.40 ppm	13.81 ppm

Limit (Clause 4.2.1.3)

The *Nominal Centre Frequencies* (f_c) for a *Nominal Channel Bandwidth* of 20 MHz are defined by equation(1).
See also figure 3.

$$f_c = 5160 + (g \times 20) \text{ MHz, where } 0 \leq g \leq 9 \text{ or } 16 \leq g \leq 27 \text{ and where } g \text{ shall be an integer. (1)}$$

A maximum offset of the *Nominal Centre Frequency* of ± 200 kHz is permitted. Where the manufacturer decides to make use of this frequency offset, the manufacturer shall declare the actual centre frequencies used by the equipment.
See clause 5.4.1, item a).

The actual centre frequency for any given channel declared by the manufacturer shall be maintained within the range $f_c \pm 20$ ppm.

Equipment may have simultaneous transmissions on more than one *Operating Channel* with a *Nominal Channel Bandwidth* of 20 MHz

4.4. Nominal channel bandwidth and Occupied channel bandwidth

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.3.2

The measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

1. Centre frequency : The centre frequency of the channel under test
2. RBW : 100 kHz
3. VBW : 300 kHz
4. Frequency span : $2 \times$ Nominal Bandwidth (e.g. 40 MHz for a 20 MHz channel)
5. Sweep time : >1 s; for larger Nominal Bandwidths, the sweep time may be increased until a value where the Sweep time has no impact on the RMS value of the signal
6. Detector mode : RMS
7. Trace mode : Max hold

Step 2 :

- Wait for the trace to stabilize.

Step 3 :

- Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.
- Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.
This value shall be recorded.
- The measurement described in step 1 to step 3 above shall be repeated in case of simultaneous transmissions in Non-adjacent channels.



Test results

Mode: 802.11ac(VHT20)

Test item	Low Frequency (5 180 MHz)	High Frequency (5 320 MHz)
99 % Bandwidth (MHz)	17.628	17.625

Mode: 802.11ac(VHT20)

Test item	Low Frequency (5 500 MHz)	High Frequency (5 700 MHz)
99 % Bandwidth (MHz)	17.619	17.621

Mode: 802.11ac(VHT40)

Test item	Low Frequency (5 190 MHz)	High Frequency (5 310 MHz)
99 % Bandwidth (MHz)	36.168	36.181

Mode: 802.11ac(VHT40)

Test item	Low Frequency (5 510 MHz)	High Frequency (5 670 MHz)
99 % Bandwidth (MHz)	36.155	36.181

Mode: 802.11ac(VHT80)

Test item	Low Frequency (5 210 MHz)	High Frequency (5 290 MHz)
99 % Bandwidth (MHz)	75.007	75.117

Mode: 802.11ac(VHT80)

Test item	Low Frequency (5 530 MHz)	High Frequency (5 610 MHz)
99 % Bandwidth (MHz)	74.950	74.994

Limit (Clause 4.2.2.2)

The Nominal Channel Bandwidth for a single Operating Channel shall be 20 MHz.

Alternatively, equipment may implement a lower *Nominal Channel Bandwidth* with a minimum of 5 MHz, providing they still comply with the *Nominal Centre Frequencies* defined in clause 4.2.1 (20 MHz raster).

The *Occupied Channel Bandwidth* shall be between 80 % and 100 % of the *Nominal Channel Bandwidth*. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement.

The *Occupied Channel Bandwidth* might change with time/payload.

During a *Channel Occupancy Time (COT)*, equipment may operate temporarily with an *Occupied Channel Bandwidth* of less than 80 % of its *Nominal Channel Bandwidth* with a minimum of 2 MHz.

4.5. RF output power, Transmit Power Control (TPC) and power density

4.5.1 RF output power

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.4.2.1.1 – Option 1, 2 or 3
Used test method is option 2.

5.4.4.2.1.3

Option2: For equipment without continuous transmission capability and operating (or with the capability to operate) in only one sub-band

This option is for equipment that is either:

- equipment capable of operation in both sub-bands, but not simultaneously; or
- equipment capable of operation in both sub-bands simultaneously but which, for the purpose of the testing, can be configured to transmit only in one sub-band.

Equipment having simultaneous transmissions in both sub-bands and which cannot be configured to transmit only in one sub-band, shall be tested using option 3 given in clause 5.4.4.2.1.1.4.

- The test procedure shall be as follows:

Step 1:

- Sample the transmit signal from the device using a fast power sensor suitable for 6 GHz. Save the raw sample. The samples shall represent the RMS power of the signal.
- Settings:
 - Sample speed : $\geq 10^6$ Sample/s.
 - Measurement duration : Sufficient to capture a minimum of 10 transmitter bursts (see clause 5.3.1.1).

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect a power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in the following steps.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.
- The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.
- In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst, calculate the RMS (mean) power over the burst(P_{burst}) using the formula below:

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

- The highest of all P_{burst} values is the value A in dBm

Step 5:

- The RF output power (e.i.r.p) at the highest power level P_H shall be calculated from the above measured power output A (in dBm), the stated antenna assembly gain G in dB and if applicable the beamforming gain Y in dB according to the formula below. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the highest gain shall be used:

$$P_H = A + G + Y \text{ (dBm)}$$

- This value PH shall be compared to the applicable limit contained in table 2 of clause 4.2.3.2.2 and shall be recorded in the report.

Test results

Mode: 802.11ac(VHT20)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 180 MHz)	High Frequency (5 320 MHz)
Min. -10.0	Min. DC 9.0 V	17.15	16.95
	Max DC 36.0 V	17.14	16.90
Nom. 23.5	Nom. DC 24.0 V	16.70	16.41
Max. 50.0	Min. DC 9.0 V	16.05	15.89
	Max DC 36.0 V	16.11	15.88
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = $T_{on} \text{ time} / \text{Period}$
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT20)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 500 MHz)	High Frequency (5 700 MHz)
Min. -10.0	Min. DC 9.0 V	16.95	16.37
	Max DC 36.0 V	16.93	16.39
Nom. 23.5	Nom. DC 24.0 V	16.64	15.95
Max. 50.0	Min. DC 9.0 V	15.85	15.40
	Max DC 36.0 V	15.89	15.43
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = $T_{on} \text{ time} / \text{Period}$
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT40)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 190 MHz)	High Frequency (5 310 MHz)
Min. -10.0	Min. DC 9.0 V	16.85	16.83
	Max DC 36.0 V	16.84	16.83
Nom. 23.5	Nom. DC 24.0 V	16.59	16.57
Max. 50.0	Min. DC 9.0 V	16.11	16.08
	Max DC 36.0 V	16.05	16.06
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT40)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 510 MHz)	High Frequency (5 670 MHz)
Min. -10.0	Min. DC 9.0 V	16.85	16.86
	Max DC 36.0 V	16.91	16.89
Nom. 23.5	Nom. DC 24.0 V	16.57	16.43
Max. 50.0	Min. DC 9.0 V	16.02	15.96
	Max DC 36.0 V	16.05	15.89
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT80)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 210 MHz)	High Frequency (5 290 MHz)
Min. -10.0	Min. DC 9.0 V	14.75	15.11
	Max DC 36.0 V	14.76	15.13
Nom. 23.5	Nom. DC 24.0 V	14.21	14.67
Max. 50.0	Min. DC 9.0 V	13.80	13.92
	Max DC 36.0 V	13.83	13.95
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT80)

Temperature(°C)	Voltage(V)	E.I.R.P power (dBm)	
		Low Frequency (5 530 MHz)	High Frequency (5 610 MHz)
Min. -10.0	Min. DC 9.0 V	15.02	14.96
	Max DC 36.0 V	15.01	14.94
Nom. 23.5	Nom. DC 24.0 V	14.41	14.34
Max. 50.0	Min. DC 9.0 V	14.08	13.95
	Max DC 36.0 V	14.10	13.95
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P power (dBm) = Average Power(dBm) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

4.5.2 Power spectral density

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.4.2.1.3 – Option 1 or 2
Used test method is option 1

5.4.4.2.1.3.2

Option 1: For equipment with continuous transmission capability or for equipment operating (or with the capability to operate) with a constant duty cycle (e.g. Frame Based equipment)

This option is for equipment that can be configured to operate in a continuous transmit mode or with a constant duty cycle (x).

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

1. Centre frequency : The centre frequency of the channel under test
2. RBW : 1 MHz
3. VBW : 3 MHz
4. Frequency span : $2 \times$ Nominal Bandwidth (e.g. 40 MHz for a 20 MHz channel)
5. Detector mode : Peak
6. Trace mode : Max hold

Step 2:

When the trace is complete, find the peak value of the power envelope and record the frequency.

1. Centre frequency : Equal to the frequency recorded in step 2
2. Frequency span : 3 MHz
3. RBW : 1 MHz
4. VBW : 3 MHz
5. Sweep time : 1 minute
6. Detector mode : RMS
7. Trace mode : Max hold

Step 4:

- When the trace is complete, the trace shall be captured using the "Hold" or "View" option on the spectrum analyser.
- Find the peak value of the trace and place the analyser marker on this peak. This level is recorded as the highest Mean power (Power Density) D in a 1 MHz band.
- Alternatively, where a spectrum analyser is equipped with a function to measure spectral Power Density, this function may be used to display the Power Density D in dBm/MHz.
- In case of conducted measurements on smart antenna systems operating in a mode with multiple transmit chains active simultaneously, the Power Density of each transmit chain shall be measured separately to calculate the total Power Density (value D in dBm/MHz) for the UUT.

Step 5:

- The maximum spectral Power Density e.i.r.p. is calculated from the above measured Power Density D, the observed duty cycle x (see clause 5.4.4.2.1.1.2, step 1), the applicable antenna assembly gain G in dBi and if applicable the beamforming gain Y in dB, according to the formula below. This value shall be recorded in the

test report. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the highest gain shall be used:

$$PD = D + G + Y + 10 \times \log(1/x) \text{ (dBm/MHz)}$$

5.4.4.2.1.3.3

Option 2 : For equipment without continuous transmission capability and without the capability to transmit with a constant duty cycle

The test procedure shall be as follows:

Step1 :

Connect the UUT to the spectrum analyser and use the following settings:

1. Start frequency : lower band edge of applicable sub-band (e.g. 5 150 MHz or 5 470 MHz)
2. Stop frequency : upper band edge of applicable sub-band (e.g. 5 350 MHz or 5 725 MHz)
3. RBW : 10 kHz
4. VBW : 30 kHz
5. Sweep points : >20 000 (for 5 150 MHz or 5 350 MHz)
>25 500 (for 5 470 MHz or 5 725 MHz)
For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.
6. Detector : RMS
7. Trace mode : Max hold
8. Sweep time : 30 s

For non-continuous signals, wait for the trace to be stabilized. Save the (trace) data set to a file.

Step 2:

- For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.3.3.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

- Add up the values of power for all the samples in the file using the formula below:

$$P_{\text{Sum}} = \sum_{n=1}^k P_{\text{sample}}(n)$$

With 'k' being the total number of sample and 'n' the actual sample number

Step 4:

- Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) (P_H) measured in clause 5.4.4.2.1.1 for this sub-band. The following formulas can be used:

$$C_{\text{Corr}} = P_{\text{Sum}} - P_{H_{\text{e.i.r.p}}}$$

$$P_{\text{Samplecorr}}(n) = P_{\text{Sample}}(n) - C_{\text{Corr}}$$

With 'n' being the actual sample number

Step 5:

- Starting from the first sample $P_{\text{Samplecorr}}(n)$ in the file (lowest frequency), add up the power (in μW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Density (e.i.r.p.) for the first 1 MHz segment which shall be saved.

Step 6:

- Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

Step 7:

- Repeat step 6 until the end of the data set and save the radiated Power Density values for each of the 1 MHz segments.
- From all the saved results, the highest value is the maximum Power Density (e.i.r.p.) for the UUT. This value, which shall comply with the limit contained in table 2 of clause 4.2.3.2.2, shall be recorded in the test report.

Test results

Mode: 802.11ac(VHT20)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 180 MHz)	High Frequency (5 320 MHz)
Nom. 23.5	Nom. DC 24.0 V	-1.06	1.86
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = 10log(1/x) = 0

Mode: 802.11ac(VHT20)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 500 MHz)	High Frequency (5 700 MHz)
Nom. 23.5	Nom. DC 24.0 V	-2.93	-1.23
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = 10log(1/x) = 0

Mode: 802.11ac(VHT40)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 190 MHz)	High Frequency (5 310 MHz)
Nom. 23.5	Nom. DC 24.0 V	-2.26	-3.03
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = T_{on} time/Period
3. Duty cycle factor (dB) = 10log(1/x) = 0

Mode: 802.11ac(VHT40)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 510 MHz)	High Frequency (5 670 MHz)
Nom. 23.5	Nom. DC 24.0 V	-2.82	-4.27
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = $T_{on} \text{ time} / \text{Period}$
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT80)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 210 MHz)	High Frequency (5 290 MHz)
Nom. 23.5	Nom. DC 24.0 V	-7.51	-6.94
Antenna gain (dBi)		2.71	2.71

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = $T_{on} \text{ time} / \text{Period}$
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Mode: 802.11ac(VHT80)

Temperature(°C)	Voltage(V)	Power spectral density (dBm/MHz)	
		Low Frequency (5 530 MHz)	High Frequency (5 610 MHz)
Nom. 23.5	Nom. DC 24.0 V	-5.90	-5.61
Antenna gain (dBi)		3.45	3.45

Note:

1. E.I.R.P. Power spectral density (dBm/MHz) = Power spectral density (dBm/MHz) + Ant Gain(dBi) + Duty cycle factor (dB)
2. Duty cycle(x) = $T_{on} \text{ time} / \text{Period}$
3. Duty cycle factor (dB) = $10\log(1/x) = 0$

Limit (Clause 4.2.3.2.2)

TPC is not required for channels whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz.

For devices with TPC, the RF output power and the power density when configured to operate at the highest stated power level (P_H) of the TPC range shall not exceed the levels given in table 2.

Devices are allowed to operate without TPC. See table 2 for the applicable limits in this case.

Table 2: Mean e.i.r.p. limits for RF output power and power density at the highest power level (P_H)

Frequency range [MHz]	Mean EIRP limit [dBm]		Mean EIRP density limit [dBm/MHz]	
	with TPC	Without TPC	with TPC	Without TPC
5 150 to 5 350	23	<u>20 / 23 (see note 1)</u>	10	<u>7 / 10 (see note 2)</u>
5 470 to 5 725	30 (see note 3)	<u>27 (see note 3)</u>	17 (see note 3)	<u>14 (see note 3)</u>

NOTE 1: The applicable limit is 20 dBm, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 23 dBm.

NOTE 2: The applicable limit is 7 dBm/MHz, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 10 dBm/MHz.

NOTE 3: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

4.6. Transmitter unwanted emissions within the 5 GHz RLAN bands

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.6.2 – Option 1 or 2
Used test method is option 2

5.4.6.2.1

Option 1 : For equipment with continuous transmission capability

The UUT shall be configured for continuous transmit mode (duty cycle equal to 100 %). If this is not possible, then option 2 shall be used.

Step 1: Determination of the reference average power level.

- Spectrum analyser settings:
 1. RBW : 1 MHz
 2. VBW : 30 kHz
 3. Detector mode : Peak
 4. Trace mode : Video average
 5. Sweep time : Coupled
 6. Centre frequency : Centre frequency of the channel being tested
 7. Span : 2 × Nominal channel bandwidth
- Use the marker to find the highest average power level of the power envelope of the UUT. This level shall be used as the reference level for the relative measurements.

Step2 : Determination of the relative average power levels.

- Adjust the frequency range of the spectrum analyser to allow the measurement to be performed within the sub-bands 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz. No other parameter of the spectrum analyser should be changed.
- Compare the relative power envelope of the UUT with the limits defined in clause 4.2.4.2.2.

5.4.6.2.1.2

Option 2: For equipment without continuous transmission capability

This method shall be used if the UUT is not capable of operating in a continuous transmit mode (duty cycle less than 100 %). In addition, this option can also be used as an alternative to option 1 for systems operating in a continuous transmit mode.

Step 1: Determination of the reference average power level.

Spectrum analyser settings:

1. RBW : 1 MHz
2. VBW : 30 kHz
3. Detector mode : RMS
4. Trace mode : Max hold
5. Sweep time : ≥ 1 min
6. Centre frequency : Centre frequency of the channel being tested
7. Span : $2 \times$ Nominal channel bandwidth

Use the marker to find the highest average power level of the power envelope of the UUT. This level shall be used as the reference level for the relative measurements.

Step 2: Determination of the relative average power levels


Adjust the frequency range of the spectrum analyser to allow the measurement to be performed within the sub-bands 5 150 MHz to 5 350 MHz and 5 470 MHz to 5 725 MHz. No other parameter of the spectrum analyser should be changed.

Compare the relative power envelope of the UUT with the limits defined in clause 4.2.4.2.2.


Test results

Mode: 802.11ac(VHT20)

5180 MHz

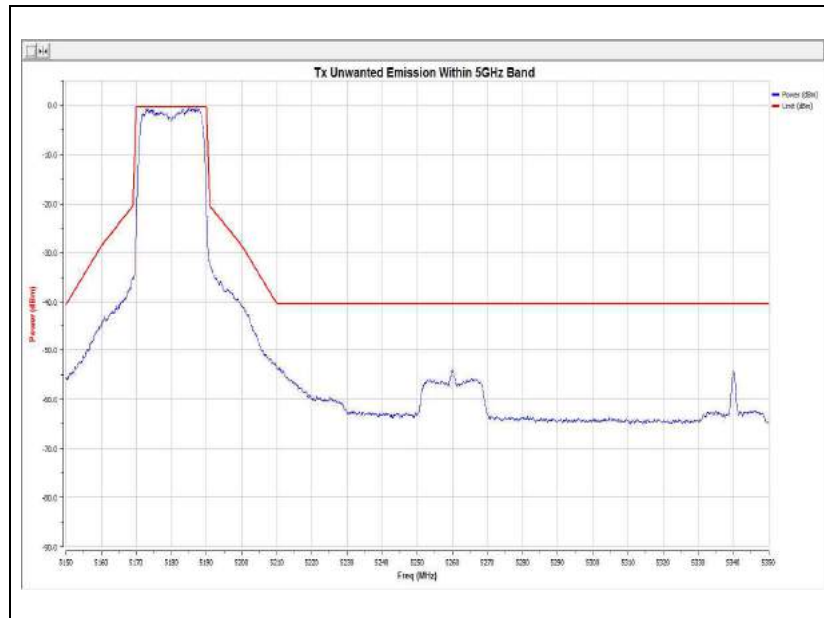


5320 MHz

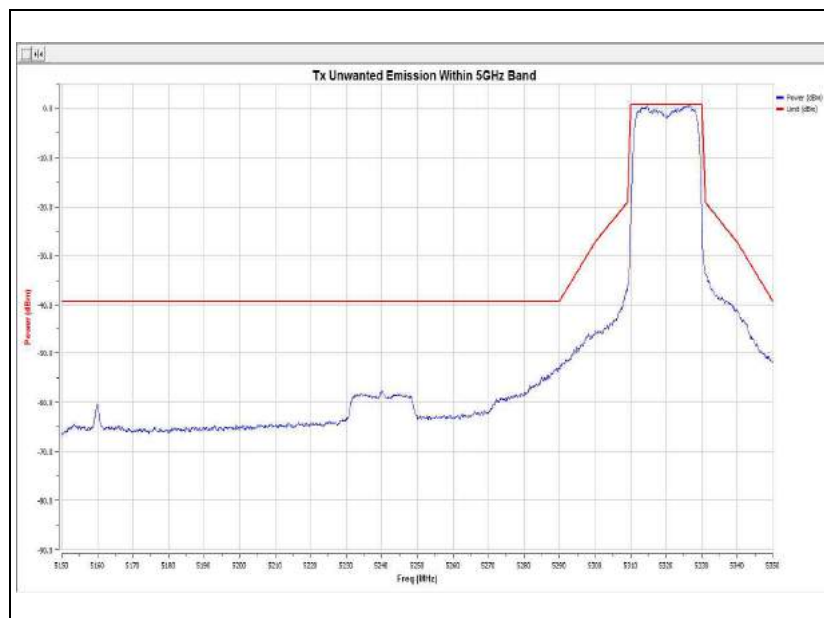


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

5500 MHz

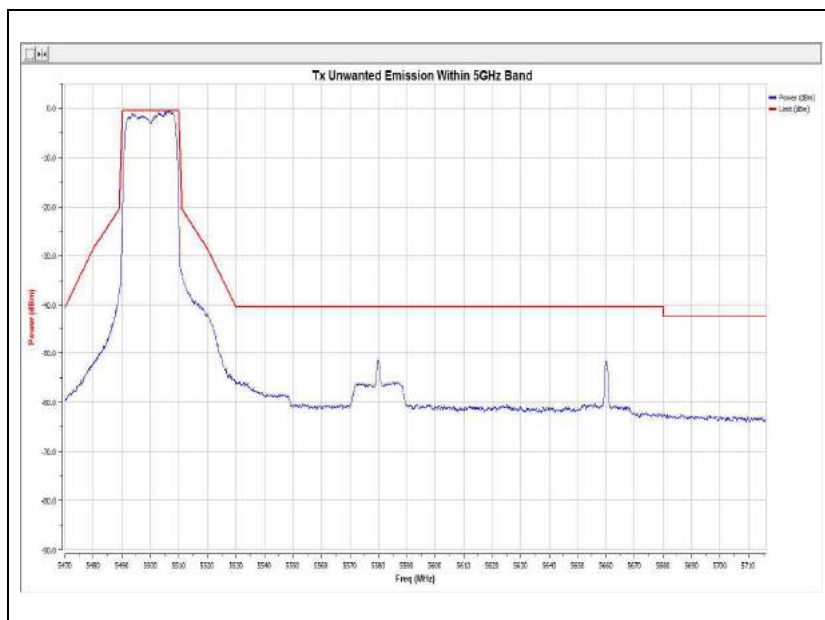


5700 MHz

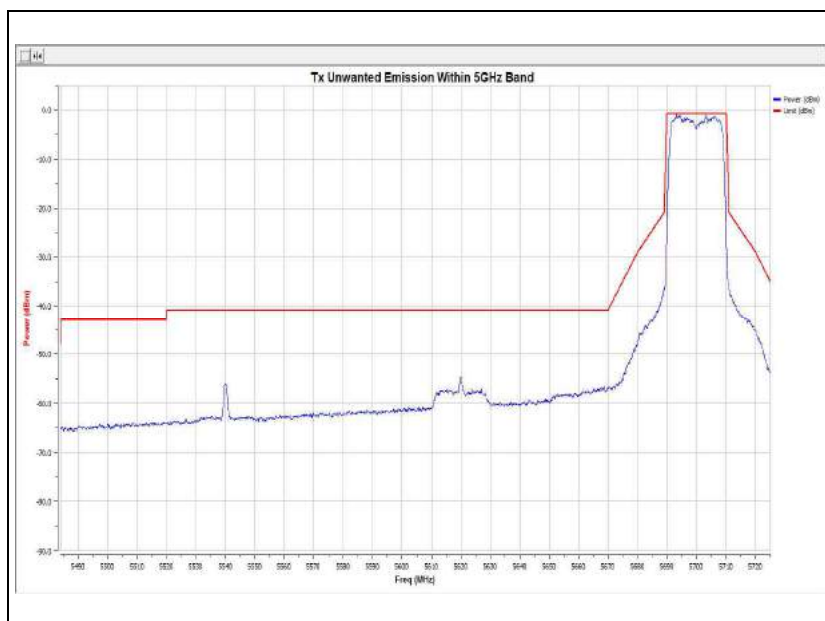


Mode: 802.11ac(VHT40)


5190 MHz

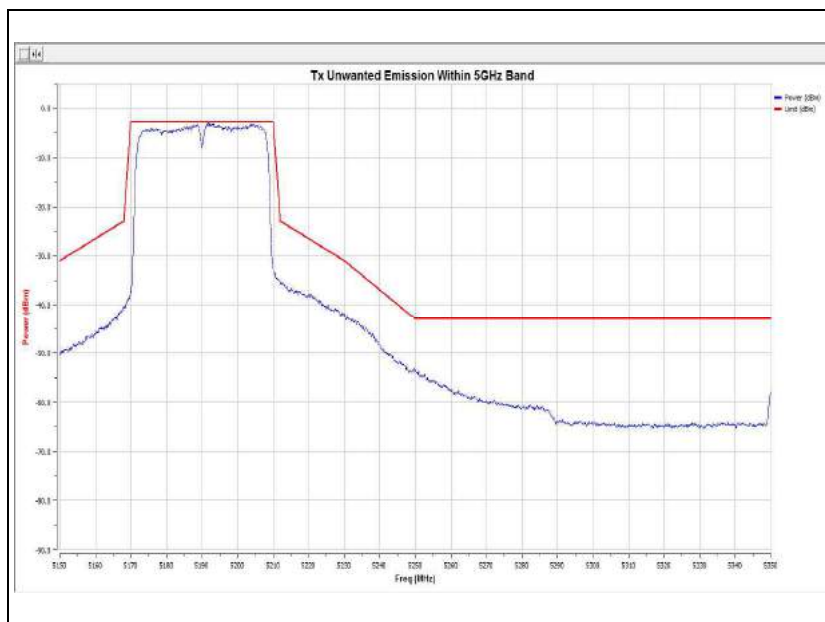


5310 MHz

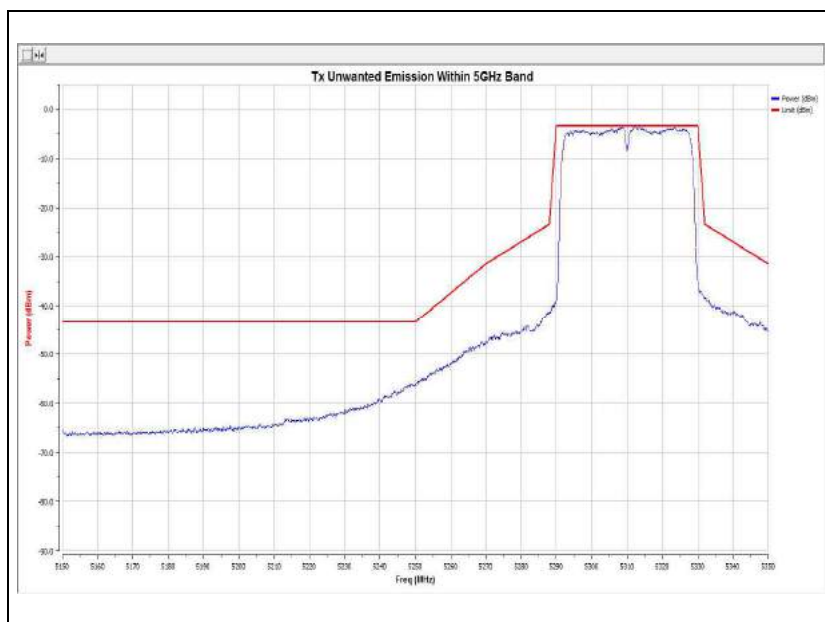

5510 MHz

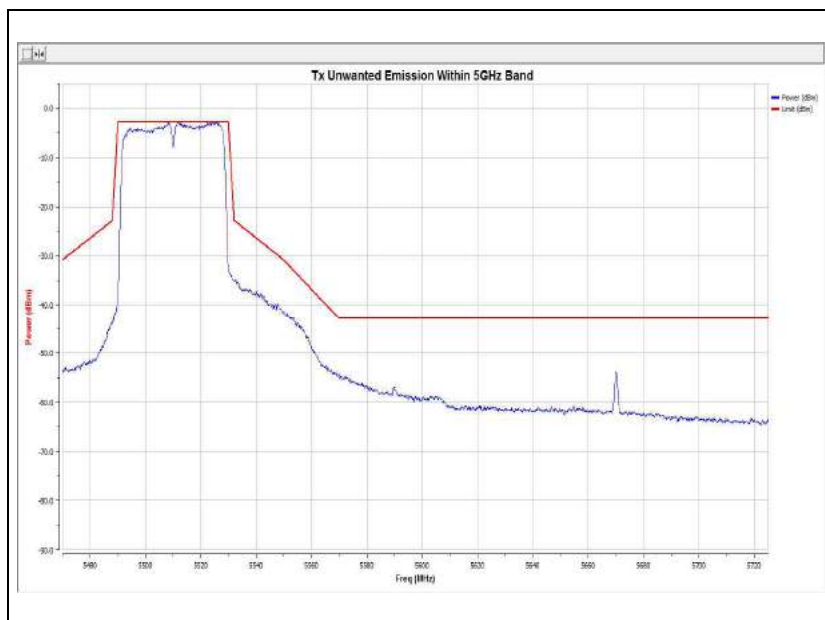


5670 MHz

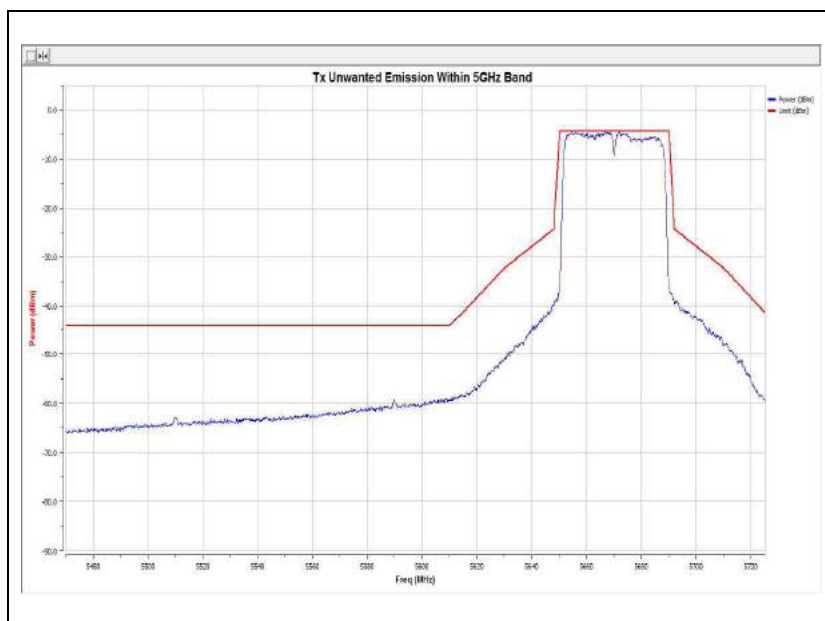


Mode: 802.11ac(VHT80)

5210 MHz

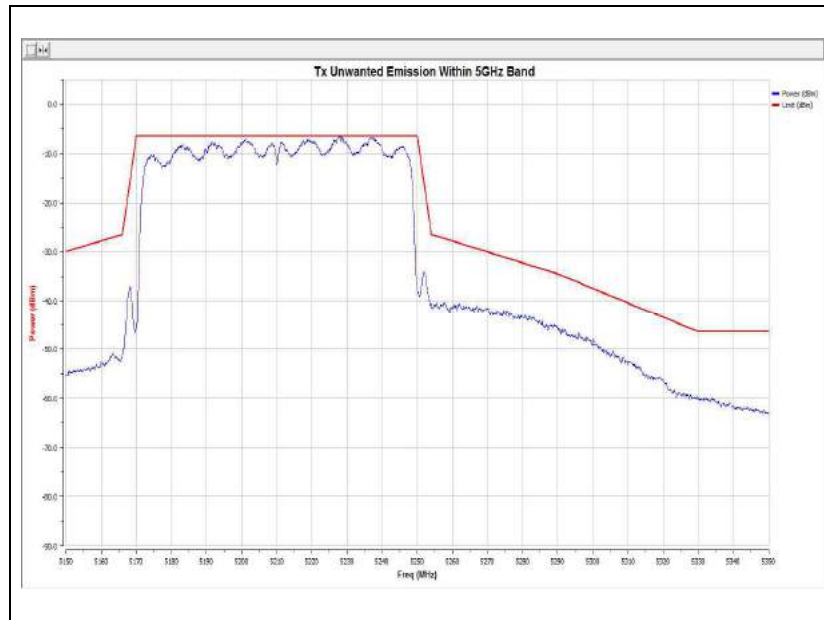


5290 MHz

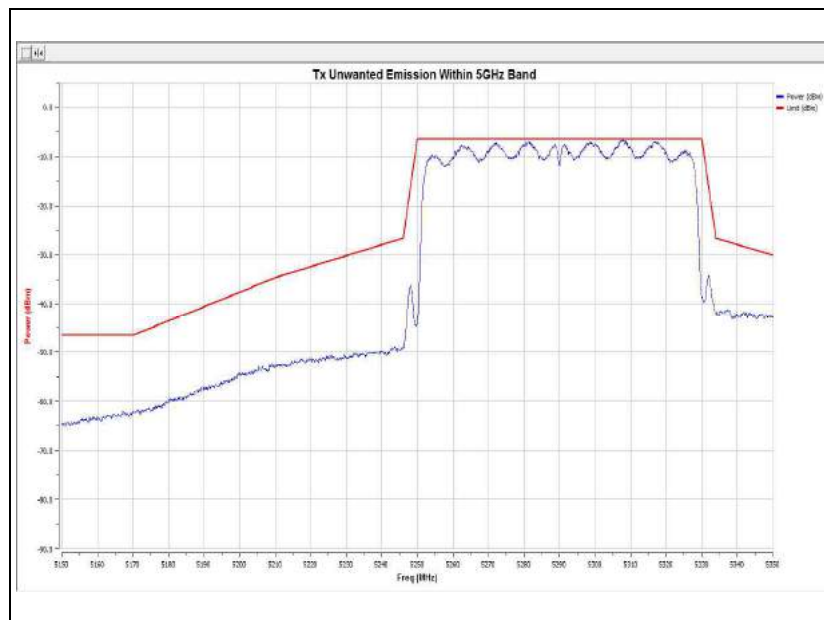


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

5530 MHz

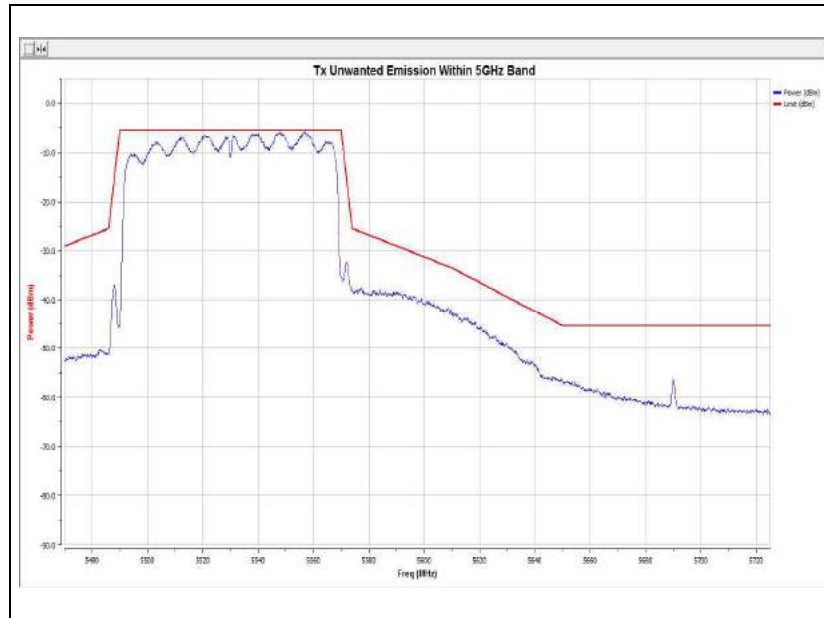


5610 MHz

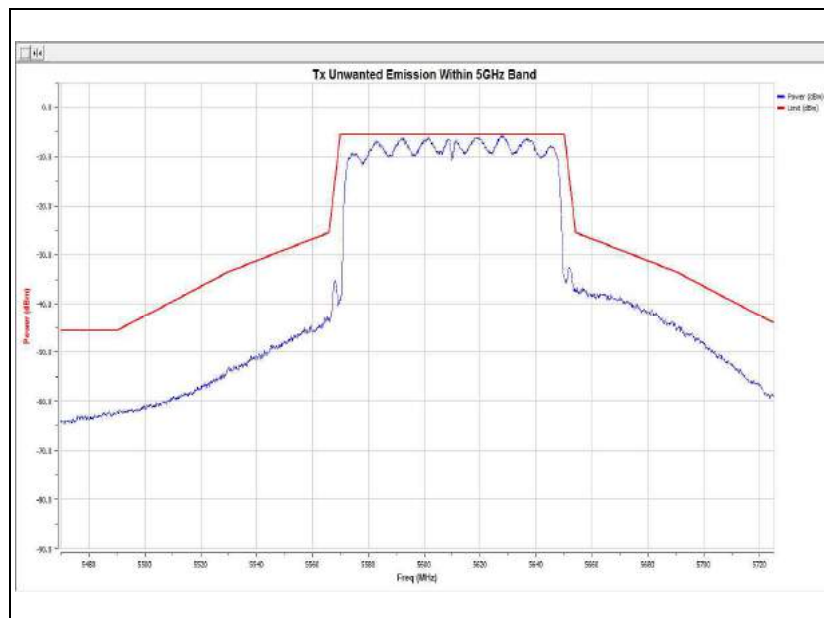

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Limit (Clause 4.2.4.2.2)

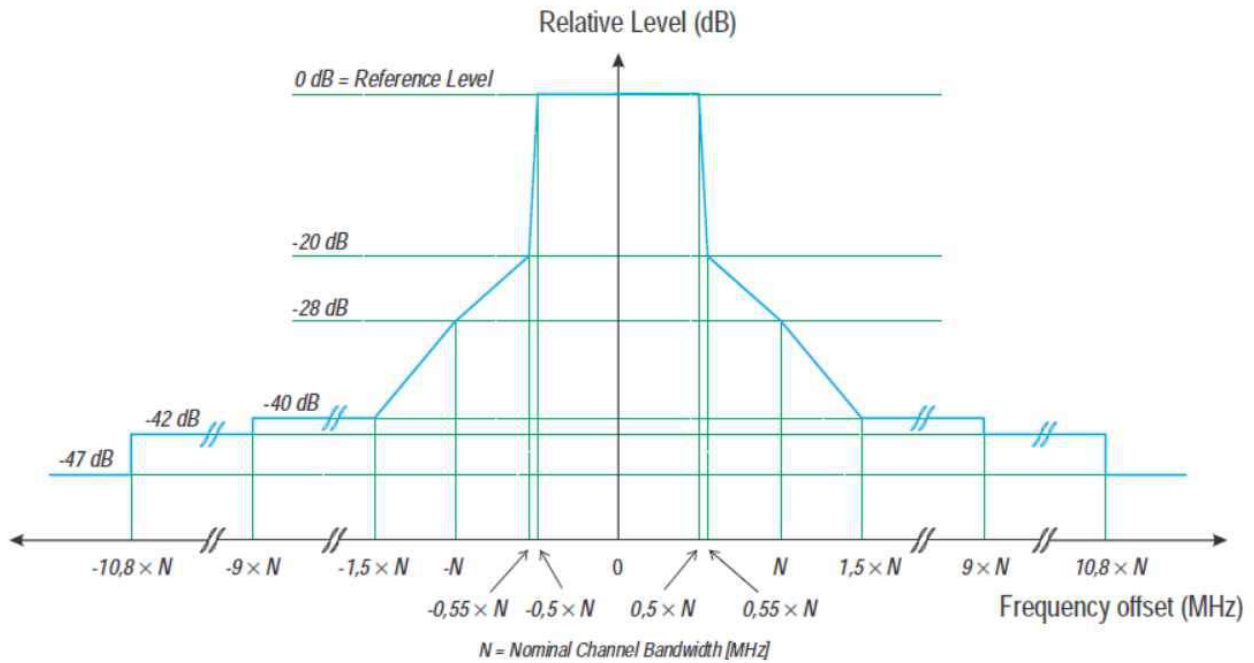

4.7. DFS (Dynamic Frequency Selection)

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

4.7.1 Carrier frequencies table

Channel bandwidth 80 MHz

Frequency Band	Channel No.	Frequency(MHz)
5 250 ~ 5 350 MHz	58	5 290
5 470 ~ 5 725 MHz	106	5 530

4.7.2 Test setup

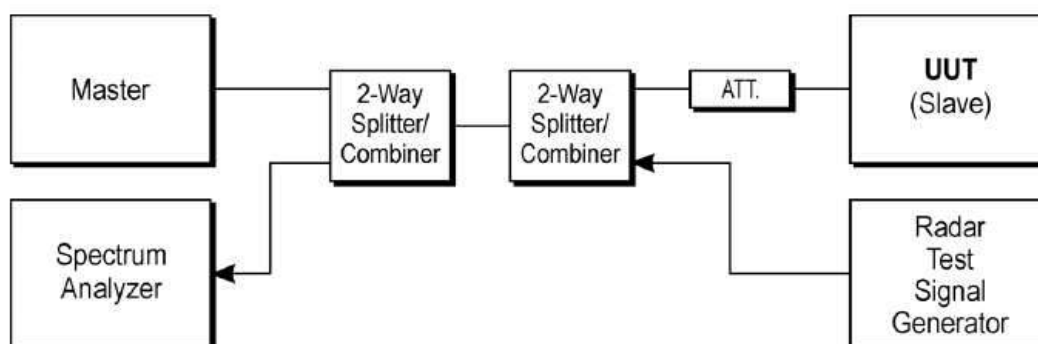


Figure 5: Set-up B

Set-up B is set-up whereby the UUT is an RLAN device operating in slave mode, with or without Radar Interference Detection function. This set-up also contains an RLAN device operating in master mode. The radar test signals are injected into the master device. The UUT (slave device) is associated with the master device.

Figure 5 shows an example for Set-up B. The set-up used shall be documented in the test report.

4.7.3 Applicability

Table 6 lists the DFS related technical requirements and their applicability for every operational mode. If the RLAN device is capable of operating in more than one operational mode then every operating mode shall be assessed separately.

Table 6 : Applicability of DFS requirements


Requirement	DFS Operational mode		
	Master	Slave without radar detection (see table D.2, note 2)	Slave with radar detection (see table D.2, note 2)
Channel Availability Check	Required	Not required	Required (see note 2)
Off-Channel CAC (see note 1)	Required	Not required	Required (see note 2)
In-Service Monitoring	Required	Not required	Required
Channel Shutdown	Required	Required	Required
Non-Occupancy Period	Required	Not required	Required
Uniform Spreading	Required	Not required	Not required
NOTE 1: Where implemented by the manufacturer.			
NOTE 2: A slave with radar detection is not required to perform a CAC or <i>Off-Channel CAC</i> at initial use of the channel but only after the slave has detected a radar signal on the <i>Operating Channel</i> by <i>In-Service Monitoring</i> and the <i>Non-Occupancy Period</i> resulting from this detection has elapsed.			

The radar detection requirements specified in clauses 4.2.6.2.2 to 4.2.6.2.4 assume that the centre frequencies of the radar signals fall within the central 80% of the Occupied Channel Bandwidth of the RLAN channel (see clause 4.2.2)


4.7.4. Test result

4.7.4.1 LAN Traffic


Mode: 802.11ac_VHT80
Operating frequency: 5 290 MHz

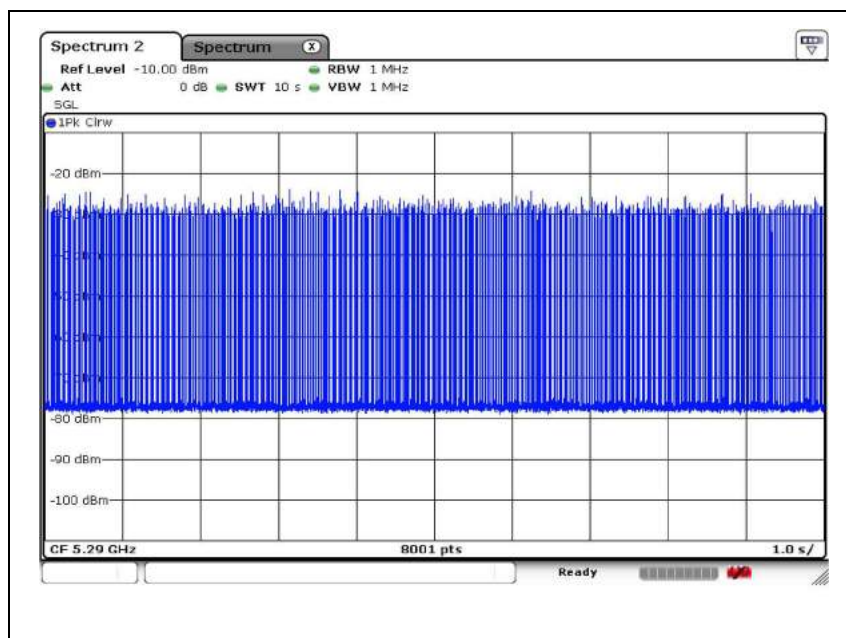

Mode: 802.11ac_VHT80
Operating frequency: 5 530 MHz

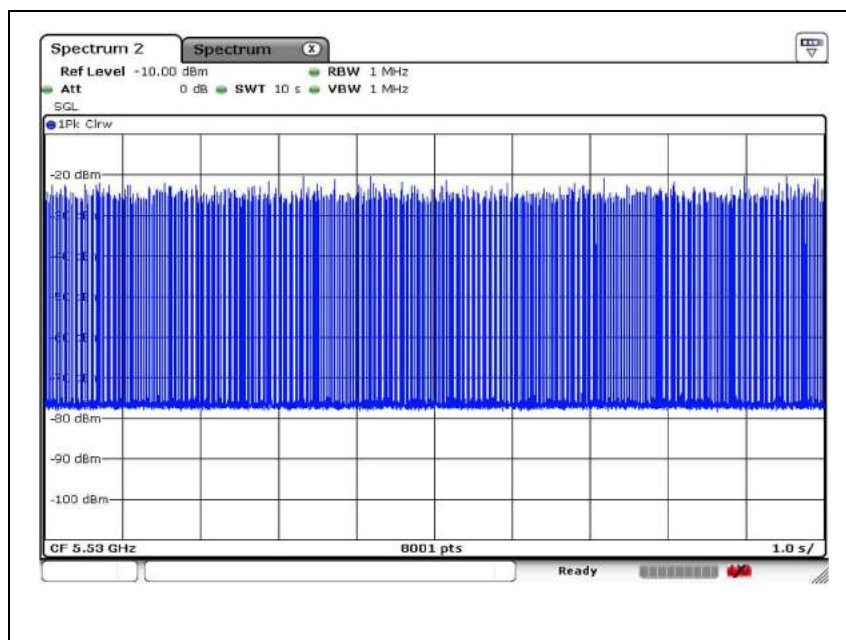

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

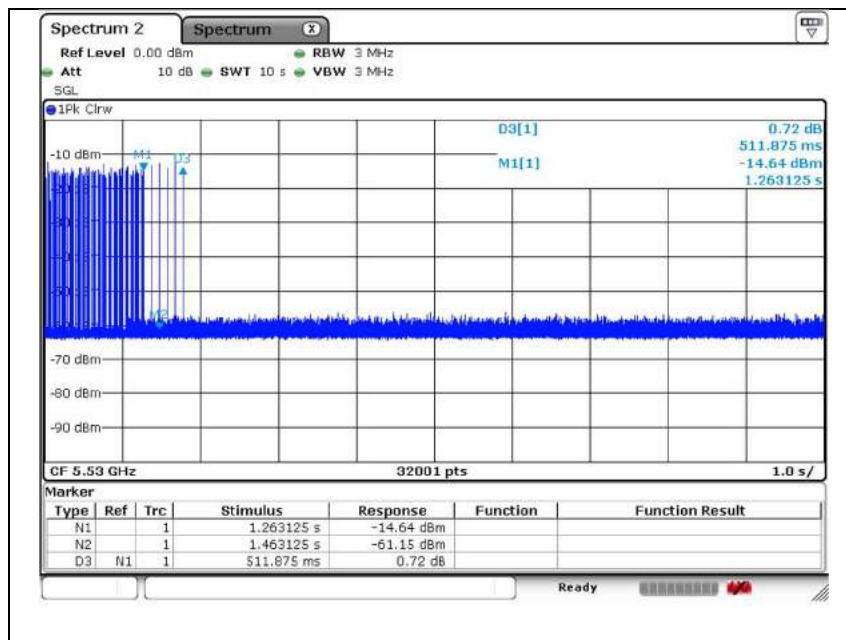


Channel closing transmission time calculated	Test results
Sweep time[S] sec	10
Sampling bins[B]	32001
Number of sampling bins in 10 sec[N]	1
Closing transmission time [C] ms	0.312


Channel move time (s)	Limit
0.512	≤ 10 s

4.7.4.3 Non-Occupancy Period

Mode: 802.11ac_VHT80
Operating frequency: 5 290 MHz

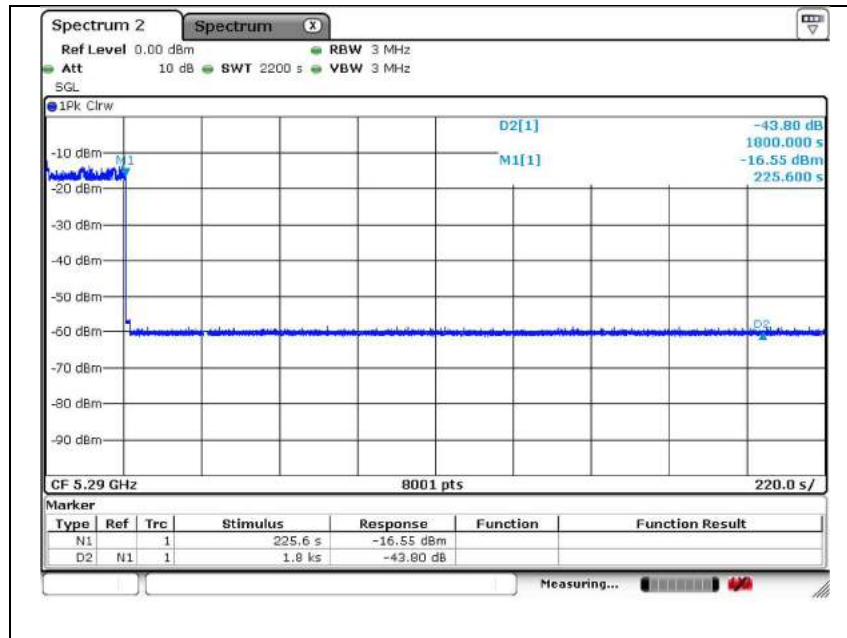

Mode: 802.11ac_VHT80
Operating frequency: 5 530 MHz

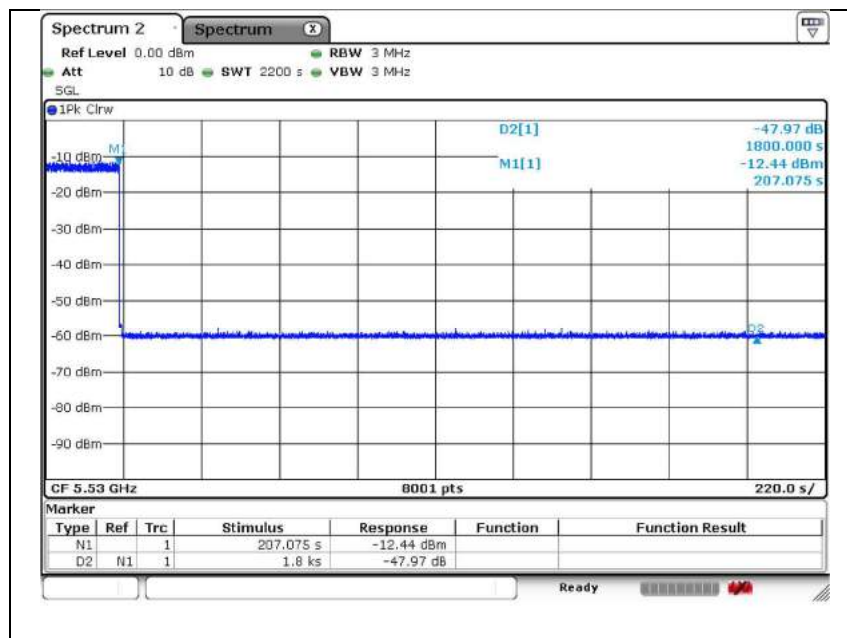

Limit (Clause 4.2.6.2)

Table D.1: DFS requirement values

Parameter	Value
Channel Availability Check Time	60 s (see note 1)
Minimum Off-Channel CAC Time	6 minutes (see note 2)
Maximum Off-Channel CAC Time	4 hours (see note 2)
Channel Move Time	10 s
Channel Closing Transmission Time	1 s
Non-Occupancy Period	30 minutes
NOTE 1: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the <i>Channel Availability Check Time</i> shall be 10 minutes.	
NOTE 2: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the <i>Off-Channel CAC Time</i> shall be within the range 1 hour to 24 hours.	

Table D.2: Radar Detection Threshold Levels

e.i.r.p. Spectral Density (dBm/MHz)	Value (see note 1 and note 2)
10	-62 dBm
NOTE 1: This is the level at the input of the receiver of an RLAN device with a maximum e.i.r.p. density of 10 dBm/MHz and assuming a 0 dBi receive antenna. For devices employing different e.i.r.p. spectral density and/or a different receive antenna gain G (dBi) the Radar Detection Threshold Level at the receiver input follows the following relationship: DFS Detection Threshold (dBm) = -62 + 10 · e.i.r.p. Spectral Density (dBm/MHz) + G (dBi); however the Radar Detection Threshold Level shall not be less than -64 dBm assuming a 0 dBi receive antenna gain.	
NOTE 2: Slave devices with a maximum e.i.r.p. of less than 23 dBm do not have to implement radar detection unless these devices are used in fixed outdoor point to point or fixed outdoor point to multipoint applications (see clause 4.2.6.1.3).	

Table D.3: Parameters of the reference DFS test signal


Pulse width W (μs)	Pulse repetition frequency PRF (PPS)	Pulses per burst (PPB)
1	700	18

Table D.4: Parameters of radar test signals

Radar test signal # (see note 1 to note 3)	Pulse width W (μs)		Pulse repetition frequency PRF (PPS)		Number of different PRFs	Pulses per burst for each PRF (PPB) (see note 5)
	Min	Max	Min	Max		
1	0,5	5	200	1 000	1	10 (see note 6)
2	0,5	15	200	1 600	1	15 (see note 6)
3	0,5	15	2 300	4 000	1	25
4	20	30	2 000	4 000	1	20
5	0,5	2	300	400	2/3	10 (see note 6)
6	0,5	2	400	1 200	2/3	15 (see note 6)

NOTE 1: Radar test signals #1 to #4 are constant PRF based signals. See figure D.1. These radar test signals are intended to simulate also radars using a packet based Staggered PRF. See figure D.2.

NOTE 2: Radar test signal #4 is a modulated radar test signal. The modulation to be used is a chirp modulation with a $\pm 2,5$ MHz frequency deviation which is described below.

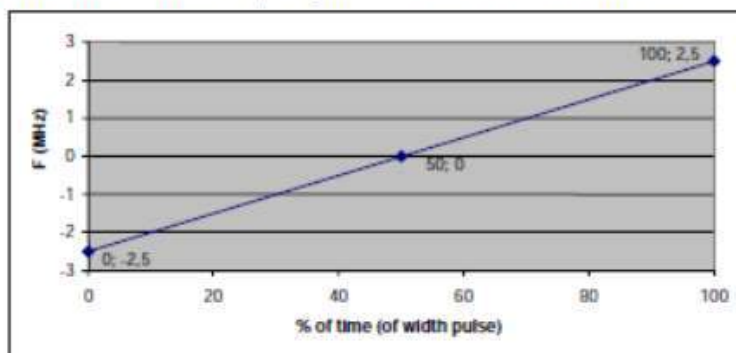

NOTE 3: Radar test signals #5 and #6 are single pulse based Staggered PRF radar test signals using 2 or 3 different PRF values. For radar test signal #5, the difference between the PRF values chosen shall be between 20 PPS and 50 PPS. For radar test signal #6, the difference between the PRF values chosen shall be between 80 PPS and 400 PPS. See figure D.3.

NOTE 4: Apart for the Off-Channel CAC testing, the radar test signals above shall only contain a single burst of pulses. See figure D.1, figure D.3 and figure D.4. For the Off-Channel CAC testing, repetitive bursts shall be used for the total duration of the test. See figure D.2 and figure D.5. See also clause 4.2.6.2.3, clause 5.4.8.2.1.4.2 and clause 5.4.8.2.1.4.3.

NOTE 5: The total number of pulses in a burst is equal to the number of pulses for a single PRF multiplied by the number of different PRFs used.

NOTE 6: For the CAC and Off-Channel CAC requirements, the minimum number of pulses (for each PRF) for any of the radar test signals to be detected in the band 5 600 MHz to 5 650 MHz shall be 18.

Table D.5: Detection probability

Parameter	Detection Probability (P_d)	
	Channels whose nominal bandwidth falls partly or completely within the 5 600 MHz to 5 650 MHz band	Other channels
CAC, Off-Channel CAC	99,99 %	60 %
In-Service Monitoring	60 %	60 %
NOTE: P_d gives the probability of detection per simulated radar burst and represents a minimum level of detection performance under defined conditions. Therefore P_d does not represent the overall detection probability for any particular radar under real life conditions.		

4.8. Adaptivity

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.9 – clause 5.4.9.2 or 5.4.9.3
Used test method is clause 5.4.9.3

5.4.9.3 Test method for Load Based Equipment

5.4.9.3.2 Conducted measurements
5.4.9.3.2.1 Initialization of the test

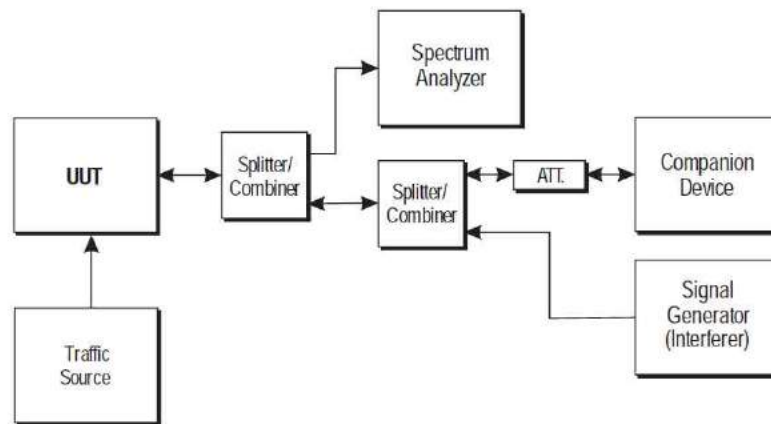


Figure 1 : Example Test Set-up for verifying the adaptivity of an equipment

The different steps below define the procedure to verify the efficiency of the adaptivity mechanism of the equipment.

Step 1:

- The UUT shall connect to a companion device during the test. The signal generator, the spectrum analyser, the UUT, the traffic source and the companion device are connected using a Set-up equivalent to the example given by figure 1 although the interference source is switched off at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interference signal. The traffic source might be part of the UUT itself.
- The received signal level (wanted signal from the companion device) at the UUT shall be sufficient to maintain a reliable link for the duration of the test. A typical value for the received signal level which can be used in most cases is -50 dBm/MHz.

- The analyser shall be set as follows:
 1. RBW : $\geq$ Occupied channel bandwidth (if the analyser does not support this setting, the highest available setting shall be used)
 2. VBW : $3 \times$ RBW (if the analyser does not support this setting, the highest available setting shall be used)
 3. Detector mode : RMS
 4. Centre frequency : Equal to the centre frequency of the operating channel
 5. Span : 0 Hz
 6. Sweep time : $> 2 \times$ Channel occupancy time
 7. Trace mode : Clear/Write
 8. Trigger mode : Video or RF/IF power




Step 2:

- Configure the traffic source so that it exceeds the UUT's theoretical radio performance. The traffic source shall fill the UUT's buffers causing the UUT to always have transmissions queued (full buffer condition) towards the companion device. To avoid adverse effects on the measurement results, a unidirectional traffic source should be used. An example of such a unidirectional traffic source not triggering reverse traffic on higher layer protocols is UDP.

4.8.1 Channel operation of EUT device type

☐ Frame based equipment	☐ Multi-channel operation
☒ Load based equipment	☐ Single-channel operation
	☒ Option 1 for Multi-channel operation
	☐ Option 2 for Multi-channel operation

Mode: 802.11ac

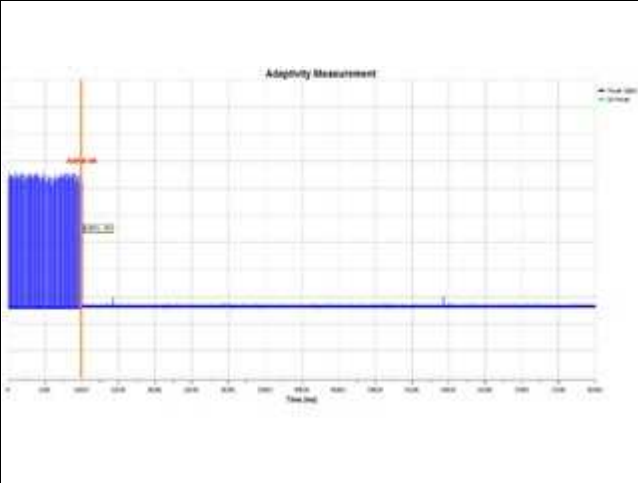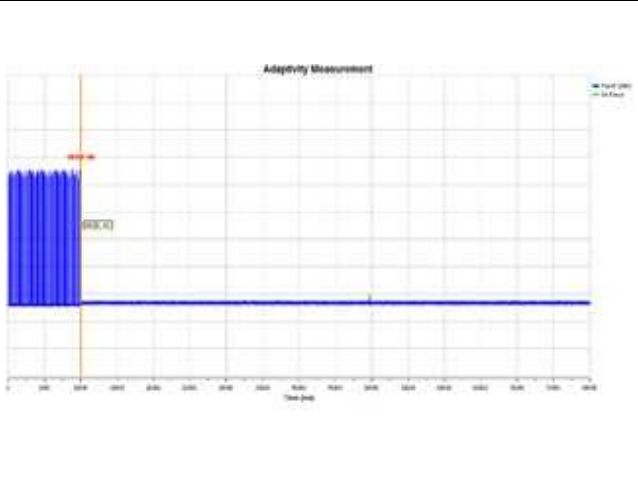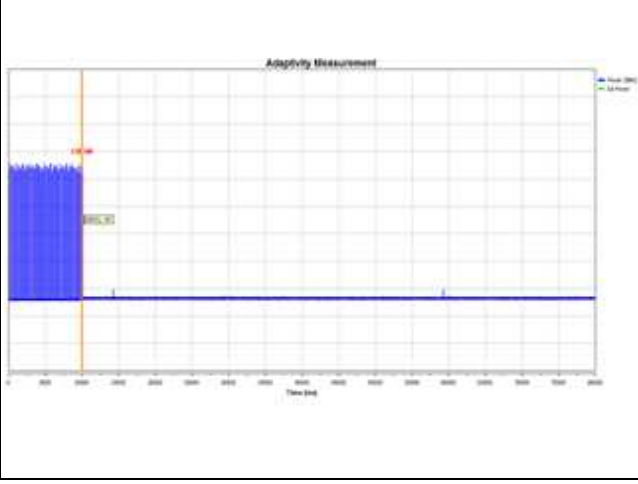Additive White Gaussian Noise(AWGN)	OFDM
	
LTE	
	Blank

4.8.2 Medium Access Mechanism of EUT type

☐ Frame based equipment	
☒ Load based equipment	☒ Option A : Verify medium access mechanism ☐ Option B : Declaration by manufacturer

4.8.3. Test result

Test item	Tested frequency (MHz)	Item		Values	Limit
Adaptivity (before the interference signal)	5 180	Channel occupancy time		1.85 ms	< 2 ms
	5 180	Idle period		26 μ s	> 25 μ s
Adaptivity (adding the interference signal)	5 180	AWGN	Stop transmissions	Stop	Stop transmission on the current operating channel
		OFDM			
		LTE			
	5 180	AWGN	Short control signaling transmission	No transmission	Short Control Signalling Transmissions of Adaptive equipment shall have a maximum duty cycle of 5 % within an observation period of 50 ms
		OFDM			
		LTE			

Limit (Clause 4.2.7.3.2)

4.2.7.3.2.4 Priority classes

Table 1 : Priority class dependent channel access parameters for supervising devices.

Class #	P ₀	CW _{min}	CW _{max}	Maximum Channel Occupancy Time (COT)
4	1	3	7	2 ms
3	1	7	15	4 ms
2	3	15	63	6 ms (see note 1 and note 2)
1	7	15	1 023	6 ms (see note 1)
Note 1 : The maximum Channel Occupancy Time (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 μs. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.				
Note 2 : The maximum Channel Occupancy Time (COT) of 6 ms may be increased to 10 ms by extending CW to CW × 2+1 when selecting the random number q for any backoff(s) that precede the Channel Occupancy that may exceed 6 ms or which follow the Channel Occupancy that exceeded 6 ms. The choice between preceding or following a Channel Occupancy shall remain unchanged during the operation time of the device.				
Note 3 : The value for P ₀ , CW _{min} , CW _{max} are minimum values. Greater values are allowed.				

Table 2 : Classification of idle periods dependent priority class for supervising devices.

Class #	Idle Periods Classification
4	$B_n = \begin{cases} [0, 23[\mu s, n = 0 \\ [23 + 9 \times (n - 1), 23 + 9 \times n[\mu s, 1 \leq n \leq 3 \\ [50, \infty[\mu s, n = 4 \end{cases}$
3	$B_n = \begin{cases} [0, 23[\mu s, n = 0 \\ [23 + 9 \times (n - 1), 23 + 9 \times n[\mu s, 1 \leq n \leq 7 \\ [86, \infty[\mu s, n = 8 \end{cases}$
2	$B_n = \begin{cases} [0, 41[\mu s, n = 0 \\ [41 + 9 \times (n - 1), 41 + 9 \times n[\mu s, 1 \leq n \leq 31 \\ [320, \infty[\mu s, n = 32 \end{cases}$
1	$B_n = \begin{cases} [0, 77[\mu s, n = 0 \\ [77 + 9 \times (n - 1), 77 + 9 \times n[\mu s, 1 \leq n \leq 15 \\ [212, \infty[\mu s, n = 16 \end{cases}$

Table 3 : Priority class dependent channel access parameters for supervised devices.

Class #	P ₀	CW _{min}	CW _{max}	Maximum Channel Occupancy Time (COT)
4	2	3	7	2 ms
3	2	7	15	4 ms
2	3	15	1 023	6 ms (see note 1)
1	7	15	1 023	6 ms (see note 1)
Note 1 : The maximum Channel Occupancy Time (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 μs. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.				
Note 2 : The value for P ₀ , CW _{min} , CW _{max} are minimum values. Greater values are allowed.				

Table 4 : Classification of idle periods dependent priority class for supervised devices.

Class #	Idle Periods Classification
4	$B_n = \begin{cases} [0, 32[\mu s, n = 0 \\ [32 + 9 \times (n - 1), 32 + 9 \times n[\mu s, 1 \leq n \leq 3 \\ [59, \infty[\mu s, n = 4 \end{cases}$
3	$B_n = \begin{cases} [0, 32[\mu s, n = 0 \\ [32 + 9 \times (n - 1), 32 + 9 \times n[\mu s, 1 \leq n \leq 7 \\ [95, \infty[\mu s, n = 8 \end{cases}$
2	$B_n = \begin{cases} [0, 41[\mu s, n = 0 \\ [41 + 9 \times (n - 1), 41 + 9 \times n[\mu s, 1 \leq n \leq 15 \\ [176, \infty[\mu s, n = 16 \end{cases}$
1	$B_n = \begin{cases} [0, 77[\mu s, n = 0 \\ [77 + 9 \times (n - 1), 77 + 9 \times n[\mu s, 1 \leq n \leq 15 \\ [212, \infty[\mu s, n = 16 \end{cases}$

Idle period probability evaluation.

- Let $H(B_n)$ define the number of Idle Periods assigned to bin B_n .
- Let E define the total number of Idle periods observed. Then E is the sum of events in all bins:

$$E = \sum_{n=0}^k H(B_n)$$

- Calculate the observed cumulative probabilities as follows:
 - Let $P(n)$ define the probability that idle periods of duration less than the upper limit specified for bin B_n Occurred, $P(n) = P(\text{Idle period} < \text{upper limit of bin } B_n)$.
 - Then, for each n , $0 \leq n \leq k$, calculate $P(n)$ as:

$$p(n) = \frac{\sum_{i=0}^n H(B_i)}{E}$$

- It shall be verified whether the UUT complies with the below maximum probabilities:

Table 5 : Idle periods probability dependent priority class

Class #	Idle Periods probability
4	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,05 + n \times 0,25, & 1 \leq n \leq 3 \\ 1, & n > 3 \end{cases}$
3	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,18, & n = 1 \\ 0,18 + (n - 1) \times 0,125, & 2 \leq n \leq 6 \\ 1, & n > 6 \end{cases}$
2	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,03125, & 2 \leq n \leq 29 \\ 1, & n > 29 \end{cases}$ $p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,0625, & 2 \leq n \leq 15 \\ 1, & n > 15 \end{cases}$ $p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,09 + (n - 1) \times 0,03125, & 1 \leq n \leq 7 \\ 0,59 + (n - 1) \times 0,03125, & 8 \leq n \leq 14 \\ 1, & n > 14 \end{cases}$
1	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,0625, & 2 \leq n \leq 15 \\ 1, & n > 15 \end{cases}$

4.2.7.3.2.5 ED Threshold level (Energy Detection Threshold Level)

Option 1 : For equipment that for its operation in the 5 GHz bands is conforming to IEEE 802.11™-2016[9], clause 17, Clause 19 or clause 21, or any combination of these clause, the ED Threshold Level (TL) is independent of The equipment's maximum transmit power (P_H). Assuming a 0 dBi receive antenna the ED Threshold Level (TL) shall be:

$$TL = -75 \text{ dBm/MHz}$$

Option 2 : For equipment conforming to one or more of the clauses listed in Option 1, and to at least one other operating mode, and for equipment conforming to none of the clauses listed in Option 1, the ED Threshold Level (TL) shall be proportional to the equipment's maximum transmit power (P_H).

Assuming a 0 dBi receive antenna the ED Threshold Level (TL) shall be:

$$\text{For } P_H \leq 13 \text{ dBm : } TL = -75 \text{ dBm/MHz}$$

$$\text{For } 13 \text{ dBm} < P_H < 23 \text{ dBm : } TL = -85 \text{ dBm/MHz} + (23 \text{ dBm} - P_H) \quad (3)$$

$$\text{For } P_H \geq 23 \text{ dBm : } TL = -85 \text{ dBm/MHz}$$

Equipment shall consider a channel to be occupied as long as other RLAN transmissions are detected at a level greater than the TL.

4.2.7.3.3 Short control signalling transmissions (FBE and LBE)

The use of Short Control Signalling Transmissions is constrained as follows:

- within an observation period of 50 ms, the number of short control signaling transmissions by the equipment shall Be equal to or less than 50; and
- the total duration of the equipment's short control signaling transmissions shall be less than 2 500 μ s within said Observation period.

4.9. Receiver blocking

Measurement Condition

Ambient temperature : 23.5 °C
Relative humidity : 37.0 % R.H.

Test procedure

EN 301 893 clause 5.4.10.2

5.4.10.2.1

Conducted measurements

For systems using multiple receive chains only one chain need to be tested. All other receiver inputs shall be terminated.

Figure 18 shows the test set-up which can be used for performing the receiver blocking test. The companion device may require appropriate shielding or may need to be put in a shielded room to prevent it may have a negative impact on the measurement.

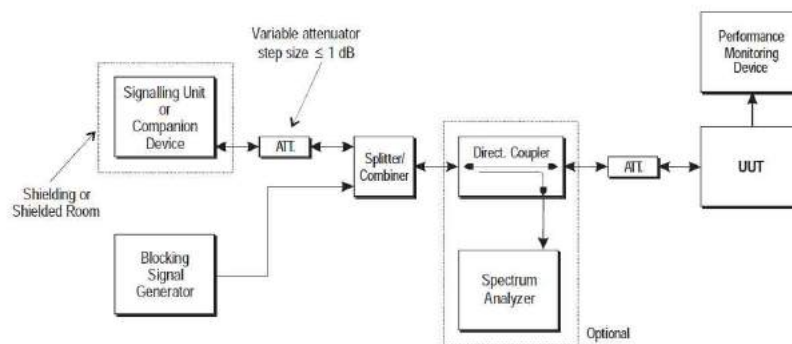


Figure 18: Test Set-up for receiver blocking

The steps below define the procedure to verify the receiver blocking requirement as described in clause 4.2.8.

Step 1:

- The UUT shall be set to the first operating frequency to be tested (see clause 5.3.2).

Step 2:

- The blocking signal generator is set to the first frequency as defined in table 9.

Step 3:

- With the blocking signal generator switched off a communication link is set up between the UUT and the associated companion device using the test setup shown in figure 18. The attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.2.8.3 is still met. The resulting level for the wanted signal at the input of the UUT is P_{min} .
- This signal level (P_{min}) is increased by 6 dB resulting in a new level ($P_{min} + 6$ dB) of the wanted signal at the UUT receiver input.

Step 5:

- Repeat step 4 for each remaining combination of frequency and level as specified in table 9.

Step 6:

- Repeat step 2 to step 5 with the UUT operating at the other operating frequencies at which the blocking test has to be performed. See clause 5.3.2.



Test results

Mode: 802.11ac

RX Channel	Int. Freq. (MHz)	Int. Lev. (dB m)	Int. Signal	Verdict
Lowest	5100.0	-53	CW	Pass
Lowest	4900.0	-47	CW	Pass
Lowest	5000.0	-47	CW	Pass
Lowest	5975.0	-47	CW	Pass
Highest	5100.0	-53	CW	Pass
Highest	4900.0	-47	CW	Pass
Highest	5000.0	-47	CW	Pass
Highest	5975.0	-47	CW	Pass

Limit (Clause 4.2.8.4)

While maintaining the minimum performance criteria as defined in clause 4.2.8.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined in table 9.

Table 9: Receiver Blocking parameters

Wanted signal mean power from companion device (dBm)	Blocking signal frequency(MHz)	Blocking signal power(dBm) (see note 2)		Type of blocking signal
		Master or Slave with radar detection (as defined in ETSI EN 301 893 [1], table D.2, note 2)	Slave without radar detection (as defined in ETSI EN 301 893 [1], table D.2, note 2)	
$P_{min} + 6 \text{ dB}$	5100	-53	-59	Continuous Wave
$P_{min} + 6 \text{ dB}$	4900 5000 5975	-47	-53	Continuous Wave
NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.1.2 in the absence of any blocking signal.				
NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.				



Appendix A.

Measurement equipment

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0023-R1
Page (81) of (92)

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV40	101002	1 year	2018.07.04
Spectrum analyzer	Agilent	N9020A	MY52091086	1 year	2019.01.19
USB Wideband Power Sensor	Agilent	U2021XA	MY54260004	1 year	2019.01.19
USB Wideband Power Sensor	Agilent	U2021XA	MY54340004	1 year	2019.01.19
USB Wideband Power Sensor	Agilent	U2021XA	MY54390010	1 year	2019.01.19
USB Wideband Power Sensor	Agilent	U2021XA	MY54390009	1 year	2019.01.19
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2019.01.22
Signal generator	Agilent	N5182A	MY50143493	1 year	2019.01.18
Signal generator	Agilent	N5182A	MY50143829	1 year	2019.01.18
DC Power Supply	Agilent	6632B	US36351824	1 year	2019.01.18
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2018.11.28
Dipole antenna	SCHWARZBECK	VHA9103	3093	2 years	2019.05.19
Dipole antenna	SCHWARZBECK	UHA9105	2703	2 years	2019.05.19
Dipole antenna	SCHWARZBECK	VHA9103	3101	2 years	2019.05.19
Dipole antenna	SCHWARZBECK	UHA9105	2702	2 years	2019.05.19
Horn Antenna	A.H.	SAS-571	781	2 years	2019.05.02
Horn Antenna	A.H SYSTEMS	SAS-571	414	2 years	2019.02.15
Preamplifier	AGILENT	8449B	3008A01729	1 year	2018.05.31
Attenuator	KEYSIGHT	8493C	82506	1 year	2019.01.22
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2018.07.03
Low Pass Filter	WEINSCHEL	WLK1.0/18G-10TT	14	1 year	2018.07.03
Splitter	MINI-CIRCUITS	ZFSC-2-10G+	F679501347-1	1 year	2018.07.03
Splitter	MINI-CIRCUITS	ZFSC-2-10G+	F679501347-2	1 year	2018.07.03
Dual Directional Coupler	KRYTAR	152613	153577	1 year	2018.07.04

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	SAMSUNG	NT-R519	ZKPA93ES900086Z


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




Appendix B.

Test setup photos

Below 1 GHz

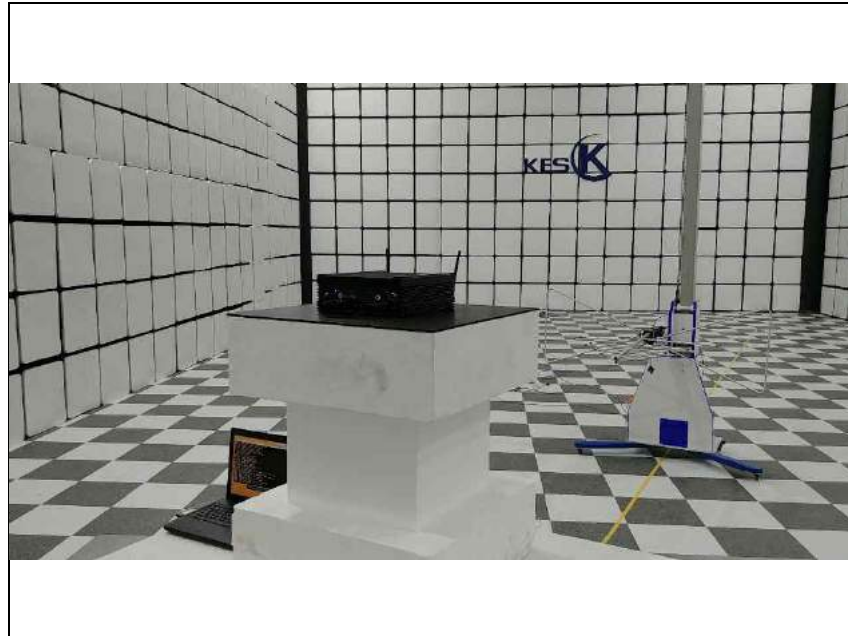

Above 1 GHz

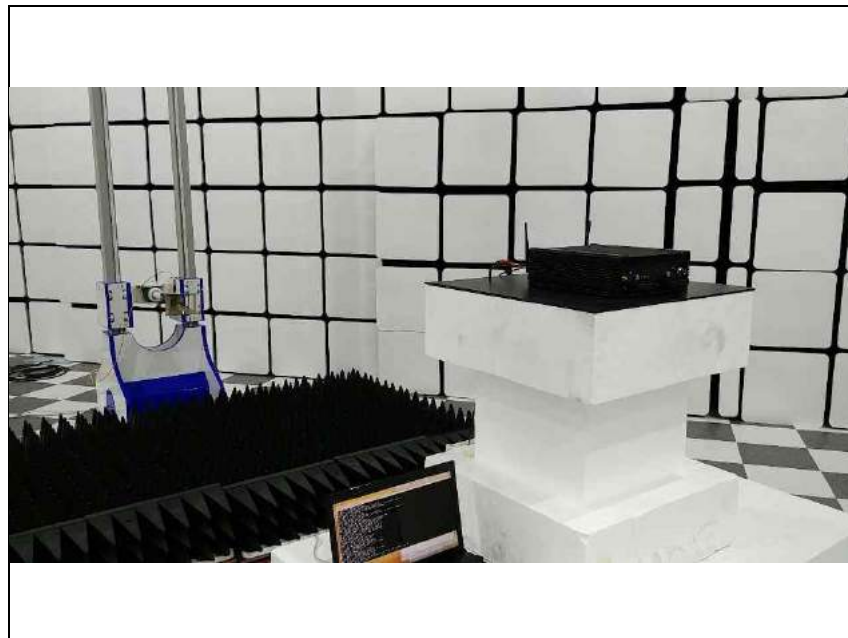



Appendix C.

EUT photos














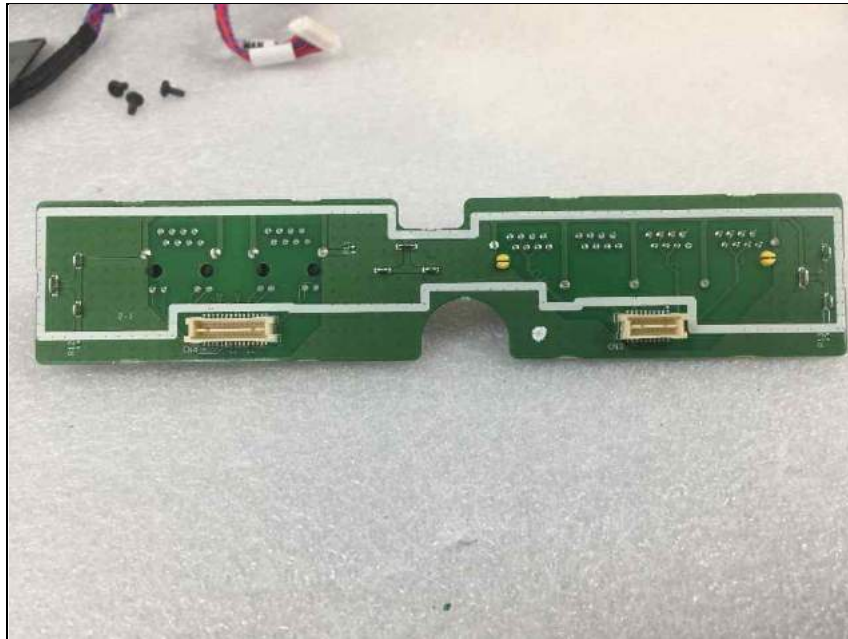

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



The end of test report.