

EMC TEST REPORT

Dates of Tests: June 28-July 05, 2017

Test Report S/N: LR500121707G

Test Site : LTA Co., Ltd.

Model No.

XNB-6005P

APPLICANT

Hanwha Vision Co., Ltd

Manufacturing Description : NETWORK CAMERA
Manufacturer : Hanwha Vision Co., Ltd
Brand : -
Model name : XNB-6005P
Additional Model : -
Test Device Serial No.: : Identification
Rule Part(s) : AS/NZS CISPR 32:2013
CISPR 32 Ed1.0

Date of issue : February 22, 2023

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Jong chae Kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB CODE 200723-0

Revision	Date of issue	Test report No.	Description
0	07.06.2017	LR5001121707G	Initial
1	22.02.2023	LR500112302Y	Change company name and manufacturer name

TABLE OF CONTENTS

1. GENERAL INFORMATION’S ----- 4

2. INFORMATION’S ABOUT TEST ITEM ----- 5

3. TEST REPORT ----- 7

 3.1 SUMMARY OF TESTS ----- 7

 3.2 EMISSION ----- 8

 3.2.1 Disturbance Voltage at the mains terminals ----- 8

 3.2.2 Radiated disturbances ----- 14

APPENDIX

APPENDIX A TEST EQUIPMENT USED FOR TESTS ----- 25

APPENDIX B PERFORMANCE CRITERIA ----- 27

APPENDIX C MEASUREMENT UNCERTAINTY ----- 29

APPENDIX D PHOTOGRAPH ----- 32

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd.**
 Address : 243 Jubug-ri, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-822, Korea
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2017-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2019-04-13	FCC CAB
VCCI	JAPAN	R-2133(10 m), C-2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2017-12-23	VCCI registration
VCCI	JAPAN	G-847	2018-12-13	VCCI registration
IC	CANADA	5799A-1	2019-11-07	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information's about test item

2-1 Client / Manufacturer

Company name : Hanwha Vision Co., Ltd
 Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do,
 13488, KOREA
 Telephone /Facsimile : TEL No : +82-02-784-9961/ FAX No : +82-02-784-1140

Factory #1

Company name HANWHA VISION VIETNAM COMPANY LIMITED
 Address Lot O-2, Que Vo Industrial Zone extended area ,Nam Son commune, Bac Ninh city,Bac Ninh
 province, Vietnam

Factory #2

Company name D-TECH CO.,LTD.
 Address 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
 (Suwon Industrial Complex)

2-2 Equipment Under Test (EUT)

Class : A
 Category : NETWORK CAMERA
 Brand : -
 Model name : XNB-6005P
 Additional model name : -
 Additional model differences : -
 Serial number : Identification
 Date of receipt : June 21, 2017
 EUT condition : Pre-production, not damaged
 Interface Ports : AC IN, DC IN, Video, Micro USB, Audio IN, Audio OUT, ALARM, GND, RS-
 485, Micro SD Slot, Network
 Power rating : DC 12 V, AC 24 V
 Test memory size : -
 Modulator : -
 Crystal/Oscillator(s) : -
 Firmware version : xxxx

2-3 Modification

-NONE

2-4 Test conditions

Temp. / Humid. / Pressure : +(21) °C / (45-51) %RH
 Tested Model : XNB-6005P
 Operating mode : Recording (AC, DC, PoE) mode
 Tested Voltage : 230 Vac , 50 Hz

2-5 Ancillary Equipment / Recording (AC) mode

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P2416D	N/A	Dell
Monitor	SMC-150F	N/A	Samsung
Mobile Phone	SCH-E330S	N/A	Samsung
Earphone	N/A	N/A	N/A
Micro SD Card	N/A	N/A	N/A
System PTZ controller	CNB-SC3100	N/A	N/A
AC Adapter	DLA24300SKA	N/A	Samsung

/ Recording (DC) mode

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P2416D	N/A	Dell
Monitor	SMC-150F	N/A	Samsung
Mobile Phone	SCH-E330S	N/A	Samsung
Earphone	N/A	N/A	N/A
Micro SD Card	N/A	N/A	N/A
System PTZ controller	CNB-SC3100	N/A	N/A
DC Adapter	P24120200EK	N/A	N/A

/ Recording (PoE) mode

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P2416D	N/A	Dell
Monitor	SMC-150F	N/A	Samsung
Mobile Phone	SCH-E330S	N/A	Samsung
Earphone	N/A	N/A	N/A
Micro SD Card	N/A	N/A	N/A
System PTZ controller	CNB-SC3100	N/A	N/A
PoE Injector	PSE305	N/A	N/A

3. Test Report

3.1 Summary of tests

Parameter	Applied Standard	Status
I. Emission		
Radiated Emission	AS/NZS CISPR32:2013	C
Conducted Emission	AS/NZS CISPR32:2013	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: We did not test EN61000-3-2 (Harmonic current emissions) for the **XNB-6005P** because equipment whose rated power is less or equal 75W don't need to be tested.

Note 3: We did not test EN 61000-3-3 (Flicker) for the **XNB-6005P** because of clause 6.1, this standard Predicate as follows: "Devices which produce no significant voltage dips or flicker with a certain probability have not to be tested."

Note 4: The data in this test report are traceable to the national or international standards.

3.2 EMISSION

3.2.1 Conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output/Telecommunication ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2013
Measurement Frequency range	: 150 kHz - 30 MHz
Measurement RBW	: 9 kHz
Test mode	: Recording (AC, DC) mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)
- No other emissions were detected at a level greater than 20 dB below limit

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

Frequency Range	Quasi-peak	Average
(0.15 - 0.5) MHz	79 dBuV	66 dBuV
(0.5 – 30) MHz	73 dBuV	60 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Limits for conducted disturbance at the mains ports of class B ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	(66 – 56) dBuV	(56 - 46) dBuV
(0.5 – 5) MHz	56 dBuV	46 dBuV
(5 – 30) MHz	60 dBuV	50 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

TEST EQUIPMENT USED: 01, 02, 03, 07, 08

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(97 – 87) dBuV	(84 – 74) dBuV	(53 – 43) dBuV	(40 – 30) dBuV
(0.5 – 30) MHz	87 dBuV	74 dBuV	43 dBuV	30 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(84 – 74) dBuV	(74 – 64) dBuV	(40 – 30) dBuV	(30 – 20) dBuV
(0.5 – 30) MHz	74 dBuV	64 dBuV	30 dBuV	20 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted emissions (LINE) / Recording (AC) mode


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNB-6005* (*N:NT/P:PAL) Phase : LINE
Test Mode : Recording mode Test Power : 230 / 50
Temp. / Humi. : 21 / 45 Test Engineer : LEE H W

Data: 2670

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (2783)

Date: 2017-06-28

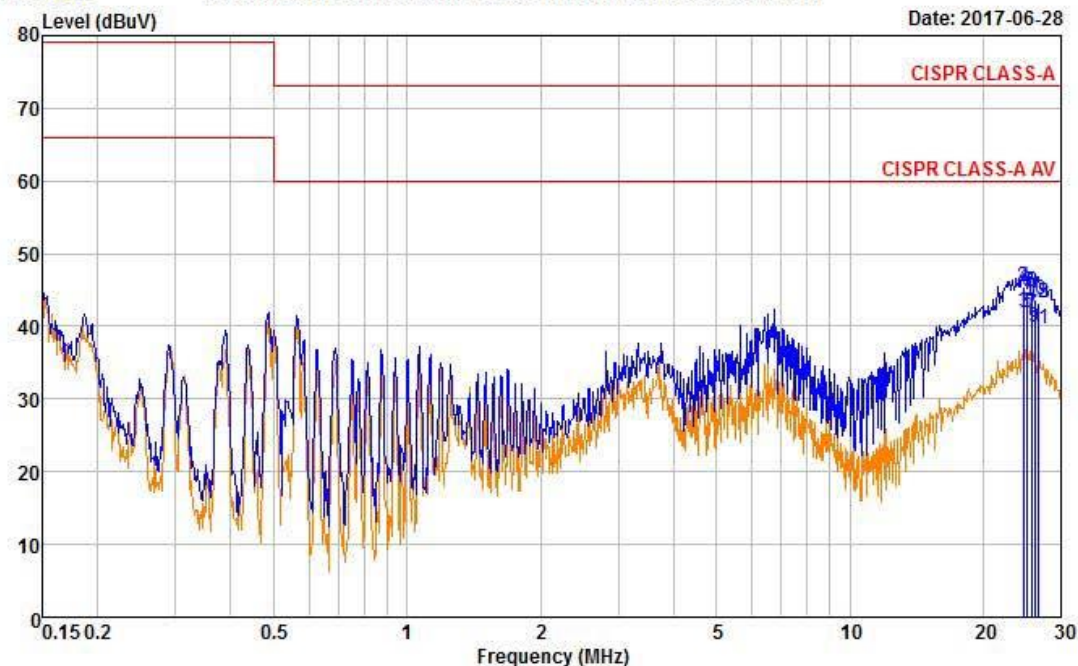

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
24.715	33.99	30.71	11.39	45.38	42.10	73.00	60.00	27.62	17.90
24.716	34.00	30.58	11.39	45.39	41.97	73.00	60.00	27.61	18.03
25.201	33.42	30.46	11.41	44.83	41.87	73.00	60.00	28.17	18.13
25.881	33.39	30.23	11.44	44.83	41.67	73.00	60.00	28.17	18.33
26.178	32.28	28.50	11.44	43.72	39.94	73.00	60.00	29.28	20.06
26.665	31.73	28.17	11.45	43.18	39.62	73.00	60.00	29.82	20.38

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL) / Recording (AC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNB-6005* (*N:NT/P:PAL) Phase : NEUTRAL
Test Mode : Recording mode Test Power : 230 / 50
Temp. / Humi. : 21 / 45 Test Engineer : LEE H W

Data: 2666

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (2783)

Date: 2017-06-28

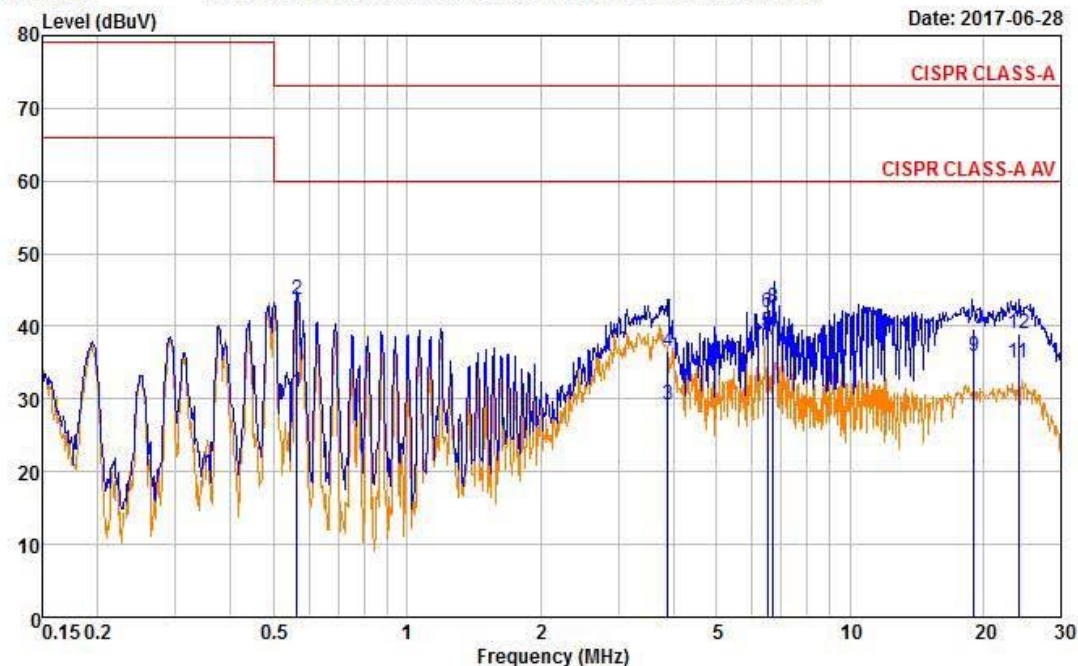

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.565	33.51	20.78	10.20	43.71	30.98	73.00	60.00	29.29	29.02
3.887	26.31	18.91	10.32	36.63	29.23	73.00	60.00	36.37	30.77
6.521	31.49	28.68	10.43	41.92	39.11	73.00	60.00	31.08	20.89
6.714	32.11	27.65	10.44	42.55	38.09	73.00	60.00	30.45	21.91
19.074	28.61	24.71	11.08	39.69	35.79	73.00	60.00	33.31	24.21
24.037	27.73	23.74	11.30	39.03	35.04	73.00	60.00	33.97	24.96

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (LINE) / Recording (DC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNB-6005* (*N:NT/P:PAL) Phase : LINE
Test Mode : Recording mode Test Power : 230 / 50
Temp. / Humi. : 21 / 45 Test Engineer : LEE H W

Data: 2767

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (2783)

Date: 2017-06-28

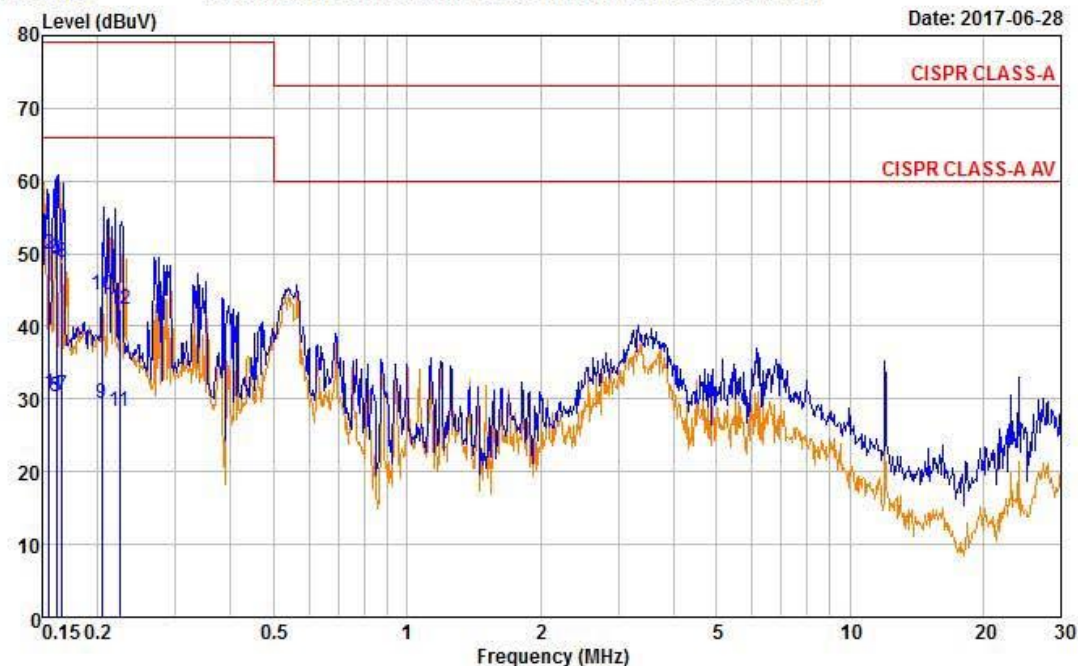

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.156	39.71	20.73	10.10	49.81	30.83	79.00	66.00	29.19	35.17
0.161	38.87	20.30	10.09	48.96	30.39	79.00	66.00	30.04	35.61
0.162	39.06	20.25	10.09	49.15	30.34	79.00	66.00	29.85	35.66
0.166	38.62	20.53	10.10	48.72	30.63	79.00	66.00	30.28	35.37
0.204	34.26	19.41	10.10	44.36	29.51	79.00	66.00	34.64	36.49
0.224	32.23	18.25	10.10	42.33	28.35	79.00	66.00	36.67	37.65

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL) / Recording (DC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNB-6005* (*N:NT/P:PAL) Phase : NEUTRAL
Test Mode : Recording mode Test Power : 230 / 50
Temp. / Humi. : 21 / 45 Test Engineer : LEE H W

Data: 2763

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (2783)

Date: 2017-06-28

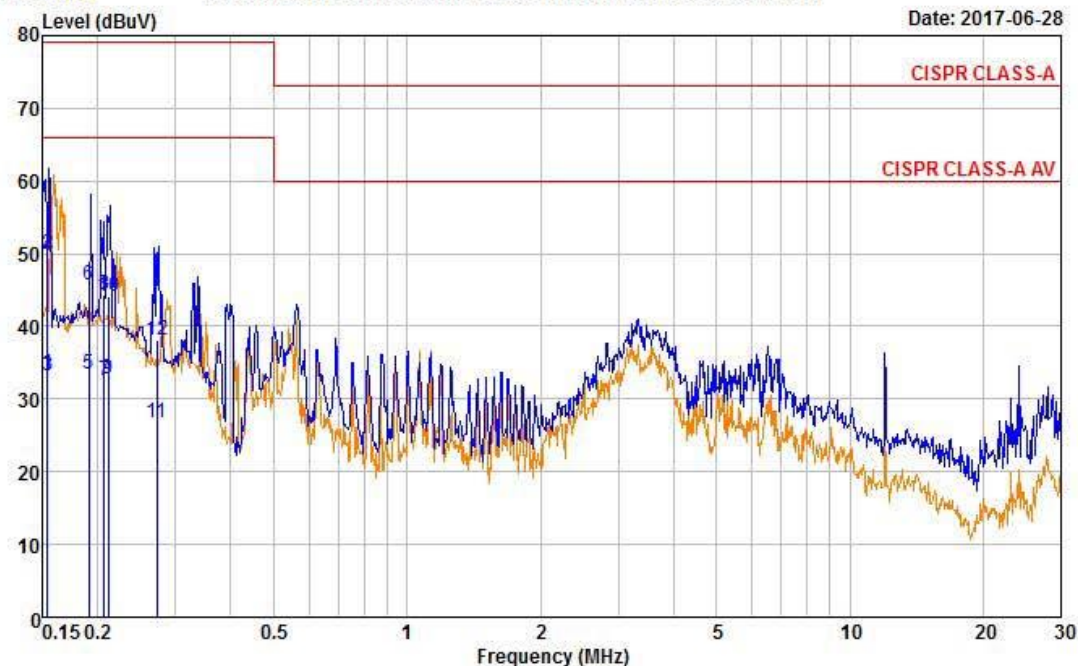

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.154	39.82	23.17	10.15	49.97	33.32	79.00	66.00	29.03	32.68
0.154	39.59	23.02	10.15	49.74	33.17	79.00	66.00	29.26	32.83
0.192	35.47	23.23	10.16	45.63	33.39	79.00	66.00	33.37	32.61
0.207	34.23	22.46	10.17	44.40	32.63	79.00	66.00	34.60	33.37
0.212	33.85	22.56	10.17	44.02	32.73	79.00	66.00	34.98	33.27
0.272	27.85	16.59	10.18	38.03	26.77	79.00	66.00	40.97	39.23

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emission

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2013
Measuring Distance	: 10 m for below 1 GHz / 3 m for above 1 GHz
Measurement Frequency range	: 30 MHz – 1 000 MHz
Measurement RBW	: 120 kHz @ 10 m / 1 MHz @ 3 m
Test mode	: Recording (AC, DC, PoE) mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)
- No other emissions were detected at a level greater than 20 dB below limit
- The highest internal source of an EUT is below 108 MHz, the measurement shall only be made up to 1 GHz.
(The highest internal source of an EUT : 40 MHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

TEST EQUIPMENT USED: 13, 14, 15, 19, 21, 23

Limit of 10 m for below 1 GHz

CLASS A

Frequency Range	Quasi-peak
(30 – 230) MHz	40 dBuV/m
(230 – 1 000) MHz	47 dBuV/m

CLASS B

Frequency Range	Quasi-peak
(30 – 230) MHz	30 dBuV/m
(230 – 1 000) MHz	37 dBuV/m

Limit of 3m for above 1 GHz

CLASS A

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	56	76
(3 000 – 6 000) MHz	60	80
NOTE:	The lower limit applies at the transition frequency.	

CLASS B

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	50	70
(3 000 – 6 000) MHz	54	74
NOTE:	The lower limit applies at the transition frequency.	

TEST EQUIPMENT USED: [13](#), [14](#), [15](#), [19](#), [21](#), [23](#)

Radiated Emission (Below 1 GHz) / Recording (AC) mode _ V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1134

File: C:\Program Files (x86)\e3\1706-1.EM6 (1138)

Date: 2017-07-03 Time: 18:44:08

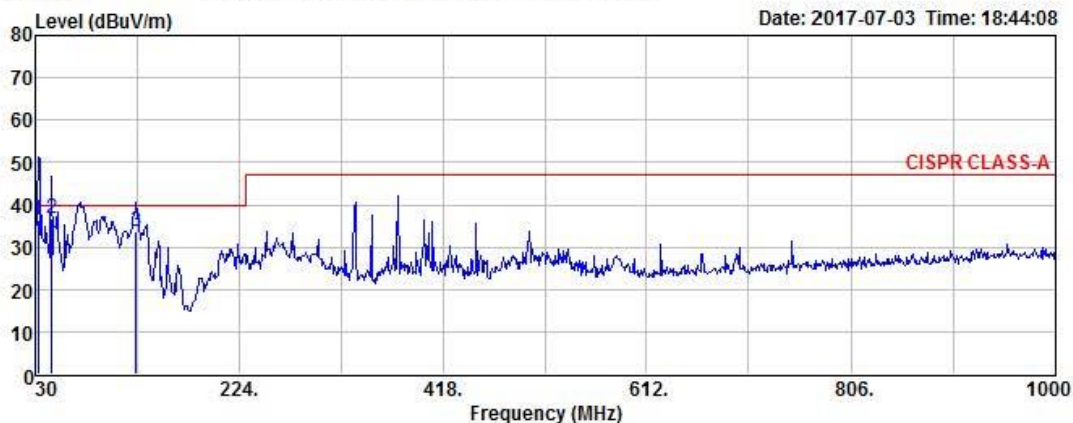

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
32.91	51.31	-14.90	36.41	40.00	3.59	166	68	VERTICAL
45.52	50.59	-13.84	36.75	40.00	3.25	157	73	VERTICAL
126.03	46.96	-13.20	33.76	40.00	6.24	164	48	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / Recording (AC) mode _ H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1133

File: C:\Program Files (x86)\e3\1706-1.EM6 (1138)

Date: 2017-07-03 Time: 18:43:30

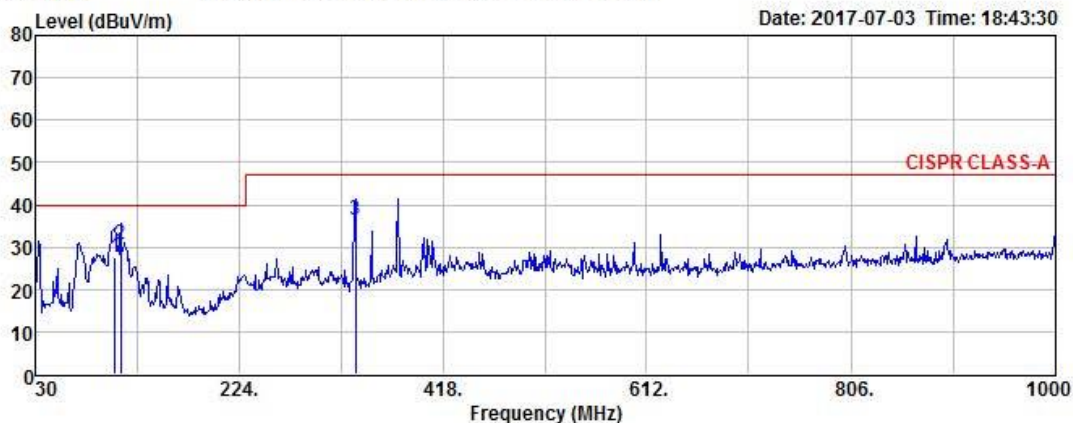

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
105.66	42.75	-15.21	27.54	40.00	12.46	152	30	HORIZONTAL
111.48	44.97	-14.38	30.59	40.00	9.41	241	84	HORIZONTAL
334.58	46.19	-9.75	36.44	47.00	10.56	193	314	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Above 1 GHz) / Recording (AC) mode

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1114

File: C:\Program Files (x86)\e3\1706-1.EM6 (1226)

Date: 2017-07-04 Time: 15:46:36

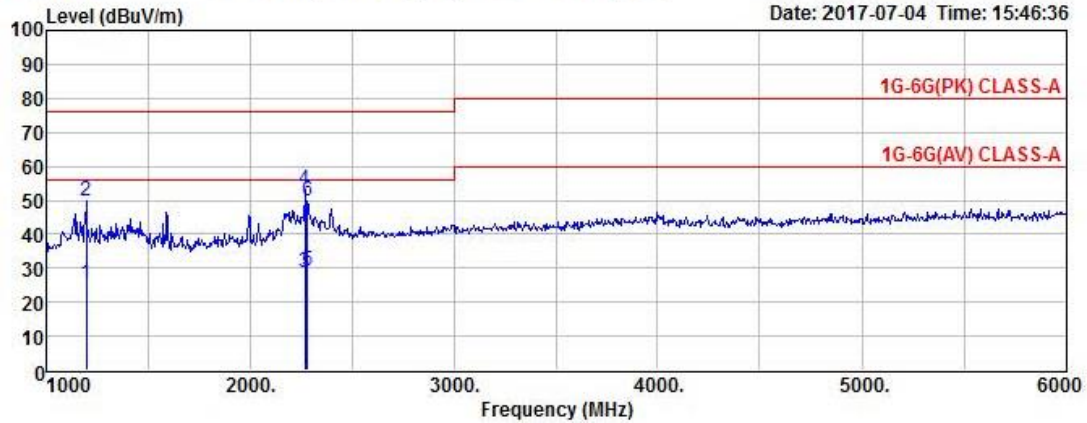

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1113

File: C:\Program Files (x86)\e3\1706-1.EM6 (1226)

Date: 2017-07-04 Time: 15:45:48

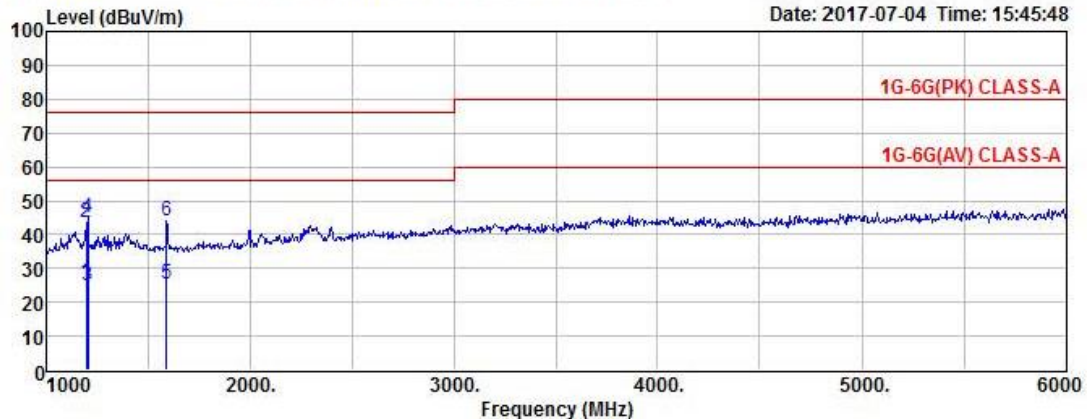

Manufacture : Hanwha Techwin Co., Ltd.

Test Date

Temp.:
[°C]Humidity:
[%]Barometric
[mbar]

Model : XNB-6005

2017/7/4

21

51

TEST mode : Recording mode

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1195.0	53.2	35.3	-6.05	47.11	29.28	76.0	56.0	28.89	26.72	156	55	H
1205.0	54.6	34.4	-6.03	48.60	28.34			27.40	27.66	318	56	H
1590.0	51.6	32.9	-4.05	47.51	28.80			28.49	27.20	196	217	H
1195.0	53.1	34.8	-6.05	53.05	28.75			22.95	27.25	135	207	V
2270.0	55.9	31.9	0.51	56.40	32.39			19.60	23.61	266	27	V
2280.0	52.5	32.3	0.61	53.07	32.86			22.93	23.14	155	227	V

Radiated Emission (Below 1 GHz) / Recording (DC) mode _ V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1206

File: C:\Program Files (x86)\e3\1706-1.EM6 (1220)

Date: 2017-07-04 Time: 15:04:31

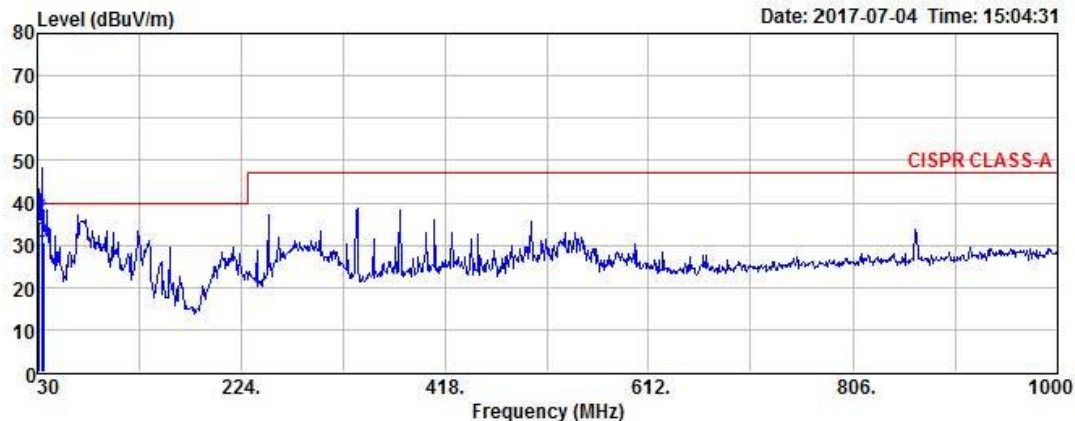

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
31.94	50.44	-15.01	35.43	40.00	4.57	127	105	VERTICAL
33.88	51.11	-14.81	36.30	40.00	3.70	275	168	VERTICAL
35.82	45.08	-14.62	30.46	40.00	9.54	166	307	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / Recording (DC) mode _ H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1205

File: C:\Program Files (x86)\e3\1706-1.EM6 (1220)

Date: 2017-07-04 Time: 15:03:51

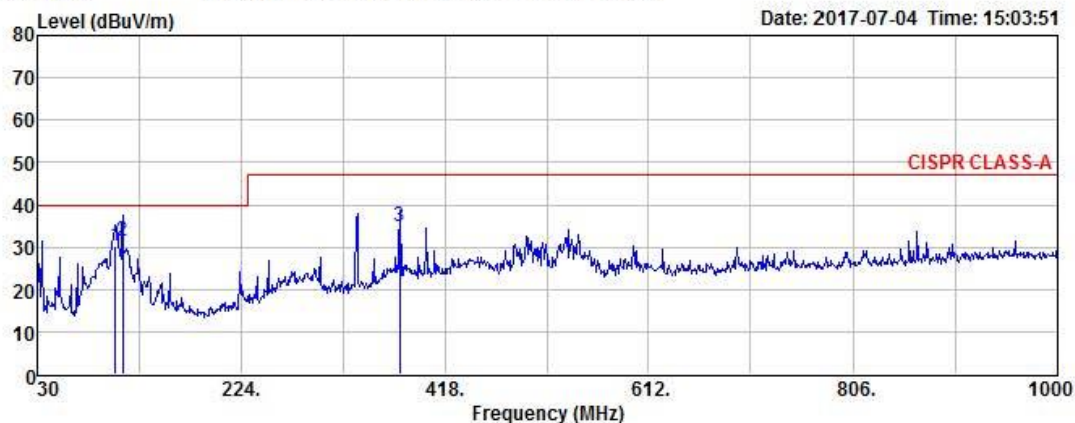

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
104.69	45.65	-15.37	30.28	40.00	9.72	118	55	HORIZONTAL
111.48	45.88	-14.38	31.50	40.00	8.50	127	224	HORIZONTAL
375.32	43.64	-8.89	34.75	47.00	12.25	115	135	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Above 1 GHz) / Recording (DC) mode

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1216

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 15:14:20

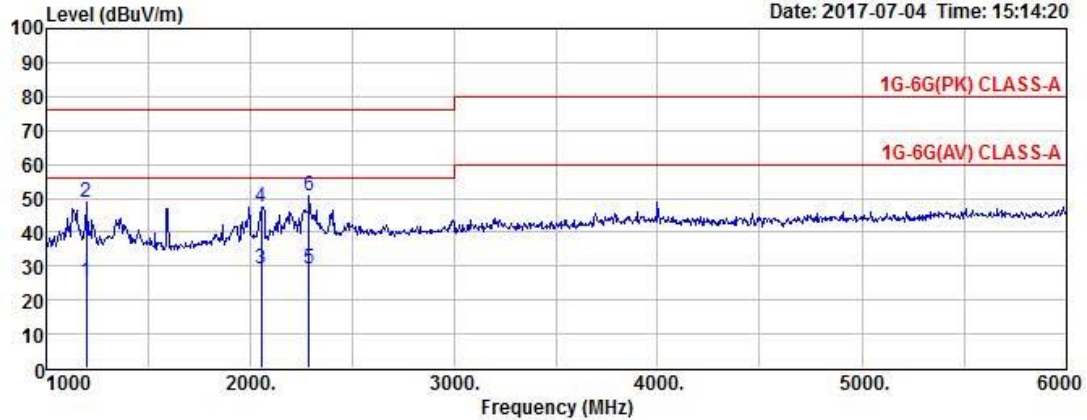

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1215

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 15:13:01

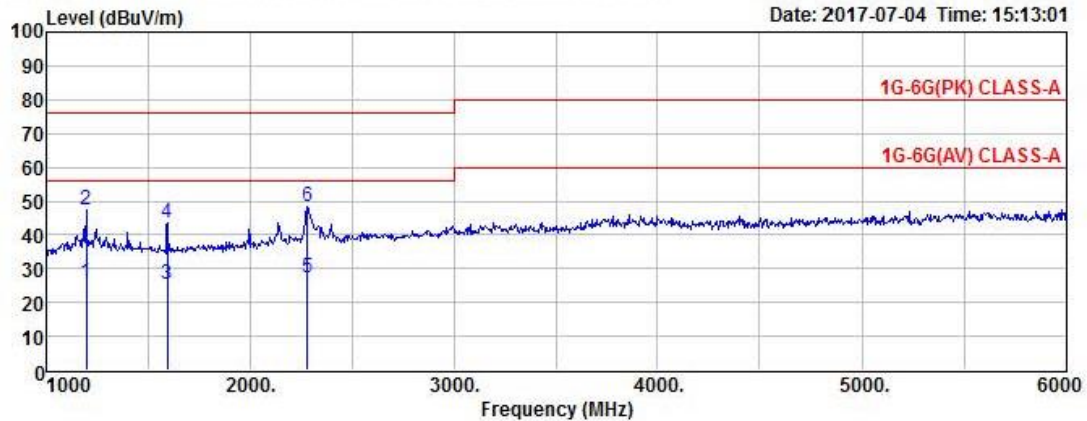

Manufacture : Hanwha Techwin Co., Ltd.

Test Date

Temp.:
[°C]Humidity:
[%]Barometric
[mbar]

Model : XNB-6005* (*N:NT/P:PAL)

2017/7/4

21

51

TEST mode : Recording mode

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1195.0	57.1	35.4	-6.05	51.02	29.35	76.0	56.0	24.98	26.65	156	50	H
1595.0	51.2	32.8	-4.02	47.18	28.80			28.82	27.20	187	253	H
2280.0	51.0	30.0	0.61	51.62	30.58			24.38	25.42	166	271	H
1195.0	58.3	35.0	-6.05	52.25	28.98			23.75	27.02	121	155	V
2055.0	51.2	33.1	-0.23	50.98	32.84			25.02	23.16	317	52	V
2290.0	53.3	31.9	0.69	54.03	32.63			21.97	23.37	268	154	V

Radiated Emission (Below 1 GHz) / Recording (PoE) mode _ V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1256

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 16:43:36

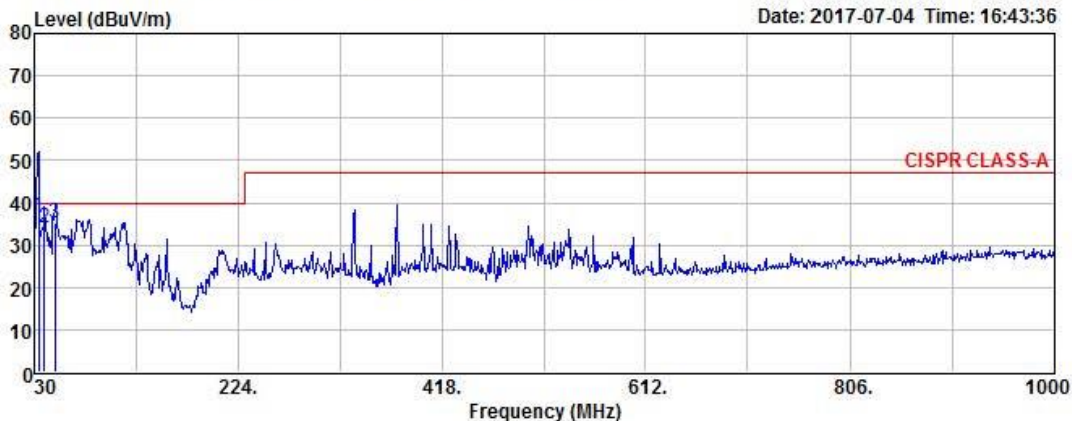

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
33.88	51.69	-14.81	36.88	40.00	3.12	158	84	VERTICAL
39.70	48.15	-14.24	33.91	40.00	6.09	157	237	VERTICAL
49.40	49.14	-13.80	35.34	40.00	4.66	277	150	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / Recording (PoE) mode _ H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1255

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 16:43:03

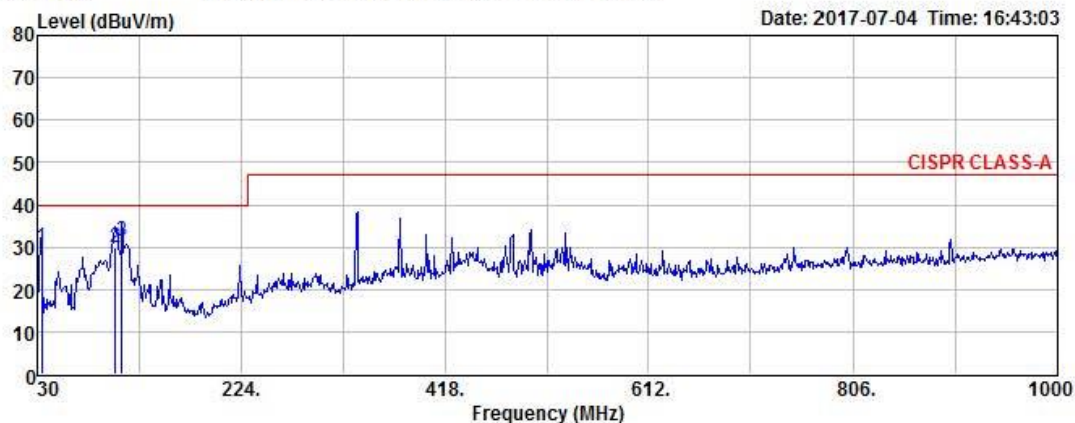

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
33.88	44.48	-14.81	29.67	40.00	10.33	184	250	HORIZONTAL
104.69	45.21	-15.37	29.84	40.00	10.16	193	314	HORIZONTAL
110.51	45.96	-14.49	31.47	40.00	8.53	106	228	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Above 1 GHz) / Recording (PoE) mode

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1236

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 16:22:43

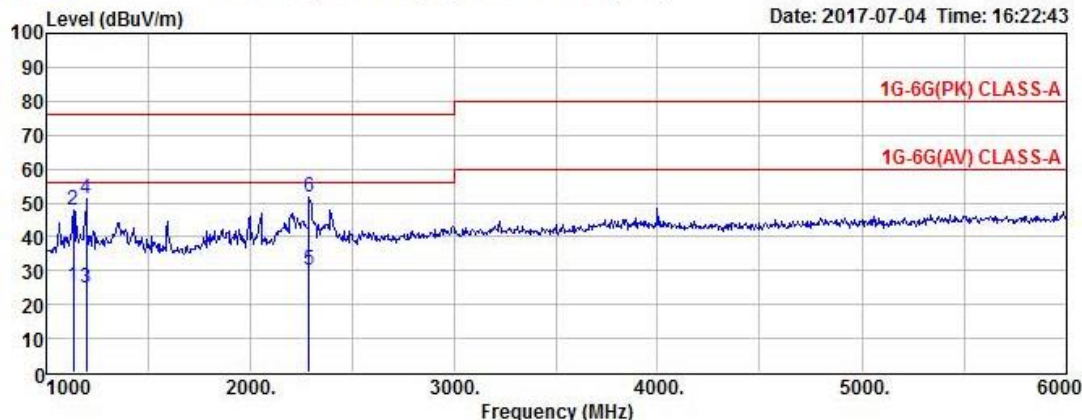

EUT/Model No.: XNB-6005* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1235

File: C:\Program Files (x86)\e3\1706-1.EM6 (1260)

Date: 2017-07-04 Time: 16:22:00

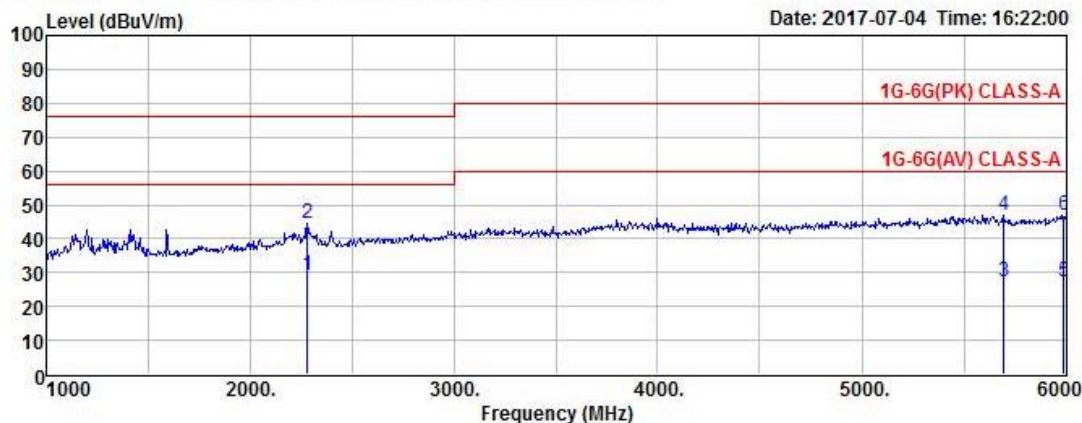

Manufacture : Hanwha Techwin Co., Ltd.

Test Date

Temp.:
[°C]Humidity:
[%]Barometric
[mbar]

Model : XNB-6005* (*N:NT/P:PAL)

2017/7/4

21

51

TEST mode : Recording mode

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
2280.0	47.6	32.0	0.61	48.17	32.56	76.0	56.0	27.83	23.44	185	217	H
5690.0	35.9	16.4	14.51	50.43	30.91	80.0	60.0	25.57	25.09	196	220	H
5987.0	35.0	15.2	15.44	50.47	30.60	80.0	60.0	25.53	25.40	284	45	H
1135.0	57.4	35.0	-6.05	51.32	28.92	76.0	56.0	24.68	27.08	293	314	V
1195.0	60.6	34.6	-6.05	54.59	28.55	76.0	56.0	21.41	27.45	225	48	V
2290.0	54.5	33.0	0.69	55.23	33.66	76.0	56.0	20.77	22.34	140	63	V

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

	Description	Model No.	Serial No.	Manufacturer	Interval	LAST Cal.
1	EMI TEST Receiver	ESR	101499	Rohde & Schwarz	1 year	Jul-16
2	Pulse Limiter	ESH3-Z2	100710	Rohde & Schwarz	1 year	Mar-17
3	DIGITAL THERMO HYGROMETER	TH-611	NONE	BODYCOM	1 year	Sep-16
4	DTV Signal Generator	MFG-100	15M2002	MFLO	1 year	Mar-17
5	Color TV Pattern Generator	PM-5518-TX	LO5333	Philips	-	-
6	LISN	ESH3-Z6	100378	Rohde & Schwarz	1 year	Sep-16
7	LISN(main)	ESH3-Z5	893045/017	Rohde & Schwarz	1 year	Mar-17
8	LISN(sub)	ENV216	100408	Rohde & Schwarz	1 year	Sep-16
9	ISN	ISN T800	27109	TESEQ	1 year	Jan-17
10	ISN	ENY81-CA6	101565	Rohde & Schwarz	1 year	Jan-17
11	CURRENT PROBE	EZ-17	100508	Rohde & Schwarz	1 year	Jan-17
12	LISN	ESH3-Z6	100378	Rohde & Schwarz	1 year	Sep-16
13	EMI TEST Receiver	ESCI7	100772	Rohde & Schwarz	1 year	Sep-16
14	Amplifier (25 dB)	8447D	2944A07974	HP	1 year	Sep-16
15	DIGITAL THERMO HYGROMETER	TESTEK-303A	TAEGUANG	-	1 year	Mar-17
16	STEP TRANSFORMER	INA6502	34270	SCHAFFNER	1 year	Sep-16
17	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	2 year	Apr-17
18	Biconical Antenna	VHA 9103	VHA 9103-2315	SCHWARZBECK	2 year	Apr-17
19	TRILOG Antenna	VULB9160	9160-3237	SCHWARZBECK	2 year	May-17
20	TRILOG Antenna	VULB9160	9160-3237	SCHWARZBECK	2 year	Apr-17
21	Amplifier (25 dB)	8449B	3008A00337	HP	1 year	Mar-17
22	Spectrum Analyzer (~ 26.5 GHz)	E4407B	MY45108946	Agilent	1 year	Mar-17
23	HORN ANTENNA	3115	55005	ETS	2 year	May-17
24	HORN ANTENNA	3115	55005	ETS	2 year	Apr-17
25	Universal Power Analyzer	PM6000	1.00007E+11	Voltech Instruments	1 year	Mar-17
26	Reference Impedance Network	ES4152	9074424	NF Corp.	1 year	Sep-16

APPENDIX B

PERFORMANCE CRITERIA

Performance criterion A:

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B:

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as untended.

Performance criterion C:

Loss of function is allowed, provided the function is self-recoverable or can be restored by the operating of the controls by the user In accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

APPENDIX C

Measurement Uncertainty

1. Conducted Emission

2. Radiated Emission

1. Conducted Emission

Input Quantity	Probability Distribution	Probability Distribution (dB)	Standard
		9 kHz – 30 MHz	
Cable loss(RG400)	Standard Deviation(SD)	± 0.061	10 th measurement
Receiver corrections; -Sine wave voltage -Pulse amplitude response -Pulse repetition rate response	Rectangular ($\sqrt{3}$) Rectangular ($\sqrt{3}$) Rectangular ($\sqrt{3}$)	± 0.17 ± 0.02 ± 0.58	Cal. Report Cal. Report Cal. Report
LISN corrections (ENV216) ; -Voltage division factor	Normal (k = 2)	± 0.09	Cal. Report
Mismatch ; - Receiver VRC* : $\Gamma_i = 0.09$ -LISN VRC : $\Gamma_g = 0.14(150\text{kHz})$ = 0.05(30MHz) - Uncertainty: $20\log(1 \pm \Gamma_i \Gamma_g)$	U-type($\sqrt{2}$)	± 0.89	Cal. Report
System Repeatability	Standard Deviation(SD)	± 0.28	10 th measurement
Combined measurement uncertainty Uc(y)	Normal	+ 0.73 - 0.73	
Expended measurement uncertainty (95%,Confidence level,k = 2)dB	Normal(k = 2)	+ 1.46 - 1.46	

2. Below 1 GHz Radiated Emission

Input Quantity	Probability Distribution	Probability Distribution (dB)		Standard
		Trilog		
		3m	10m	
Antenna Factor (VULB 9160)	Normal (k = 2)	30 MHz– 1 GHz	30 MHz – 1 GHz	ANT Cal. uncertainty
		± 2.00	± 2.00	
Cable loss (HFB-5010/HFC12D)	Standard Deviation(SD)	± 0.14	± 0.14	10 th measurement
Receiver corrections; -Sine Wave Voltage -Pulse amplitude response -Pulse repetition rate response	Normal (k = 2)	± 0.17	± 0.17	Cal. Report Cal. Report CISPR16-4-2
	Normal (k = 2)	± 0.58	± 0.58	
	Rectangular(√ 3)	± 1.50	± 1.50	
Antenna Directivity	Rectangular(√ 3)	± 1.00	± 1.00	CISPR16-4-2
AF Height Dependence	Rectangular(√ 3)	± 0.10	± 0.10	CISPR16-4-2
Phase Center Location	Rectangular(√ 3)	± 0.20	± 0.20	CISPR16-4-2
Separation Distance	Rectangular(√ 3)	± 0.30	± 0.30	CISPR16-4-2
Uncertainty of Site	Triangular(√ 6)	± 2.97	± 2.97	NSA
Mismatch ; - Receiver VRC* : Γi = 0.09 -ANT. VRC : Γg = 0.09 - Uncertainty: 20log(1± Γi Γg)	U-type (√ 2)	± 0.54	± 0.54	CISPR16-4-2
Pre-amp.	Normal (k = 2)	± 0.14	± 0.14	Cal. Report
System Repeatability	Standard Deviation(SD)	± 0.60	± 0.60	10 th measurement
Combined measurement uncertainty Uc(y)	Normal	+ 1.97 - 1.97	+ 1.97 - 1.97	
Expended measurement uncertainty (95%,Confidence level,k=2)dB	Normal(k = 2)	30 MHz – 1 GHz + 3.94 - 3.94	30 MHz – 1 GHz + 3.94 - 3.94	

Note:VRC(Voltage Reflection Coefficient)

3. Above 1 GHz Radiated Emission

Input Quantity	Probability Distribution	Probability Distribution (dB)	Standard
		HORN	
Antenna Factor (ETS 3115)	Normal (k=2) (normal)	1 GHz - 6 GHz ± 1.00	ANT Cal. uncertainty
Cable loss (SUHNER MULTIFLEX microwave cables)	Standard Deviation(SD)	± 0.32	10 th measurement
Receiver corrections; -Sine Wave Voltage -Pulse amplitude response -Pulse repetition rate response	Normal (k = 2) Normal (k = 2) Rectangular($\sqrt{3}$)	± 0.17 ± 0.58 ± 1.50	Cal. Report Cal. Report CISPR16-4-2
Antenna Directivity	Rectangular($\sqrt{3}$)	± 1.00	CISPR16-4-2
AF Height Dependence	Rectangular($\sqrt{3}$)	± 0.10	CISPR16-4-2
Phase Center Location	Rectangular($\sqrt{3}$)	± 0.20	CISPR16-4-2
Separation Distance	Rectangular($\sqrt{3}$)	± 0.30	CISPR16-4-2
Uncertainty of Site	Standard Deviation(SD)	± 0.13	SVSWR 10 th measurement
Mismatch ; - Receiver VRC* : $\Gamma_i = 0.09$ -ANT. VRC : $\Gamma_g = 0.09$ - Uncertainty: $20\log(1 \pm \Gamma_i \Gamma_g)$	U-type ($\sqrt{2}$)	± 0.54	CISPR16-4-2
Pre-amp.	Normal (k = 2)	± 0.60	Cal. Report
System Repeatability	Standard Deviation(SD)	± 0.34	10 th measurement
Combined measurement uncertainty $U_c(y)$	Normal	+ 1.73 - 1.73	
Expanded measurement uncertainty (95%,Confidence level,k=2)dB	Normal(k = 2)	1 GHz - 6 GHz + 3.46 - 3.46	

Note:VRC(Voltage Reflection Coefficient)

APPENDIX D

PHOTOGRAPHS


Conducted emission (Maximum emission configuration) / Recording (AC) mode



Conducted emission (Maximum emission configuration) / Recording (DC) mode




Radiated emission (Maximum emission configuration)-Below 1 GHz / Recording (AC) mode

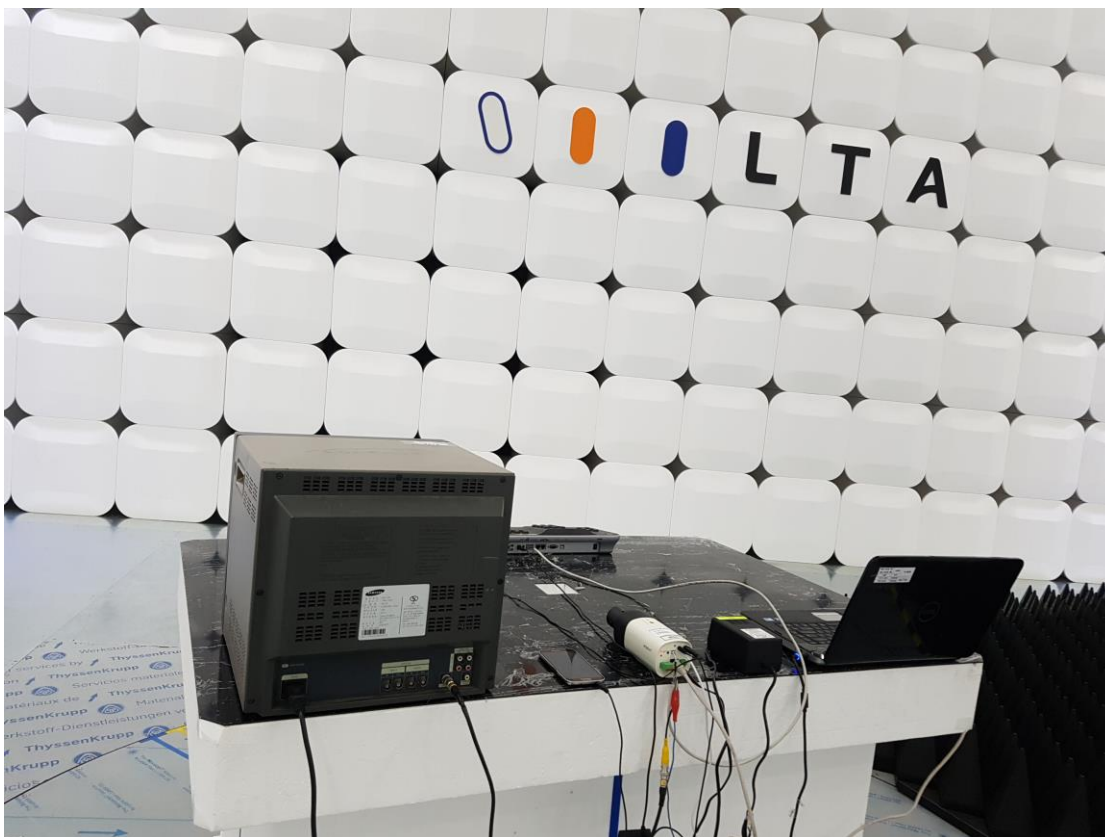


Radiated emission (Maximum emission configuration)-Below 1 GHz / Recording (DC) mode




Radiated emission (Maximum emission configuration)-Below 1 GHz / Recording (PoE) mode

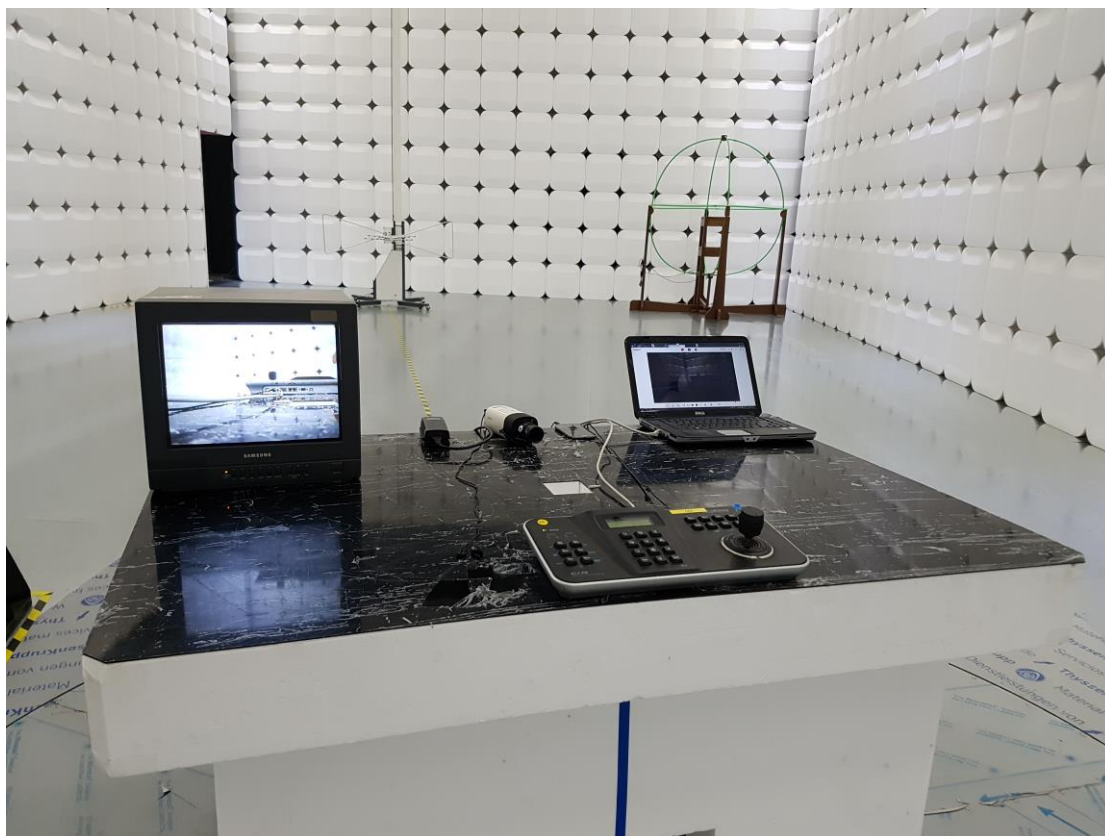



Radiated emission (Maximum emission configuration) – Above 1GHz / Recording (AC) mode

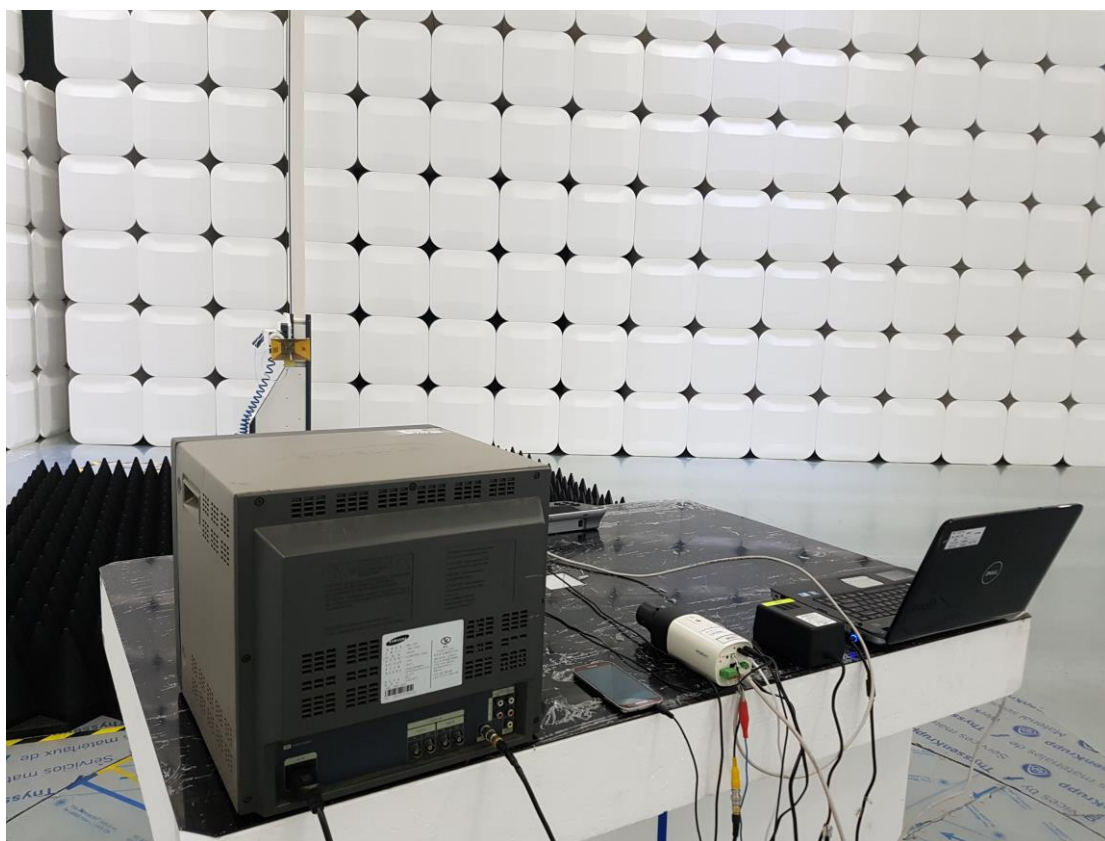

Radiated emission (Maximum emission configuration) – Above 1GHz / Recording (DC) mode

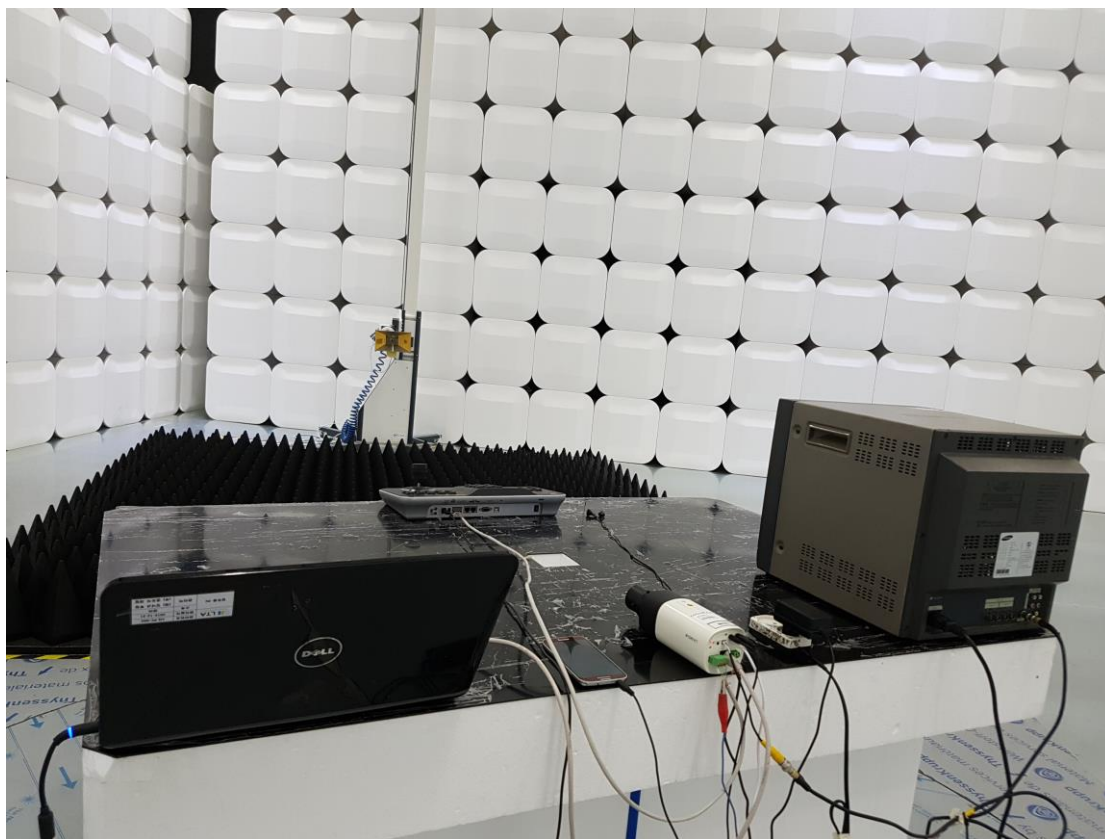

Radiated emission (Maximum emission configuration) – Above 1GHz / Recording (PoE) mode

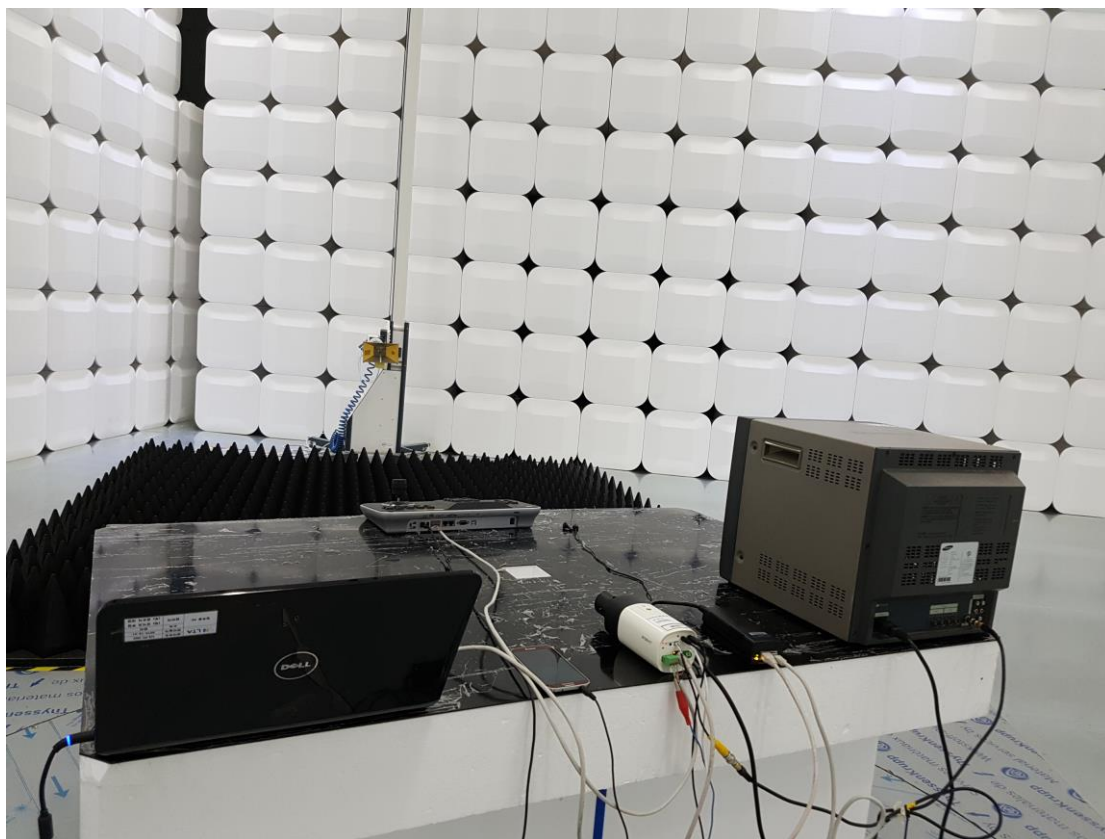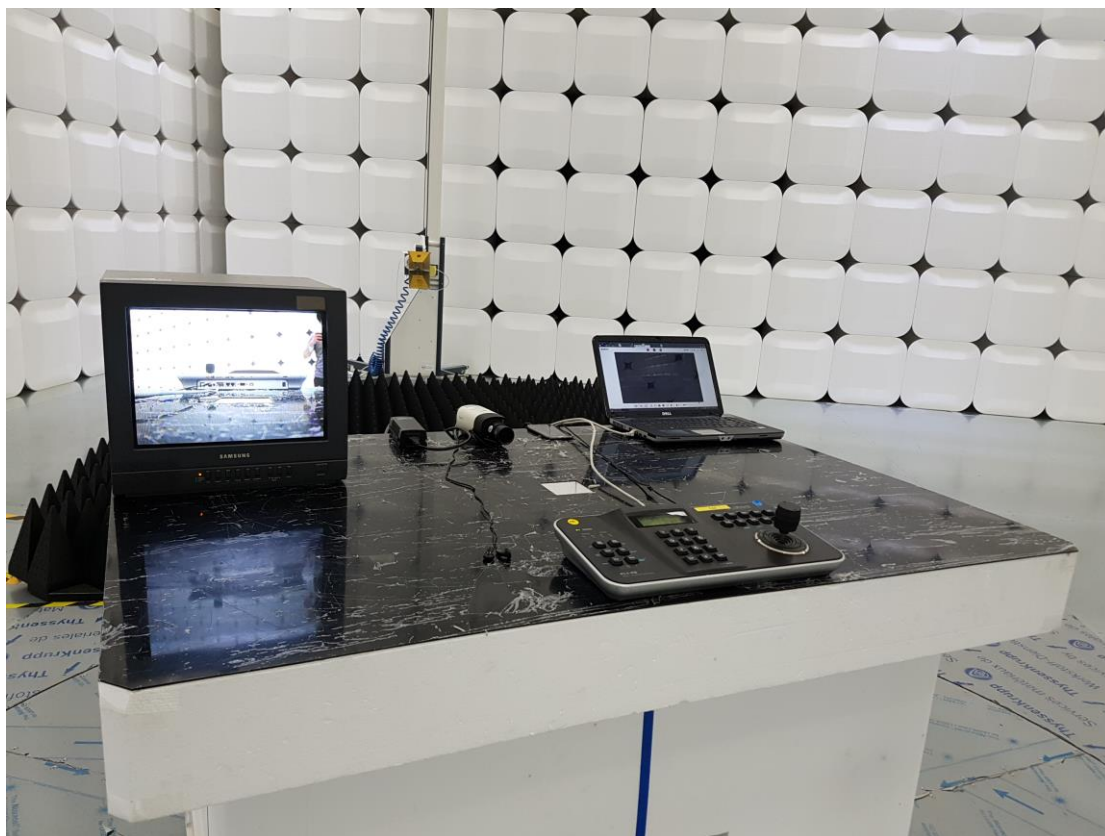

EUT



EUT





EUT





EUT





EUT

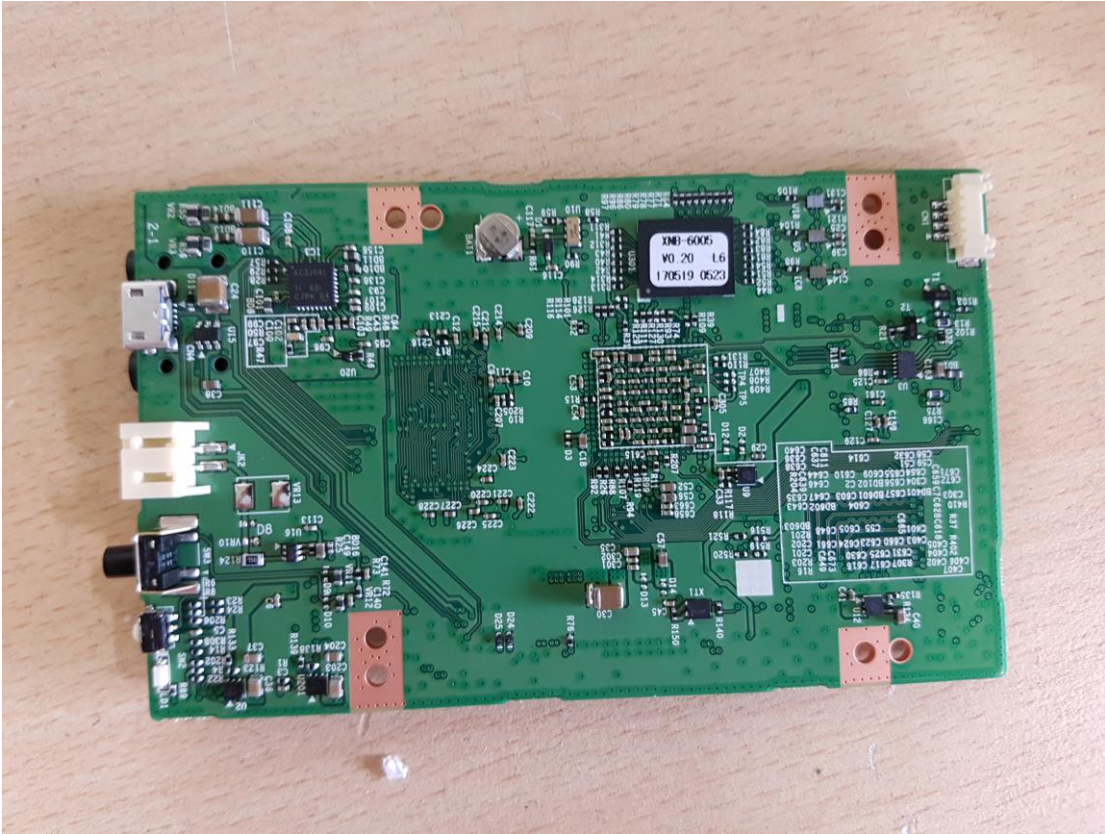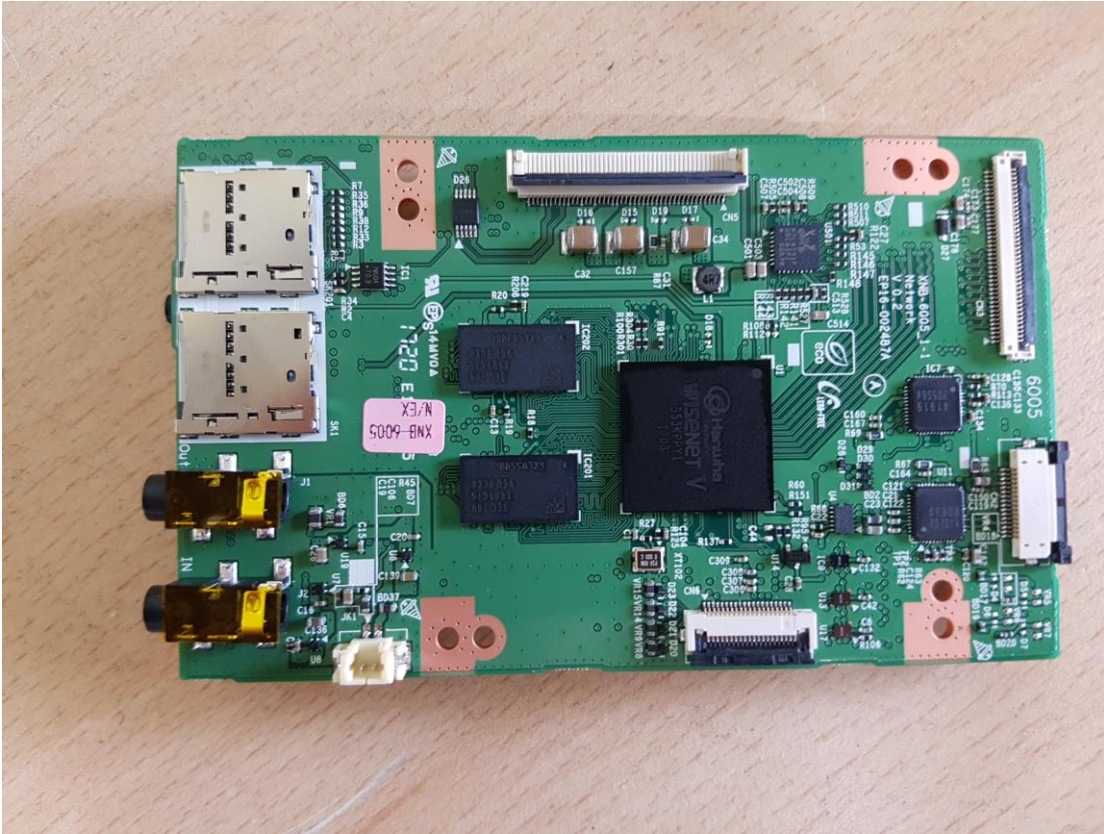

EUT

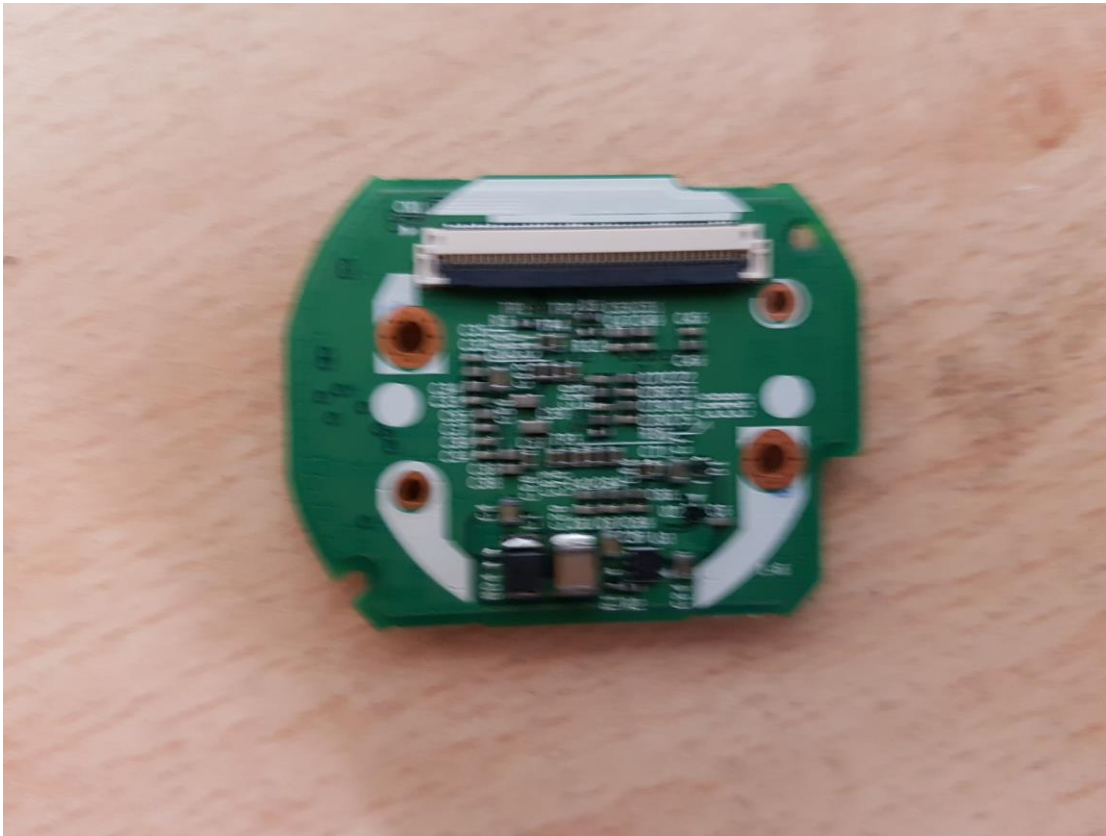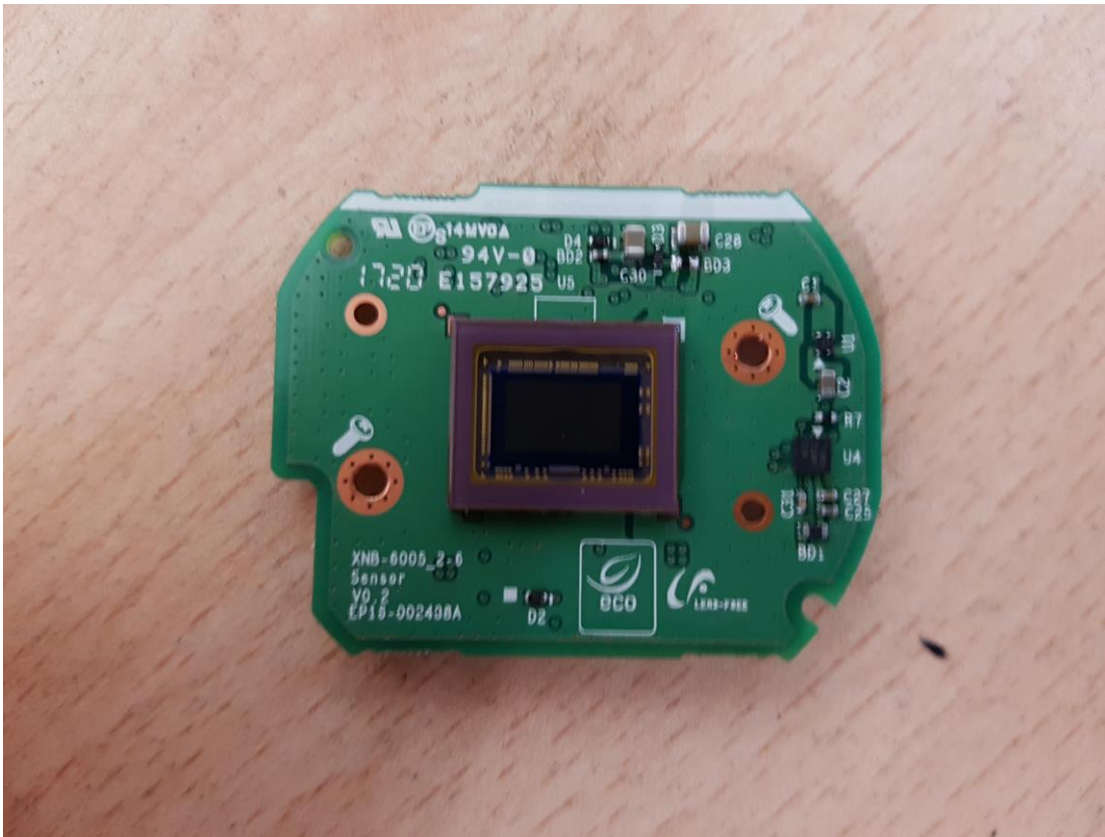

EUT

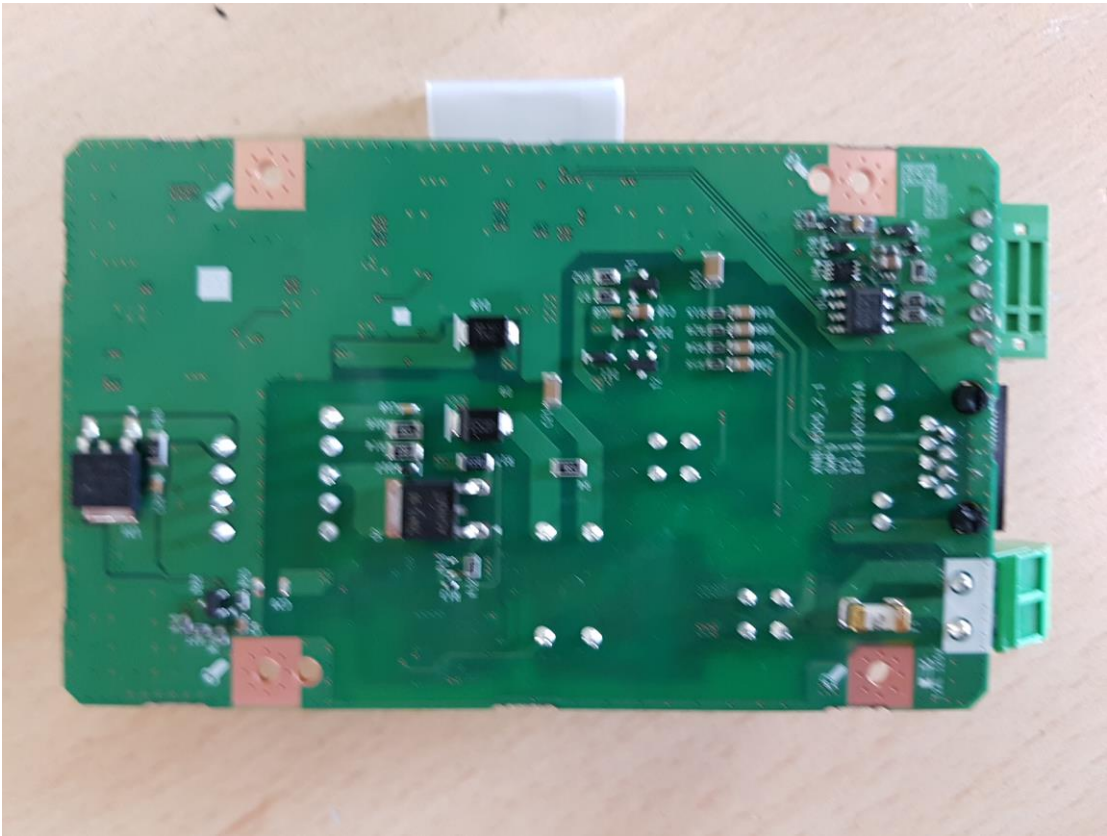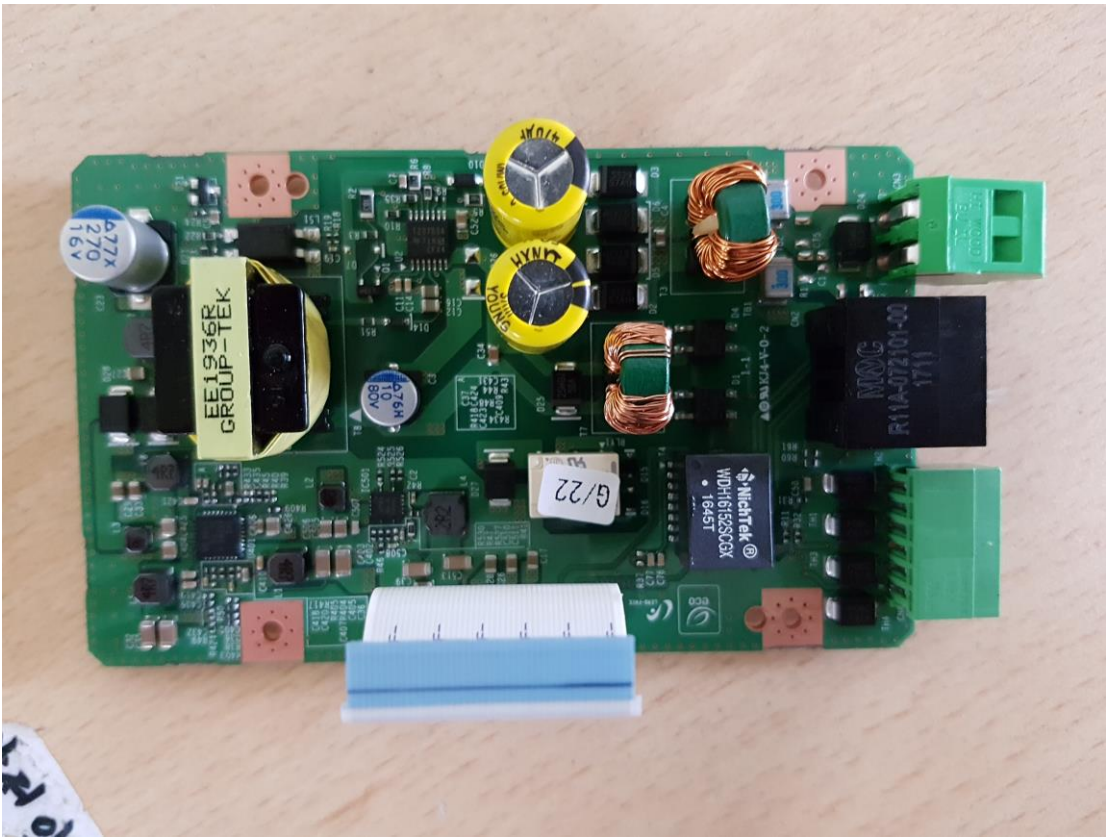

EUT

