



EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0608-R2
Date of Issue : May. 15, 2019
Product name : NETWORK CAMERA
Model/Type No. : XNB-8000
Variant Model : XNB-8000P
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA
Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.
Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)
Date of Receipt : Nov, 23, 2016
Test date : Nov, 28, 2016 – Nov. 30, 2016
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (2) of (98)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 05, 2016	KES-E1-16T0608	Issued
Jun. 26, 2018	KES-E1-16T0608-R1	Re-issue due to manufacturer change
May. 15, 2019	KES-E1-16T0608-R2	Variant model addition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	E.U.T Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Conducted Emissions at Telecommunication Ports	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
2.5	Harmonic Current Emissions	19
2.6	Voltage Fluctuations and Flicker	20
3.0	Criteria for compliance	21
3.1	Electrostatic Discharge	23
3.2	Radiated Electric Field Immunity	29
3.3	Electrical Fast Transients/Bursts	32
3.4	Surge Transients	35
3.5	Conducted Disturbance	39
3.6	Voltage Dips and Short Interruptions	43
APPENDIX A – TEST DATA		45
Conducted Emissions at Mains Power Ports		45
Conducted Emissions at Telecommunication Ports		47
Radiated Electric Field Emissions(Below 1 GHz)		53
Radiated Electric Field Emissions(Above 1 GHz)		55
Harmonic Current Emissions and Voltage Fluctuations and Flicker		67
Test Setup Photos and Configuration		70
Conducted Voltage Emissions		70
Conducted Telecommunication Emissions		71
Radiated Electric Field Emissions(Below 1 GHz)		74
Radiated Electric Field Emissions(Above 1 GHz)		77
Harmonic Current Emissions and Voltage Fluctuations and Flicker		80
Electrostatic Discharge		80
Radiated Electric Field Immunity		81
Electrical Fast Transients/Bursts		83
Surge Transients		86
Conducted Disturbance		89
Voltage Dips and Short Interruptions		92
EUT External Photographs		93
EUT Internal Photographs		94



1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux (TBD) B/W : 0.003Lux(TBD)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
Lens	
Focal Length (Zoom Ratio)	
Max. Aperture Ratio	
Angular Field of View	
Min. Object Distance	
Focus Control	Simple focus / Manual, Remote control via network, Butto control (Manual, Simple focus)
Lens Type	Manual / DC Auto Iris, P-iris
Mount Type	C/CS
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	
Operational	
IR LED	
Viewable Length	
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	120dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog&Dust detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic ※ Zoom ratio option for mask mode (TBD)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (5) of (98)

Digital PTZ	24X, 'Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio A	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Forma	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	5M mode : 2592 x 1944, 2592 x 1464, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240 2M mode : 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576 640x480, 640x360, 320x240, 320x180
Max. Framerate	5M mode : H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps 2M mode : H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Forma	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-dierctional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (6) of (98)

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method
Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8. 10.9. 10.10. 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Software	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C (-14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	Black, Ivory / Plastic
Dimension (WxHxD)	TBD
Weight	TBD
스펙시트 미표기 요구사항	
Cable Connection	Plug-in
SD카드	듀얼슬롯

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Add derivative model for vendor management

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNB-8000	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE ADAPTOR	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Notebook	X56K	HN11N5151FJ0045 W	HANSUNG COMPUTER	-
Notebook ADAPTOR	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
SPEAKER	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Cellphone	LG-F700	-	LG	-
Alarm	-	-	-	-
Micro SD CARD	-	-	-	4GB
Lens	SLA-M2890DN	-	SAMSUNG	-



1.6 External I / O Cabling

- AC, DC Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	Audio In	Cellphone	Audio In	1.0	U
	Audio OUT	SPEAKER	Audio OUT	1.7	U
	Micro SD	Micro SD Card	Micro SD	-	-
	Iris	Lens	Iris	-	-
	2Pin	Alarm	2Pin	3.0	U

- POE Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	POE ADAPTOR	RJ-45	3.0	U
	Audio In	cellphone	Audio In	1.0	U
	Audio OUT	SPEAKER	Audio OUT	1.7	U
	Micro SD	Micro SD Card	Micro SD	-	-
	Iris	Lens	Iris	-	-
	2Pin	Alarm	2Pin	3.0	U
POE ADAPTOR	RJ-45	Notebook	RJ-45	3.5	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (9) of (98)

1.7 E.U.T Operating Mode(s)

Test mode	Normal operating
AC, DC, POE	E.U.T Monitoring, 1 kHz, Ping Test


E.U.T Test operating S / W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main


- AC Mode

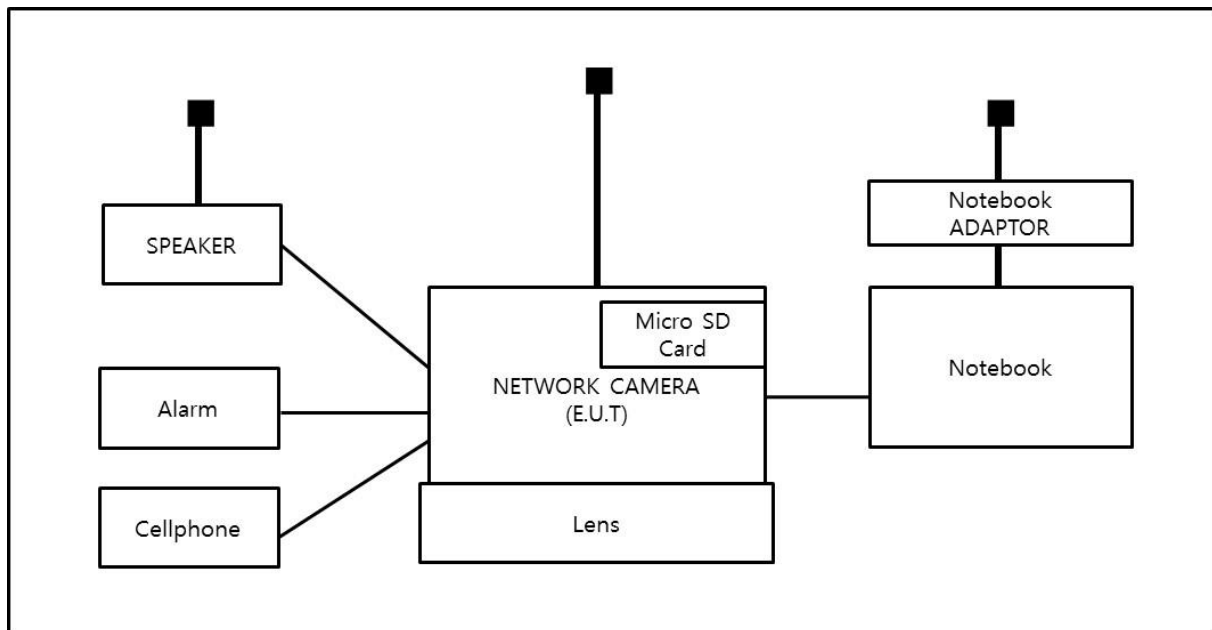

- DC Mode

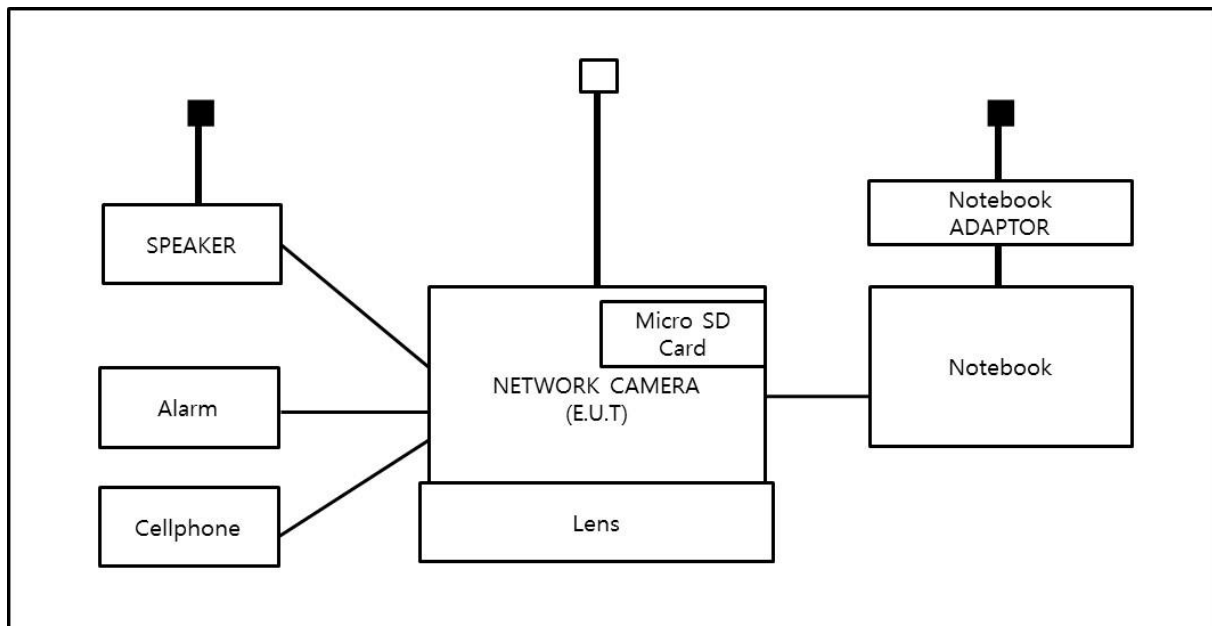

- POE Mode

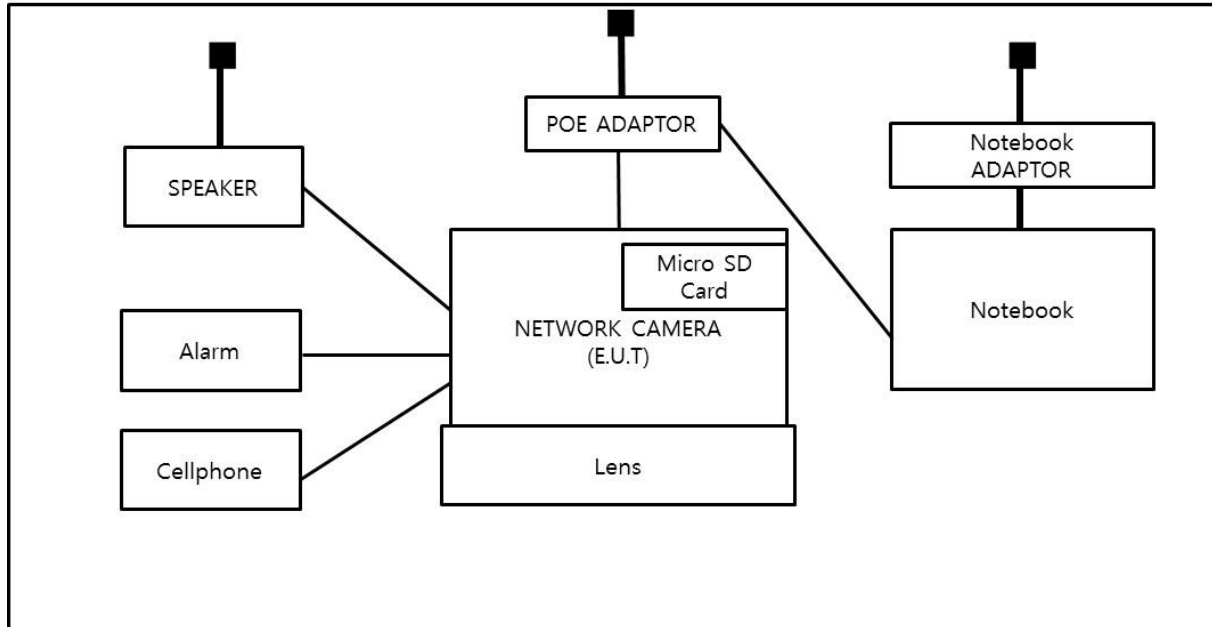

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (14) of (98)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 + A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Nov, 28, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 17,4 °C

Relative Humidity: 41,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov, 28, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 17,4 °C

Relative Humidity: 41,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov, 28, 2016

Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 3,9 °C

Relative Humidity: 65,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov, 28, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 17,4 °C

Relative Humidity: 41,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

N/A : Because the E.U.T power is less than 75 W, limits are not specified.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A : Because the E.U.T power is less than 75 W, limits are not specified.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Nov, 28, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-
☒	EMS Test S/W	N/A	N/A	N/A	-

Test ConditionsTemperature: 17,4 °C
Relative Humidity: 41,7 %
Atmospheric Pressure: 101,7 kPa**Test Specifications**Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling planeRequired Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Location of Discharge:

- AC Mode

Air
Contact



1

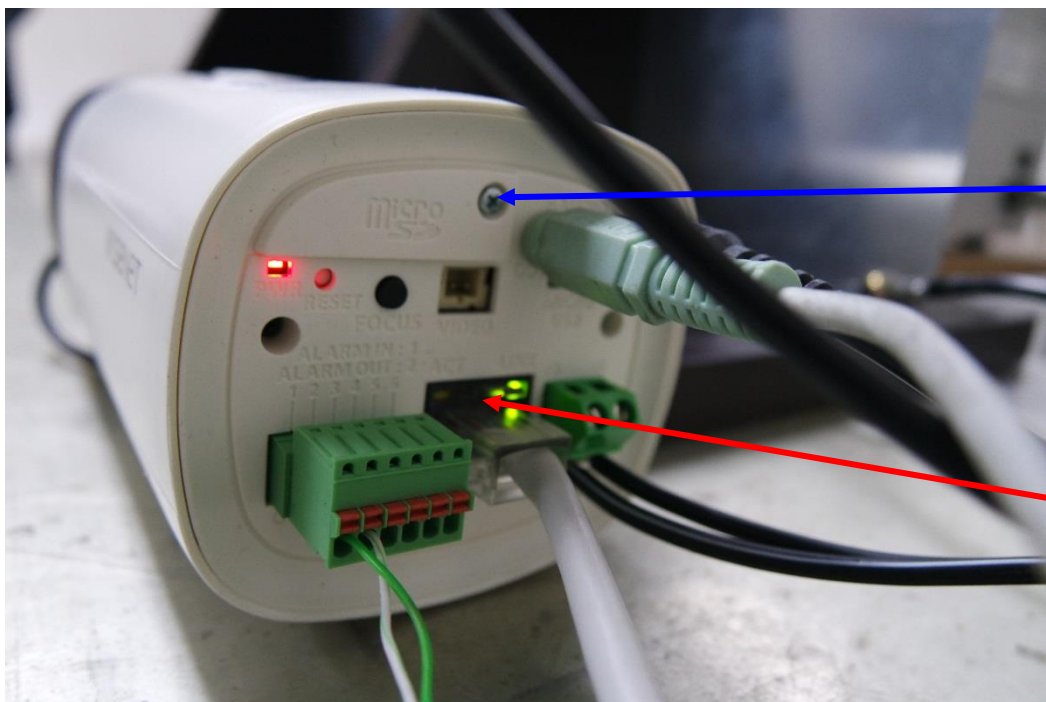


2


3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode

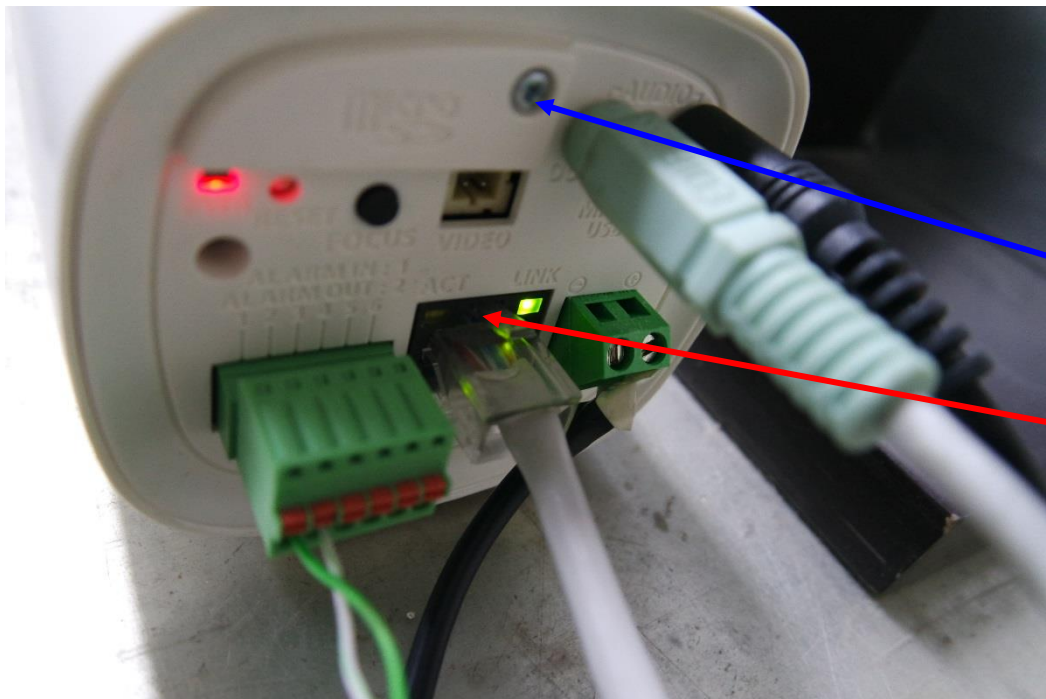

- POE Mode

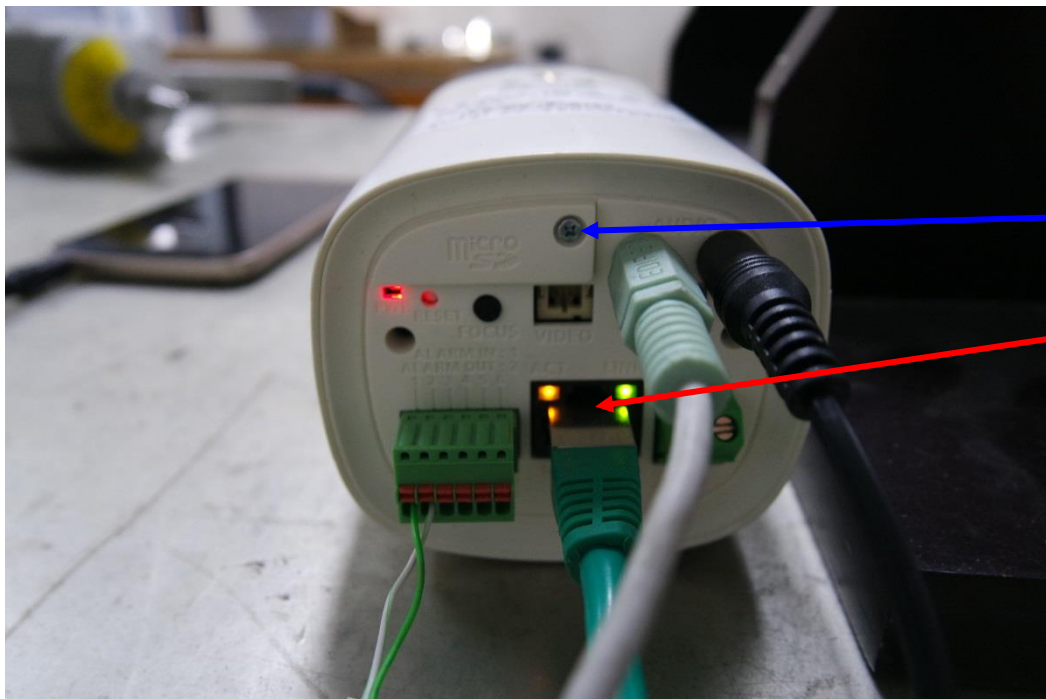

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (27) of (98)

Test Data**- AC Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	

- DC Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (28) of (98)

- POE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Nov, 29, 2016

Test Location

EMS-RS: ☐ Semi Anechoic Chamber #1☒ Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 08, 2017
☒	BROADBAND AMPLIFIER	BBA100	Rohde & Schwarz	101239	08, 08, 2017
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 08, 2017
☒	POWER METER	NRP2	Rohde & Schwarz	103475	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102526	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102527	08, 08, 2017
☒	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	Kytelecom Co., Ltd.	KY150001	08, 08, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	EMS Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 17,1 °C
Relative Humidity: 42,0 %
Atmospheric Pressure: 102,4 kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (31) of (98)

Test Data**- AC Mode**

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- POE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.3 Electrical Fast Transients / Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Nov, 30, 2016

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Capacitive Coupling Clamp	HFK	EM TEST	070925	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 43,7 %
Atmospheric Pressure: 101,5 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

- AC Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (34) of (98)

- POE Mode☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Nov, 30, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 504N	EM TEST	V0936105121	06, 27, 2017
☒	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 43,7 %
Atmospheric Pressure: 101,5 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**Test Data****- AC Mode**☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1 – PE	Complied	Complied
L2 – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (38) of (98)

- POE Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Nov, 30, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
☒	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
☐	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 08, 2017
☐	CDN	CDN-T4	EM TEST	0909-08	08, 08, 2017
☐	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 08, 2017
☐	CDN	CDN-AF2	EM TEST	0909-10	08, 08, 2017
☐	CDN	CDN-AF4	EM TEST	0909-11	08, 08, 2017
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017
☒	EMS Test S/W	icd.control	EM TEST AG	5.3.7	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 43,7 %
Atmospheric Pressure: 101,5 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (40) of (98)

Test Specifications

- Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz
- Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms
- Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: ☒ 1 % step
- Dwell Time: ☒ 1 s ☐ 3 s
- Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Data

- AC Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN (☒ M2, ☐ M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

- DC Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 – L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (42) of (98)

- POE Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Nov, 30, 2016

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 43,7 %
Atmospheric Pressure: 101,5 kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (44) of (98)

Test Specifications & Observations / Remarks**- AC Mode**

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 /5000	<u>Complied</u>
☒ 30 % dip	☒ 25 /500	<u>Complied</u>
☒ 60 % dip	☒ 10 /200	<u>Complied</u>
☒ 100 % dip	☒ 250 /5000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNB-8000P
Mode	AC
Operator Name:	KES

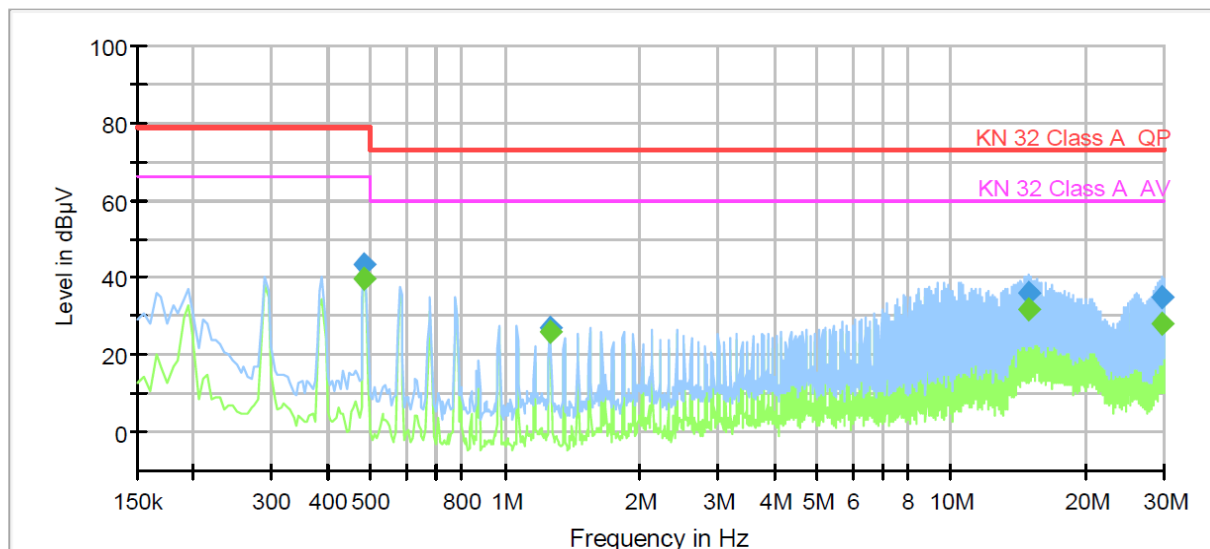

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	39.53	66.00	26.47	1000.0	9.000	L1	9.8
0.485000	43.53	---	79.00	35.47	1000.0	9.000	L1	9.8
1.260000	---	26.01	60.00	33.99	1000.0	9.000	L1	10.1
1.260000	26.84	---	73.00	46.16	1000.0	9.000	L1	10.1
14.835000	---	31.63	60.00	28.37	1000.0	9.000	L1	10.1
14.835000	36.25	---	73.00	36.75	1000.0	9.000	L1	10.1
29.575000	---	28.28	60.00	31.72	1000.0	9.000	L1	10.4
29.575000	35.12	---	73.00	37.88	1000.0	9.000	L1	10.4

◆ Calculation

QuasiPeak[dBµV] / CAverage [dBµV] = Reading Value[dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:


KES-E1-16T0608-R2

Page (46) of (98)

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNB-8000P
Mode: AC
Operator Name: KES

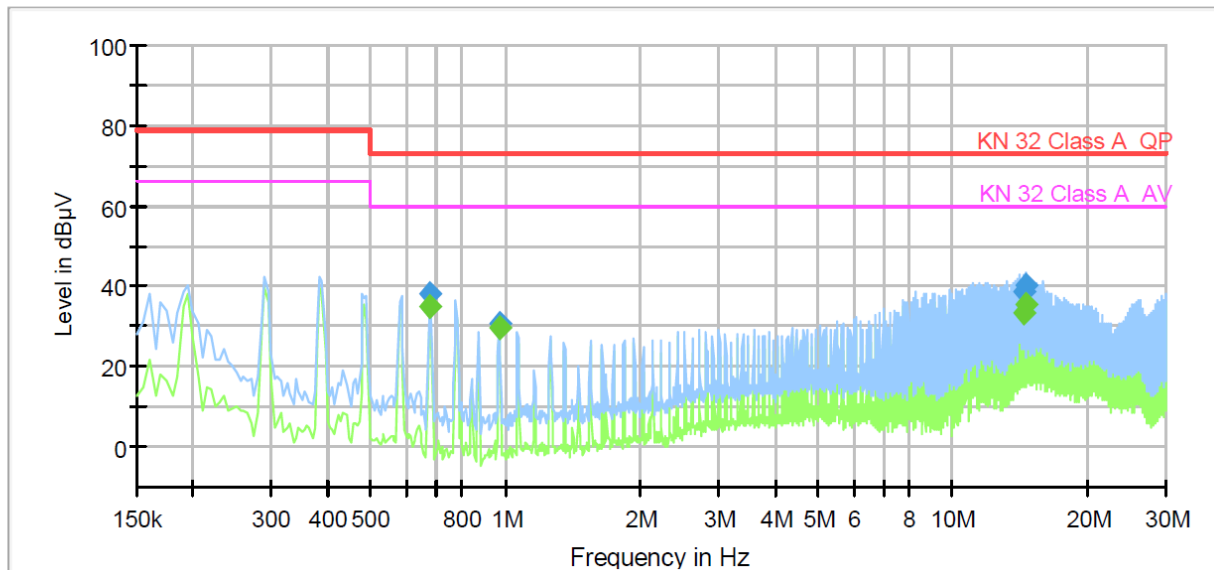

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.680000	---	34.85	60.00	25.15	1000.0	9.000	N	9.9
0.680000	38.21	---	73.00	34.79	1000.0	9.000	N	9.9
0.970000	---	29.84	60.00	30.16	1000.0	9.000	N	10.0
0.970000	30.83	---	73.00	42.17	1000.0	9.000	N	10.0
14.355000	---	33.43	60.00	26.57	1000.0	9.000	N	10.1
14.355000	38.49	---	73.00	34.51	1000.0	9.000	N	10.1
14.550000	---	35.53	60.00	24.47	1000.0	9.000	N	10.1
14.550000	39.98	---	73.00	33.02	1000.0	9.000	N	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Emissions at Telecommunication Ports

- AC Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: AC_10M
Operator Name: KES

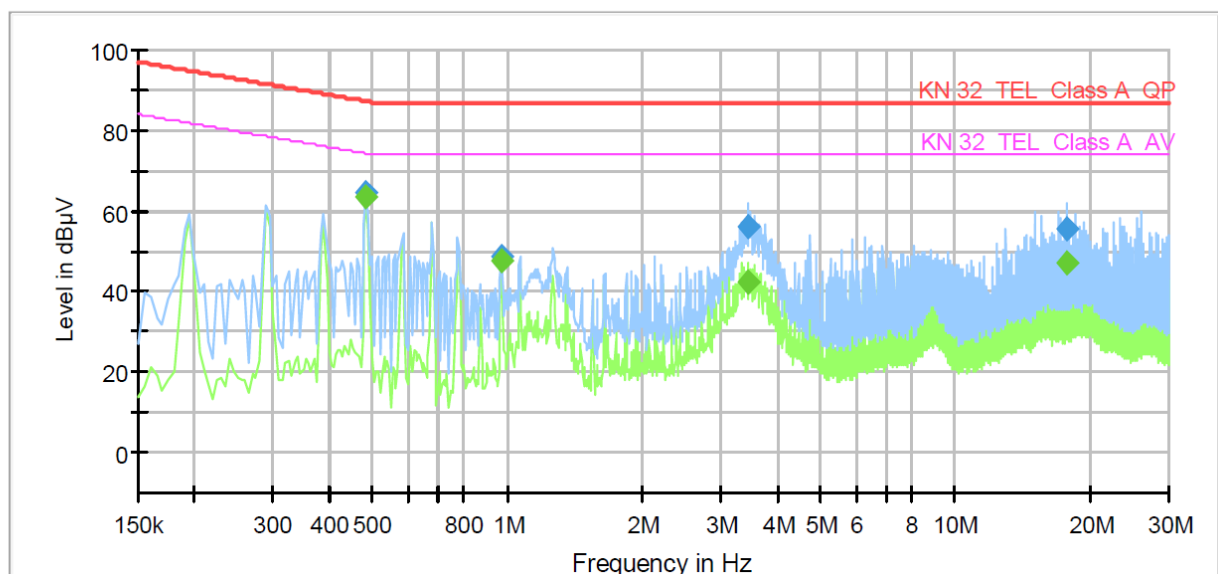

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	63.53	74.25	10.72	1000.0	9.000	Single Line	10.1
0.485000	64.70	---	87.25	22.55	1000.0	9.000	Single Line	10.1
0.970000	---	47.78	74.00	26.22	1000.0	9.000	Single Line	10.2
0.970000	48.49	---	87.00	38.51	1000.0	9.000	Single Line	10.2
3.460000	---	42.15	74.00	31.85	1000.0	9.000	Single Line	10.2
3.460000	56.07	---	87.00	30.93	1000.0	9.000	Single Line	10.2
17.770000	---	47.33	74.00	26.67	1000.0	9.000	Single Line	10.2
17.770000	55.81	---	87.00	31.19	1000.0	9.000	Single Line	10.2

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:


KES-E1-16T0608-R2

Page (48) of (98)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: AC_100M
Operator Name: KES

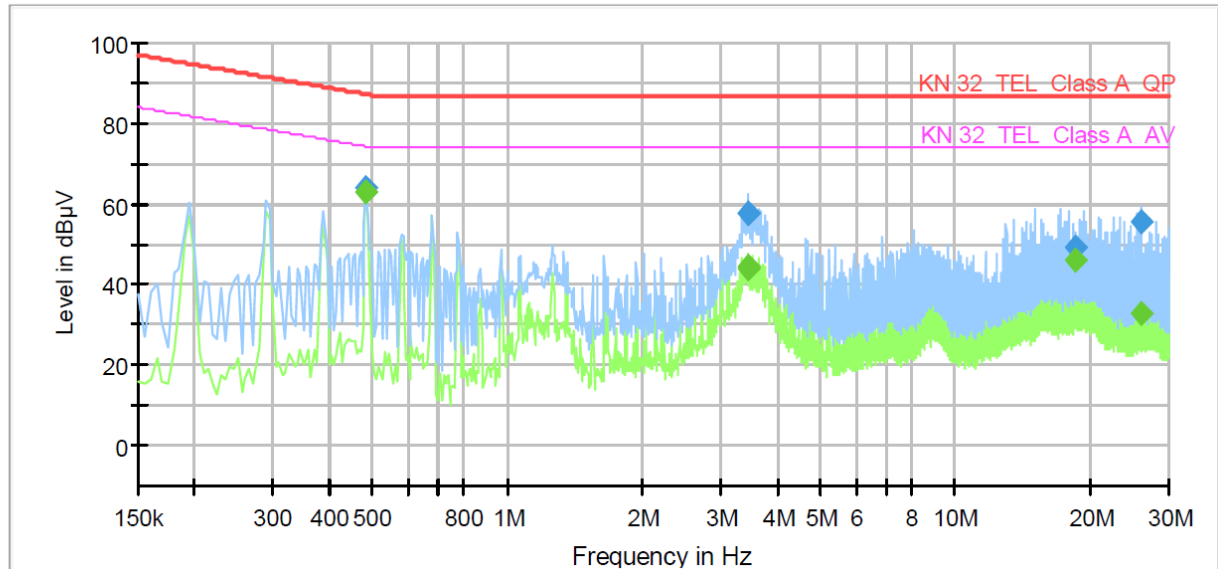

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	63.04	74.25	11.21	1000.0	9.000	Single Line	9.6
0.485000	64.27	---	87.25	22.98	1000.0	9.000	Single Line	9.6
3.450000	---	44.26	74.00	29.74	1000.0	9.000	Single Line	9.7
3.450000	57.60	---	87.00	29.40	1000.0	9.000	Single Line	9.7
3.455000	---	43.74	74.00	30.26	1000.0	9.000	Single Line	9.7
3.455000	57.46	---	87.00	29.54	1000.0	9.000	Single Line	9.7
18.550000	---	46.12	74.00	27.88	1000.0	9.000	Single Line	9.6
18.550000	49.15	---	87.00	37.85	1000.0	9.000	Single Line	9.6
26.015000	---	32.65	74.00	41.35	1000.0	9.000	Single Line	9.5
26.015000	55.36	---	87.00	31.64	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2


Page (49) of (98)

- DC Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: DC_10M
Operator Name: KES

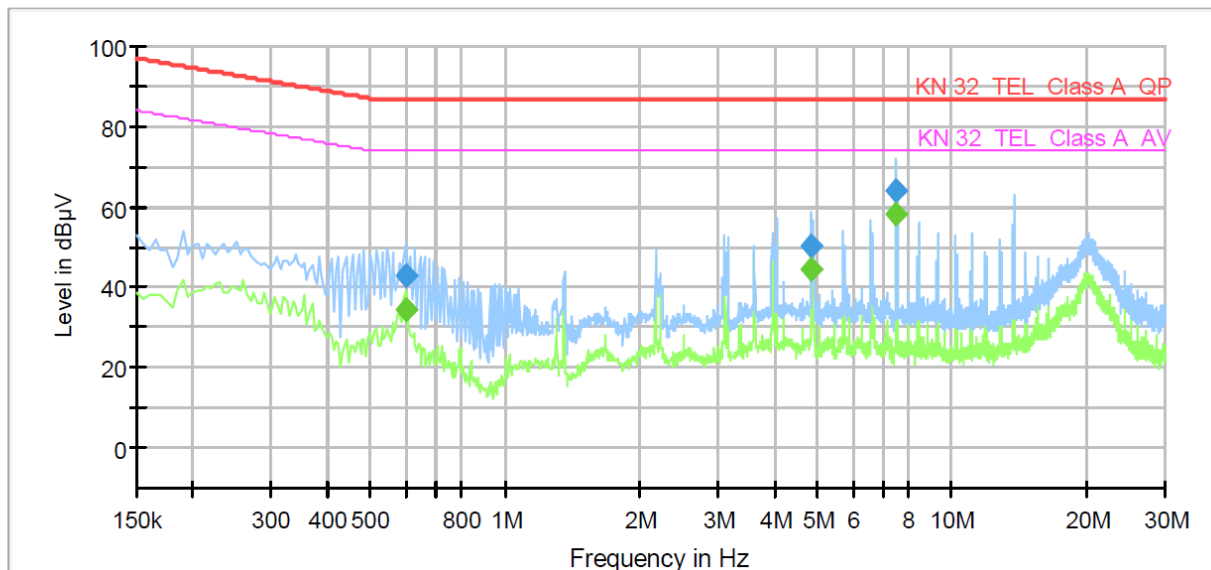

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.600000	---	34.32	74.00	39.68	1000.0	9.000	Single Line	10.1
0.600000	43.01	---	87.00	43.99	1000.0	9.000	Single Line	10.1
4.835000	---	44.61	74.00	29.39	1000.0	9.000	Single Line	10.1
4.835000	50.12	---	87.00	36.88	1000.0	9.000	Single Line	10.1
7.500000	---	58.38	74.00	15.62	1000.0	9.000	Single Line	10.0
7.500000	64.08	---	87.00	22.92	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBμV] / CAverage [dBμV] = Reading Value[dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:


KES-E1-16T0608-R2

Page (50) of (98)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: DC_100M
Operator Name: KES

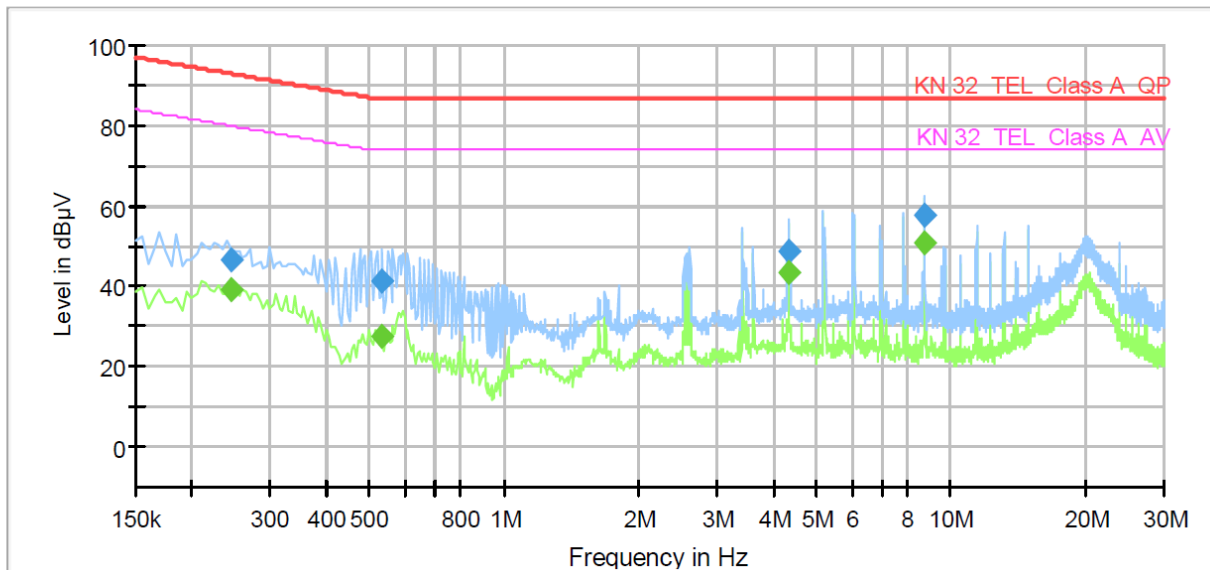

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.245000	---	39.18	79.92	40.74	1000.0	9.000	Single Line	9.6
0.245000	46.51	---	92.92	46.41	1000.0	9.000	Single Line	9.6
0.535000	---	27.56	74.00	46.44	1000.0	9.000	Single Line	9.6
0.535000	41.40	---	87.00	45.60	1000.0	9.000	Single Line	9.6
4.350000	---	43.25	74.00	30.75	1000.0	9.000	Single Line	9.6
4.350000	48.75	---	87.00	38.25	1000.0	9.000	Single Line	9.6
8.750000	---	51.03	74.00	22.97	1000.0	9.000	Single Line	9.5
8.750000	57.64	---	87.00	29.36	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2


Page (51) of (98)

- POE Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: POE_10M
Operator Name: KES

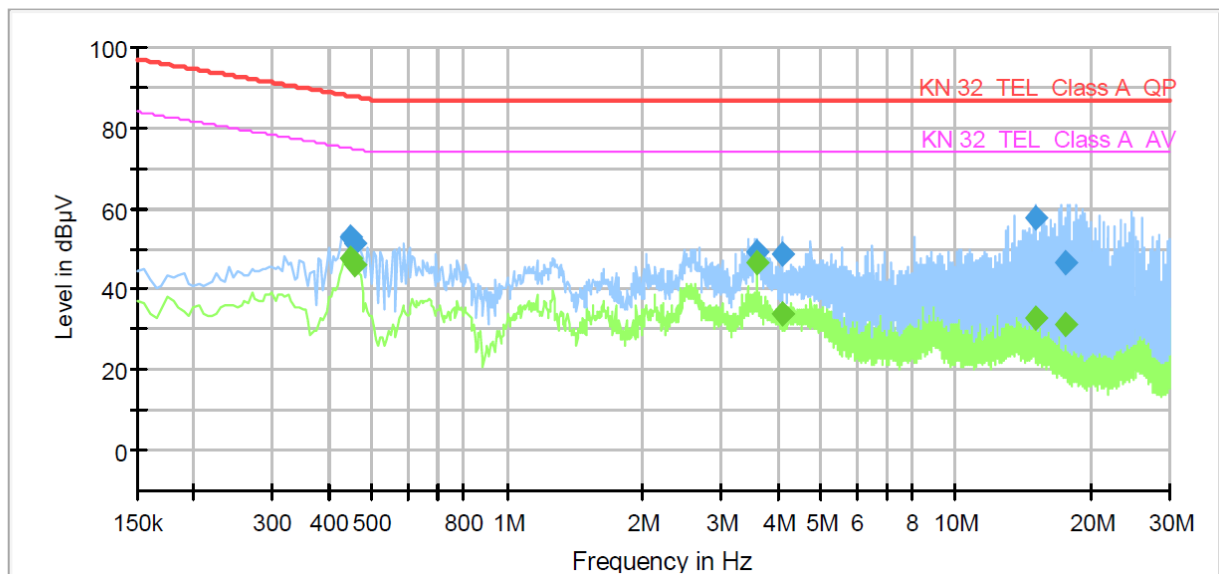

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	---	47.87	74.97	27.10	1000.0	9.000	Single Line	10.1
0.445000	53.12	---	87.97	34.85	1000.0	9.000	Single Line	10.1
0.455000	---	46.10	74.78	28.68	1000.0	9.000	Single Line	10.1
0.455000	51.59	---	87.78	36.19	1000.0	9.000	Single Line	10.1
3.600000	---	46.63	74.00	27.37	1000.0	9.000	Single Line	10.2
3.600000	49.46	---	87.00	37.54	1000.0	9.000	Single Line	10.2
4.090000	---	33.83	74.00	40.17	1000.0	9.000	Single Line	10.1
4.090000	48.87	---	87.00	38.13	1000.0	9.000	Single Line	10.1
15.025000	---	32.81	74.00	41.19	1000.0	9.000	Single Line	10.1
15.025000	57.54	---	87.00	29.46	1000.0	9.000	Single Line	10.1
17.570000	---	31.24	74.00	42.76	1000.0	9.000	Single Line	10.2
17.570000	46.84	---	87.00	40.16	1000.0	9.000	Single Line	10.2

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8000P
Mode: POE_100M
Operator Name: KES

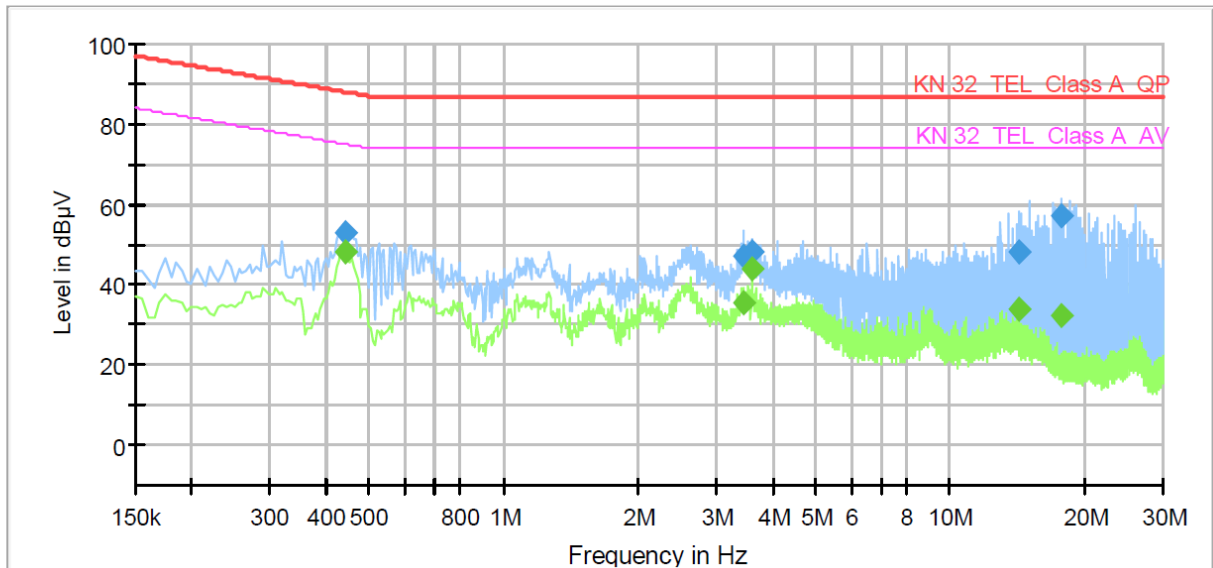

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.440000	---	48.01	75.06	27.05	1000.0	9.000	Single Line	9.6
0.440000	52.98	---	88.06	35.08	1000.0	9.000	Single Line	9.6
3.450000	---	35.62	74.00	38.38	1000.0	9.000	Single Line	9.7
3.450000	47.17	---	87.00	39.83	1000.0	9.000	Single Line	9.7
3.600000	---	43.93	74.00	30.07	1000.0	9.000	Single Line	9.7
3.600000	48.03	---	87.00	38.97	1000.0	9.000	Single Line	9.7
14.275000	---	34.01	74.00	39.99	1000.0	9.000	Single Line	9.6
14.275000	47.91	---	87.00	39.09	1000.0	9.000	Single Line	9.6
17.770000	---	32.14	74.00	41.86	1000.0	9.000	Single Line	9.7
17.770000	57.18	---	87.00	29.82	1000.0	9.000	Single Line	9.7

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)



Radiated Electric Field Emissions(Below 1 GHz)

- AC Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
150.19	18.71	H	2.36	8.21	3.57	30.49	40.00	9.51
157.05	12.58	V	1.35	8.45	3.66	24.69	40.00	15.31
224.06	11.85	H	2.11	11.83	4.41	28.09	40.00	11.91
230.72	16.25	V	1.85	11.98	4.49	32.72	47.00	14.28
270.45	19.24	V	1.05	12.81	4.90	36.95	47.00	10.05
297.69	12.37	V	3.01	13.34	5.13	30.84	47.00	16.16
297.72	13.05	H	2.00	13.34	5.13	31.52	47.00	15.48
350.96	12.95	H	1.96	14.56	5.65	33.16	47.00	13.84

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dB μ V] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (54) of (98)

- DC Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
151.24	10.52	H	2.36	8.24	3.58	22.34	40.00	17.66
155.10	11.58	V	1.52	8.38	3.63	23.59	40.00	16.41
220.01	12.25	H	2.01	11.74	4.36	28.35	40.00	11.65
229.79	11.09	H	1.95	11.96	4.47	27.52	40.00	12.48
251.07	10.23	V	3.02	12.43	4.73	27.39	47.00	19.61
297.69	13.20	H	1.22	13.34	5.13	31.67	47.00	15.33
473.24	11.28	V	3.01	16.73	6.89	34.90	47.00	12.10

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- POE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
152.26	13.25	H	2.31	8.28	3.60	25.13	40.00	14.87
155.00	15.68	V	2.00	8.38	3.63	27.69	40.00	12.31
223.03	11.25	H	1.52	11.81	4.39	27.45	40.00	12.55
223.94	11.01	V	1.66	11.83	4.40	27.24	40.00	12.76
260.80	13.25	H	3.01	12.62	4.81	30.68	47.00	16.32
270.54	13.20	V	1.25	12.81	4.90	30.91	47.00	16.09
320.01	14.21	H	2.01	13.84	5.35	33.40	47.00	13.60
370.41	11.98	V	1.09	15.01	5.86	32.85	47.00	14.15

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,


Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

- AC Mode

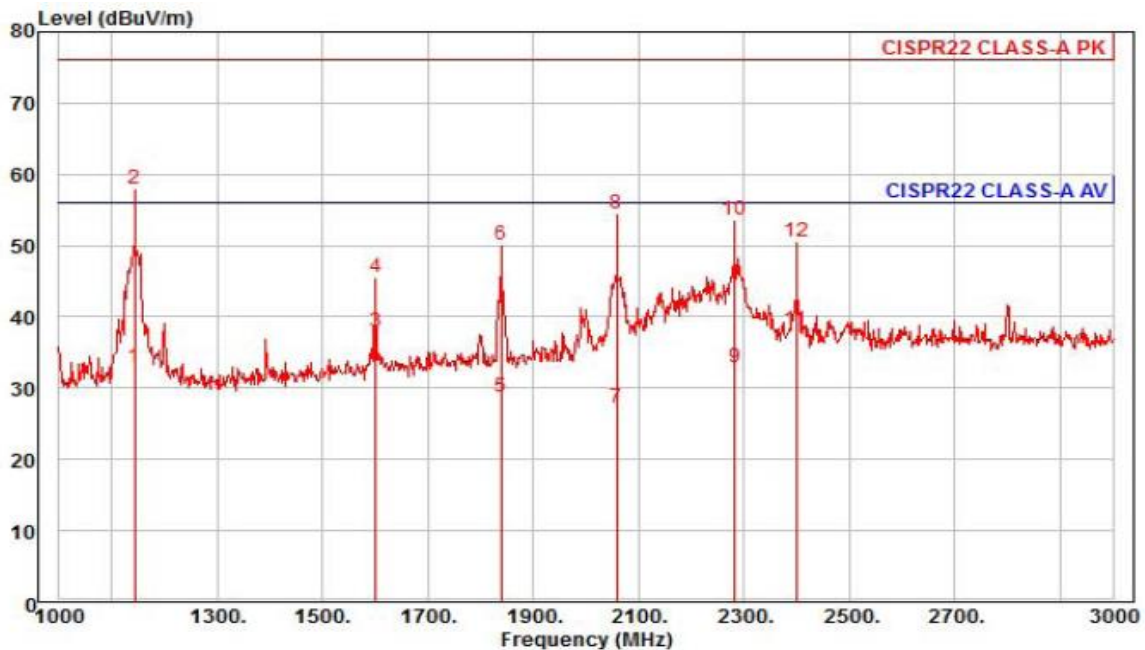

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : AC
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1144.00	41.29	24.48	6.95	39.74	214	56.00	-23.02	horizontal	Average
2 pk	1144.00	66.34	24.48	6.95	39.74	214	76.00	-17.97	horizontal	Peak
3	1600.00	42.61	26.29	8.31	39.22	39	56.00	-18.01	horizontal	Average
4	1600.00	50.14	26.29	8.31	39.22	39	76.00	-30.48	horizontal	Peak
5	1840.00	31.89	27.24	8.93	39.34	28	56.00	-27.28	horizontal	Average
6	1840.00	53.20	27.24	8.93	39.34	28	76.00	-25.97	horizontal	Peak
7	2058.00	29.18	28.02	9.47	39.41	199	56.00	-28.74	horizontal	Average
8	2058.00	56.38	28.02	9.47	39.41	199	76.00	-21.54	horizontal	Peak
9	2282.00	33.82	28.57	10.02	39.42	56	56.00	-23.01	horizontal	Average
10	2282.00	54.42	28.57	10.02	39.42	56	76.00	-22.41	horizontal	Peak
11 pp	2400.00	38.44	28.86	10.32	39.42	51	56.00	-17.80	horizontal	Average
12	2400.00	50.83	28.86	10.32	39.42	51	76.00	-25.41	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (56) of (98)

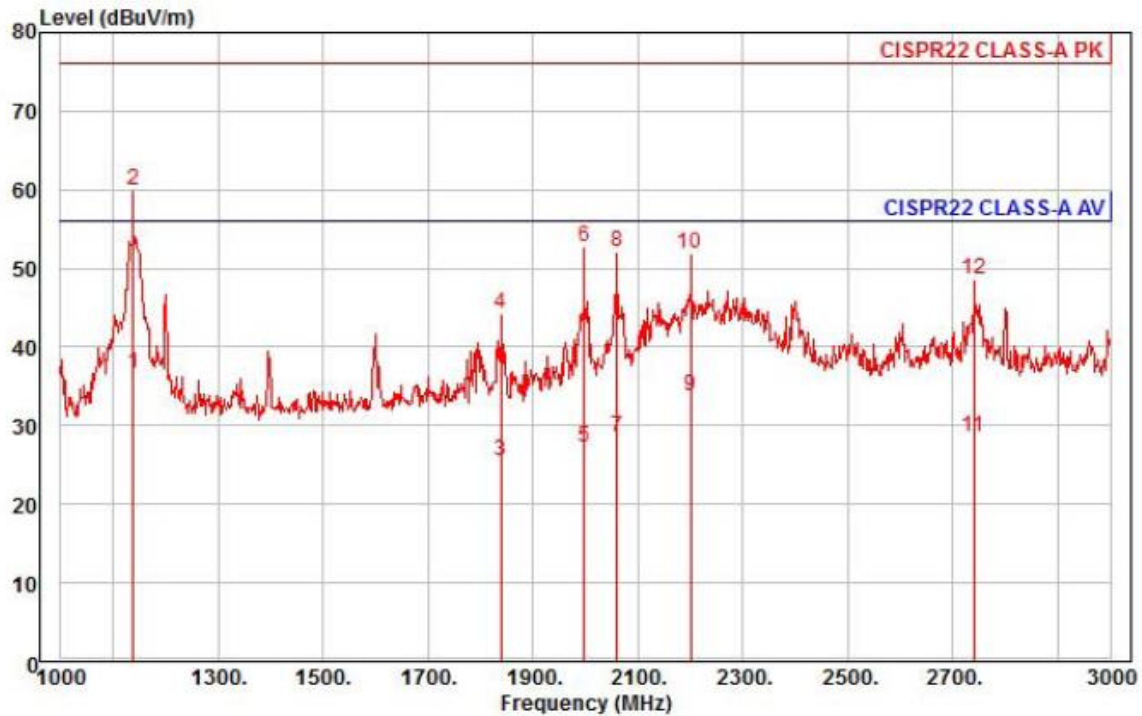

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : AC
Memo : 1 ~ 3 GHz

		Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	av	1138.00	44.94	24.46	6.93	39.76	172	56.00	-19.43	vertical	Average
2	pp	1138.00	68.22	24.46	6.93	39.76	172	76.00	-16.15	vertical	Peak
3		1840.00	28.60	27.24	8.93	39.34	160	56.00	-30.57	vertical	Average
4		1840.00	47.52	27.24	8.93	39.34	160	76.00	-31.65	vertical	Peak
5		1998.00	29.40	27.87	9.33	39.41	187	56.00	-28.81	vertical	Average
6		1998.00	54.91	27.87	9.33	39.41	187	76.00	-23.30	vertical	Peak
7		2060.00	30.45	28.03	9.48	39.41	218	56.00	-27.45	vertical	Average
8		2060.00	54.06	28.03	9.48	39.41	218	76.00	-23.84	vertical	Peak
9		2200.00	35.03	28.37	9.80	39.42	187	56.00	-22.22	vertical	Average
10		2200.00	53.05	28.37	9.80	39.42	187	76.00	-24.20	vertical	Peak
11		2740.00	27.59	29.69	11.09	39.81	333	56.00	-27.44	vertical	Average
12		2740.00	47.73	29.69	11.09	39.81	333	76.00	-27.30	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (57) of (98)

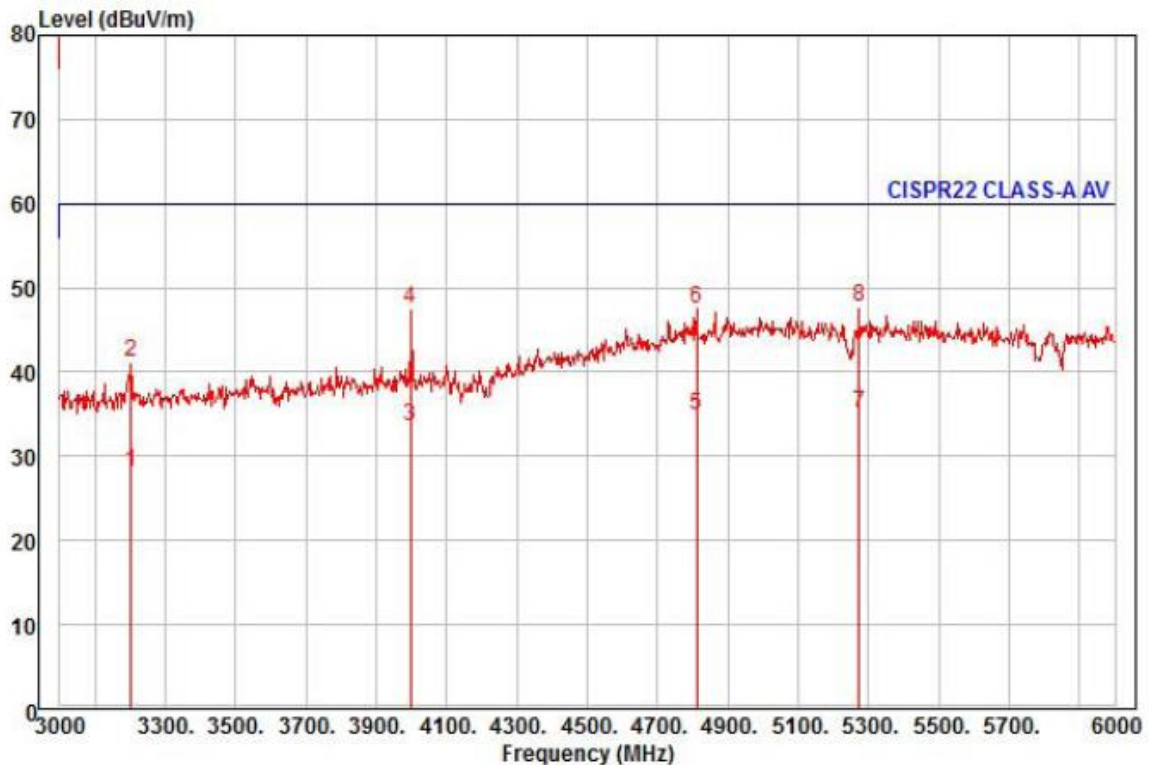

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : AC
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	25.88	30.67	12.06	40.42	180	60.00	-31.81	horizontal	Average
2	3201.00	38.92	30.67	12.06	40.42	180	80.00	-38.77	horizontal	Peak
3	3999.00	28.64	32.01	13.56	40.70	36	60.00	-26.49	horizontal	Average
4	3999.00	42.62	32.01	13.56	40.70	36	80.00	-32.51	horizontal	Peak
5	4812.00	23.62	36.65	15.11	40.46	30	60.00	-25.08	horizontal	Average
6	4812.00	36.33	36.65	15.11	40.46	30	80.00	-32.37	horizontal	Peak
7 pp	5274.00	22.81	37.17	15.83	40.72	38	60.00	-24.91	horizontal	Average
8 pk	5274.00	35.35	37.17	15.83	40.72	38	80.00	-32.37	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (58) of (98)

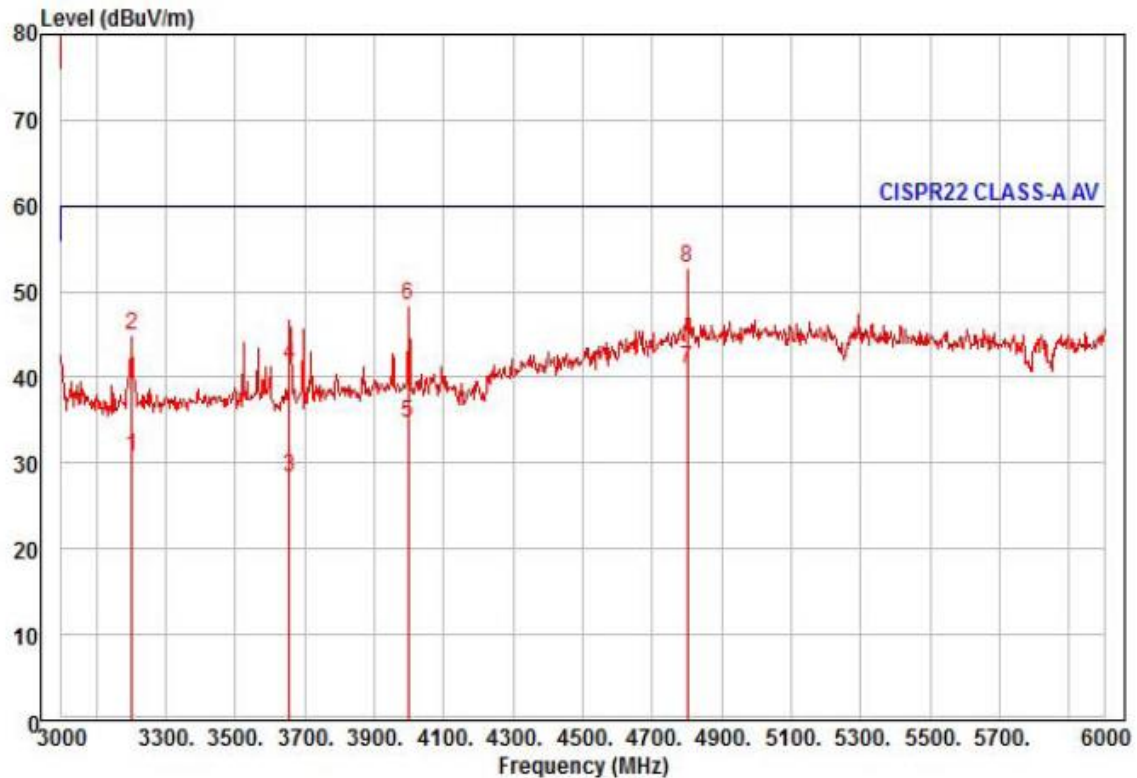

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : AC
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	28.53	30.67	12.06	40.42	1	60.00	-29.16	vertical	Average
2	3201.00	42.57	30.67	12.06	40.42	1	80.00	-35.12	vertical	Peak
3	3657.00	24.73	31.43	12.91	40.82	171	60.00	-31.75	vertical	Average
4	3657.00	37.88	31.43	12.91	40.82	171	80.00	-38.60	vertical	Peak
5	3999.00	29.83	32.01	13.56	40.70	262	60.00	-25.30	vertical	Average
6	3999.00	43.62	32.01	13.56	40.70	262	80.00	-31.51	vertical	Peak
7 pp	4800.00	29.80	36.58	15.10	40.47	269	60.00	-18.99	vertical	Average
8 pk	4800.00	41.50	36.58	15.10	40.47	269	80.00	-27.29	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (59) of (98)

- DC Mode

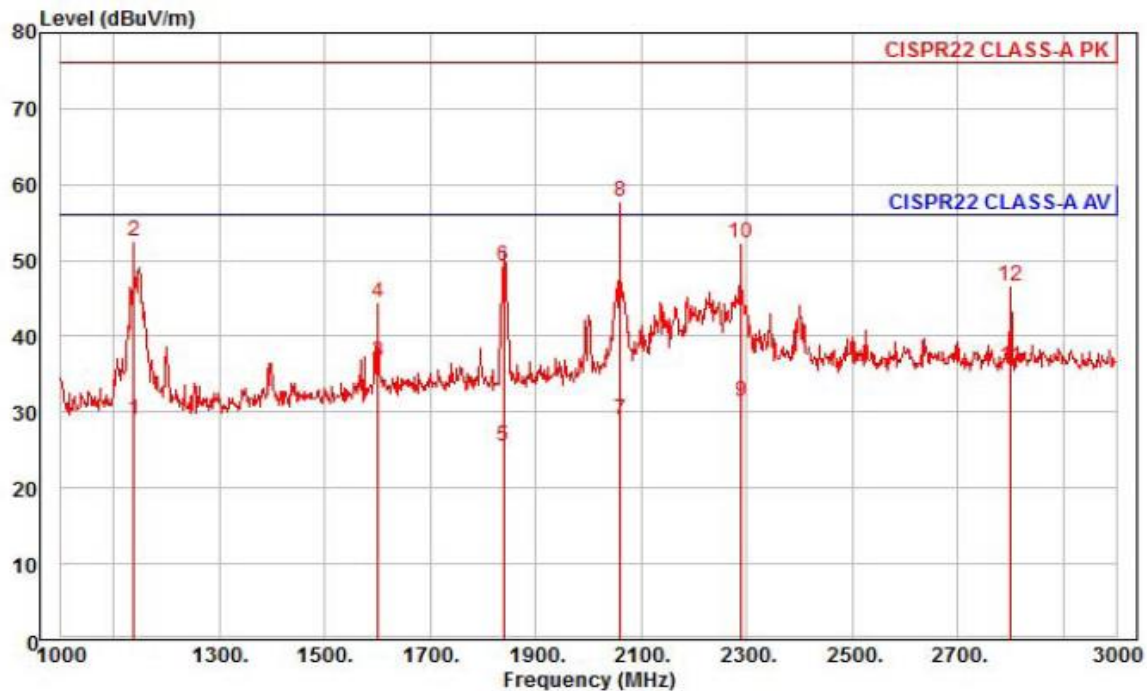

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : DC
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	37.42	24.46	6.93	39.76	280	56.00	-26.95	horizontal	Average
2	1138.00	60.93	24.46	6.93	39.76	280	76.00	-23.44	horizontal	Peak
3 av	1600.00	41.16	26.29	8.31	39.22	47	56.00	-19.46	horizontal	Average
4	1600.00	49.13	26.29	8.31	39.22	47	76.00	-31.49	horizontal	Peak
5	1840.00	28.65	27.24	8.93	39.34	265	56.00	-30.52	horizontal	Average
6	1840.00	52.47	27.24	8.93	39.34	265	76.00	-26.70	horizontal	Peak
7	2060.00	30.85	28.03	9.48	39.41	179	56.00	-27.05	horizontal	Average
8 pp	2060.00	59.64	28.03	9.48	39.41	179	76.00	-18.26	horizontal	Peak
9	2290.00	32.18	28.59	10.04	39.42	82	56.00	-24.61	horizontal	Average
10	2290.00	53.02	28.59	10.04	39.42	82	76.00	-23.77	horizontal	Peak
11	2800.00	34.87	29.84	11.23	39.88	213	56.00	-19.94	horizontal	Average
12	2800.00	45.39	29.84	11.23	39.88	213	76.00	-29.42	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (60) of (98)

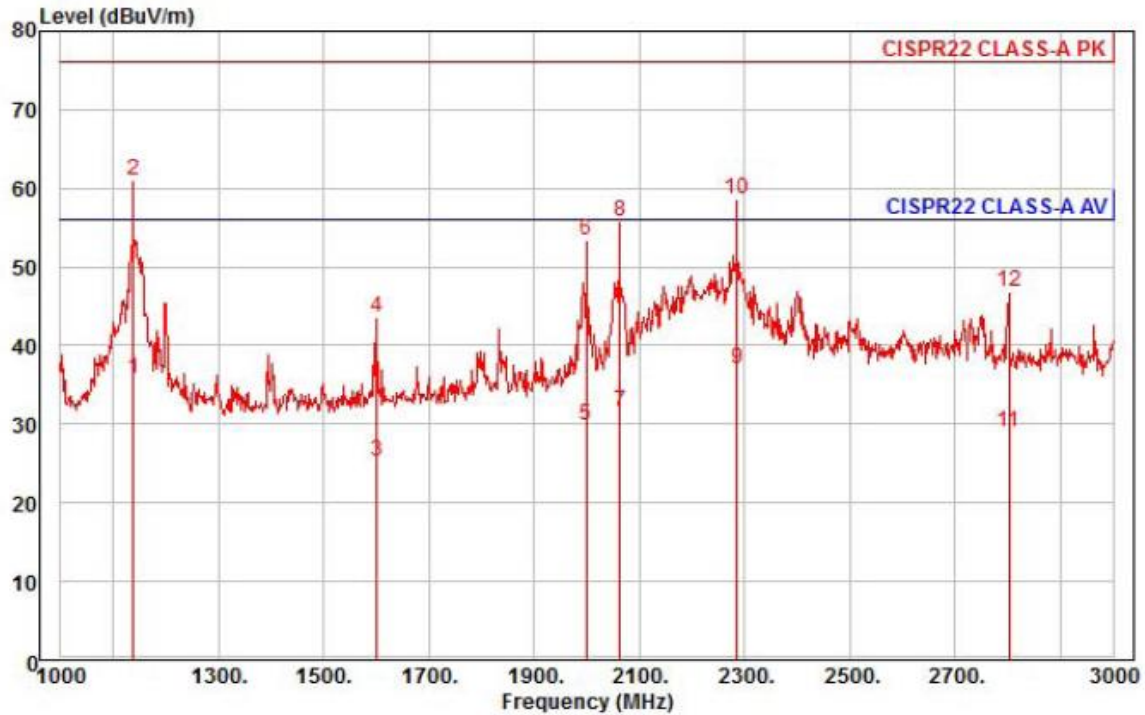

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : DC
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	44.11	24.46	6.93	39.76	227	56.00	-20.26	vertical	Average
2 pp	1138.00	69.48	24.46	6.93	39.76	227	76.00	-14.89	vertical	Peak
3	1600.00	29.86	26.29	8.31	39.22	205	56.00	-30.76	vertical	Average
4	1600.00	48.25	26.29	8.31	39.22	205	76.00	-32.37	vertical	Peak
5	2000.00	32.15	27.88	9.34	39.41	184	56.00	-26.04	vertical	Average
6	2000.00	55.59	27.88	9.34	39.41	184	76.00	-22.60	vertical	Peak
7	2064.00	33.54	28.04	9.48	39.41	343	56.00	-24.35	vertical	Average
8	2064.00	57.67	28.04	9.48	39.41	343	76.00	-20.22	vertical	Peak
9 av	2286.00	37.91	28.58	10.03	39.42	343	56.00	-18.90	vertical	Average
10	2286.00	59.46	28.58	10.03	39.42	343	76.00	-17.35	vertical	Peak
11	2802.00	27.87	29.84	11.24	39.88	7	56.00	-26.93	vertical	Average
12	2802.00	45.60	29.84	11.24	39.88	7	76.00	-29.20	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

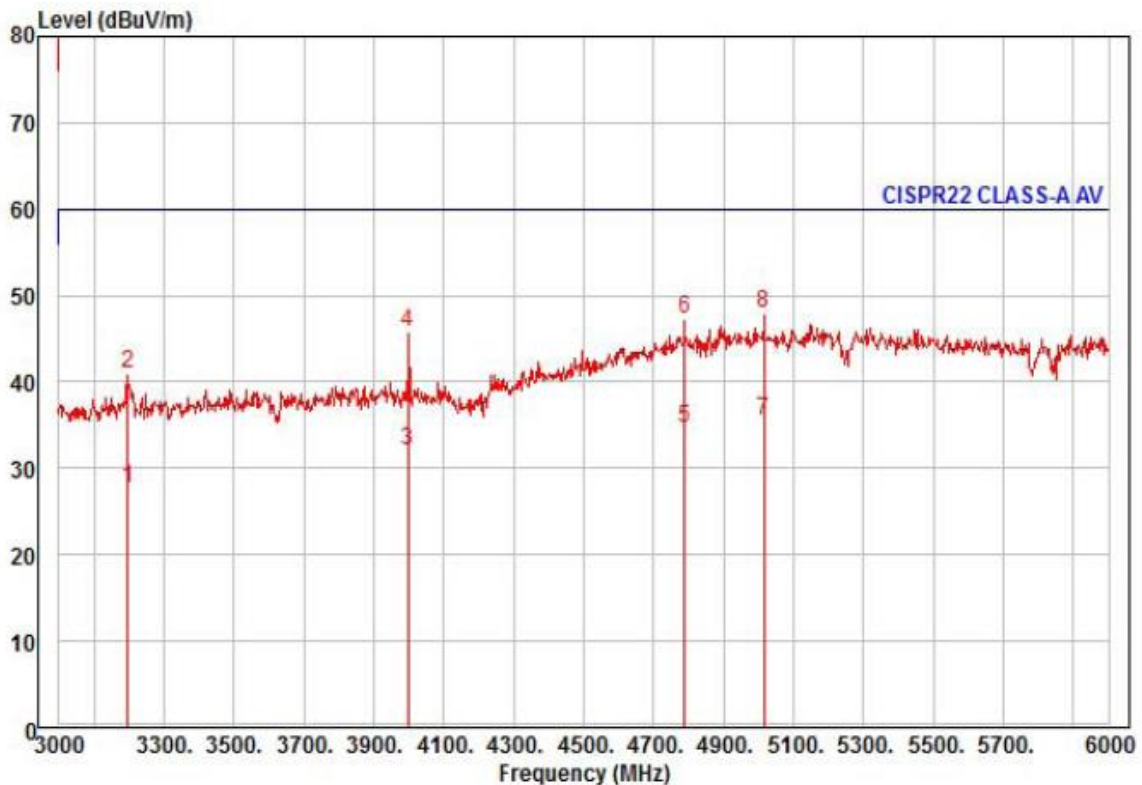

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : DC
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	25.32	30.66	12.05	40.41	45	60.00	-32.38	horizontal	Average
2	3198.00	38.70	30.66	12.05	40.41	45	80.00	-39.00	horizontal	Peak
3	3999.00	27.27	32.01	13.56	40.70	37	60.00	-27.86	horizontal	Average
4	3999.00	40.86	32.01	13.56	40.70	37	80.00	-34.27	horizontal	Peak
5	4788.00	23.60	36.51	15.07	40.48	126	60.00	-25.30	horizontal	Average
6	4788.00	36.12	36.51	15.07	40.48	126	80.00	-32.78	horizontal	Peak
7 pp	5016.00	22.69	37.69	15.35	40.30	171	60.00	-24.57	horizontal	Average
8 pk	5016.00	35.29	37.69	15.35	40.30	171	80.00	-31.97	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (62) of (98)

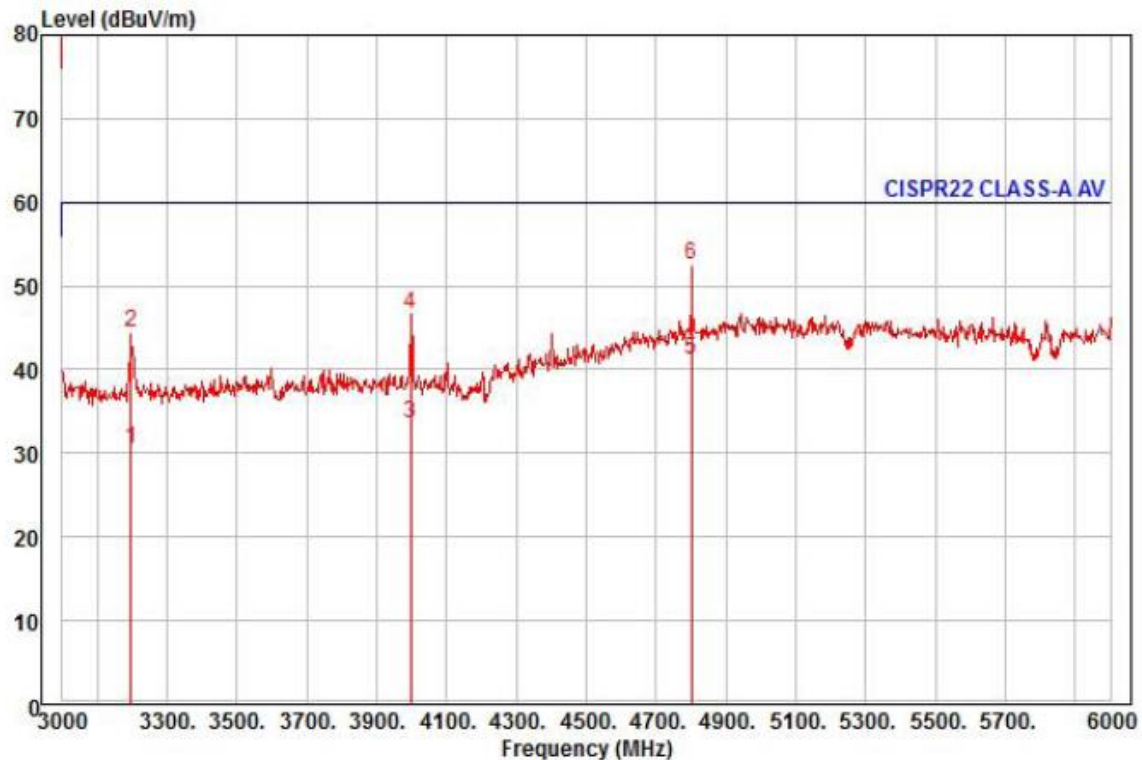

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : DC
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	28.29	30.66	12.05	40.41	23	60.00	-29.41	vertical	Average
2	3198.00	42.20	30.66	12.05	40.41	23	80.00	-35.50	vertical	Peak
3	3999.00	28.62	32.01	13.56	40.70	34	60.00	-26.51	vertical	Average
4	3999.00	41.81	32.01	13.56	40.70	34	80.00	-33.32	vertical	Peak
5 pp	4800.00	30.03	36.58	15.10	40.47	268	60.00	-18.76	vertical	Average
6 pk	4800.00	41.38	36.58	15.10	40.47	268	80.00	-27.41	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (63) of (98)

- POE Mode

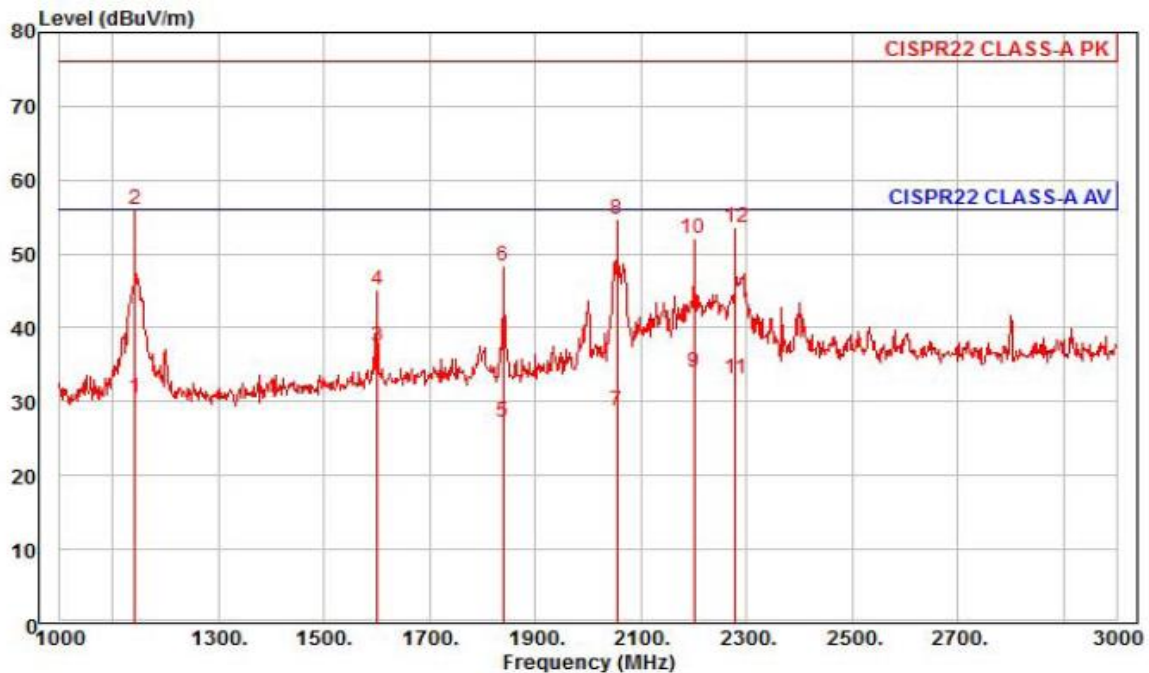

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : POE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1142.00	38.78	24.47	6.95	39.75	230	56.00	-25.55	horizontal	Average
2 pk	1142.00	64.42	24.47	6.95	39.75	230	76.00	-19.91	horizontal	Peak
3 pp	1600.00	42.14	26.29	8.31	39.22	45	56.00	-18.48	horizontal	Average
4	1600.00	49.70	26.29	8.31	39.22	45	76.00	-30.92	horizontal	Peak
5	1840.00	30.39	27.24	8.93	39.34	30	56.00	-28.78	horizontal	Average
6	1840.00	51.62	27.24	8.93	39.34	30	76.00	-27.55	horizontal	Peak
7	2054.00	30.70	28.01	9.46	39.41	339	56.00	-27.24	horizontal	Average
8	2054.00	56.71	28.01	9.46	39.41	339	76.00	-21.23	horizontal	Peak
9	2200.00	35.15	28.37	9.80	39.42	173	56.00	-22.10	horizontal	Average
10	2200.00	53.38	28.37	9.80	39.42	173	76.00	-23.87	horizontal	Peak
11	2280.00	33.95	28.57	10.01	39.42	333	56.00	-22.89	horizontal	Average
12	2280.00	54.53	28.57	10.01	39.42	333	76.00	-22.31	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0608-R2

Page (64) of (98)

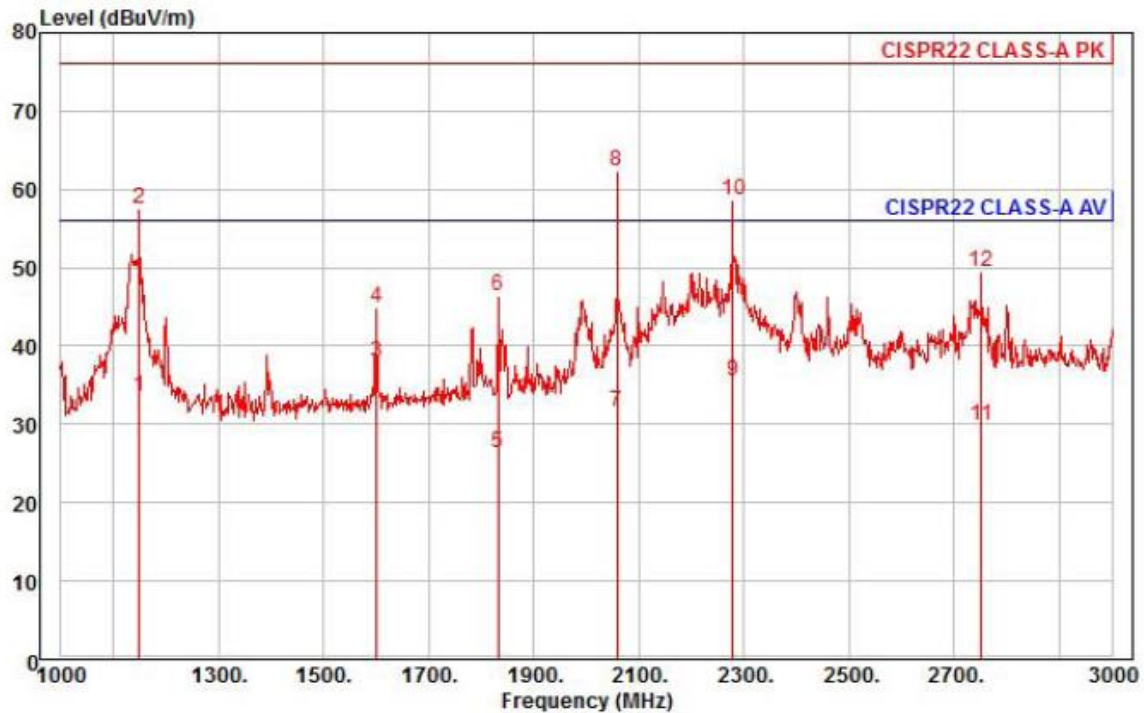

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : POE
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1148.00	41.74	24.50	6.97	39.73	176	56.00	-22.52	vertical	Average
2	1148.00	65.82	24.50	6.97	39.73	176	76.00	-18.44	vertical	Peak
3 av	1600.00	42.63	26.29	8.31	39.22	344	56.00	-17.99	vertical	Average
4	1600.00	49.57	26.29	8.31	39.22	344	76.00	-31.05	vertical	Peak
5	1832.00	29.54	27.21	8.91	39.33	226	56.00	-29.67	vertical	Average
6	1832.00	49.58	27.21	8.91	39.33	226	76.00	-29.63	vertical	Peak
7	2058.00	33.61	28.02	9.47	39.41	350	56.00	-24.31	vertical	Average
8 pp	2058.00	64.22	28.02	9.47	39.41	350	76.00	-13.70	vertical	Peak
9	2280.00	36.43	28.57	10.01	39.42	330	56.00	-20.41	vertical	Average
10	2280.00	59.50	28.57	10.01	39.42	330	76.00	-17.34	vertical	Peak
11	2752.00	28.92	29.72	11.11	39.82	356	56.00	-26.07	vertical	Average
12	2752.00	48.48	29.72	11.11	39.82	356	76.00	-26.51	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

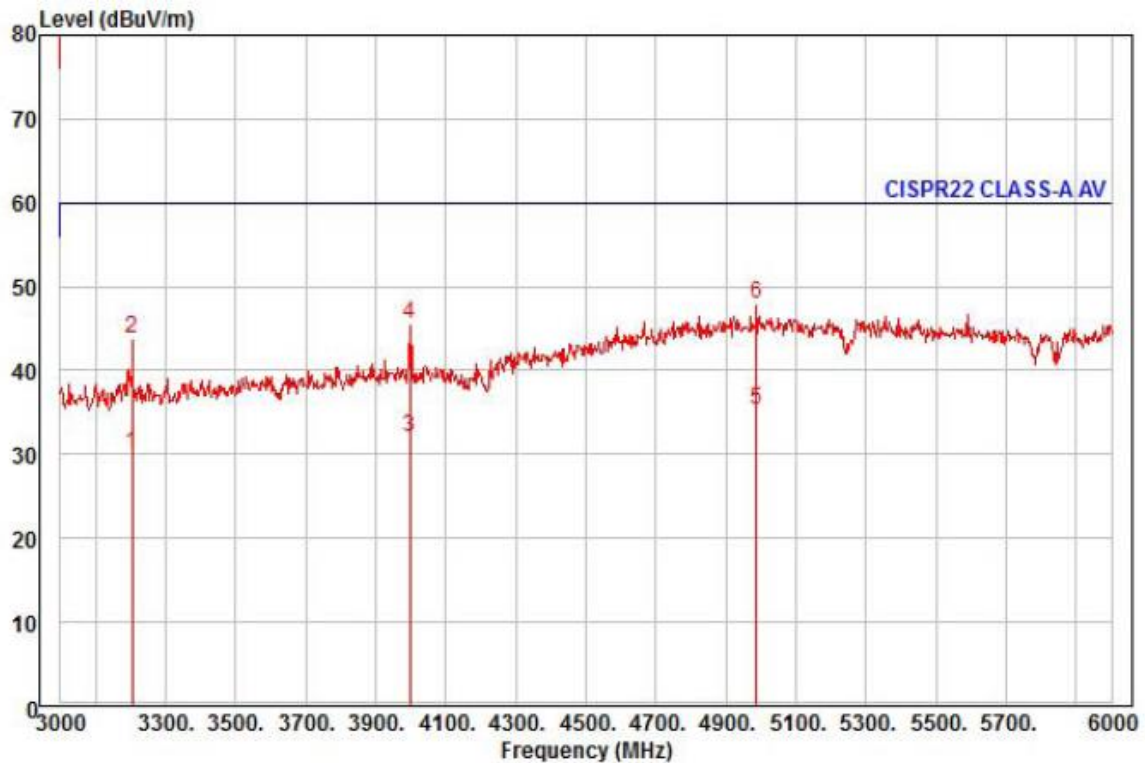

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : POE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3204.00	27.74	30.67	12.07	40.42	41	60.00	-29.94	horizontal	Average
2	3204.00	41.59	30.67	12.07	40.42	41	80.00	-36.09	horizontal	Peak
3	3999.00	27.15	32.01	13.56	40.70	38	60.00	-27.98	horizontal	Average
4	3999.00	40.59	32.01	13.56	40.70	38	80.00	-34.54	horizontal	Peak
5 pp	4986.00	22.55	37.64	15.30	40.28	32	60.00	-24.79	horizontal	Average
6 pk	4986.00	35.23	37.64	15.30	40.28	32	80.00	-32.11	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]


Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (66) of (98)

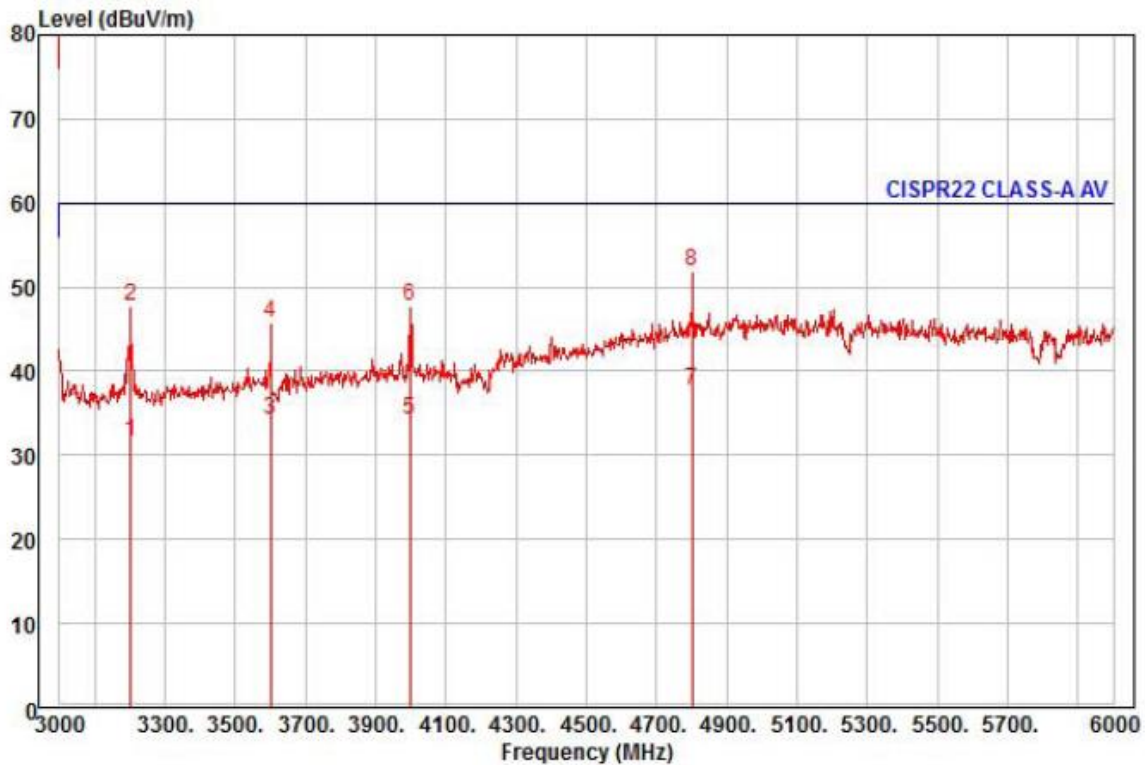

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNB-8000P
Mode : POE
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	29.23	30.67	12.06	40.42	320	60.00	-28.46	vertical	Average
2	3201.00	45.36	30.67	12.06	40.42	320	80.00	-32.33	vertical	Peak
3	3600.00	30.93	31.34	12.81	40.84	23	60.00	-25.76	vertical	Average
4	3600.00	42.41	31.34	12.81	40.84	23	80.00	-34.28	vertical	Peak
5	3999.00	29.39	32.01	13.56	40.70	29	60.00	-25.74	vertical	Average
6	3999.00	42.89	32.01	13.56	40.70	29	80.00	-32.24	vertical	Peak
7 pp	4800.00	26.49	36.58	15.10	40.47	357	60.00	-22.30	vertical	Average
8 pk	4800.00	40.70	36.58	15.10	40.47	357	80.00	-28.09	vertical	Peak


◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (69) of (98)

Test Data - Voltage Fluctuations**Maximum Flicker results**


	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions

- AC Mode

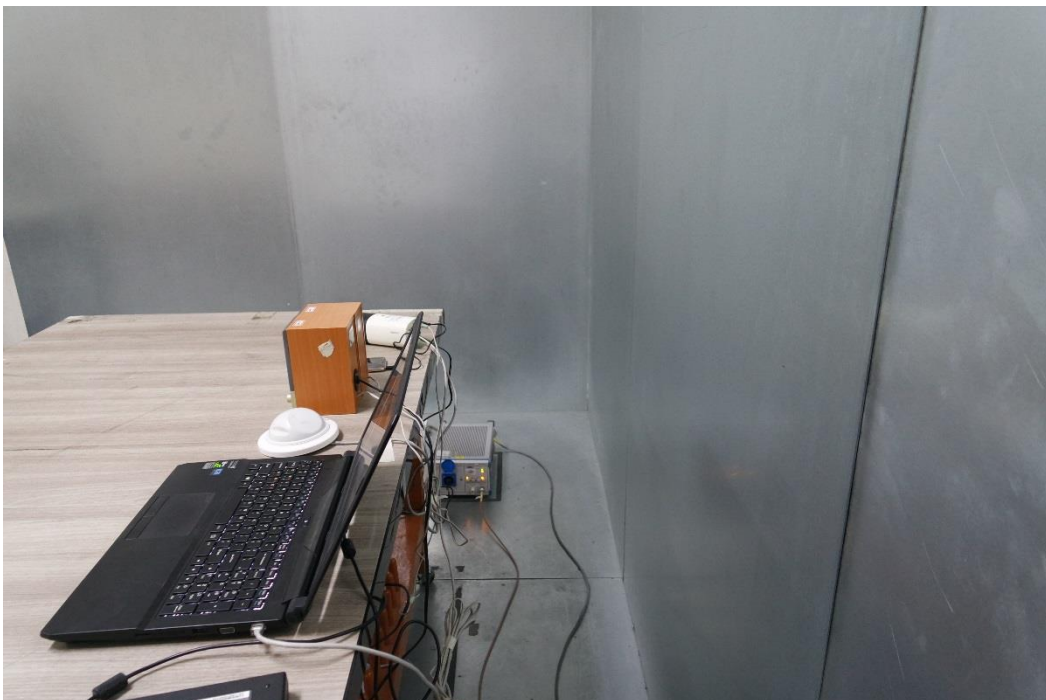

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Telecommunication Emissions

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode

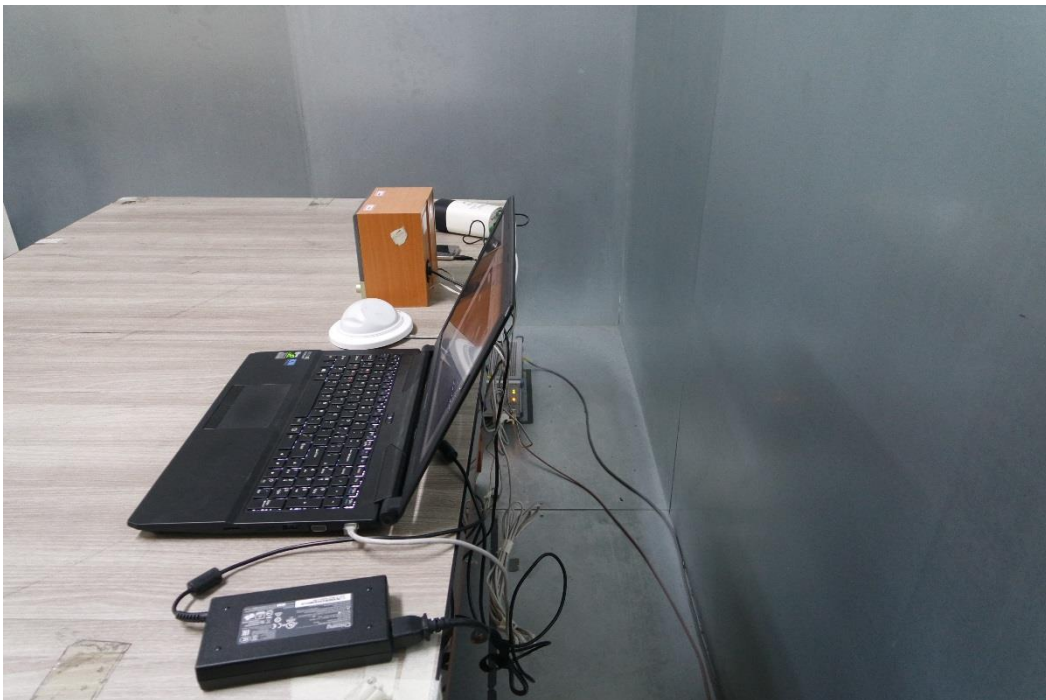

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- POE Mode




Radiated Electric Field Emissions(Below 1 GHz)

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode

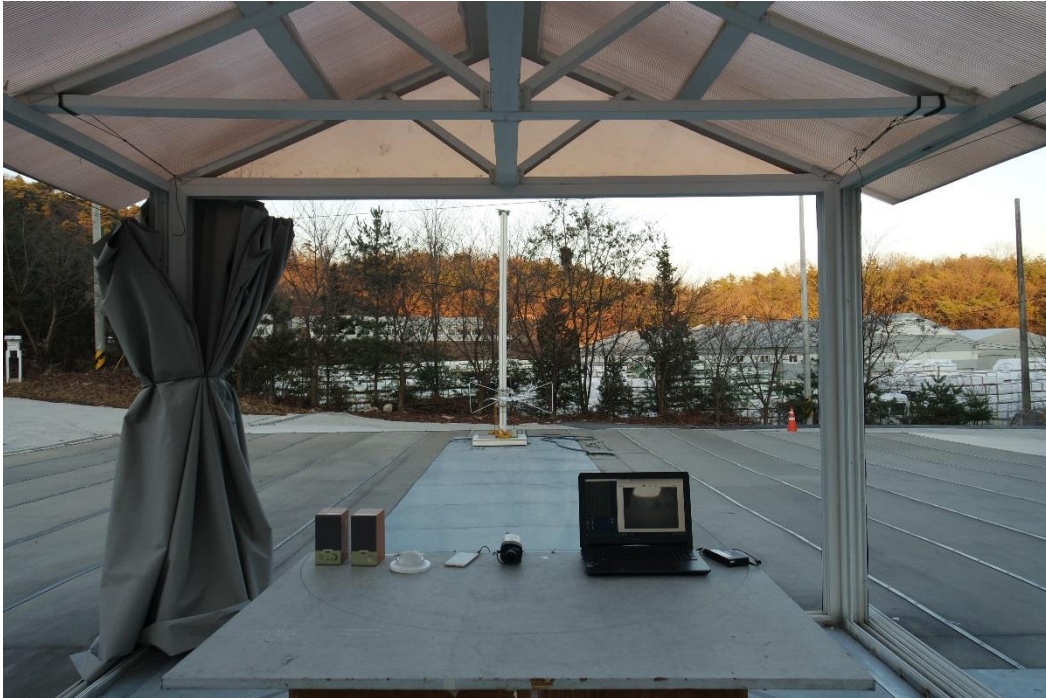

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

- AC Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- POE Mode

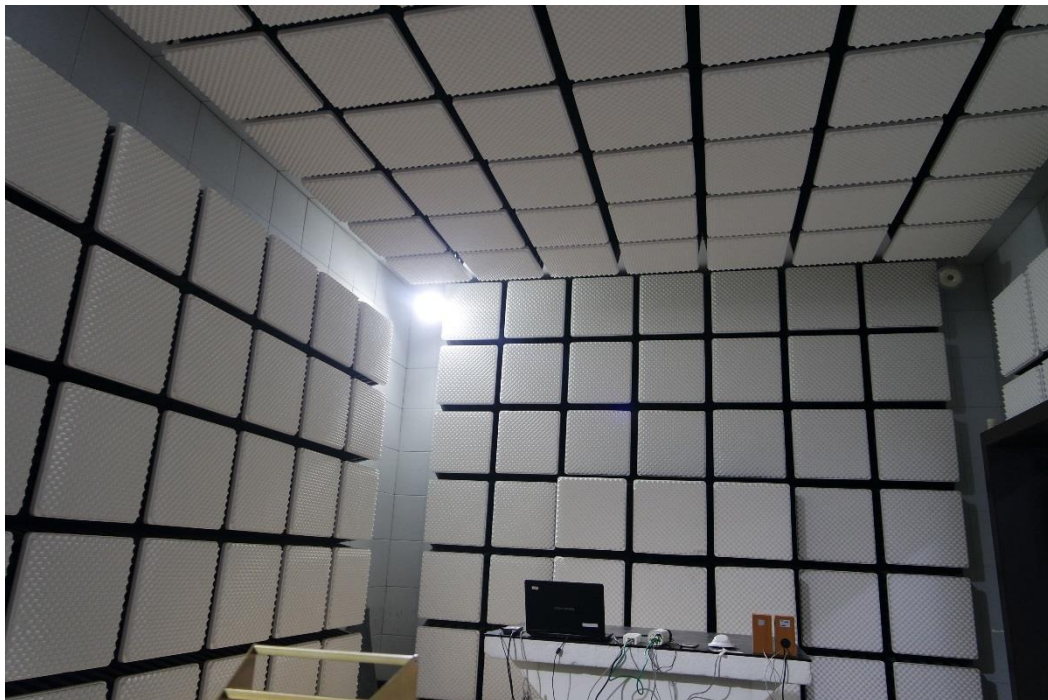

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0608-R2
Page (80) of (98)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A


Electrostatic Discharge

N/A


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Immunity

- AC Mode

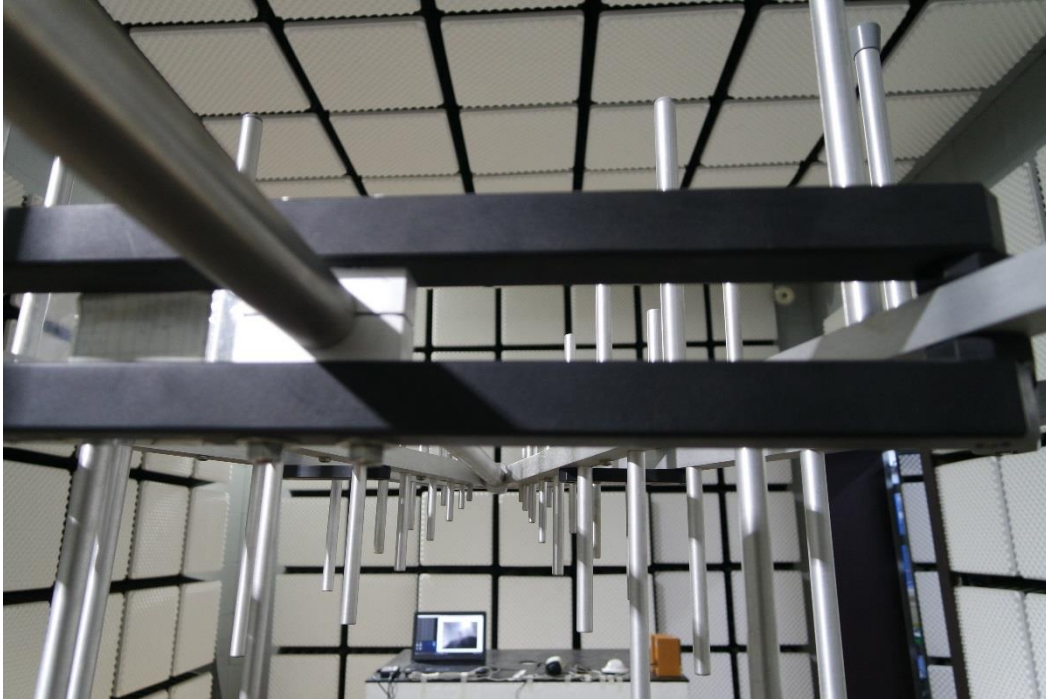

- DC Mode

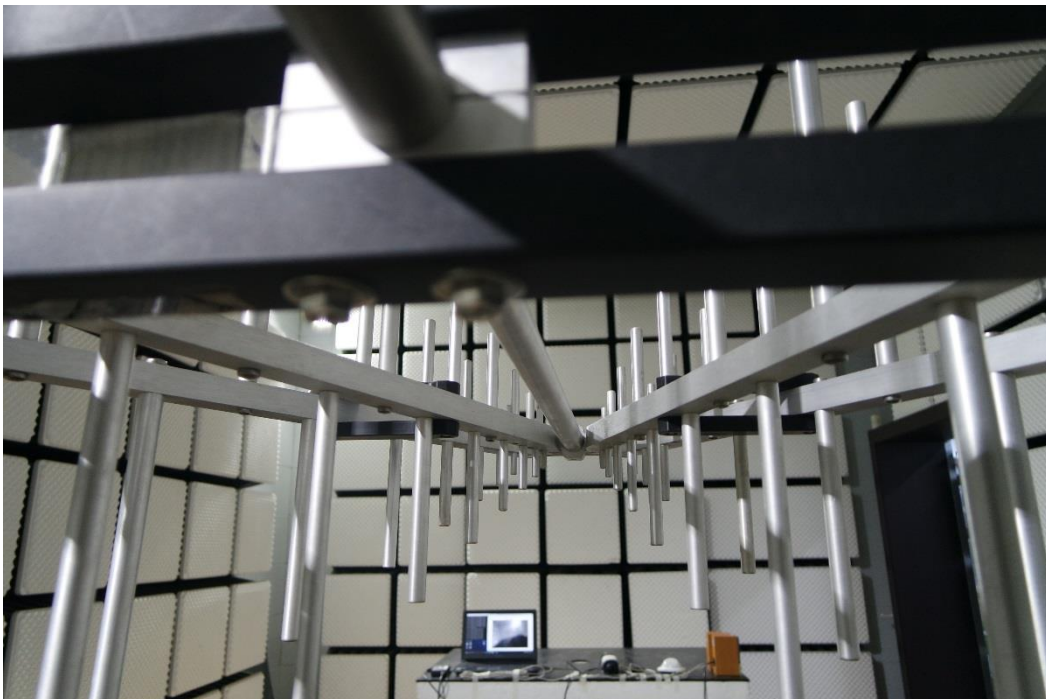

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients / Bursts

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode



- POE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Surge Transients

- AC Mode



N/A

- DC Mode



N/A

- POE Mode



N/A

Conducted Disturbance

- AC Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- DC Mode



- POE Mode

N/A

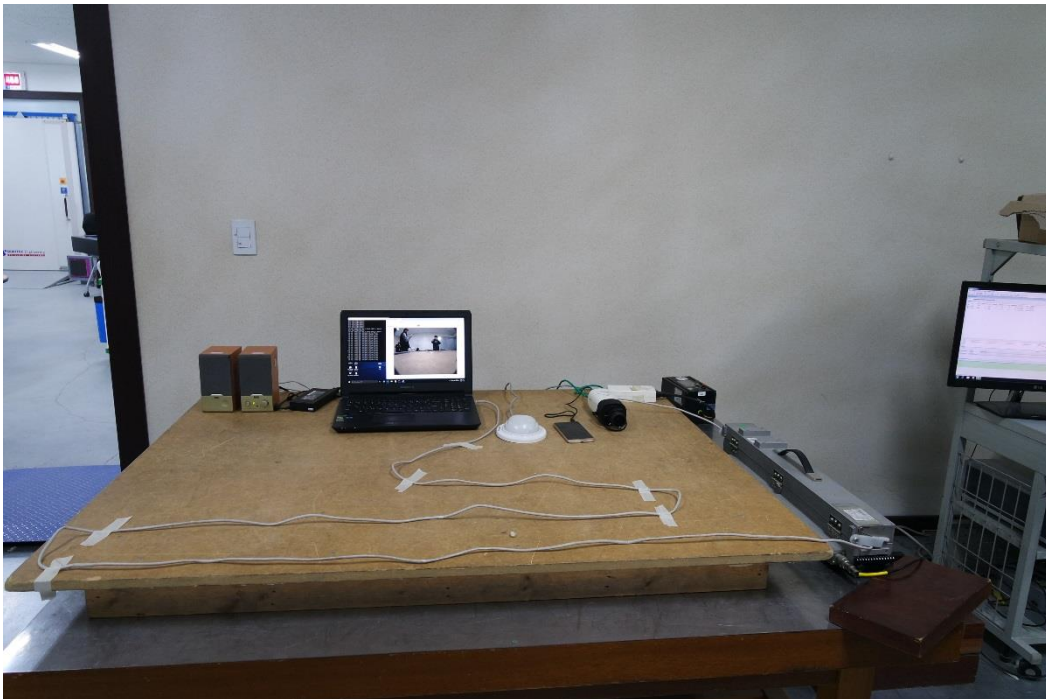

Voltage Dips and Short Interruptions

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Main board

(Top)

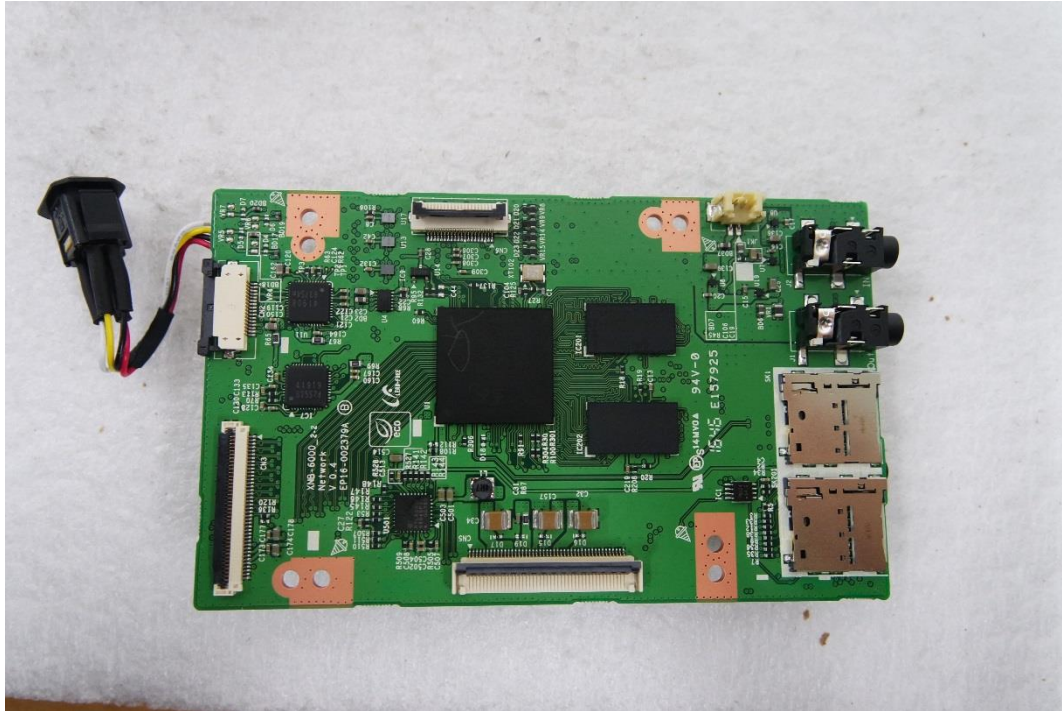


(Bottom)

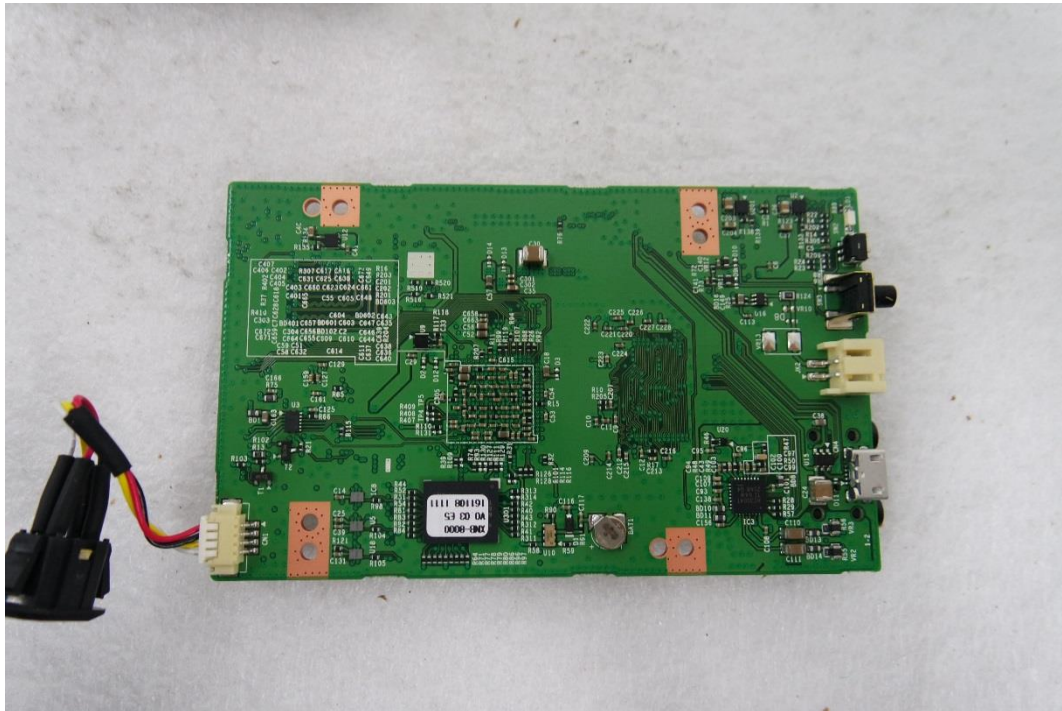


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Power Board

(Top)

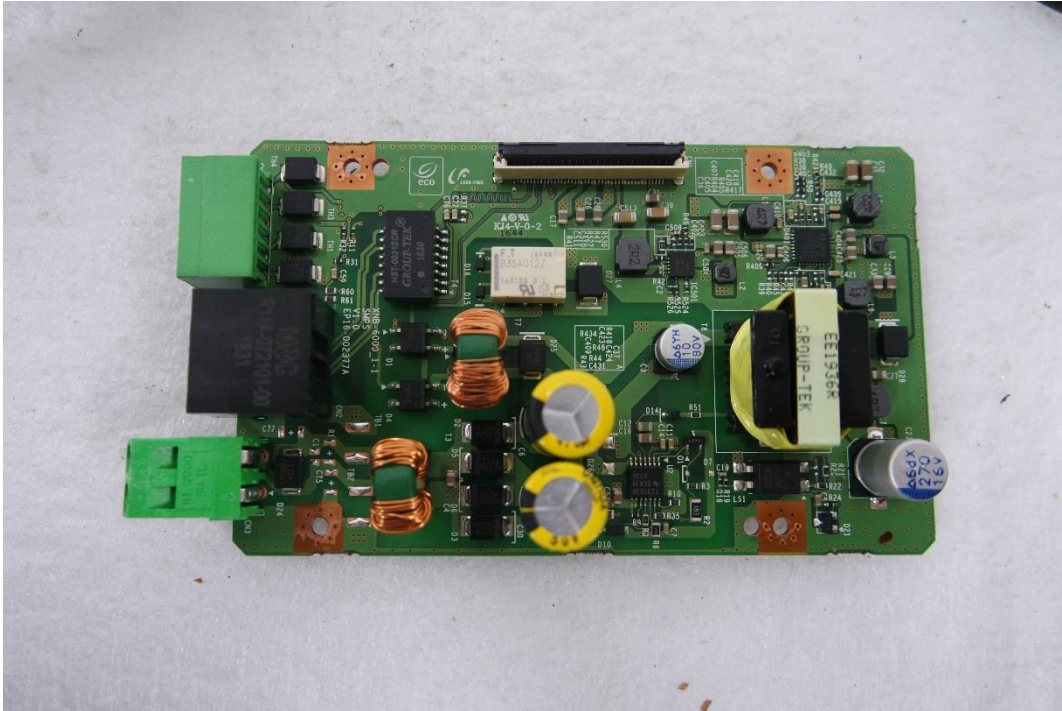

(Bottom)

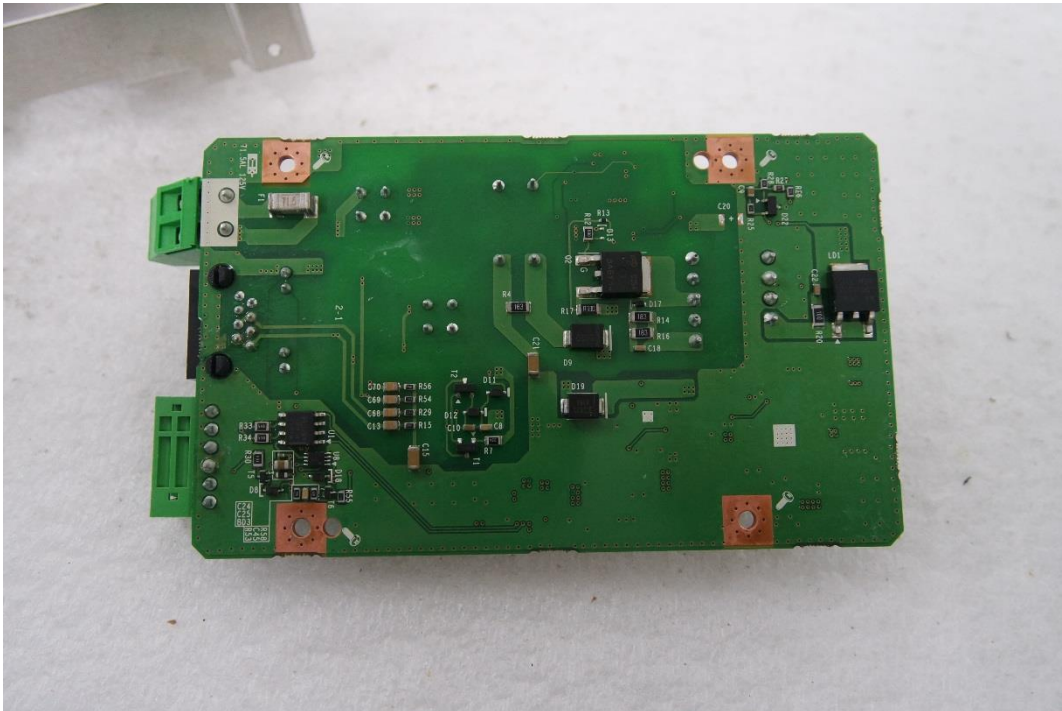


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View - Lens


(Top)



(Bottom)

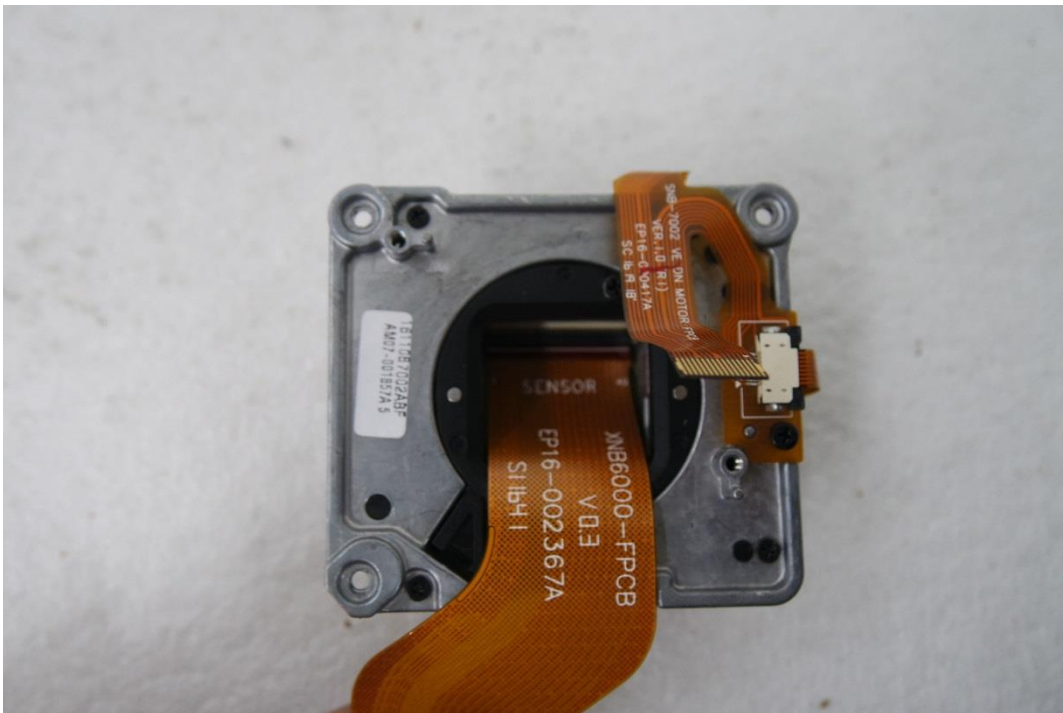

Label and Location

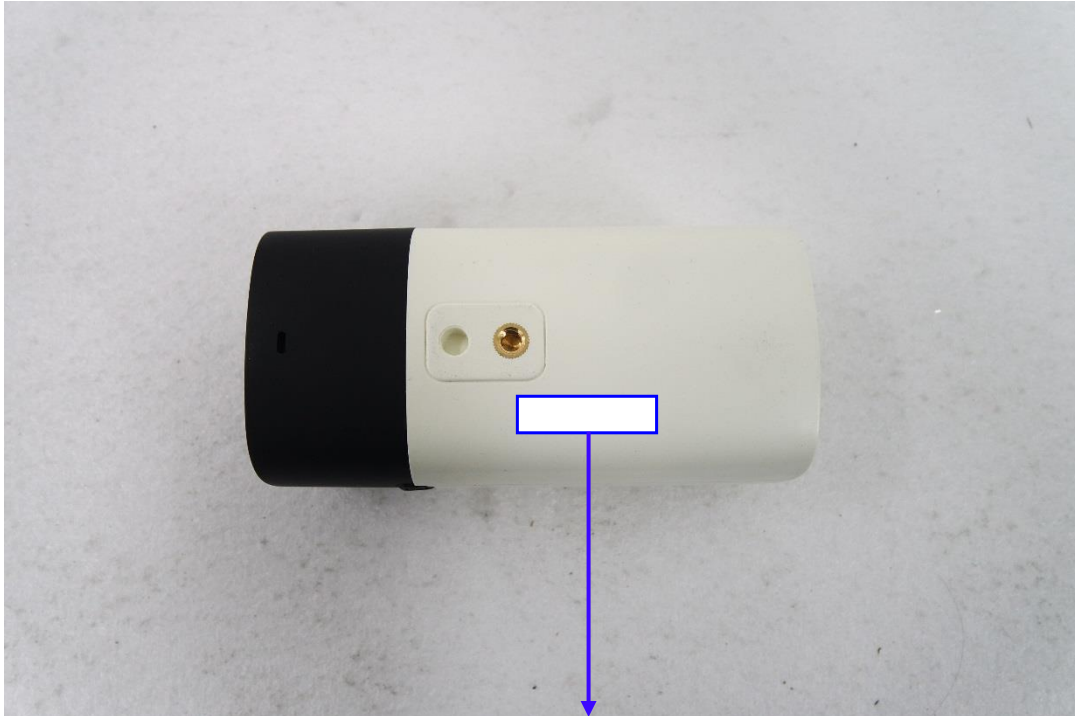

NETWORK CAMERA

Model No : XNB-8000

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

