

VERIFICATION OF FCC PART 15 COMPLIANCE

*KES hereby verify that the subject product complies with all the
electromagnetic emission specified in the FCC Rule Part 15*

Product Description:	NETWORK CAMERA
Model/Brand Name:	XND-6010N
Variant Model:	-
FCC Rule Part(s):	FCC 47CFR Part 15 Subpart B Class A Part 15.107(b) & Part 15.109(b)
FCC Procedure:	Verification
Applicant Name:	Hanwha Techwin Co., Ltd.
Applicant Address:	Changwon-dareri, Seongsan-gu Changwon-si, Gy eongsangn am-do
Manufacturer Name:	Tianjin Samsung Techwin Opto-Eletronic Co.,Ltd.
Manufacturer Address:	No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China
Test Report Reference No.:	KES-E1-16T0633

NETWORK CAMERA, Model XND-6010N has been tested in accordance with the measurement procedures specified in FCC 47CFR Part 15 Subpart B class A and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part 15 Subpart B class A. A testing of the sample product has been valid for the sample tested based on the reference test report, KES-E1-16T0633

Date of Issue: 12. 12, 2016

Dong Hun, Jang
Technical Manager
Signature:



KES.Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 //Fax: +82-31-424-0450



EMC TEST REPORT For FCC

Test Report No. : KES-E1-16T0633

Date of Issue : Dec, 12, 2016

Product name : NETWORK CAMERA

Model/Type No. : XND-6010N

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : Changwon-daero, Seongsan-gu Changwon-si, Gyeongsangnam-do

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.

Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China

Equipment authorization : ☐ Declaration of Conformity
☒ Verification
☐ Certification

Date of Receipt : Nov, 23, 2016

Test date : Dec, 06, 2016

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (2) of (34)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 12, 2016	KES-E1-16T0633	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Sep be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement.....	11
1.10	Test Facility	11
1.11	Laboratory Accreditations and Listings	11
2.0	Test Regulations	12
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		19
Radiated Electric Field Emissions(Above 1 GHz)		21
Test Setup Photos and Configuration.....		24
Conducted Voltage Emissions		24
Radiated Electric Field Emissions(Below 1 GHz)		25
Radiated Electric Field Emissions(Above 1 GHz)		27
EUT External Photographs.....		29
EUT Internal Photographs		30



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS (IMX291)
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.07 lux (TBD)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
Lens	
Focal Length (Zoom Ratio)	2.5mm Fixed
Max. Aperture Ratio	F2.0
Angular Field of View	H: 139°, V:73°, D: 167°
Min. Object Distance	0.4m
Focus Control	Manual
Lens Type	Fixed
Mount Type	Board-in type(M12)
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 85°(TBD) / 0° ~ 355°
Operational	
IR LED	Non-IR
Viewable Length	-
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	150dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog&Dust detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)
Digital PTZ	24X, Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification, Heatmap, People counting, Queue management
Alarm I/O	Input 1ea / Output 1ea

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (5) of (34)

Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Built-in MIC. Max output level : 1Vrms Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576, 640x480, 640x360, 320x240, 320x180
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method
Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (6) of (34)

Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C (-14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	IK08
Electrical	
Input Voltage / Current	DC12V,PoE(IEEE802.3af,Class3)
Power Consumption	TBD
Mechanical	
Color / Material	Ivory / Plastic
Dimension (WxHxD)	φ110xH86mm
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 120 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XND-6010N	-	Hanwha Techwin Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	1.7 m
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	1.6 m
Alarm	-	-	-	-



1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	2.5	U
Notebook	Audio in	Phone	Audio out	1.7	U

- POE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	2.5	U
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (9) of (34)

1.7 EUT Operating Mode(s)

operating
E.U.T Monitoring , Ping test, 1 kHz


E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

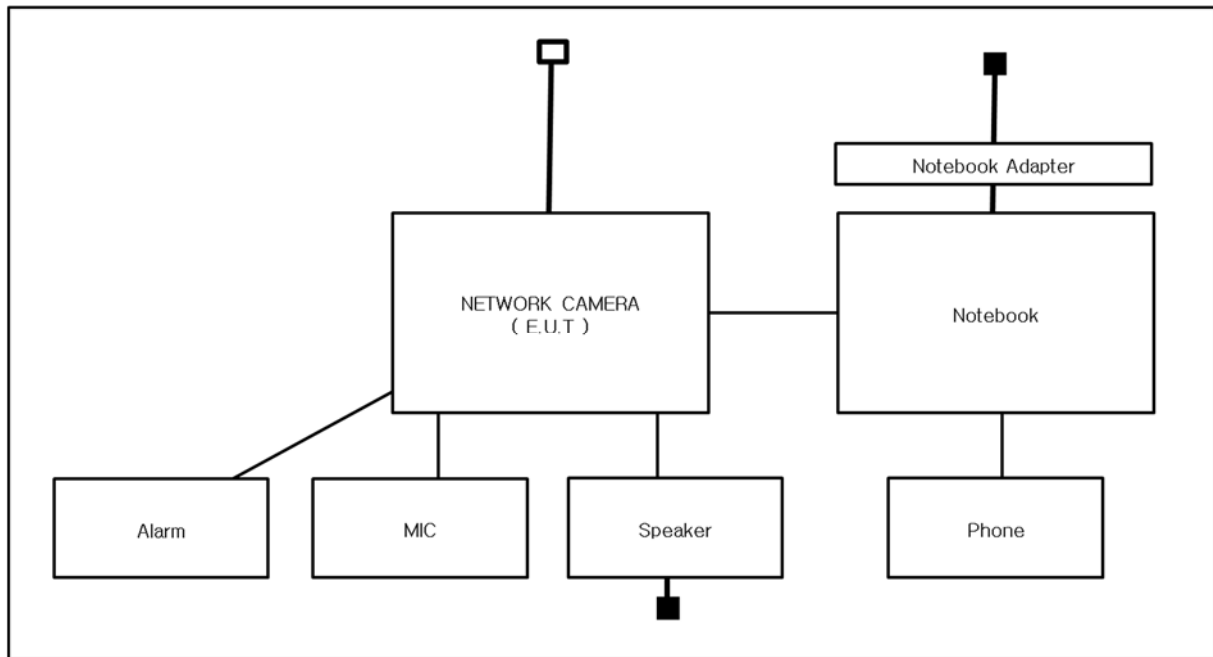

- POE Mode

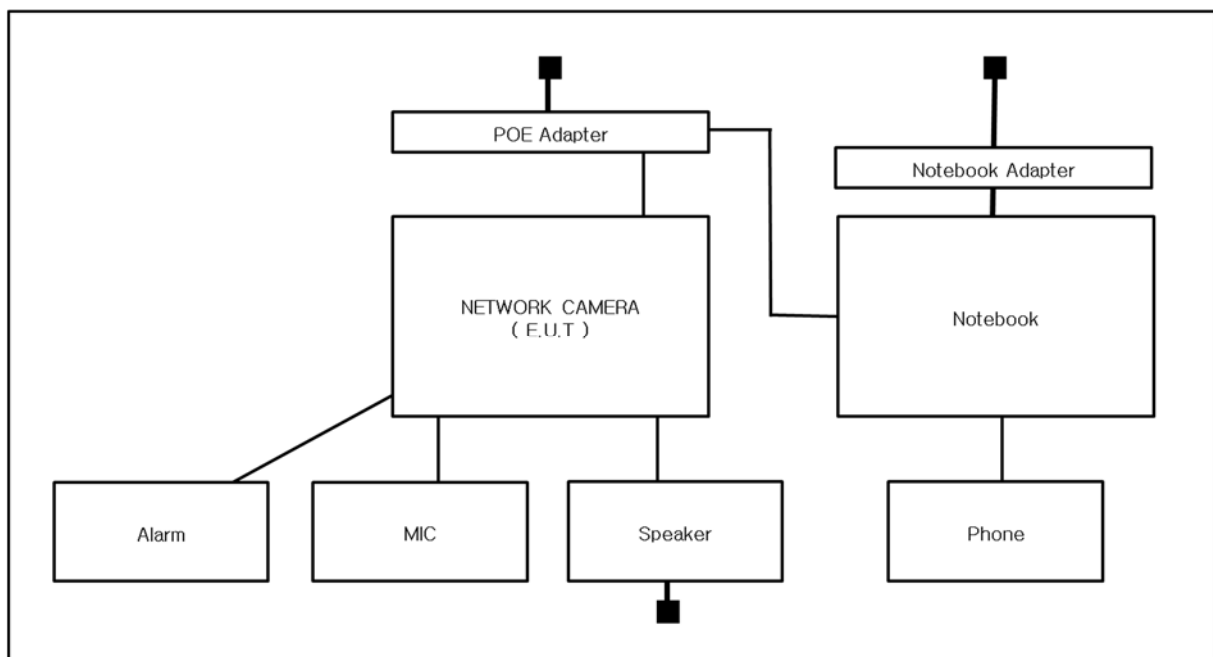

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☒ CISPR 22:2009 +A1:2010 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ MEDICAL – Directive 93/42/EEC | | |
| ☐ EN 60601-1-2 :2007 | | |
| ☐ RE– Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/V

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 04, 2017
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: °C

Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A : Because the E.U.T power is 12 v (dc) power and PoE, limits are not specified.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 06, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 4,4 °C
Relative Humidity: 39,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 06, 2016

Test Location

Semi Anechoic Chamber #1

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Log-Periodic Antenna	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
☒	EMI TEST Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Preamplifier	EMI TEST Receiver	R&S	102232	06, 29, 2017
☒	Semi Anechoic Chamber #1	-	KES	-	-
☒	Tilt Antenna Mast	TAM 4.0-E	matur	18100116	-
☒	Turn Table	DT 2000-1,5T	INN-CO	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 19,7 °C

Relative Humidity: 49,5 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (18) of (34)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
148.35	12.60	H	2.63	8.14	3.55	24.29	43.50	19.21
155.04	12.23	V	1.25	8.38	3.63	24.24	43.50	19.26
224.95	13.98	H	2.31	11.85	4.42	30.25	46.40	16.15
375.27	11.90	V	2.08	15.13	5.91	32.94	46.40	13.46
449.04	11.78	H	3.01	16.39	6.79	34.96	46.40	11.44
489.70	14.95	V	1.85	16.96	6.96	38.87	46.40	7.53
505.33	16.87	H	1.69	17.22	7.05	41.14	46.40	5.26
542.32	17.70	V	1.87	18.03	7.34	43.07	46.40	3.33

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dB μ V] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (20) of (34)

- POE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
146.45	13.25	H	2.60	8.07	3.53	24.85	43.50	18.65
152.28	13.02	V	1.25	8.28	3.60	24.90	43.50	18.60
221.02	11.95	H	2.33	11.77	4.37	28.09	46.40	18.31
270.54	12.01	H	1.89	12.81	4.90	29.72	46.40	16.68
375.24	11.90	V	1.27	15.13	5.91	32.94	46.40	13.46
425.69	16.20	H	3.02	16.06	6.49	38.75	46.40	7.65
491.65	12.95	V	3.19	16.98	6.97	36.90	46.40	9.50
542.29	17.06	V	2.07	18.03	7.34	42.43	46.40	3.97

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (21) of (34)

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

- PK

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 141.000	58.450	V	1.000	21.210	3.300	43.640	39.320	70.000	30.680
1 147.000	60.070	H	1.000	21.240	3.310	43.640	40.980	70.000	29.020
1 894.000	57.300	H	1.000	25.060	4.350	43.750	42.960	70.000	27.040
1 987.000	55.680	V	1.000	25.530	4.390	43.780	41.820	70.000	28.180
1 993.000	66.000	H	1.000	25.560	4.400	43.780	52.180	70.000	17.820
2 057.000	57.530	V	1.000	25.840	4.510	43.810	44.070	70.000	25.930
2 391.000	53.240	V	1.000	27.240	4.900	43.960	41.420	70.000	28.580
2 397.000	58.040	H	1.000	27.260	4.900	43.960	46.240	70.000	23.760
3 198.000	57.370	H	1.000	30.110	5.680	44.220	48.940	74.000	25.060
4 903.000	49.820	H	1.000	33.050	6.990	44.320	45.540	74.000	28.460
4 948.000	50.440	V	1.000	33.130	6.990	44.320	46.240	74.000	27.760

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (22) of (34)

- AV

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 134.000	50.810	V	1.000	21.170	3.290	43.640	31.630	50.000	18.370
1 397.000	41.930	H	1.000	22.520	3.650	43.630	24.470	50.000	25.530
1 596.000	41.530	H	1.000	23.540	3.860	43.660	25.270	50.000	24.730
1 596.000	40.890	V	1.000	23.540	3.860	43.660	24.630	50.000	25.370
1 993.000	52.490	H	1.000	25.560	4.400	43.780	38.670	50.000	11.330
2 000.000	44.170	V	1.000	25.600	4.400	43.780	30.390	50.000	19.610
2 057.000	47.630	V	1.000	25.840	4.510	43.810	34.170	50.000	15.830
2 596.000	42.630	H	1.000	28.100	5.190	44.050	31.870	50.000	18.130
3 198.000	42.060	H	1.000	30.110	5.680	44.220	33.630	54.000	20.370
4 884.000	38.170	V	1.000	33.020	7.000	44.310	33.880	54.000	20.120
4 903.000	38.490	H	1.000	33.050	6.990	44.320	34.210	54.000	19.790

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- POE Mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (23) of (34)

- PK

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	[dB]
1 134.000	50.810	V	1.000	21.170	3.290	43.640	31.630	50.000	18.370
1 397.000	41.930	H	1.000	22.520	3.650	43.630	24.470	50.000	25.530
1 596.000	41.530	H	1.000	23.540	3.860	43.660	25.270	50.000	24.730
1 596.000	40.890	V	1.000	23.540	3.860	43.660	24.630	50.000	25.370
1 993.000	52.490	H	1.000	25.560	4.400	43.780	38.670	50.000	11.330
2 000.000	44.170	V	1.000	25.600	4.400	43.780	30.390	50.000	19.610
2 057.000	47.630	V	1.000	25.840	4.510	43.810	34.170	50.000	15.830
2 596.000	42.630	H	1.000	28.100	5.190	44.050	31.870	50.000	18.130
3 198.000	42.060	H	1.000	30.110	5.680	44.220	33.630	54.000	20.370
4 884.000	38.170	V	1.000	33.020	7.000	44.310	33.880	54.000	20.120

- AV

Frequency	Amplitude	ANT Polar.	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	(H/V)	[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	[dB]
1 000.000	43.550	V	1.000	20.490	3.110	43.640	23.510	50.000	26.490
1 134.000	46.680	H	1.000	21.170	3.290	43.640	27.500	50.000	22.500
1 141.000	49.380	V	1.000	21.210	3.300	43.640	30.250	50.000	19.750
1 993.000	51.190	H	1.000	25.560	4.400	43.780	37.370	50.000	12.630
2 057.000	55.030	H	1.000	25.840	4.510	43.810	41.570	50.000	8.430
2 070.000	47.890	V	1.000	25.890	4.540	43.810	34.510	50.000	15.490
3 198.000	43.110	H	1.000	30.110	5.680	44.220	34.680	54.000	19.320
3 198.000	39.600	V	1.000	30.110	5.680	44.220	31.170	54.000	22.830
4 903.000	38.380	H	1.000	33.050	6.990	44.320	34.100	54.000	19.900
4 903.000	38.350	V	1.000	33.050	6.990	44.320	34.070	54.000	19.930

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0633
Page (24) of (34)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

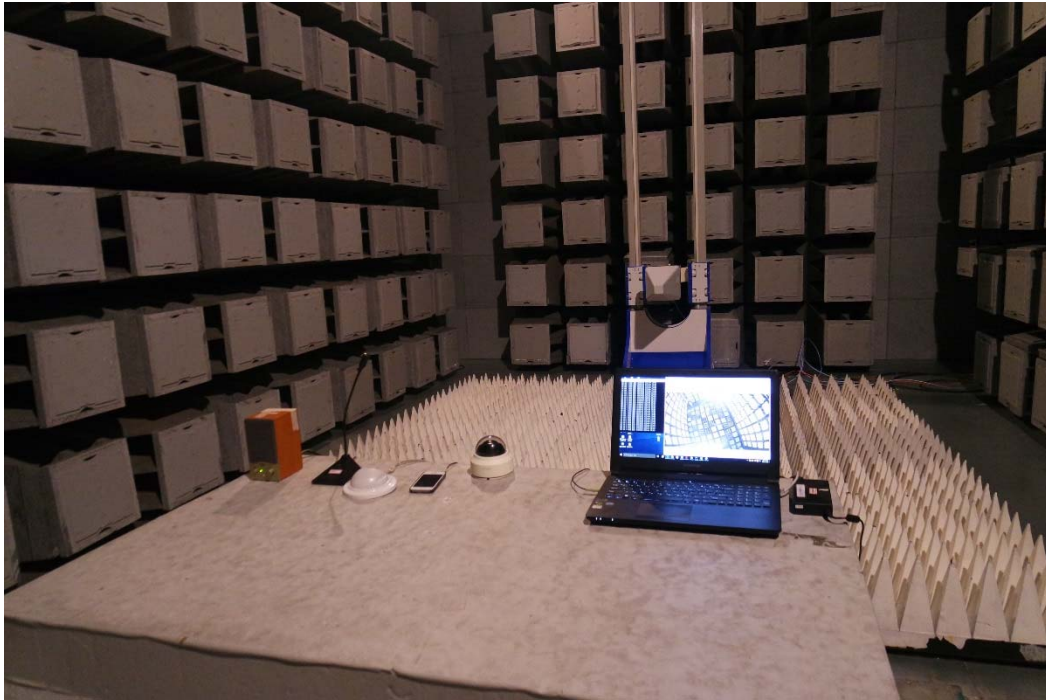

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

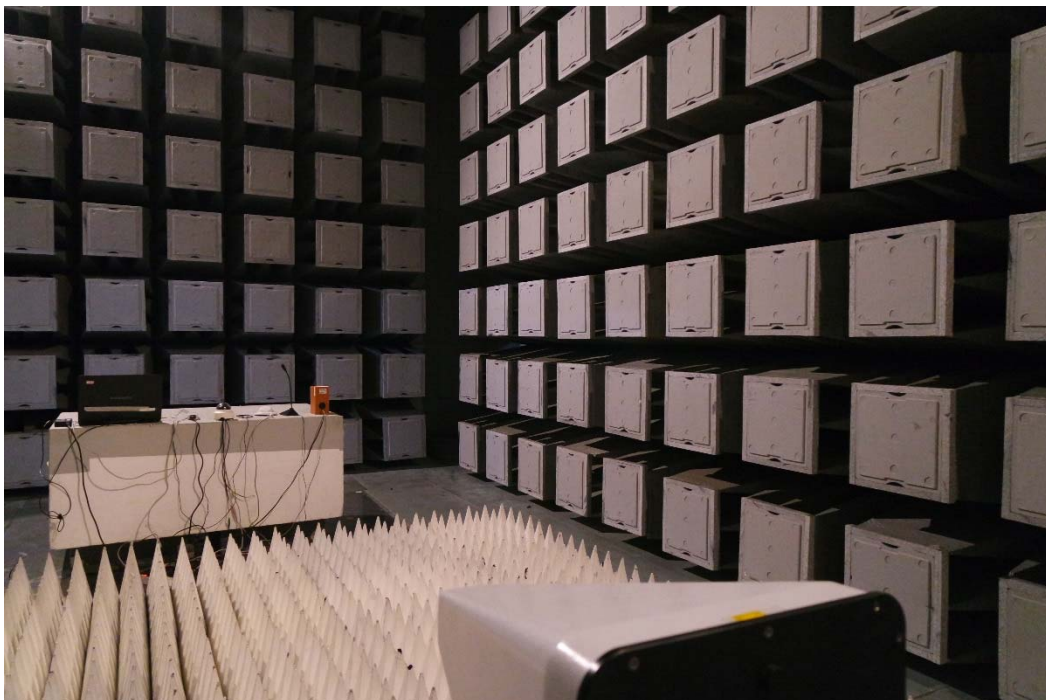

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)



(Bottom)

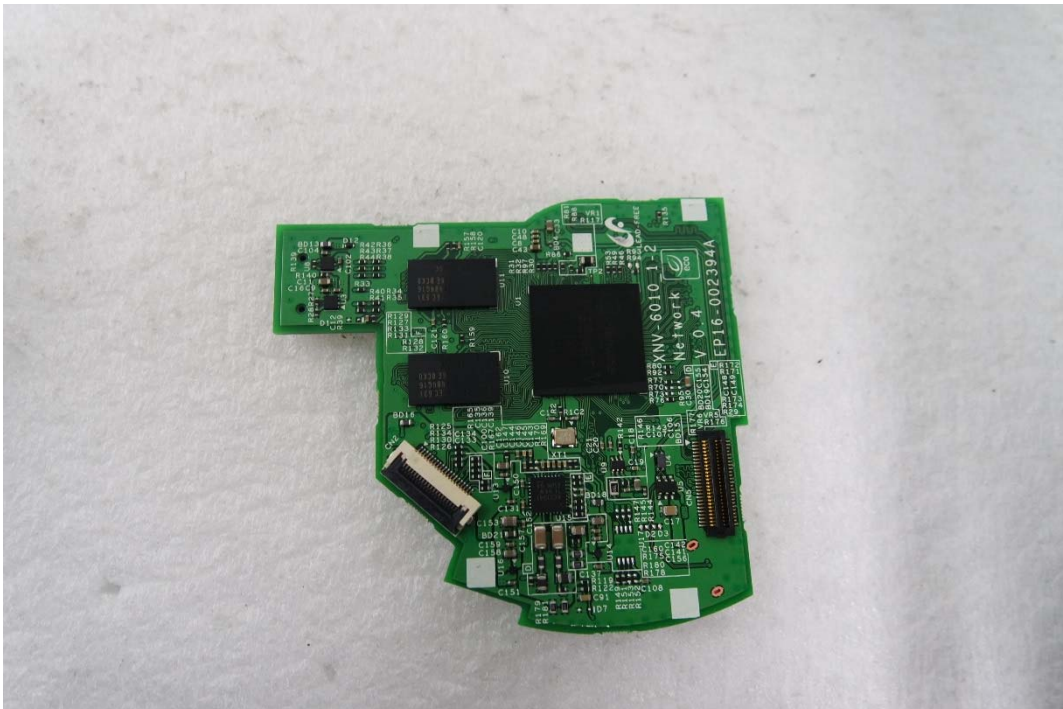


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Sub Board

(Top)



(Bottom)

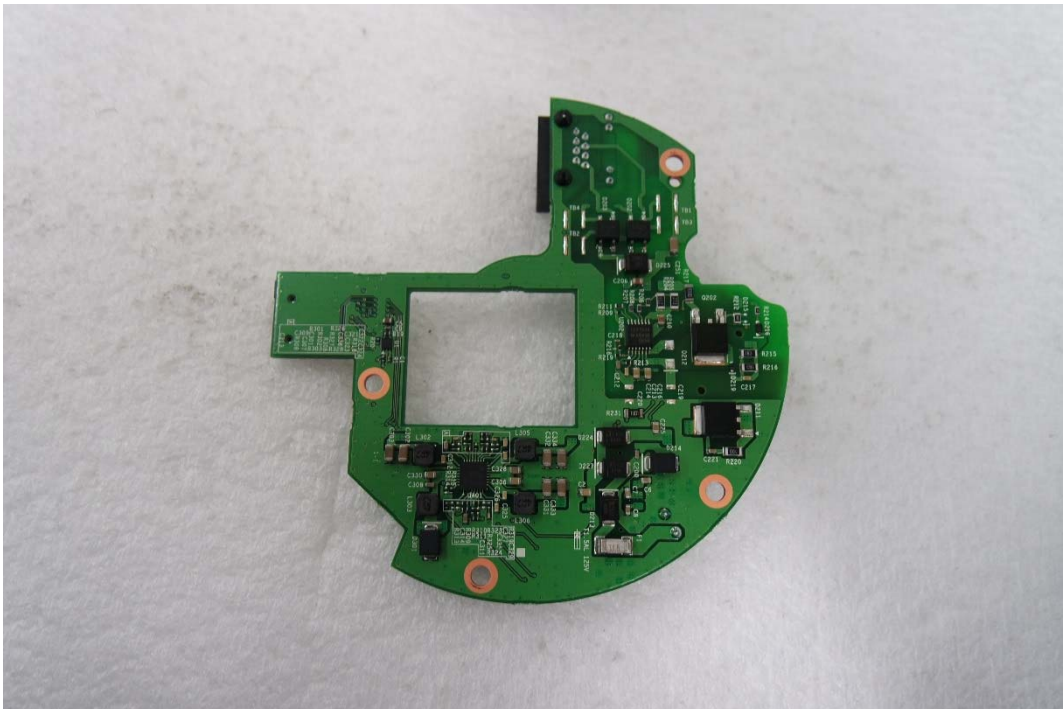

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.