

EMC TEST REPORT For VCCI


Test Report No. : KES-E1-16T0693-R1
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XND-6080
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Nov, 23, 2016
Test date : Dec, 18, 2016 ~ Dec, 21, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Dae Hyun, Kim
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 28, 2016	KES-E1-16T0693	Issued
Feb. 24, 2023	KES-E1-16T0693-R1	Change the Applicant, manufacturer at the request of the customer and model name

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement	11
1.10	Test Facility	11
1.11	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions Mains Power Ports.....	14
2.2	Conducted Emissions at Telecommunication Ports.....	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz)		25
Test Setup Photos and Configuration		33
Conducted Voltage Emissions		33
Conducted Telecommunication Emissions		34
Radiated Electric Field Emissions(Below 1 GHz)		36
Radiated Electric Field Emissions(Above 1 GHz)		38
EUT External Photographs		40
EUT Internal Photographs		41

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux(F1.4, 1./30sec) B/W : 0.003 Lux (F1.4, 1./30sec)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080 for installation
Lens	
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal
Max. Aperture Ratio	1.4(Wide) ~ 3.6(Tele)
Angular Field of View	H: 119.5°, V: 62.8°, D: 142.1° H: 27.9°, V: 15.7°, D: 32.0°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network (Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 85°(TBD) / 0° ~ 355°
Operational	
IR LED	-
Viewable Length	-
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Hand over
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0693-R1
Page (5) of (44)

Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Built-in MIC. Max output level : 1Vrms Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	N/A
Pixel Counter	Support
Network	
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576, 640x480, 640x360, 320x240, 320x180
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0693-R1
Page (6) of (44)

Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.10. 10.11 10.12 Non-plugin Webviewer Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49 , Apple Safari 9 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C (-14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	IK08
Electrical	
Input Voltage / Current	12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	IVORY / Plastic
Dimension (WxHxD)	PND-9080R
Weight	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XND-6080	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Mobile Phone	A1688	-	Apple Inc.	-
Micro SD Card	-	-	-	-
Notebook	ProBook4430s	-	HP	-
Notebook Adapter	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Alarm Jig	-	-	-	-

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45(LAN)	Notebook	RJ-45(LAN)	4.0	U
	Audio in	Mobile Phone	Audio Out	1.2	U
	Audio Out	Speaker	Audio in	1.1	U
	Alarm	Alarm Jig	Alarm	3.2	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Audio in	Mobile Phone	Audio Out	1.2	U
	Audio Out	Speaker	Audio in	1.1	U
	Alarm	Alarm Jig	Alarm	3.2	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
	RJ-45(PoE)	PoE Adapter	RJ-45(PoE)	4.0	U
PoE Adapter	RJ-45(LAN)	Notebook	RJ-45(LAN)	1.9	U

* Unshielded = U, Shielded = S

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0693-R1

Page (9) of (44)

1.7 EUT Operating Mode(s)

Test mode	Normal operating
DC 12 V	E.U.T Monitoring , Ping test
PoE	

E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebView	-	Hanwha Vision Co., Ltd

- Input power condition during the measurements was 12 v (dc) , PoE.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.8 Configuration


■ AC Main

□ DC 12 V Main

- DC 12 V Mode

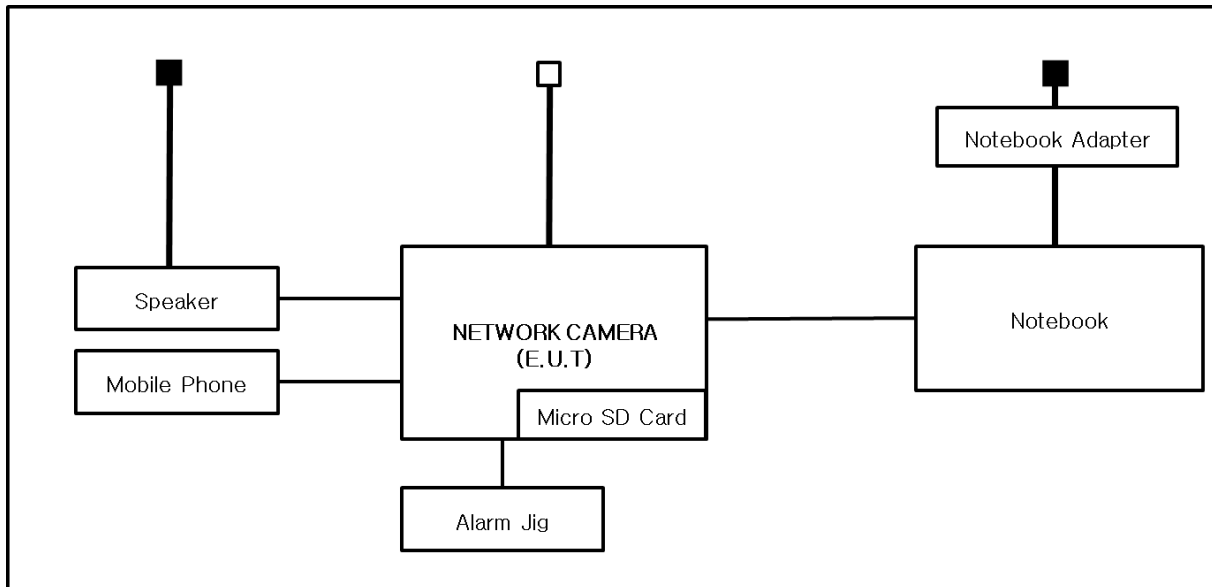

- PoE Mode

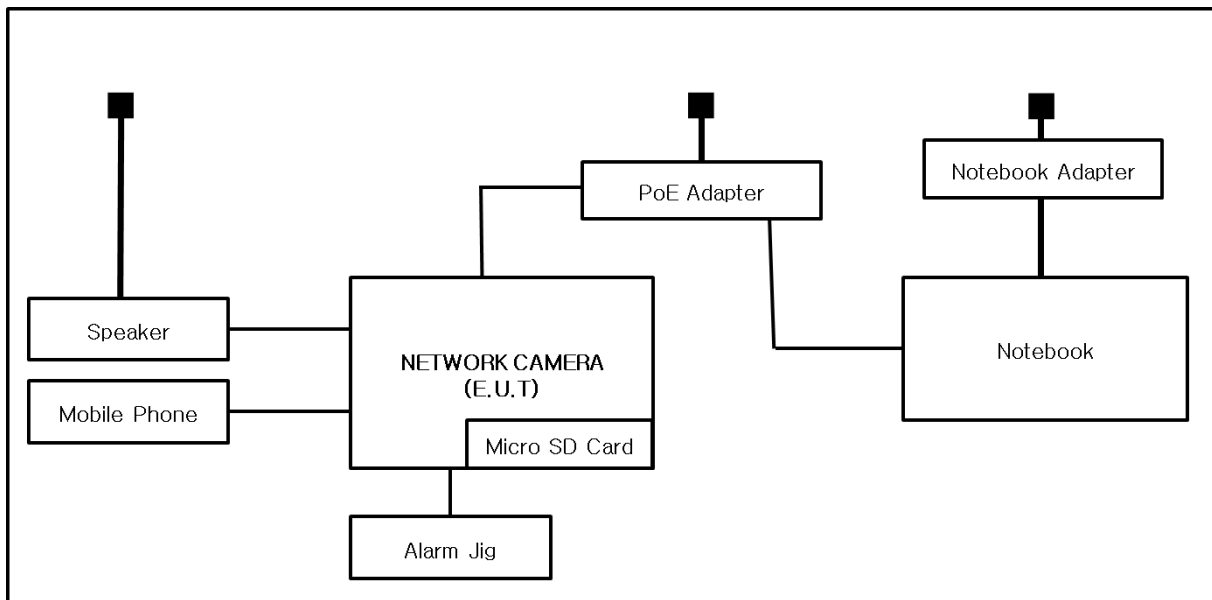

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0693-R1
Page (13) of (44)

☒ **VCCI V-3 / 2015.04**

☒ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☒ Class A

☐ Class B

☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

☐ CAN/CSA CISPR 22-10

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 04, 2017
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

DC 12 V , PoE Mode N/A :

E.U.T power is 12 v (dc) power and PoE, limits are not specified

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec, 18, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 19,6 °C

Relative Humidity: 39,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 18, 2016

Test Location

☒ Open Area Test Site #1 ☐ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-715	04, 14, 2018
☒	OATS	-	KES	-	-
☒	Antenna Mast	1070/1080	EMCO	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	N/A	N/A	N/A	N/A

Test Conditions

Temperature: 3,6 °C
Relative Humidity: 61,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 21, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 24, 2017
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 19,9 °C

Relative Humidity: 39,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0693-R1

Page (19) of (44)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XND-6080N
Mode: DC 12 V_10 Mbps
Operator Name: KES

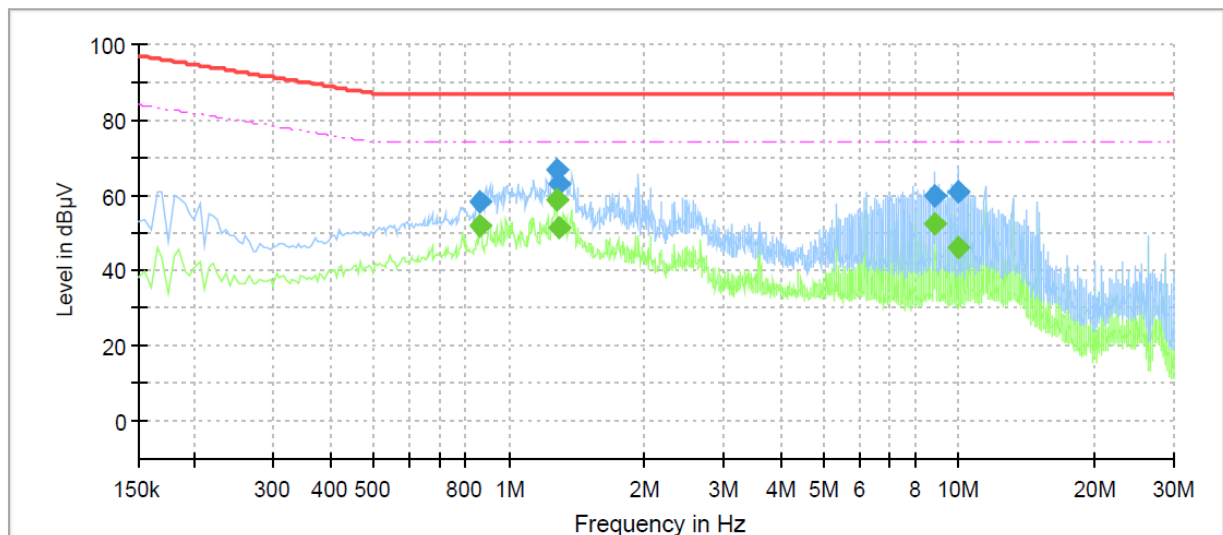

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.865000	---	51.90	74.00	22.10	1000.0	9.000	Single Line	10.2
0.865000	57.98	---	87.00	29.02	1000.0	9.000	Single Line	10.2
1.270000	---	58.51	74.00	15.49	1000.0	9.000	Single Line	10.2
1.270000	66.76	---	87.00	20.24	1000.0	9.000	Single Line	10.2
1.295000	---	51.46	74.00	22.54	1000.0	9.000	Single Line	10.2
1.295000	63.19	---	87.00	23.81	1000.0	9.000	Single Line	10.2
8.805000	---	52.38	74.00	21.62	1000.0	9.000	Single Line	10.0
8.805000	59.63	---	87.00	27.37	1000.0	9.000	Single Line	10.0
9.995000	---	46.24	74.00	27.76	1000.0	9.000	Single Line	10.0
9.995000	60.99	---	87.00	26.01	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XND-6080N
Mode: DC 12 V_100 Mbps
Operator Name: KES

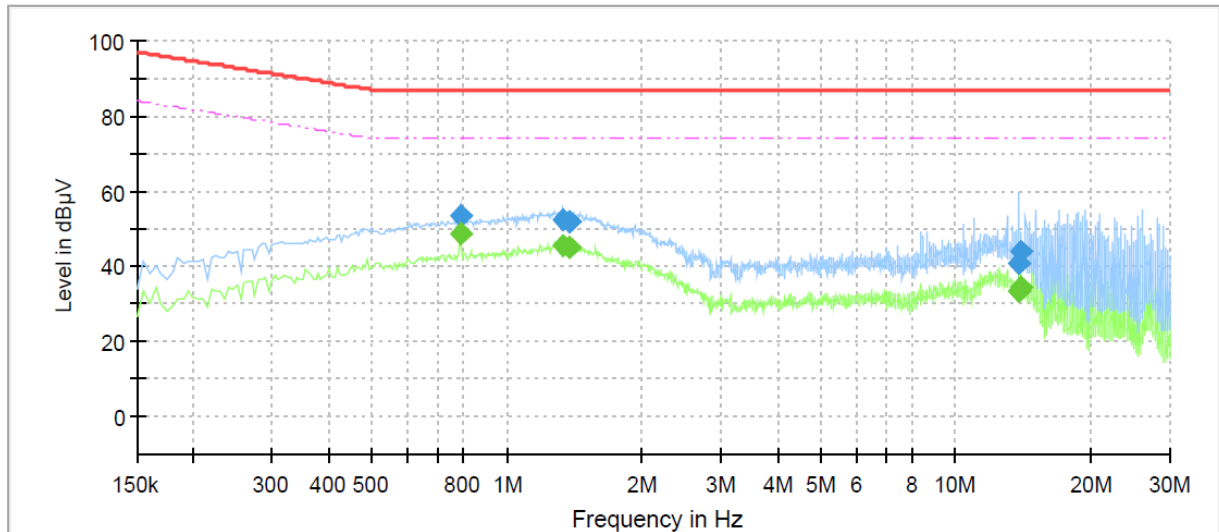

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.785000	---	48.94	74.00	25.06	1000.0	9.000	Single Line	9.7
0.785000	53.70	---	87.00	33.30	1000.0	9.000	Single Line	9.7
1.340000	---	45.29	74.00	28.71	1000.0	9.000	Single Line	9.7
1.340000	52.39	---	87.00	34.61	1000.0	9.000	Single Line	9.7
1.385000	---	45.09	74.00	28.91	1000.0	9.000	Single Line	9.7
1.385000	52.13	---	87.00	34.87	1000.0	9.000	Single Line	9.7
13.795000	---	33.62	74.00	40.38	1000.0	9.000	Single Line	9.6
13.795000	40.88	---	87.00	46.12	1000.0	9.000	Single Line	9.6
13.925000	---	34.45	74.00	39.55	1000.0	9.000	Single Line	9.6
13.925000	43.98	---	87.00	43.02	1000.0	9.000	Single Line	9.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- PoE Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XND-6080N
Mode: PoE_10 Mbps
Operator Name: KES

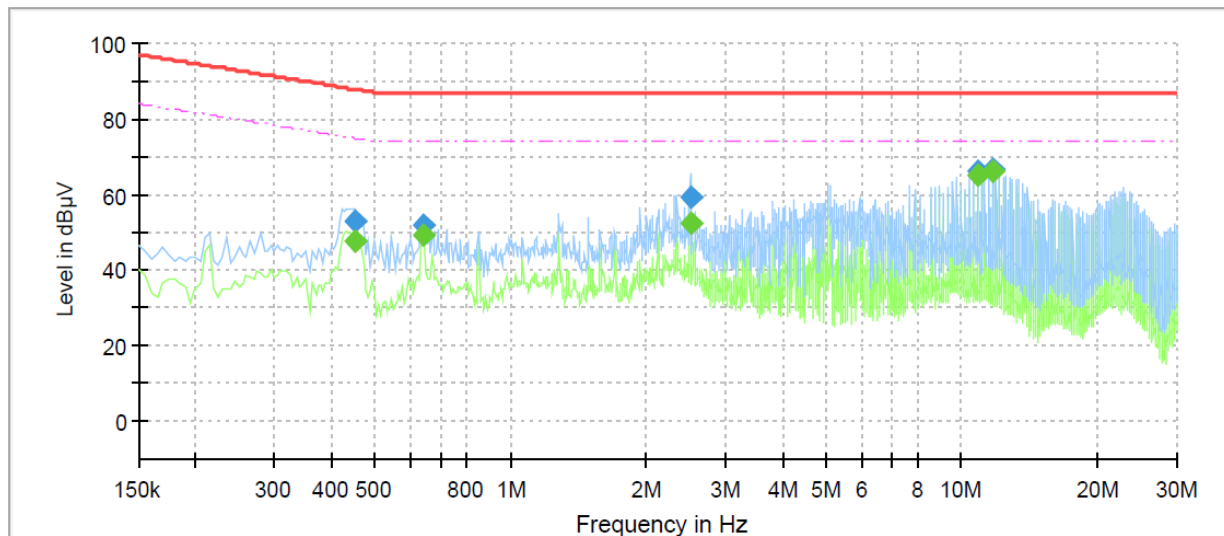

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	47.56	74.88	27.32	1000.0	9.000	Single Line	10.1
0.450000	53.18	---	87.88	34.70	1000.0	9.000	Single Line	10.1
0.640000	---	49.44	74.00	24.56	1000.0	9.000	Single Line	10.1
0.640000	51.98	---	87.00	35.02	1000.0	9.000	Single Line	10.1
2.500000	---	52.41	74.00	21.59	1000.0	9.000	Single Line	10.2
2.500000	59.05	---	87.00	27.95	1000.0	9.000	Single Line	10.2
10.850000	---	65.31	74.00	8.69	1000.0	9.000	Single Line	10.0
10.850000	65.98	---	87.00	21.02	1000.0	9.000	Single Line	10.0
11.700000	---	65.90	74.00	8.10	1000.0	9.000	Single Line	10.0
11.700000	66.80	---	87.00	20.20	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XND-6080N
Mode: PoE_100 Mbps
Operator Name: KES

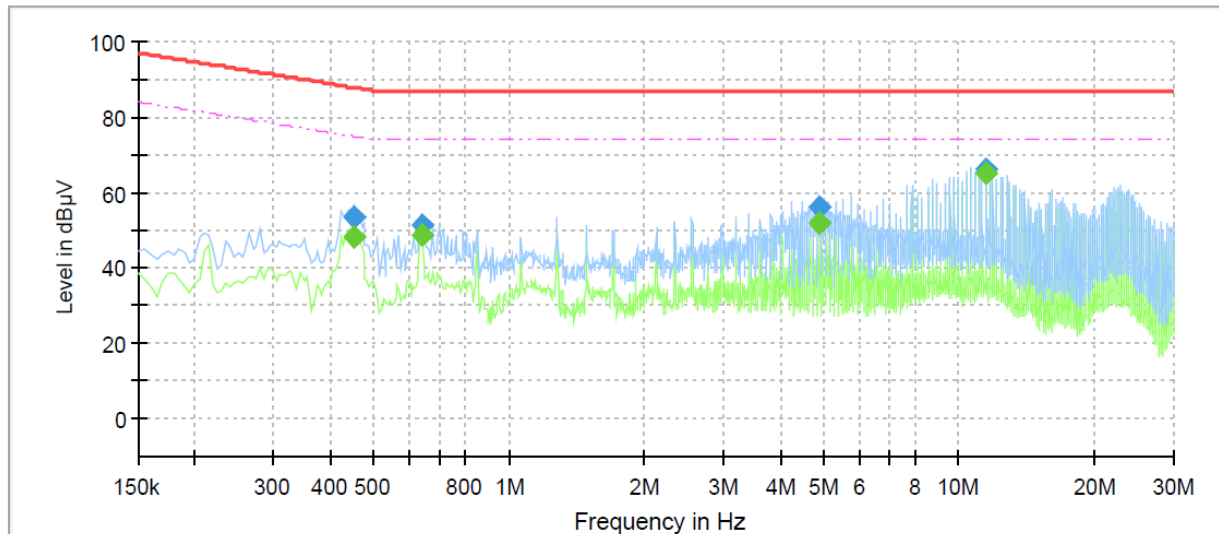

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	47.97	74.88	26.91	1000.0	9.000	Single Line	9.6
0.450000	53.38	---	87.88	34.50	1000.0	9.000	Single Line	9.6
0.640000	---	48.74	74.00	25.26	1000.0	9.000	Single Line	9.6
0.640000	51.48	---	87.00	35.52	1000.0	9.000	Single Line	9.6
4.890000	---	52.01	74.00	21.99	1000.0	9.000	Single Line	9.6
4.890000	56.22	---	87.00	30.78	1000.0	9.000	Single Line	9.6
11.485000	---	65.15	74.00	8.85	1000.0	9.000	Single Line	9.5
11.485000	66.12	---	87.00	20.88	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
49.13	7.70	V	1.00	13.78	1.36	22.84	40.00	17.16
186.08	11.38	H	4.00	10.06	2.84	24.28	40.00	15.72
225.86	9.91	H	4.00	12.03	3.13	25.07	40.00	14.93
334.39	11.40	V	1.00	14.15	3.82	29.37	47.00	17.63
525.52	12.55	V	1.00	17.80	5.15	35.50	47.00	11.50
550.68	10.62	V	1.40	18.30	5.25	34.17	47.00	12.83
623.89	11.18	V	1.50	19.37	5.78	36.33	47.00	10.67

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
50.30	18.32	V	1.00	13.86	1.38	33.56	40.00	6.44
300.42	12.59	H	4.00	13.41	3.61	29.61	47.00	17.39
475.07	10.10	H	3.90	16.87	4.95	31.92	47.00	15.08
500.18	9.82	V	1.10	17.30	5.06	32.18	47.00	14.82
550.72	9.89	V	1.80	18.30	5.25	33.44	47.00	13.56
601.07	7.91	V	1.60	19.27	5.60	32.78	47.00	14.22

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

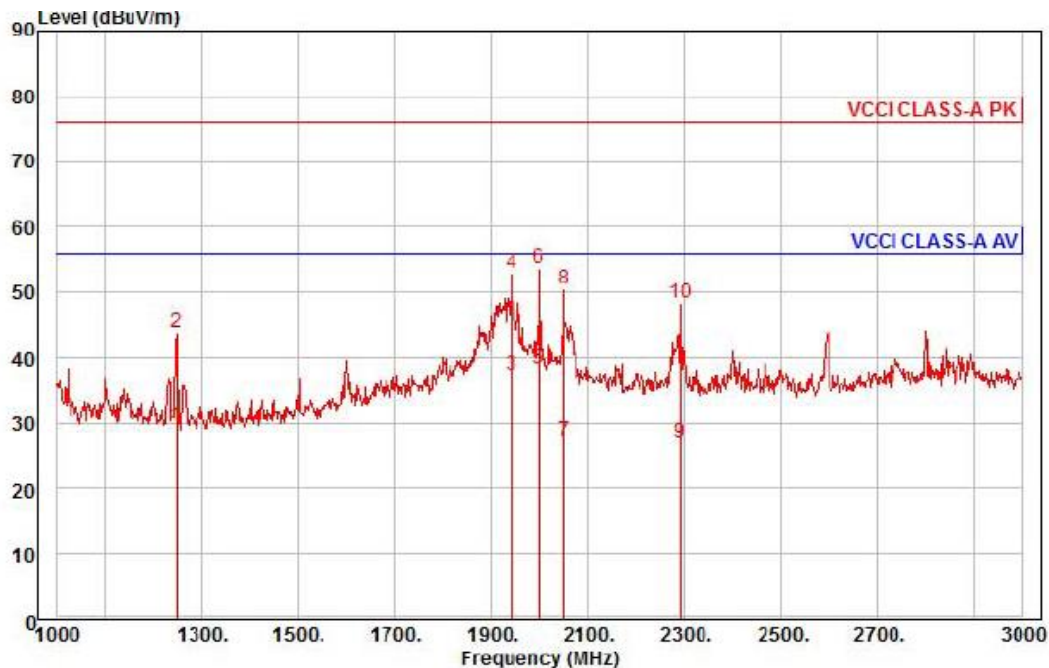


Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : DC 12 V
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1248.00	36.85	24.89	7.28	39.49	242	56.00	-26.47	horizontal Average
2	1248.00	51.15	24.89	7.28	39.49	242	76.00	-32.17	horizontal Peak
3	1942.00	39.83	27.65	9.19	39.38	52	56.00	-18.71	horizontal Average
4	1942.00	55.59	27.65	9.19	39.38	52	76.00	-22.95	horizontal Peak
5 pp	2000.00	40.37	27.88	9.34	39.41	44	56.00	-17.82	horizontal Average
6 pk	2000.00	55.85	27.88	9.34	39.41	44	76.00	-22.34	horizontal Peak
7	2050.00	29.25	28.00	9.45	39.41	58	56.00	-28.71	horizontal Average
8	2050.00	52.39	28.00	9.45	39.41	58	76.00	-25.57	horizontal Peak
9	2292.00	27.82	28.60	10.04	39.42	10	56.00	-28.96	horizontal Average
10	2292.00	48.98	28.60	10.04	39.42	10	76.00	-27.80	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

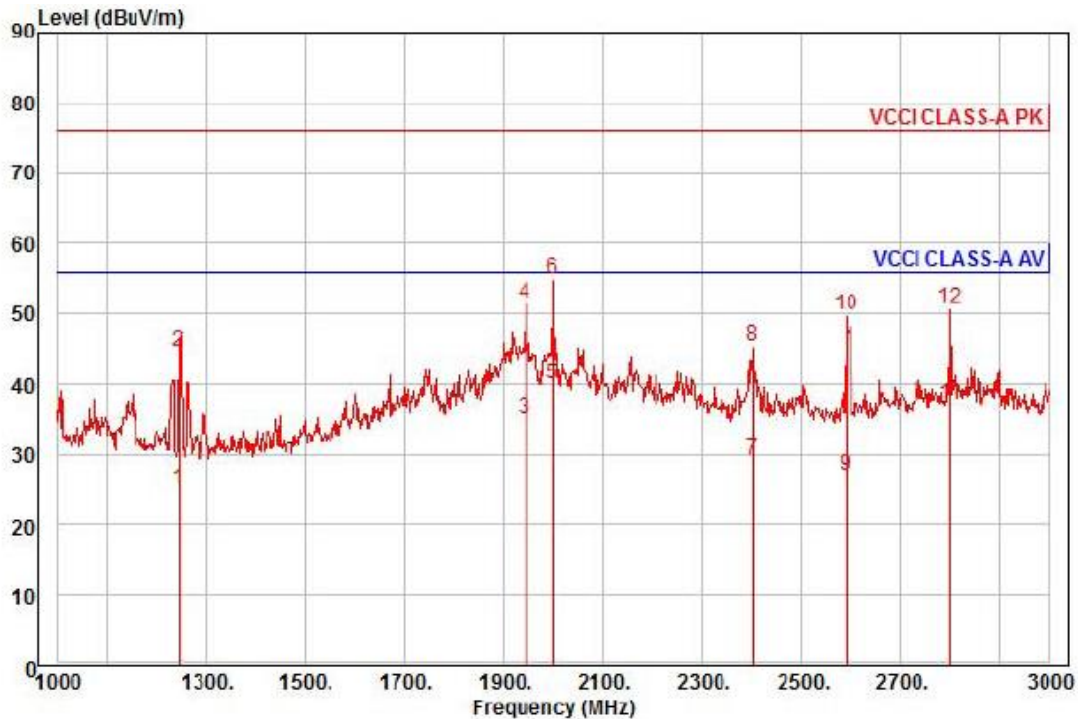

Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : DC 12 V
Memo : 1 ~ 3 GHz


	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1244.00	32.44	24.88	7.27	39.50	187	56.00	-30.91	vertical	Average
2	1244.00	51.89	24.88	7.27	39.50	187	76.00	-31.46	vertical	Peak
3	1944.00	37.54	27.66	9.19	39.38	263	56.00	-20.99	vertical	Average
4	1944.00	54.04	27.66	9.19	39.38	263	76.00	-24.49	vertical	Peak
5 pp	2000.00	42.15	27.88	9.34	39.41	263	56.00	-16.04	vertical	Average
6 pk	2000.00	57.02	27.88	9.34	39.41	263	76.00	-21.17	vertical	Peak
7	2402.00	29.50	28.86	10.33	39.42	235	56.00	-26.73	vertical	Average
8	2402.00	45.64	28.86	10.33	39.42	235	76.00	-30.59	vertical	Peak
9	2590.00	26.53	29.33	10.72	39.64	56	56.00	-29.06	vertical	Average
10	2590.00	49.41	29.33	10.72	39.64	56	76.00	-26.18	vertical	Peak
11	2800.00	35.80	29.84	11.23	39.88	204	56.00	-19.01	vertical	Average
12	2800.00	49.55	29.84	11.23	39.88	204	76.00	-25.26	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

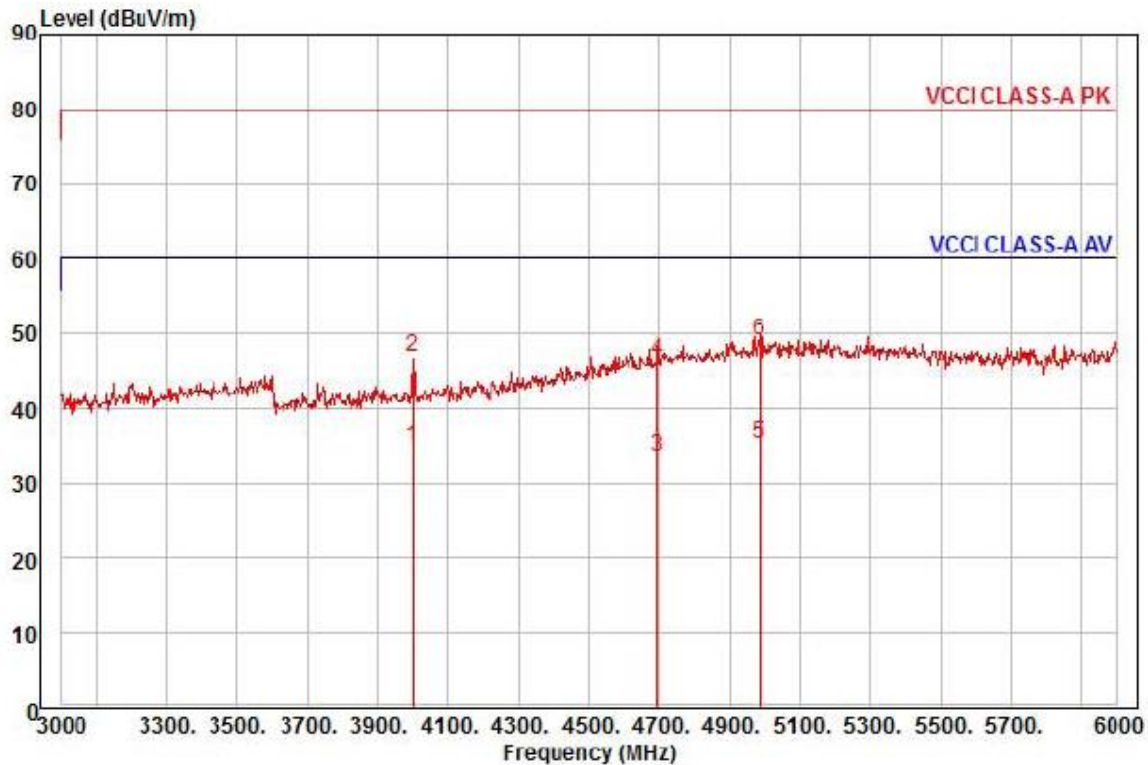

Site : chamber

Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project : NETWORK CAMERA

Model : XND-6080N

Mode : DC 12 V

Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3999.00	30.02	32.01	13.56	40.70	1	60.00	-25.11	horizontal Average
2	3999.00	41.91	32.01	13.56	40.70	1	80.00	-33.22	horizontal Peak
3	4695.00	23.35	35.98	14.87	40.58	293	60.00	-26.38	horizontal Average
4	4695.00	36.08	35.98	14.87	40.58	293	80.00	-33.65	horizontal Peak
5 pp	4983.00	22.62	37.62	15.30	40.29	110	60.00	-24.75	horizontal Average
6 pk	4983.00	36.32	37.62	15.30	40.29	110	80.00	-31.05	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

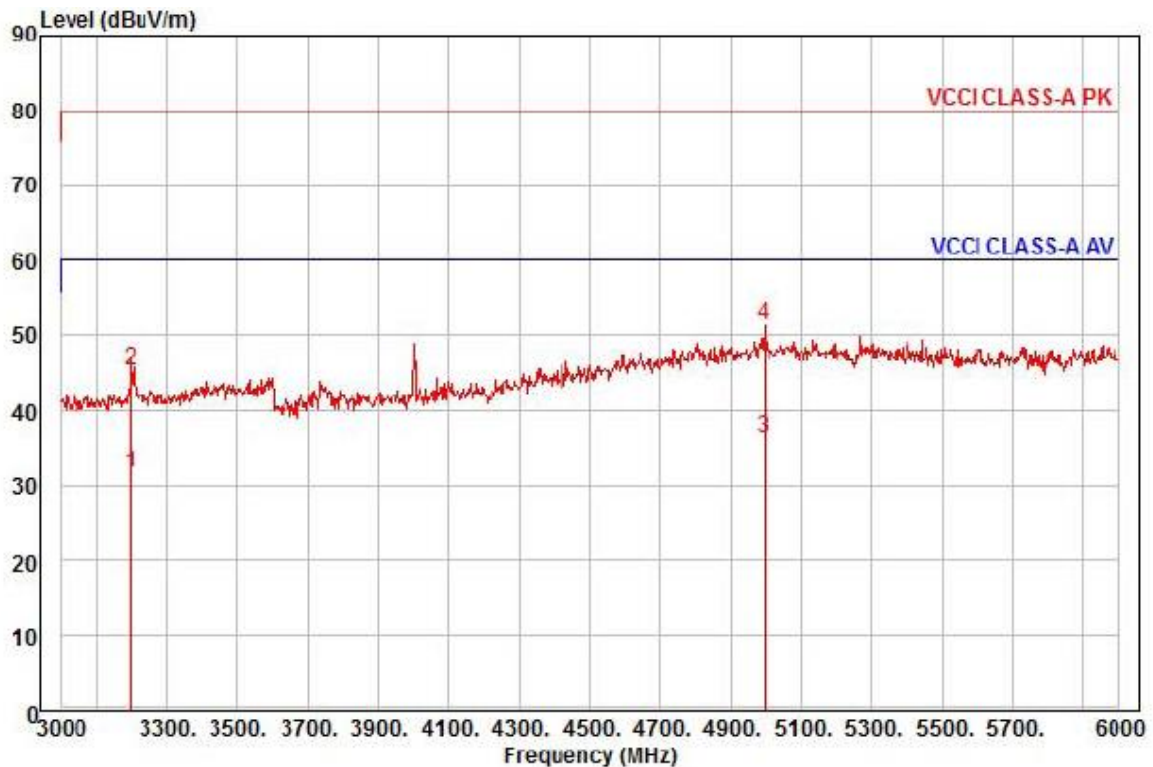

Site : chamber

Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project : NETWORK CAMERA

Model : XND-6080N

Mode : DC 12 V

Memo : 3 ~ 6 GHz


		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	29.22	30.66	12.05	40.41	14	60.00	-28.48	vertical	Average
2	3198.00	43.17	30.66	12.05	40.41	14	80.00	-34.53	vertical	Peak
3 pp	4995.00	23.68	37.69	15.31	40.28	120	60.00	-23.60	vertical	Average
4 pk	4995.00	38.88	37.69	15.31	40.28	120	80.00	-28.40	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

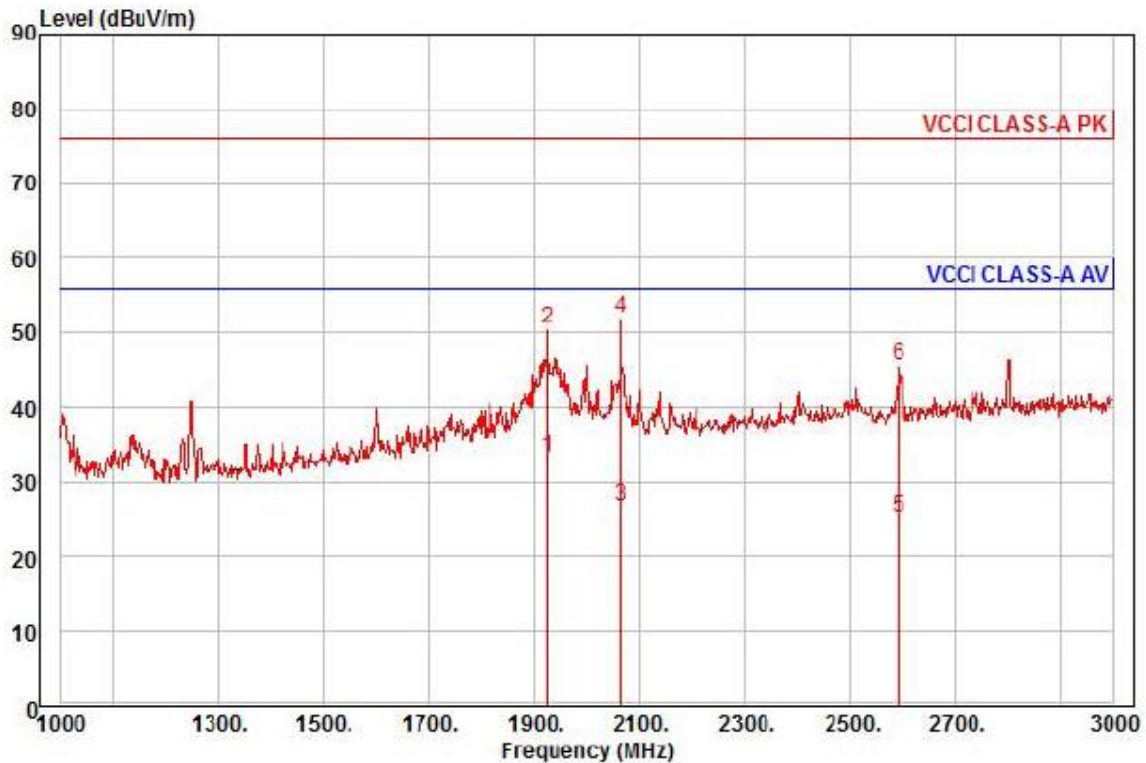


Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : PoE
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1924.00	36.01	27.58	9.14	39.37	21	56.00	-22.64	horizontal Average	
2	1924.00	53.12	27.58	9.14	39.37	21	76.00	-25.53	horizontal Peak	
3	2064.00	28.72	28.04	9.48	39.41	318	56.00	-29.17	horizontal Average	
4 pk	2064.00	53.83	28.04	9.48	39.41	318	76.00	-24.06	horizontal Peak	
5	2592.00	24.91	29.33	10.72	39.64	226	56.00	-30.68	horizontal Average	
6	2592.00	45.30	29.33	10.72	39.64	226	76.00	-30.29	horizontal Peak	

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

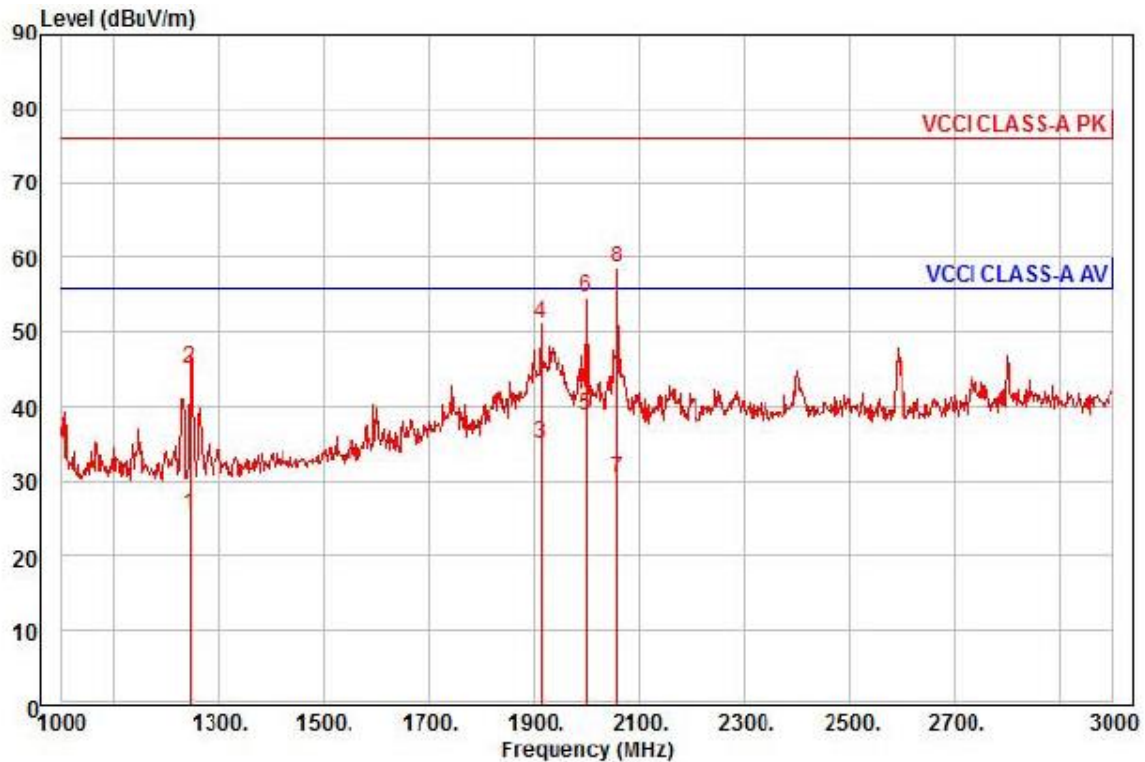


Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : PoE
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1244.00	32.75	24.88	7.27	39.50	188	56.00	-30.60	vertical
2	1244.00	52.45	24.88	7.27	39.50	188	76.00	-30.90	vertical
3	1912.00	37.74	27.53	9.11	39.37	280	56.00	-20.99	vertical
4	1912.00	53.91	27.53	9.11	39.37	280	76.00	-24.82	vertical
5 pp	2000.00	41.01	27.88	9.34	39.41	102	56.00	-17.18	vertical
6	2000.00	56.78	27.88	9.34	39.41	102	76.00	-21.41	vertical
7	2056.00	32.35	28.02	9.47	39.41	110	56.00	-25.57	vertical
8 pk	2056.00	60.46	28.02	9.47	39.41	110	76.00	-17.46	vertical

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

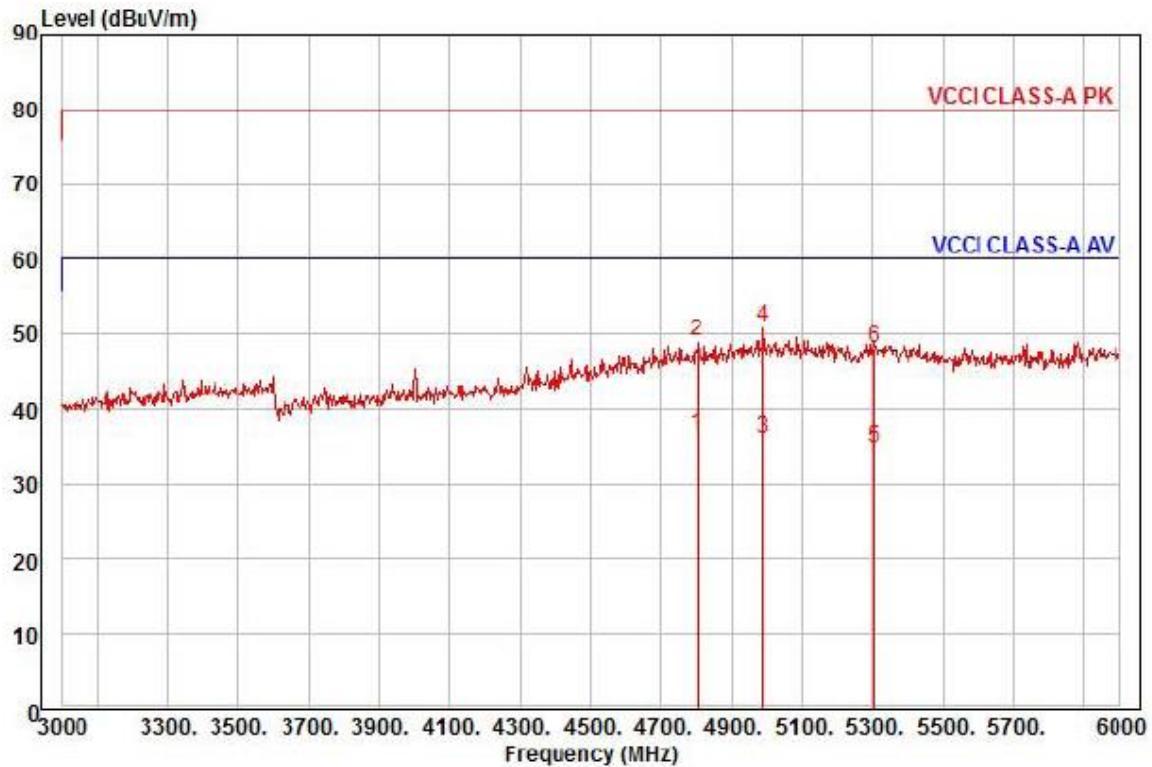


Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : PoE
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	4800.00	25.40	36.58	15.10	40.47	70	60.00	-23.39	horizontal	Average
2	4800.00	37.95	36.58	15.10	40.47	70	80.00	-30.84	horizontal	Peak
3	4986.00	23.34	37.64	15.30	40.28	116	60.00	-24.00	horizontal	Average
4 pk	4986.00	38.43	37.64	15.30	40.28	116	80.00	-28.91	horizontal	Peak
5	5304.00	22.51	37.11	15.88	40.77	148	60.00	-25.27	horizontal	Average
6	5304.00	35.89	37.11	15.88	40.77	148	80.00	-31.89	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

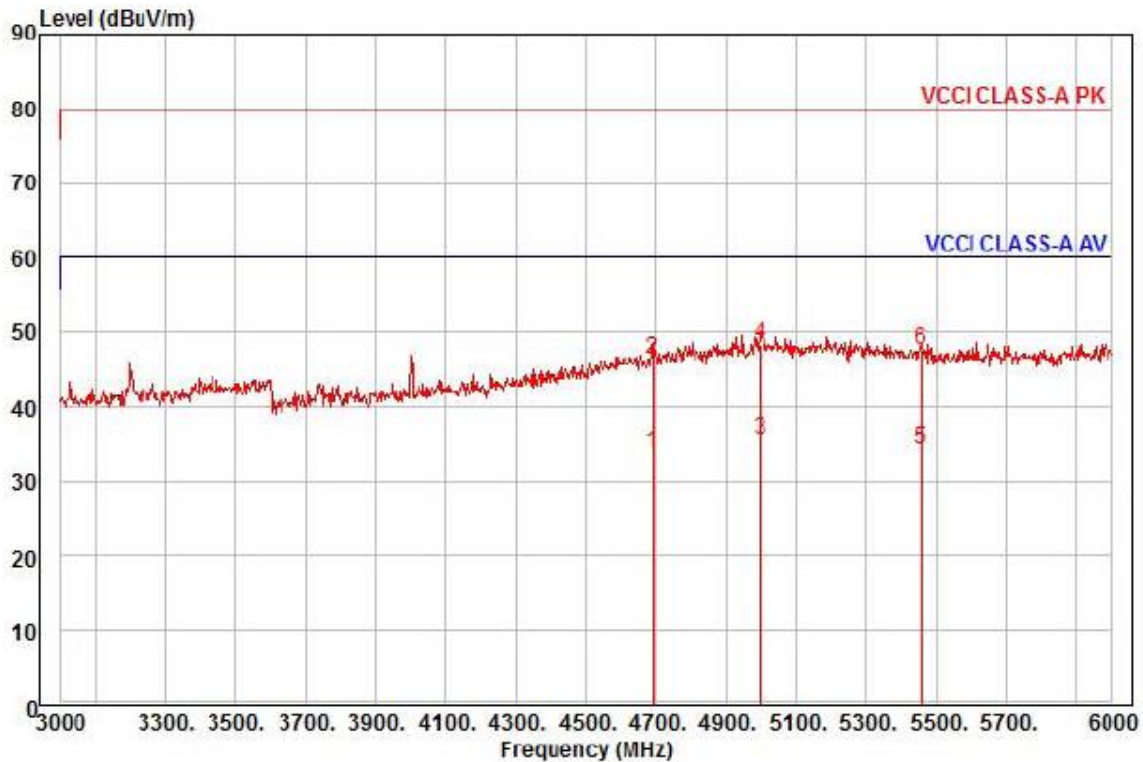

Site : chamber
Condition: VCCI CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
Model : XND-6080N
Mode : PoE
Memo : 3 ~ 6 GHz

	Read Freq	Ant Level	Cable Factor	Preamp Loss	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	deg	dBuV/m	dB		
	4692.00	23.64	35.96	14.86	40.58	10	60.00	-26.12	vertical
	4692.00	36.13	35.96	14.86	40.58	10	80.00	-33.63	vertical
pp	4998.00	22.76	37.71	15.31	40.27	241	60.00	-24.49	vertical
pk	4998.00	35.45	37.71	15.31	40.27	241	80.00	-31.80	vertical
	5460.00	22.54	36.79	16.13	41.03	266	60.00	-25.57	vertical
	5460.00	35.60	36.79	16.13	41.03	266	80.00	-32.51	vertical

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0693-R1

Page (33) of (44)

Test Setup Photos and Configuration


Conducted Voltage Emissions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Telecommunication Emissions

- DC 12 V Mode

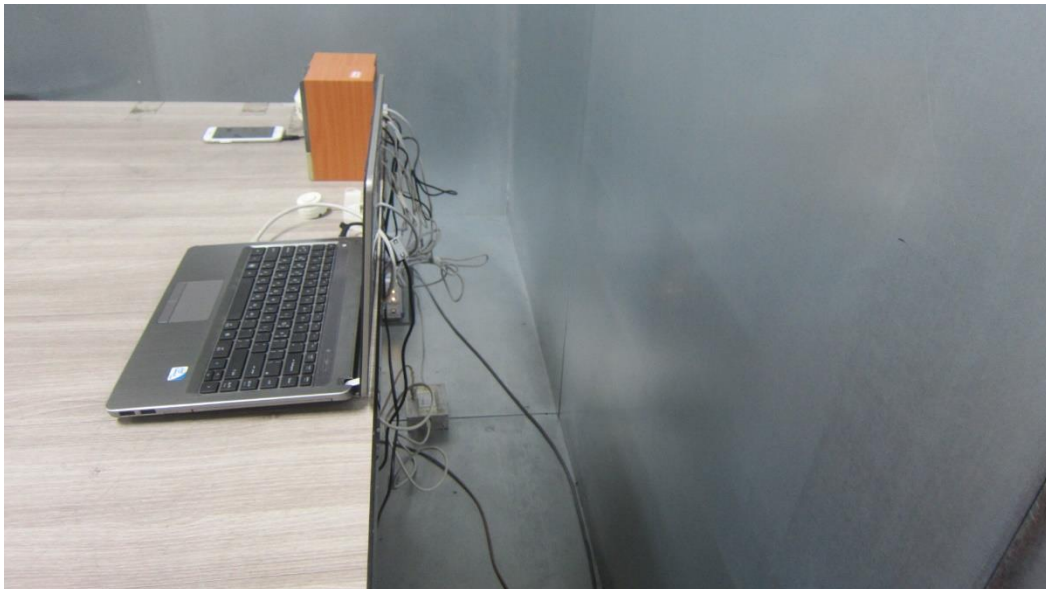

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

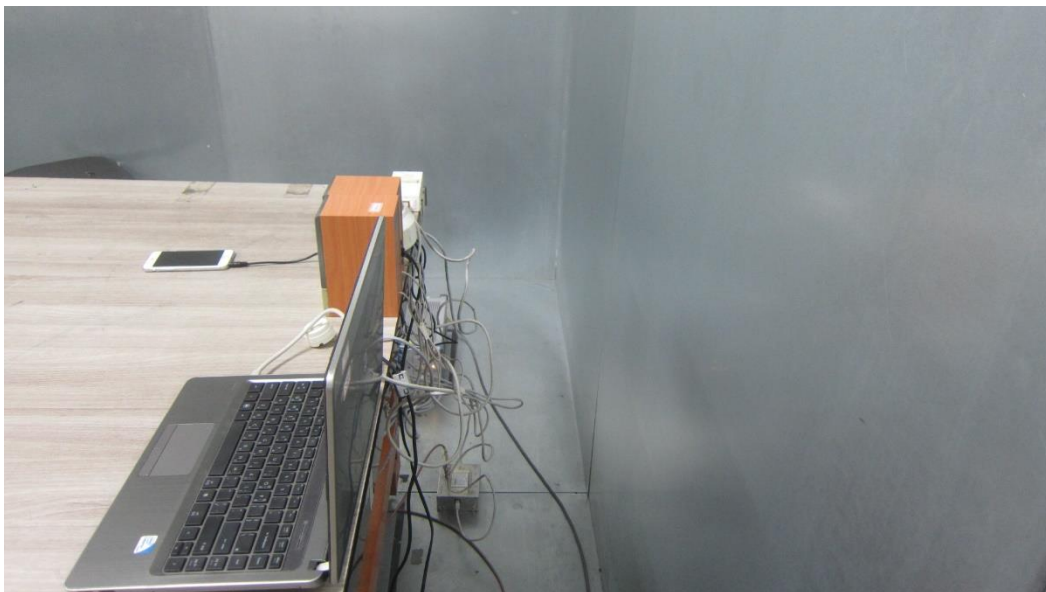

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

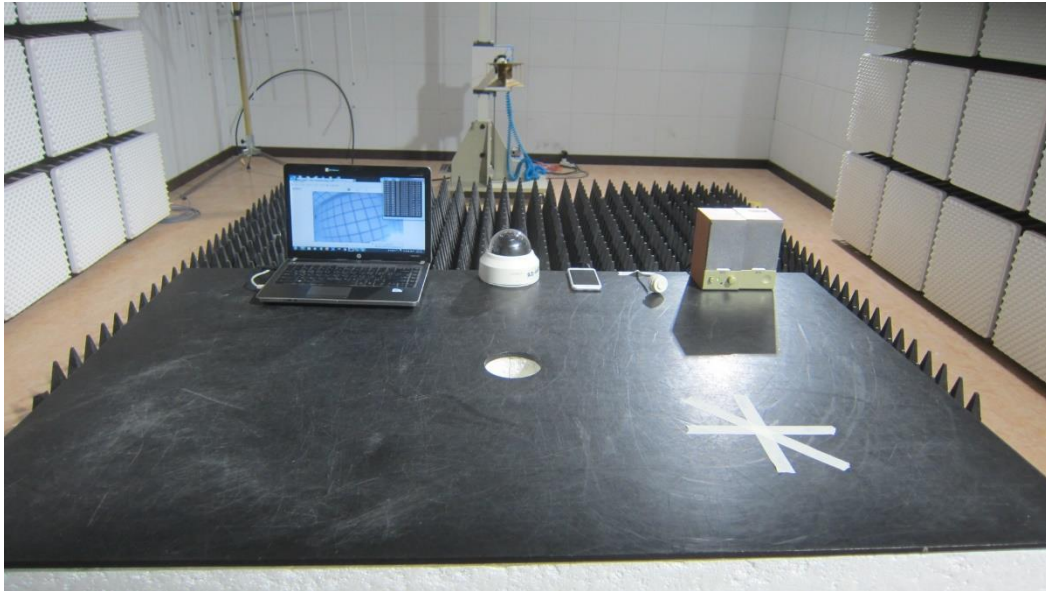

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode



EUT External Photographs

(Top)



(Bottom)



EUT Internal Photographs

(Internal View)




EUT Internal View – Main board

(Top)




(Bottom)

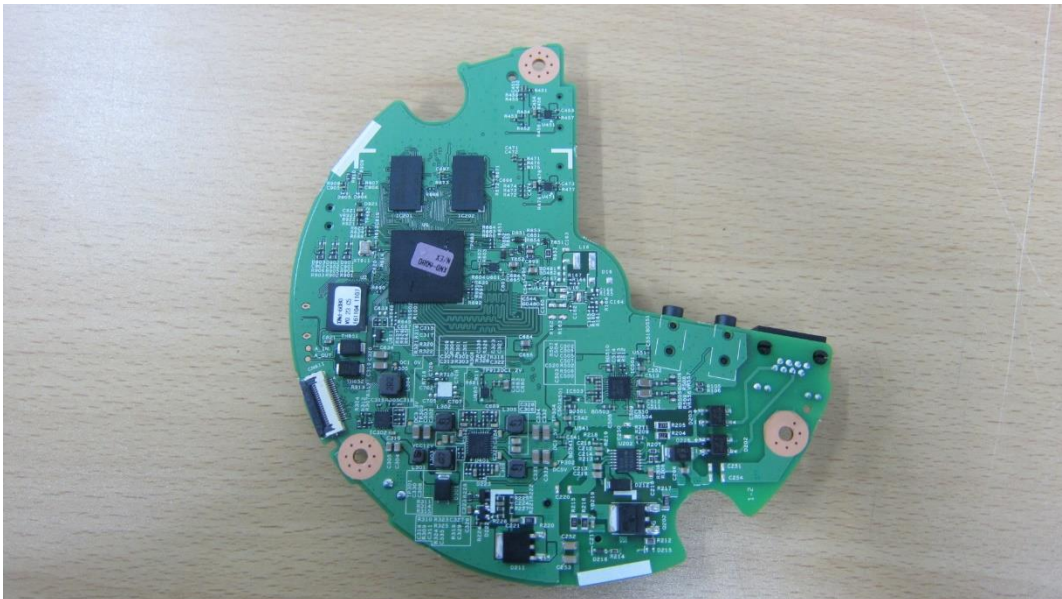


EUT Internal View – Sub board

(Top)

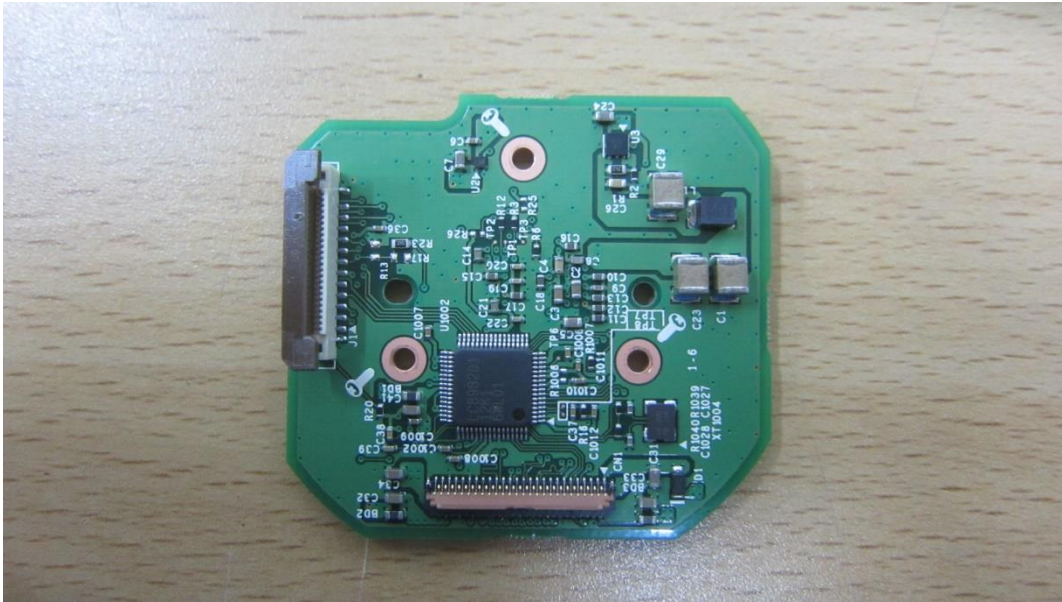

(Bottom)

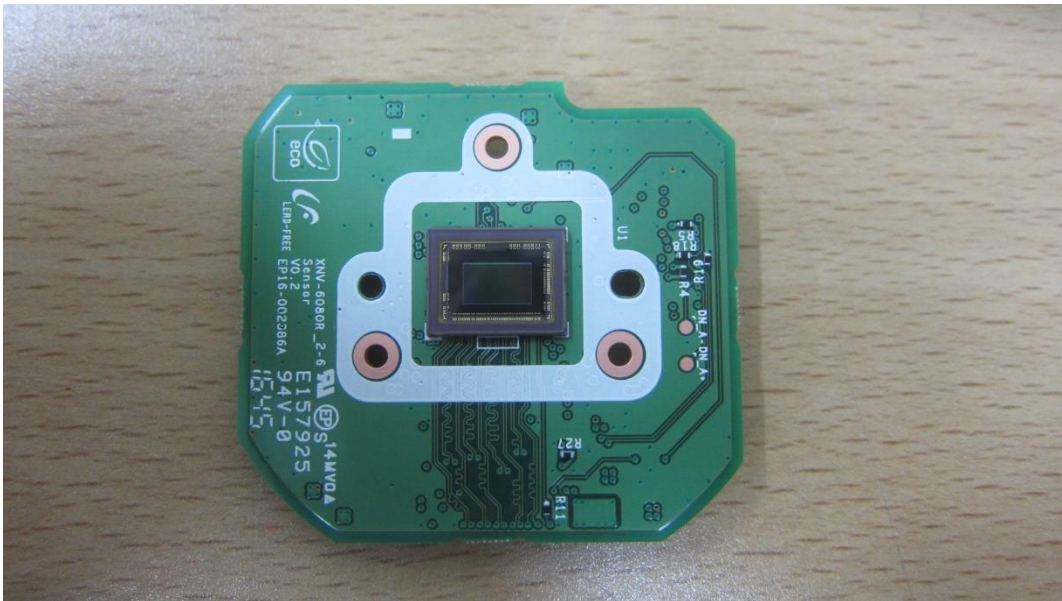

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)



(Bottom)

