



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (1) of (38)

EMC TEST REPORT For VCCI

Test Report No. : KES-EM-22T0080-R1
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNF-8010RV
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jan. 03, 2022
Test date : Jan. 05, 2022 ~ Jan. 06, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Yun, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0080-R1
Page (2) of (38)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 19, 2022	KES-EM-22T0080	Issued
Feb. 24, 2023	KES-EM-22T0080-R1	Change the Applicant and manufacturer at the request of the customer.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	8
1.2	Variant Model Differences	8
1.3	Device Modifications	8
1.4	Equipment Under Test.....	8
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions Mains Power Ports.....	14
2.2	Conducted Emissions at Telecommunication Ports.....	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz).....		24
Test Setup Photos and Configuration		26
Conducted Emissions at Mains Power Ports.....		26
Conducted Emissions at Telecommunication Ports		27
Radiated Electric Field Emissions(Below 1 GHz)		29
Radiated Electric Field Emissions(Above 1 GHz).....		31
EUT External Photographs		33
EUT Internal Photographs		34



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3,096x2,094
Effective Pixels	2,048x2,048
Scanning System	Progressive
Min. Illumination	Color : 0.07Lux(F2.2, 30IRE) B/W : 0 Lux (IR LED On)
S / N Ratio	50d
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 714x480(N), 702x576(P), for installation - DIP connector type USB
Lens	
Focal Length (Zoom Ratio)	1.6mm
Max. Aperture Ratio	F1.6
Angular Field of View	H : 187° / V : 187° / D : 187°
Min. Object Distance	0.3m
Focus Control	Simple Focus / Manual - Remote control via network
Lens Type	Fixed Lens
Mount Type	Board Type
Operational	
Viewable Length	15m
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	OFF / BLC / HLC(Masking / Dimming) / WDR

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0080-R1
Page (5) of (38)

Wide Dynamic Range	120dB
Contrast Enhancement	SSDR Off / On
Digital Noise Reduction	SSNR V (2D+3D noise filter) Off / On
Motion Detection	Off / On (8ea, 8point Polygonal zones), Hand over
Privacy Masking	Off / On (32ea, Polygonal) - Color : Gray, Green, Red, Blue, Black, White, Mosaic
Gain Control	Off / Low / Middle / High / Manual
White Balance	ATW / AWC / Manual / Indoor / Outdoor(Included mercury&Sodium)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker(2~1/12,000sec)
Digital Zoom	24x, Digital PTZ(Preset, Group)
Flip / Mirror	Off / On
Video & Audio Analytics	Tampering, Loitering, Directional detection, Virtual line, Enter/Exit, (Dis)Appear, Audio detection, Motion detection, Sound classification
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics , Network Disconnect, SD card error, NAS error
Alarm events	File upload via FTP and E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output
View Composition	<Camera Side> FisheyeSingle PanoramaDouble PanoramaFisheye+4 PTZQuad viewFisheye+8 PTZ
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264/MJPEG
Resolution	[Original View(1:1)] 2048x2048 / 1280x1280 / 1080x1080 / 960x960 / 768x768 / 720x720 / 640x640 / 480x480
	[Original View(1:1)] 2048x2048 / 1280x1280 / 1080x1080 / 960x960 / 768x768 / 720x720 / 640x640 / 480x480
Max. Framerate	H.265/H.264 : 30fps@2,048x2,048

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0080-R1
Page (6) of (38)

	MJPEG : Max 15fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStreamII	Support
Video Quality Adjustment	H.265/H.264 : Target Bitrate Level Control MJPEG : Quality Level Control
Streaming Capability	Multiple Streaming (Up to 10profiles)
Audio In	Selectable (Mic IN/Line IN/Built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm mono jack), Max output level: 1 Vrms
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional(2way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, SIP
Protocol	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication (EAP-TLS, EAP-LEAP)
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2 slot (up to 512GB) - Continuous recording(1st slot to 2nd slot) - motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. - camera can detect automatically when the memory is connected - memory status display (normal/error/active/formatting/lock) NAS(Network Attached Storage)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (7) of (38)

	Local PC for Instant Recording(plug-in viewer only)
Application Programming Interface	ONVIF Profile S/G SUNAPI Wisenet open platform
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Portuguese, Turkish, Polish, Czech, Dutch, Hungary, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.9. 10.10. 10.11. 10.12 Plug-in Free Webviewer Supported Browser : Google Chrome, MS Edge, Mozilla Firefox (Window 64bit only), Apple Safari *Mac OS X only Plug-in Webviewer Supported Browser : MS Explore, Apple Safari * Mac OS X only
Central Management Software	Smart Viewer
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	DC12V±10%, PoE(IEEE802.3af,Class3)
Power Consumption	DC12V(9.5W 0.8A), PoE(10.5W 0.28A)
Mechanical	
Color / Material	Ivory/ALUMINUM, PLASTIC
Dimension (WxHxD)	D146 x H65.8
Weight	785g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNF-8010RV	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC / DC Adapter	2ACB022F	-	ChAnnel Well Technology (Guangzhou) Co.,Ltd.	-
PoE Injector	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	LG15N54	411NZJV044052	LG Electronics	-
Notebook Adapter	PA-1900-14	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD	-
Speaker	BR-1000A CUVE	-	DONGGUAN EDFIER TECHNOLOGY CO, LTD	-
MIC	CMK-303	-	CAMAC	-
Alarm	SLE-0001 DO	C64167JDB6012 68 F	-	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	SanDisk	16 GB

1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	Audio Out	Speaker	Audio In	1.2	U
	Audio In	MIC	Audio Out	2.0	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	DC Jack	AC / DC Adapter	DC Jack	0.8	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.3	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Injector	RJ-45 (PoE)	3.0	U
	Audio Out	Speaker	Audio In	1.2	U
	Audio In	MIC	Audio Out	2.0	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
Notebook	RJ-45 (LAN)	PoE Injector	RJ-45 (LAN)	2.0	U
	DC Jack	Notebook Adapter	DC Jack	1.3	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (10) of (38)

1.7 EUT Operating Mode(s)

■ DC Mode, PoE Mode

Test Mode	operating
Operation	Monitoring EUT Using Web Viewer, Ping Test, After the test, the Micro SD Card was checked to see if it was recorded normally


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

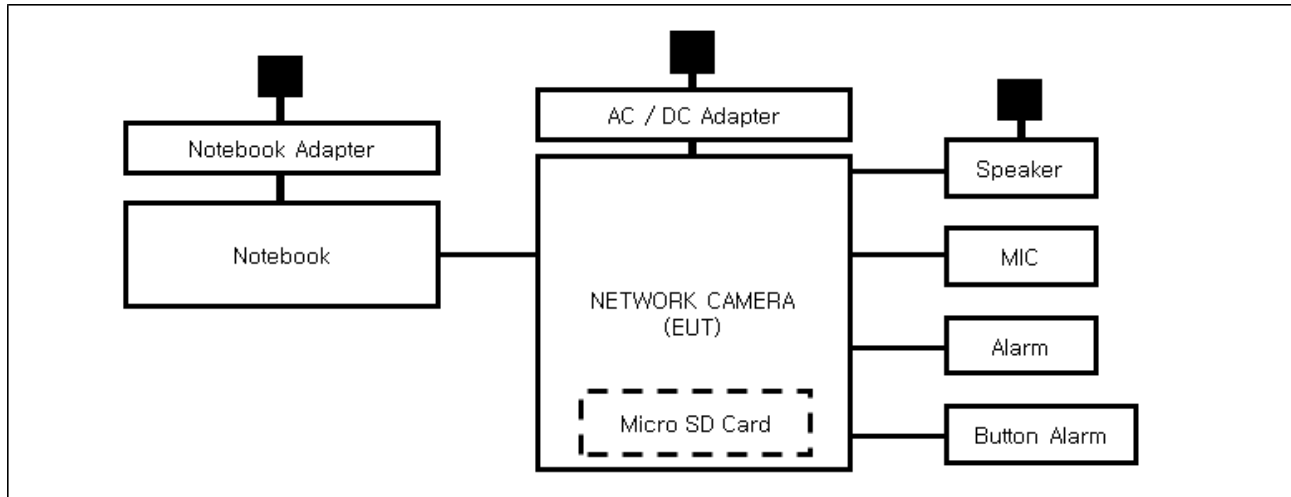

■ PoE Mode

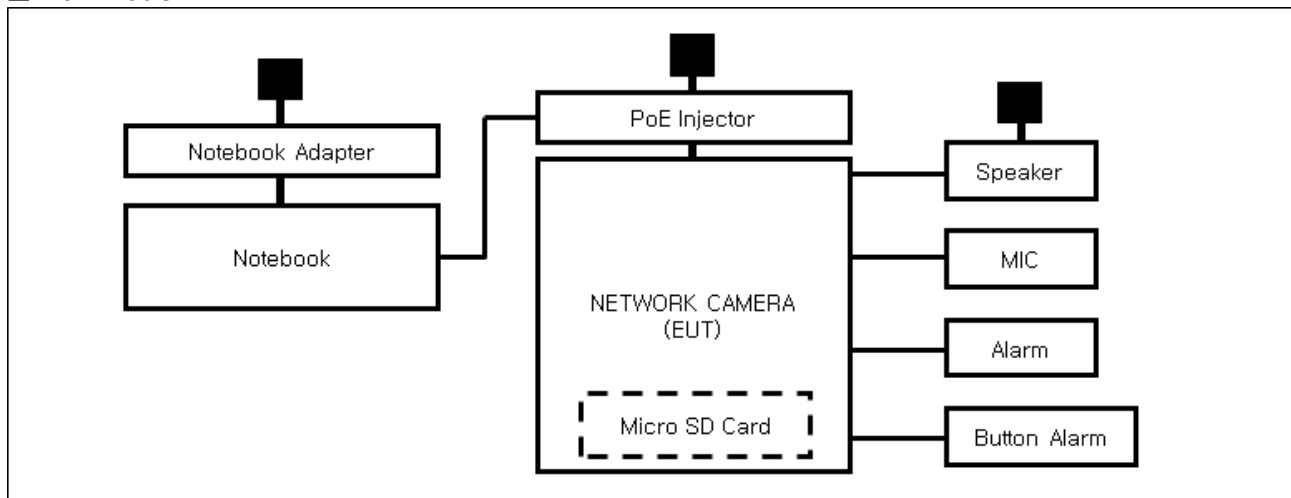

1.9 Remarks when standards applied

USB, VIDEO port are for administrator use and is excluded from testing.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (13) of (38)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date

Jan. 05, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (23,1 ± 0,2) °C

Relative Humidity: (44,0 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jan. 05, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 28, 2022
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 28, 2022
☐	CDN	CDNS502A	TESEQ	40431	12, 27, 2022

Test Conditions

Temperature: (23,1 ± 0,2) °C
Relative Humidity: (44,0 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 05, 2022

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (23,0 ± 0,3) °C

Relative Humidity: (43,1 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS☐ NOT PASS☐ NOT APPLICABLE**Remarks**See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 06, 2022

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 03, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (22,1 ± 0,1) °C

Relative Humidity: (43,1 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNF-8010RV
Phase:	L1
Mode:	DC
Operator Name:	KES

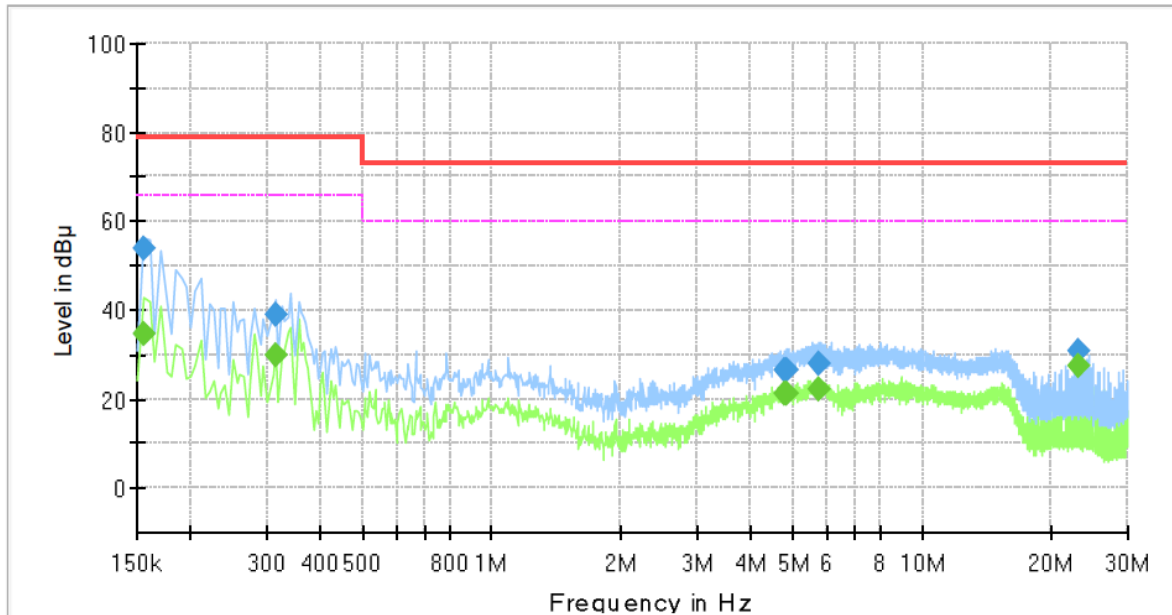

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	54.11	---	79.00	24.89	1000.0	9.000	L1	19.5
0.155000	---	34.47	66.00	31.53	1000.0	9.000	L1	19.5
0.315000	---	29.87	66.00	36.13	1000.0	9.000	L1	19.6
0.315000	38.95	---	79.00	40.05	1000.0	9.000	L1	19.6
4.775000	---	21.15	60.00	38.85	1000.0	9.000	L1	19.7
4.775000	26.59	---	73.00	46.41	1000.0	9.000	L1	19.7
4.855000	---	21.07	60.00	38.93	1000.0	9.000	L1	19.7
4.855000	26.55	---	73.00	46.45	1000.0	9.000	L1	19.7
5.750000	---	22.41	60.00	37.59	1000.0	9.000	L1	19.6
5.750000	28.08	---	73.00	44.92	1000.0	9.000	L1	19.6
23.130000	---	27.69	60.00	32.31	1000.0	9.000	L1	20.2
23.130000	30.77	---	73.00	42.23	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNF-8010RV
Phase:	N
Mode:	DC
Operator Name:	KES

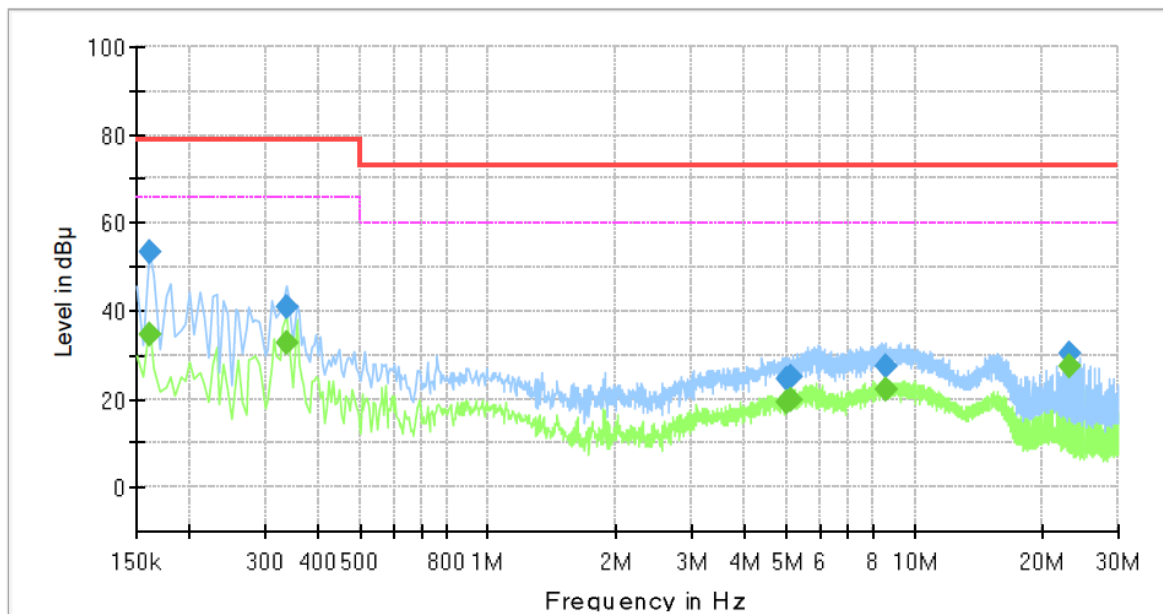

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	34.69	66.00	31.31	1000.0	9.000	N	19.4
0.160000	53.20	---	79.00	25.80	1000.0	9.000	N	19.4
0.335000	---	32.93	66.00	33.07	1000.0	9.000	N	19.6
0.335000	40.97	---	79.00	38.03	1000.0	9.000	N	19.6
5.035000	---	19.50	60.00	40.50	1000.0	9.000	N	19.7
5.035000	24.64	---	73.00	48.36	1000.0	9.000	N	19.7
5.125000	---	19.78	60.00	40.22	1000.0	9.000	N	19.7
5.125000	25.25	---	73.00	47.75	1000.0	9.000	N	19.7
8.520000	---	22.29	60.00	37.71	1000.0	9.000	N	19.7
8.520000	27.45	---	73.00	45.55	1000.0	9.000	N	19.7
23.130000	---	27.25	60.00	32.75	1000.0	9.000	N	20.2
23.130000	30.25	---	73.00	42.75	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNF-8010RV
Mode :	DC
Speed :	100 Mbps
Operator Name:	KES

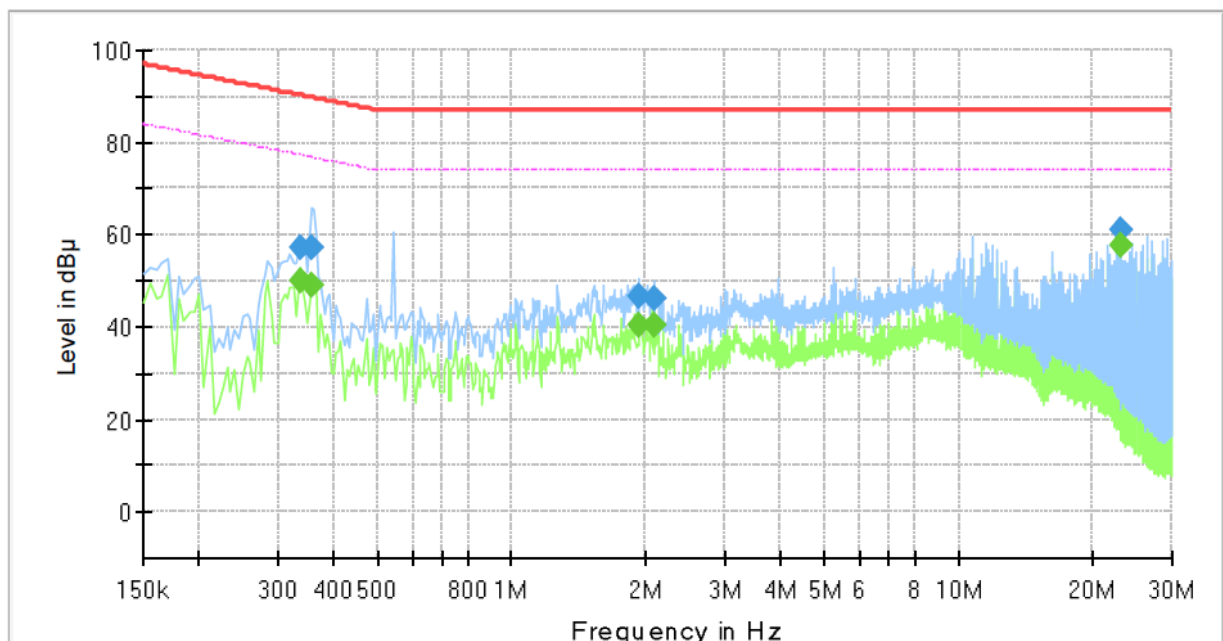

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.335000	---	50.16	77.33	27.17	1000.0	9.000	Single Line	19.7
0.335000	57.03	---	90.33	33.30	1000.0	9.000	Single Line	19.7
0.355000	---	49.05	76.84	27.79	1000.0	9.000	Single Line	19.7
0.355000	57.21	---	89.84	32.63	1000.0	9.000	Single Line	19.7
1.930000	---	40.23	74.00	33.77	1000.0	9.000	Single Line	20.2
1.930000	46.50	---	87.00	40.50	1000.0	9.000	Single Line	20.2
2.080000	---	40.35	74.00	33.65	1000.0	9.000	Single Line	20.2
2.080000	46.35	---	87.00	40.65	1000.0	9.000	Single Line	20.2
23.130000	---	57.90	74.00	16.10	1000.0	9.000	Single Line	20.1
23.130000	60.91	---	87.00	26.09	1000.0	9.000	Single Line	20.1

■ PoE Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNF-8010RV
Mode :	PoE
Speed :	100 Mbps
Operator Name:	KES

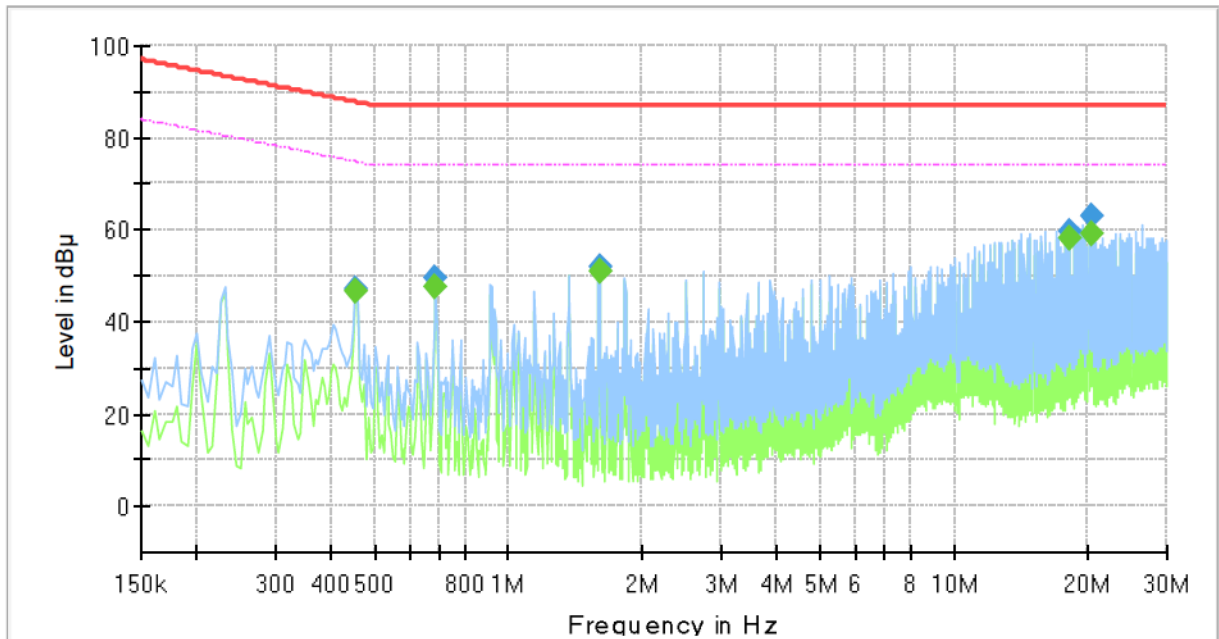

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	46.86	74.78	27.92	1000.0	9.000	Single Line	19.8
0.455000	47.29	---	87.78	40.49	1000.0	9.000	Single Line	19.8
0.685000	---	47.83	74.00	26.17	1000.0	9.000	Single Line	19.9
0.685000	49.62	---	87.00	37.38	1000.0	9.000	Single Line	19.9
1.600000	---	50.98	74.00	23.02	1000.0	9.000	Single Line	20.1
1.600000	52.05	---	87.00	34.95	1000.0	9.000	Single Line	20.1
18.265000	---	58.27	74.00	15.73	1000.0	9.000	Single Line	19.9
18.265000	59.60	---	87.00	27.40	1000.0	9.000	Single Line	19.9
20.320000	---	59.07	74.00	14.93	1000.0	9.000	Single Line	20.0
20.320000	62.81	---	87.00	24.19	1000.0	9.000	Single Line	20.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

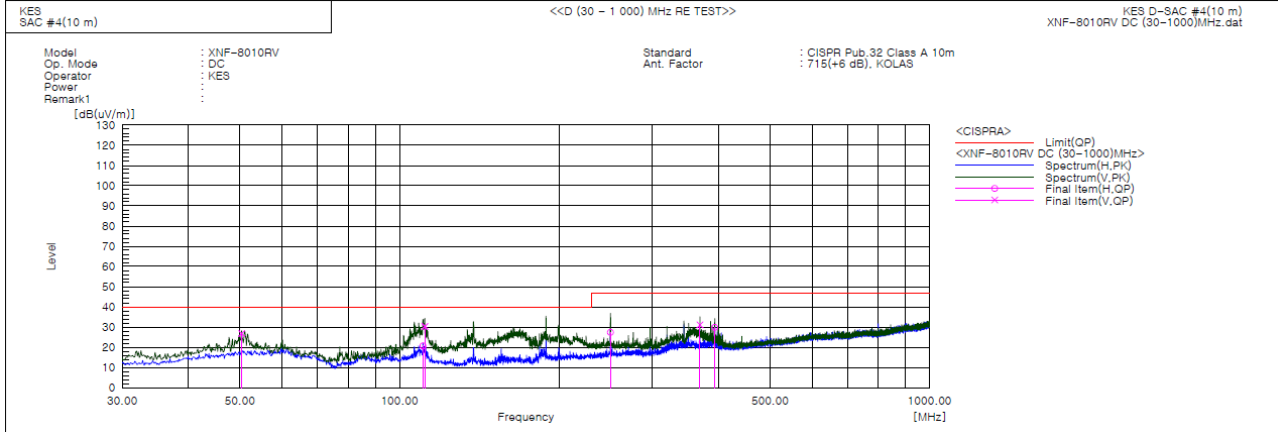

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.370	V	47.7	-20.9	26.8	40.0	13.2	113.0	100.0	
2	110.753	H	42.9	-22.2	20.7	40.0	19.3	110.0	354.0	
3	111.601	V	52.6	-22.3	30.3	40.0	9.7	100.0	96.0	
4	249.948	H	46.5	-19.1	27.4	47.0	19.6	103.0	117.0	
5	368.651	V	46.0	-14.8	31.2	47.0	15.8	106.0	329.0	
6	393.265	H	44.1	-14.2	29.9	47.0	17.1	109.0	313.0	



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (23) of (38)

■ PoE Mode

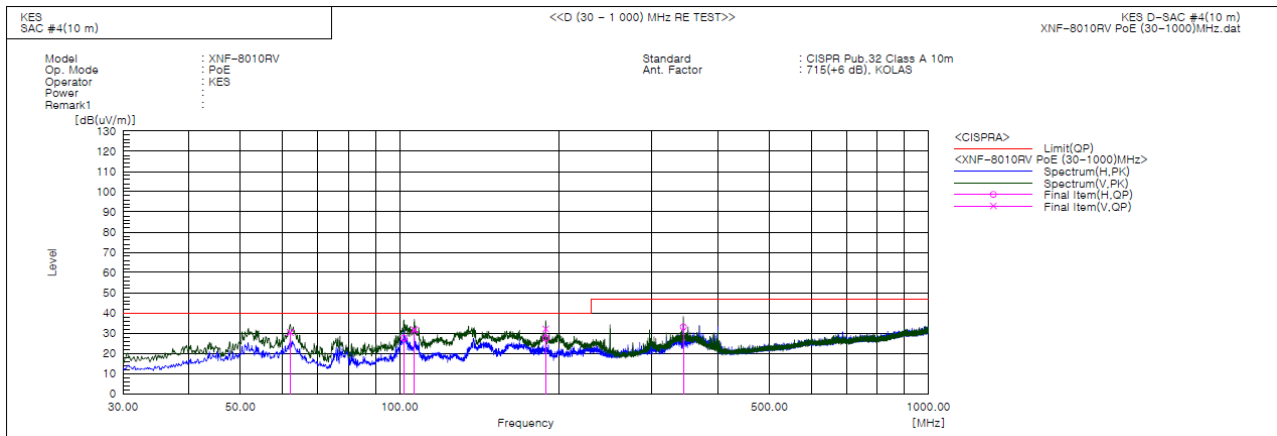

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	62.131	V	52.6	-22.3	30.3	40.0	9.7	103.0	262.0	
2	101.901	H	50.0	-22.4	27.6	40.0	12.4	396.0	154.0	
3	106.630	V	54.0	-22.3	31.7	40.0	8.3	105.0	112.0	
4	188.959	H	49.7	-22.2	27.5	40.0	12.5	380.0	128.0	
5	188.959	V	54.3	-22.2	32.1	40.0	7.9	111.0	349.0	
6	344.038	H	48.4	-15.3	33.1	47.0	13.9	388.0	181.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-22T0080-R1

Page (24) of (38)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

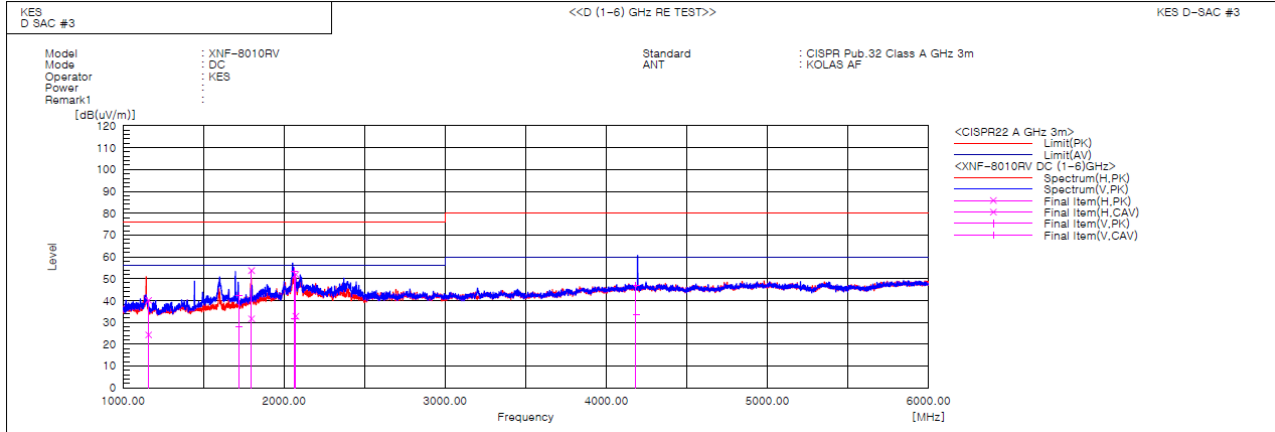

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1158.377	H	48.9	33.1	-8.8	40.1	24.3	76.0	56.0	35.9	31.7	100.0	50.5	
2	1719.456	V	46.3	32.0	-4.1	42.2	27.9	76.0	56.0	33.8	28.1	100.0	111.3	
3	1798.200	H	56.8	34.7	-3.1	53.7	31.6	76.0	56.0	22.3	24.4	100.0	50.7	
4	2062.878	V	54.1	32.4	-0.8	53.3	31.6	76.0	56.0	22.7	24.4	100.0	63.1	
5	2072.667	H	52.7	33.4	-0.7	52.0	32.7	76.0	56.0	24.0	23.3	100.0	341.9	
6	4184.012	V	39.9	26.8	6.9	46.8	33.7	80.0	60.0	33.2	26.3	100.0	194.7	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0080-R1

Page (25) of (38)

PoE Mode

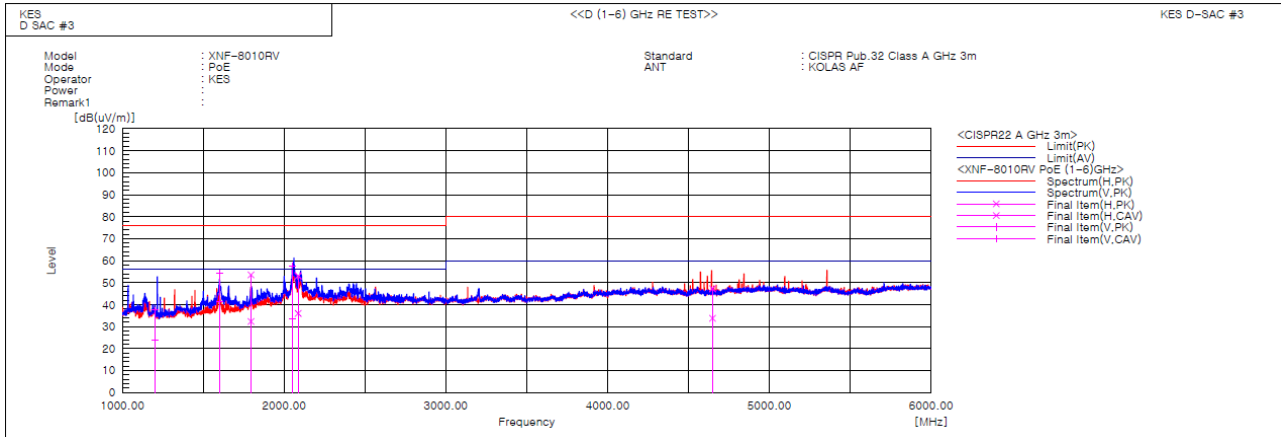

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1199.863	V	46.0	32.1	-8.5	37.5	23.6	76.0	56.0	38.5	32.4	100.0	293.1	
2	1600.110	V	59.6	46.7	-5.3	54.3	41.4	76.0	56.0	21.7	14.6	100.0	30.2	
3	1794.291	H	56.7	35.4	-3.1	53.6	32.3	76.0	56.0	22.4	23.7	100.0	29.1	
4	2049.482	V	58.5	34.2	-0.8	57.7	33.4	76.0	56.0	18.3	22.6	100.0	10.7	
5	2086.185	H	53.7	36.7	-0.7	53.0	36.0	76.0	56.0	23.0	20.0	100.0	47.1	
6	4648.699	H	40.1	26.5	7.2	47.3	33.7	80.0	60.0	32.7	26.3	100.0	142.6	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode

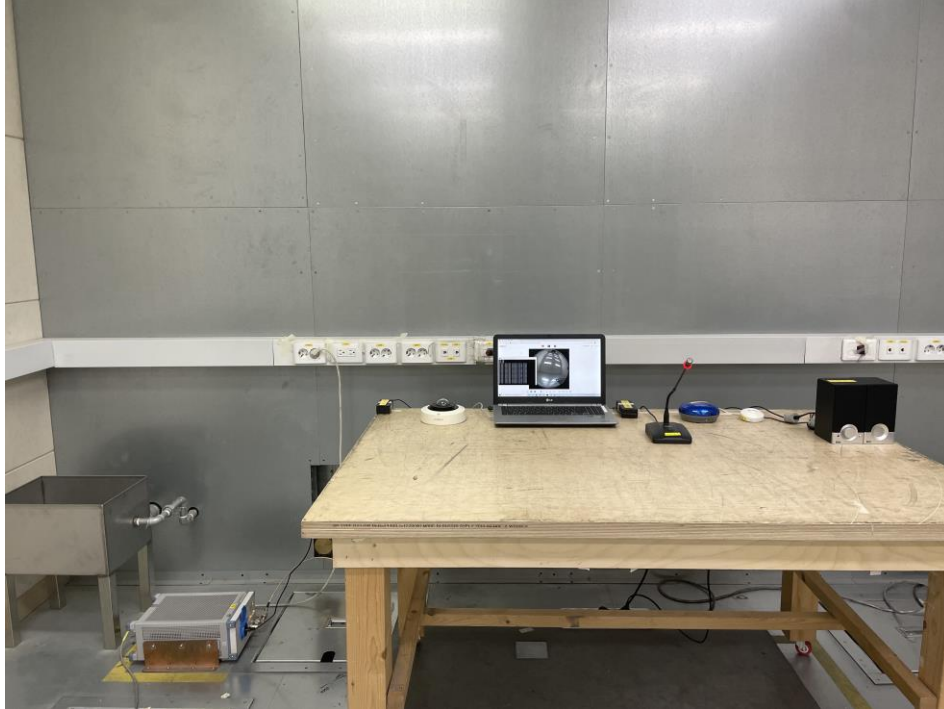

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode




Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

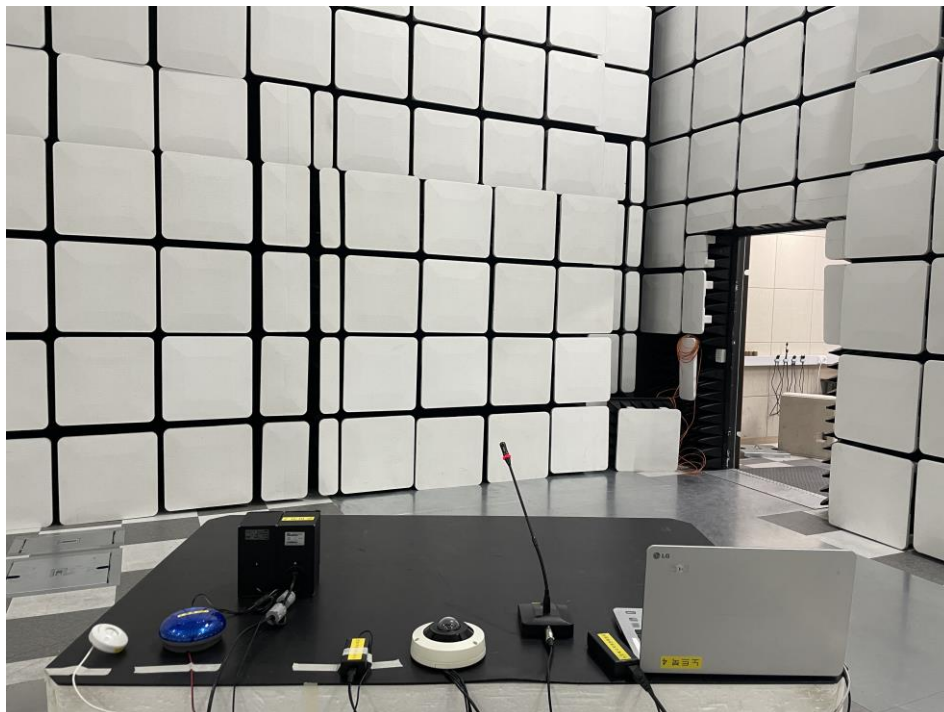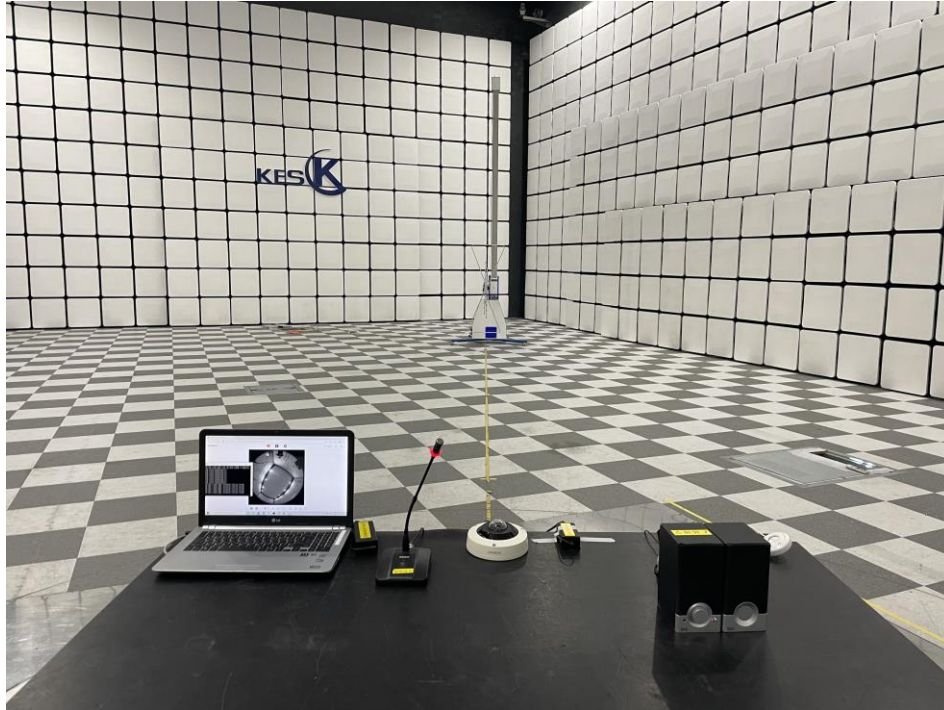

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


■ PoE Mode

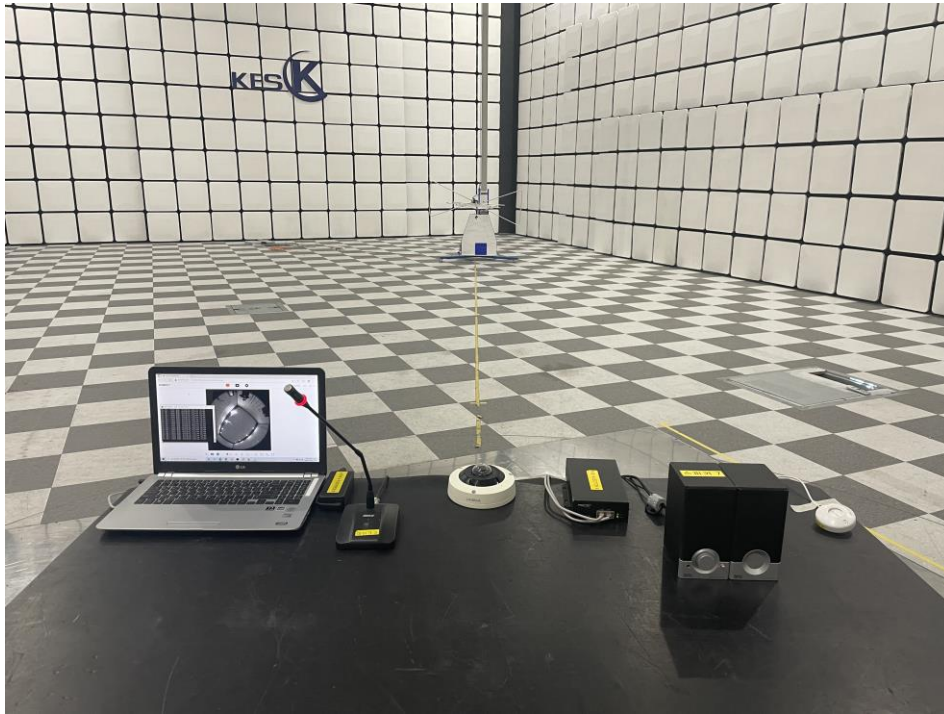

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

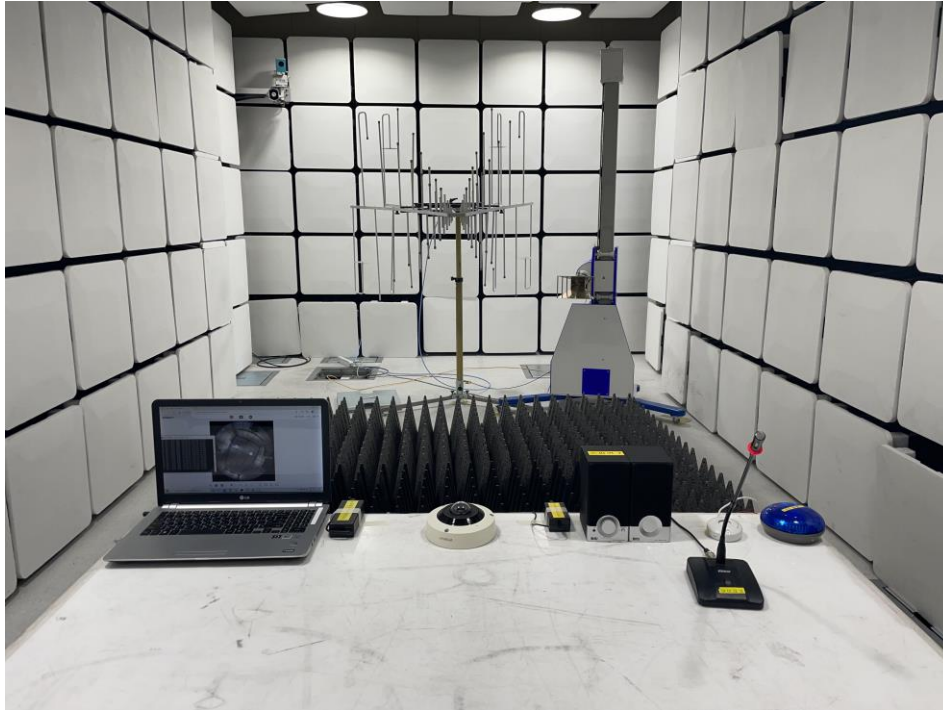

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

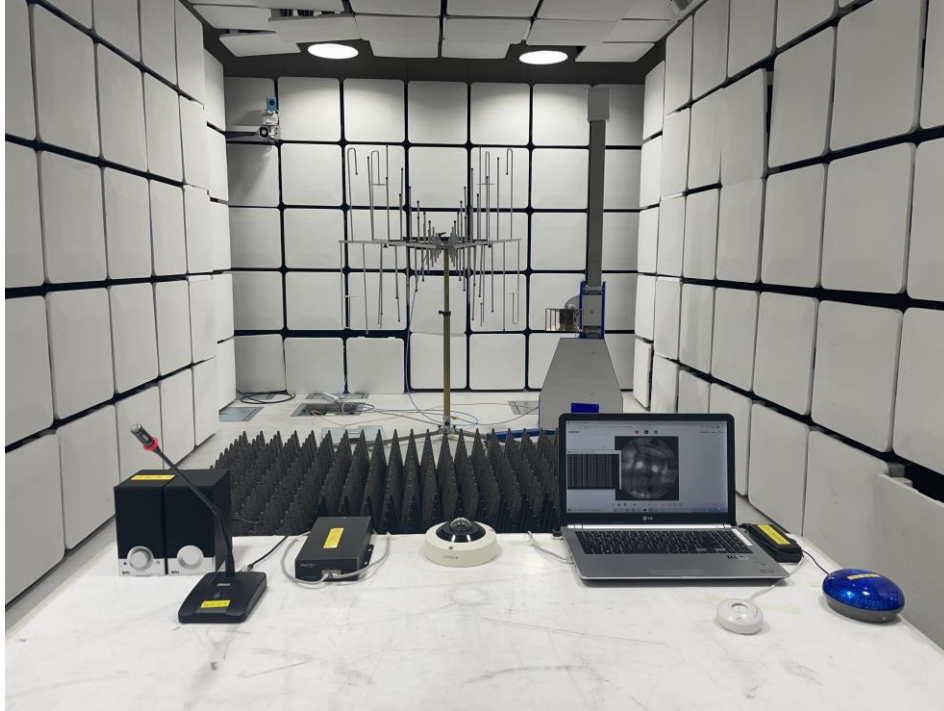

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)

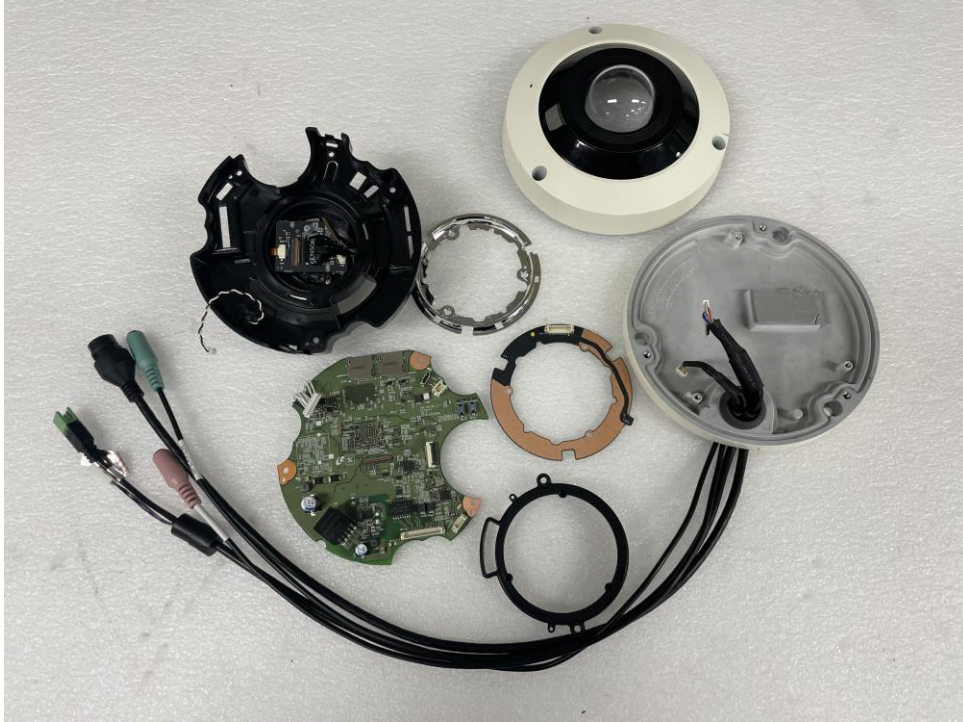


EUT Internal View – Main Board

(Top)

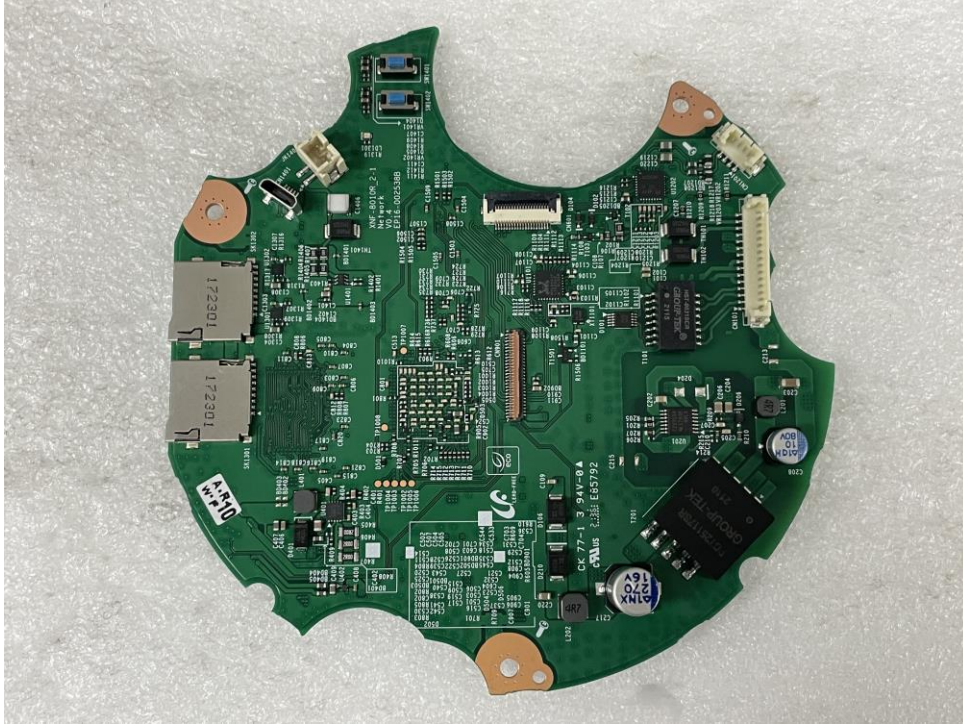

(Bottom)

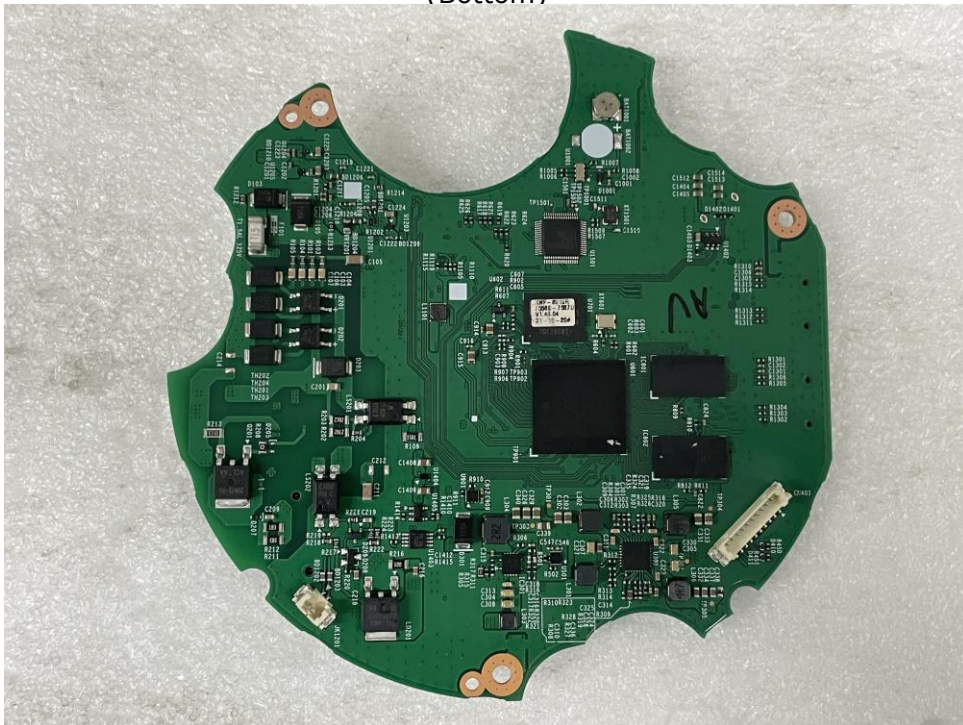

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LED Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Camera Module

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

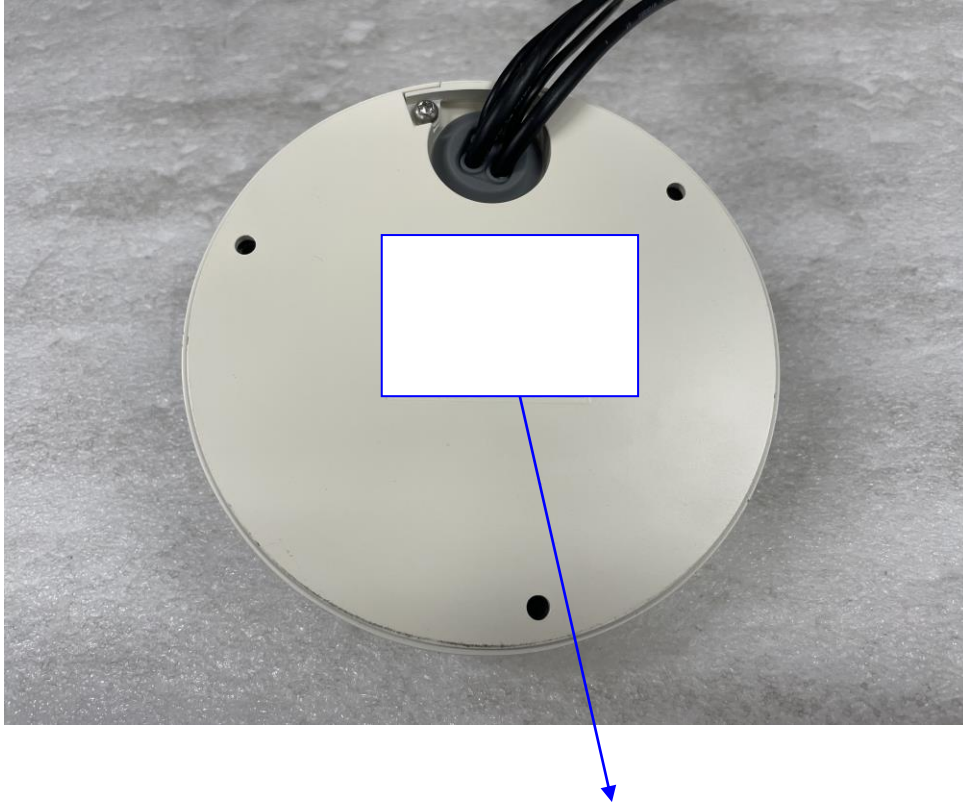

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A