

EMC TEST REPORT

Test Report No. : KES-E1-16T0613-R7

Date of Issue : Feb. 24, 2023

Product name : NETWORK CAMERA

Model/Type No. : XNO-6080R

Variant Model : XNO-6080RP, XNO-6080R/MSK

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)

Date of Receipt : Nov, 23, 2016

Test date : Dec, 02, 2016 – Dec, 05, 2016

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

Tested by Jin Bae, Lee
(Retired person)
Proxy signature : Dae Hyun, Kim

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (2) of (98)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 06, 2016	KES-E1-16T0613	Issued
Sep. 27, 2017	KES-E1-16T0613-R1	Standard Revision
Jun. 25, 2018	KES-E1-16T0613-R2	Re-issue due to manufacturer change
May. 15, 2019	KES-E1-16T0613-R3	Add a derived model
Jun. 05, 2020	KES-E1-16T0613-R4	Add a derived model
May. 28, 2021	KES-E1-16T0613-R5	Delete Manufacturer on Customer Request
Jun. 08, 2022	KES-E1-16T0613-R6	Test Regulations update due to customer request.
Feb. 24, 2023	KES-E1-16T0613-R7	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	E.U.T Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
2.5	Harmonic Current Emissions.....	18
2.6	Voltage Fluctuations and Flicker	19
3.0	Criteria for compliance.....	20
3.1	Electrostatic Discharge.....	22
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	32
3.5	Conducted Disturbance	36
3.6	Voltage Dips and Short Interruptions	40
APPENDIX A	– TEST DATA.....	42
	Conducted Emissions at Mains Power Ports.....	42
	Conducted Emissions at Telecommunication Ports	44
	Radiated Electric Field Emissions(Below 1 GHz)	51
	Radiated Electric Field Emissions(Above 1 GHz)	53
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	65
	Test Setup Photos and Configuration	68
	Conducted Voltage Emissions	68
	Conducted Telecommunication Emissions	69
	Radiated Electric Field Emissions(Below 1 GHz)	72
	Radiated Electric Field Emissions(Above 1 GHz)	75
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	78
	Electrostatic Discharge	78
	Radiated Electric Field Immunity	80
	Electrical Fast Transients/Bursts	82
	Surge Transients	85
	Conducted Disturbance	87
	Voltage Dips and Short Interruptions	90
	EUT External Photographs	91
	EUT Internal Photographs	92



1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	1/2.8" 2M CMOS (IMX291)
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux (TBD) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
Lens	
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal
Max. Aperture Ratio	1.4(Wide) ~ 3.6(Tele)
Angular Field of View	H: 119.5°, V: 62.8°, D: 142.1° H: 27.9°, V: 15.7°, D: 32.0°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network (Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	
Operational	
IR LED	4EA
Viewable Length	50m(164.04ft)
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	150dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic ※ Zoom ratio option for mask mode (TBD)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (5) of (98)

Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576, 640x480, 640x360, 320x240, 320x180
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, * WiseStream 별도항목으로 분리 MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (6) of (98)

Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform ※ SVN 1.2 삭제 (구 기종 NVR 변경점 대응)
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Software	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	Dark gray / Aluminum
Dimension (WxHxD)	TBD
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

- Add derivative model for vendor management

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNO-6080R	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964 200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045 W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	1.7 m
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	1.6 m
Alarm	-	-	-	-
SD card	-	-	SanDisk	16 GB



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U



- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)


Test mode	Normal operating
E.U.T Monitoring , Ping test, 1 kHz	

E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Vision Co., Ltd


1.8 Configuration

■ AC 24 V Main
 □ DC 12 V Main


- AC 24 V Mode

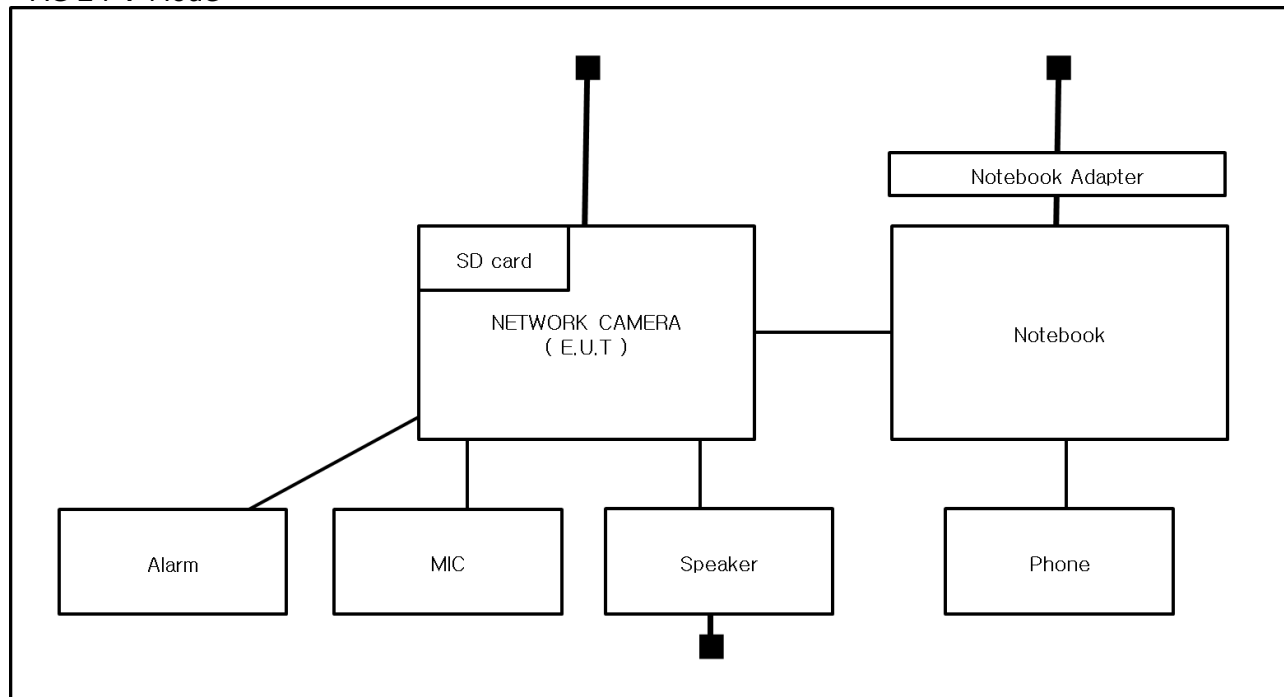

- DC 12 V Mode

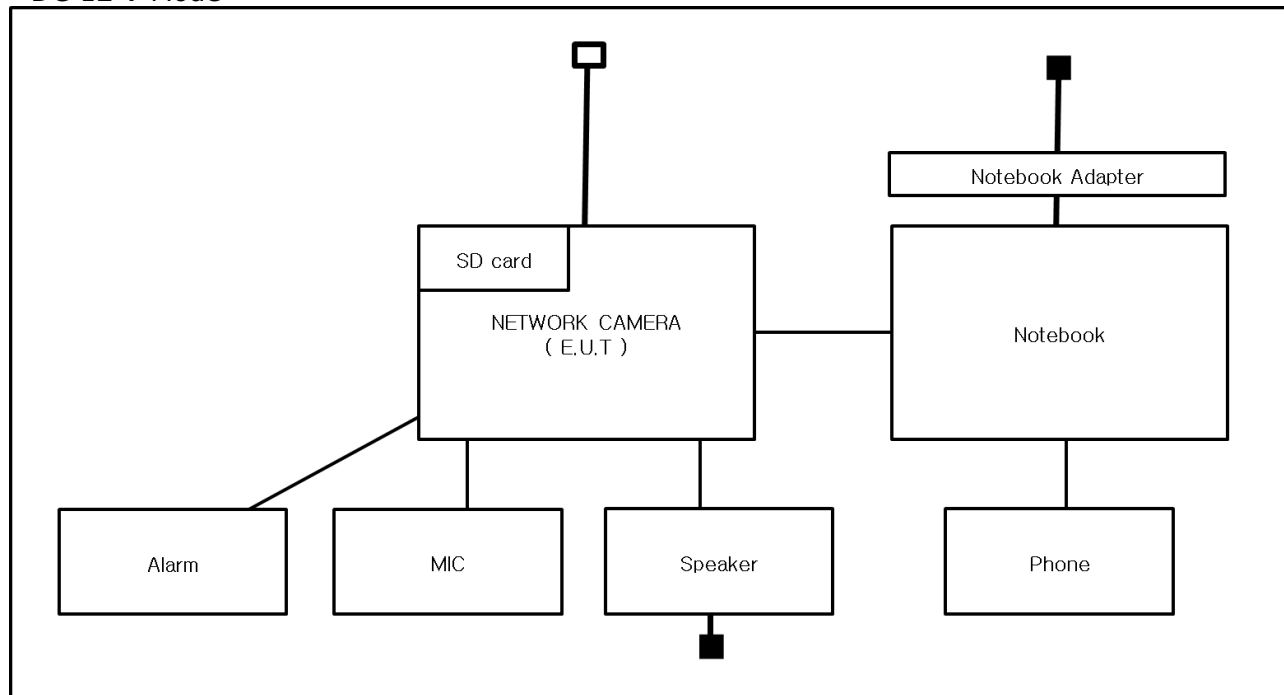

- PoE Mode

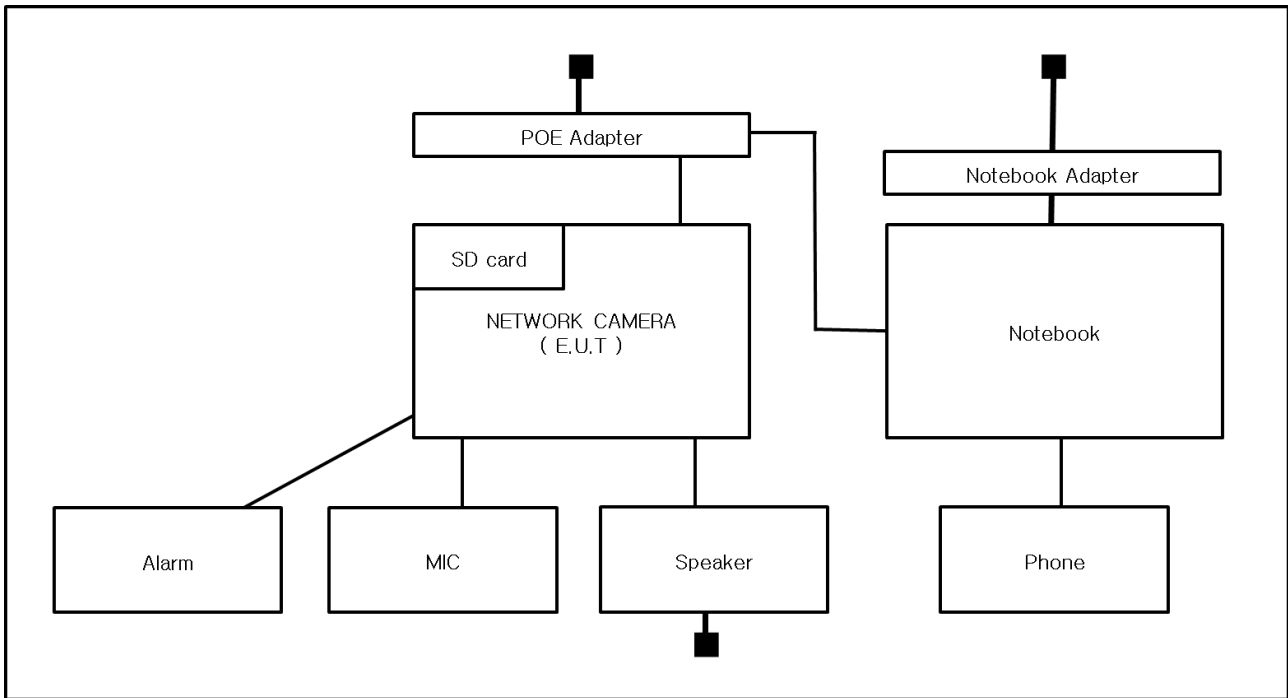

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

2.1 Conducted Emissions at Mains Power Ports

Test Date

Dec, 02, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 16,5 °C

Relative Humidity: 39,8 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec, 02, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 16,5 °C

Relative Humidity: 39,8 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 03, 2016

Test Location☐ Open Area Test Site #1☒ Open Area Test Site #2**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 9,8 °C

Relative Humidity: 35,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS☐ NOT PASS☐ NOT APPLICABLE**Remarks**See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 03, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 17,8 °C

Relative Humidity: 47,2 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

N/A



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no residual
change in the EUT or any change in outputs, which could be interpreted by associated equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Dec, 05, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-
☒	EMS Test S/W	-	-	-	-

Test Conditions

Temperature: 17,5 °C
Relative Humidity: 49,3 %
Atmospheric Pressure: 100,6 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane



Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Location of Discharge:

- AC 24 V Mode

Air
Contact

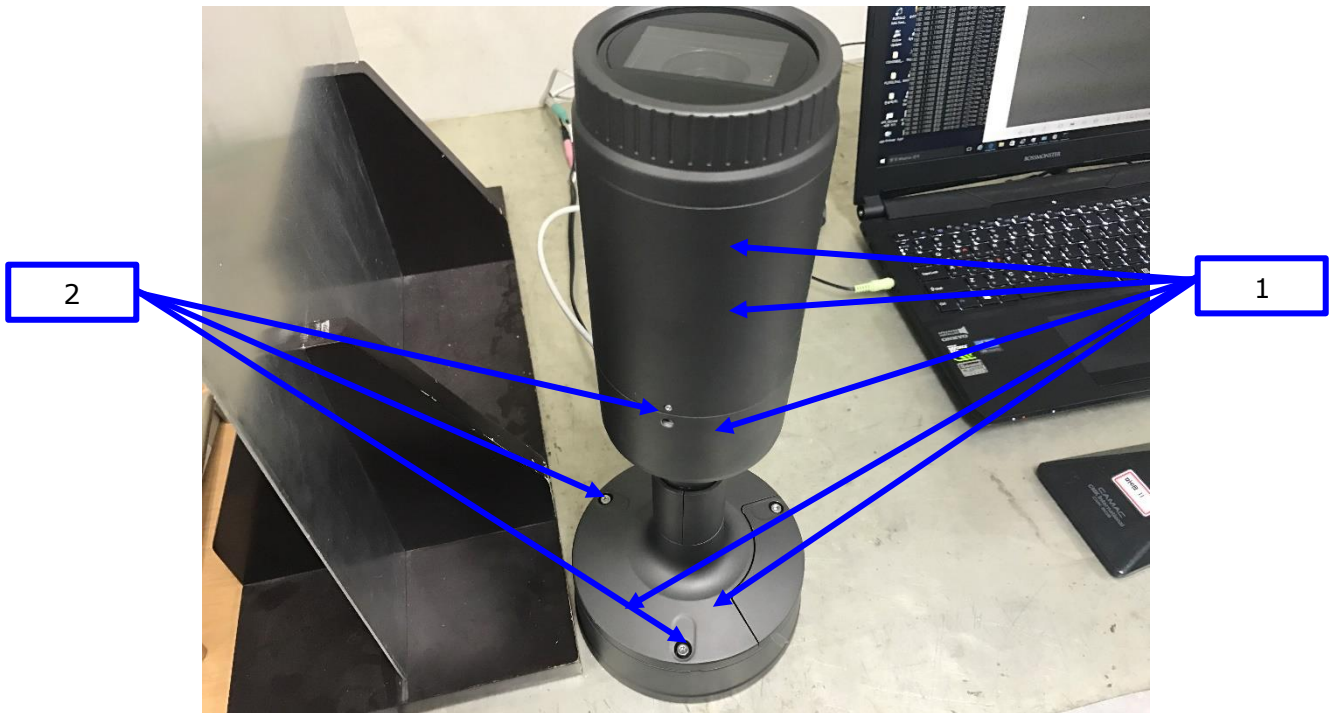

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (24) of (98)

Test Data**- AC 24 V Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Inclosure	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

- DC 12 V Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Inclosure	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (25) of (98)

- PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Inclosure	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Dec, 04, 2016

Test LocationEMS-RS: ☐ Semi Anechoic Chamber #1☒ Semi Anechoic Chamber #2**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 08, 2017
☒	BROADBAND AMPLIFIER	BBA100	Rohde & Schwarz	101239	08, 08, 2017
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 08, 2017
☒	POWER METER	NRP2	Rohde & Schwarz	103475	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102526	08, 08, 2017
☒	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102527	08, 08, 2017
☒	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	Kytelecom Co., Ltd.	KY150001	08, 08, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	EMS Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 16,6 °C
Relative Humidity: 46,8 %
Atmospheric Pressure: 101,3 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (27) of (98)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Test Data

- AC 24 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Dec, 05, 2016

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Capacitive Coupling Clamp	HFK	EM TEST	070925	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 18,2 °C
Relative Humidity: 43,7 %
Atmospheric Pressure: 101,5 kPa

Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	☐ ± 1.0 kV ☐ ± 4.0 kV	☒ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV	☒ ± 1.0 kV ☐ ± 2.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	

Test Data

- AC 24 V Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
Alarm (2 Pin)	Complied	Complied
RJ-45	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
Alarm (2 Pin)	Complied	Complied
RJ-45	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (31) of (98)

- PoE Mode☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
Alarm (2 Pin)	Complied	Complied
RJ-45	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**

PASS Required Performance Criteria.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Dec, 05, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 504N	EM TEST	V0936105121	06, 27, 2017
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 17,5 °C
Relative Humidity: 49,3 %
Atmospheric Pressure: 100,6 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (33) of (98)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Test Data

- AC 24 V Mode

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
Alarm	Complied	Complied
RJ-45	Complied	Complied

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1-PE	Complied	Complied
L2-PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
Alarm	Complied	Complied
RJ-45	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (35) of (98)

- POE Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
Alarm	Complied	Complied
RJ-45	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Dec, 05, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
☒	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
☐	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 08, 2017
☐	CDN	CDN-T4	EM TEST	0909-08	08, 08, 2017
☐	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 08, 2017
☐	CDN	CDN-AF2	EM TEST	0909-10	08, 08, 2017
☐	CDN	CDN-AF4	EM TEST	0909-11	08, 08, 2017
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017
☒	EMS Test S/W	icd.control	EM TEST AG	5.3.7	-

Test Conditions

Temperature: 17,5 °C
Relative Humidity: 49,3 %
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (37) of (98)

Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☒ 1 s

☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Test Data

- AC 24 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN (☒ M2, ☐ M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
Alarm (2Pin)	EM Injection Clamp	Complied
RJ-45	EM Injection Clamp	Complied

- DC 12 V Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 - L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
Alarm (2Pin)	EM Injection Clamp	Complied
RJ-45	EM Injection Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (39) of (98)

- PoE Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
Alarm (2Pin)	EM Injection Clamp	Complied
RJ-45	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0613-R7

Page (40) of (98)

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11:2020

Test Date

Dec, 05, 2016

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 17,5 °C
Relative Humidity: 49,3 %
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Test Specifications & Observations/Remarks

- AC 24 V Mode

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 /5000	<u>Complied</u>
☒ 30 % dip	☒ 25 /500	<u>Complied</u>
☒ 60 % dip	☒ 10 /200	<u>Complied</u>
☒ 100 % dip	☒ 250 /5000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

The test has been tested using the AC/AC Adapter

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-6080RP
Mode	AC 24 V H
Operator Name:	KES

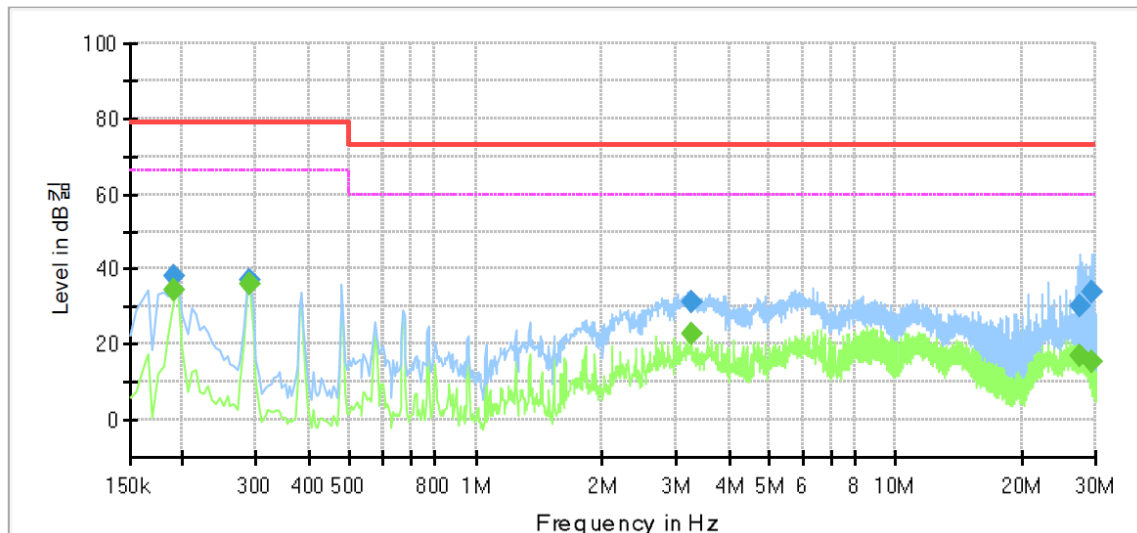

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	34.49	66.00	31.51	1000.0	9.000	L1	9.7
0.190000	38.27	---	79.00	40.73	1000.0	9.000	L1	9.7
0.290000	---	35.98	66.00	30.02	1000.0	9.000	L1	9.7
0.290000	36.99	---	79.00	42.01	1000.0	9.000	L1	9.7
3.265000	---	22.91	60.00	37.09	1000.0	9.000	L1	10.2
3.265000	31.09	---	73.00	41.91	1000.0	9.000	L1	10.2
27.485000	---	16.77	60.00	43.23	1000.0	9.000	L1	10.3
27.485000	30.34	---	73.00	42.66	1000.0	9.000	L1	10.3
29.305000	---	15.61	60.00	44.39	1000.0	9.000	L1	10.4
29.305000	33.93	---	73.00	39.07	1000.0	9.000	L1	10.4

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-6080RP
Mode	AC 24 V N
Operator Name:	KES

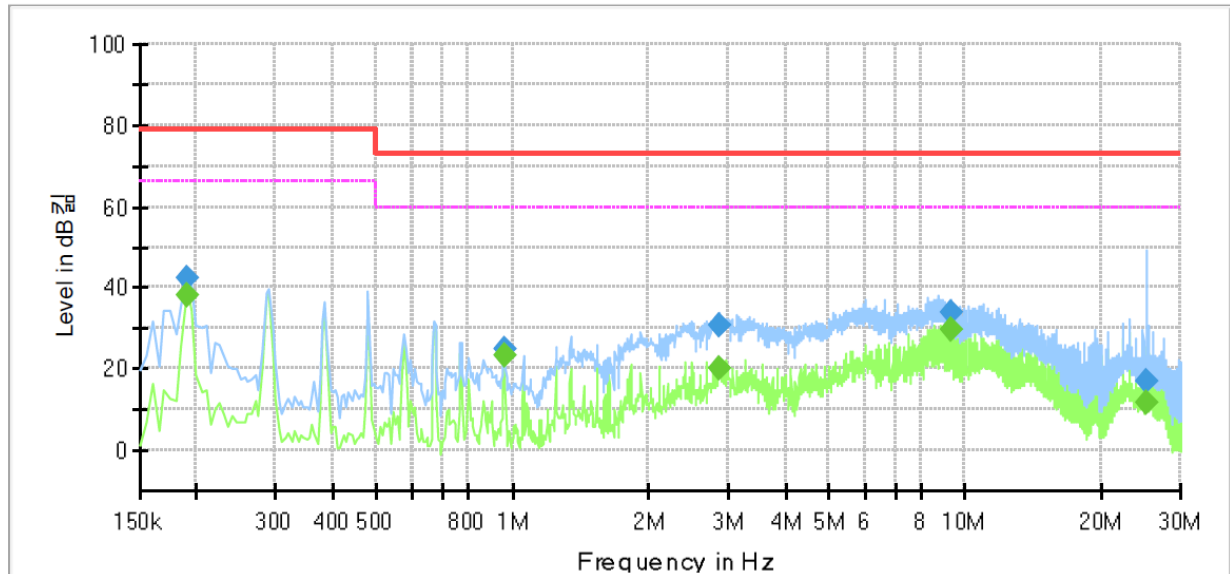

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	38.37	66.00	27.63	1000.0	9.000	N	9.7
0.190000	42.57	---	79.00	36.43	1000.0	9.000	N	9.7
0.960000	---	23.51	60.00	36.49	1000.0	9.000	N	10.0
0.960000	25.02	---	73.00	47.98	1000.0	9.000	N	10.0
2.870000	---	20.39	60.00	39.61	1000.0	9.000	N	10.2
2.870000	30.57	---	73.00	42.43	1000.0	9.000	N	10.2
9.310000	---	29.79	60.00	30.21	1000.0	9.000	N	9.8
9.310000	34.01	---	73.00	38.99	1000.0	9.000	N	9.8
25.270000	---	11.83	60.00	48.17	1000.0	9.000	N	10.3
25.270000	16.72	---	73.00	56.28	1000.0	9.000	N	10.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)


Conducted Emissions at Telecommunication Ports

- AC 24 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-6080RP
Mode	AC 24 V 10 Mbps
Operator Name:	KES

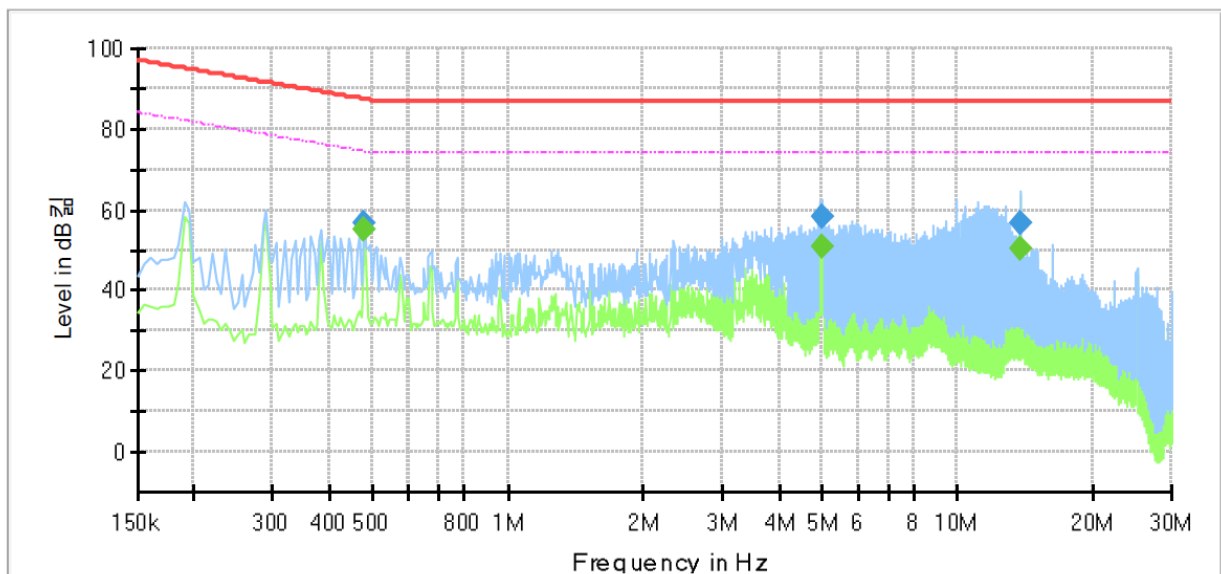

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.480000	---	55.20	74.34	19.14	1000.0	9.000	Single Line	10.1
0.480000	56.59	---	87.34	30.75	1000.0	9.000	Single Line	10.1
5.000000	---	50.58	74.00	23.42	1000.0	9.000	Single Line	10.1
5.000000	57.99	---	87.00	29.01	1000.0	9.000	Single Line	10.1
13.750000	---	50.51	74.00	23.49	1000.0	9.000	Single Line	10.1
13.750000	56.43	---	87.00	30.57	1000.0	9.000	Single Line	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-6080RP
Mode	AC 24 V 100 Mbps
Operator Name:	KES

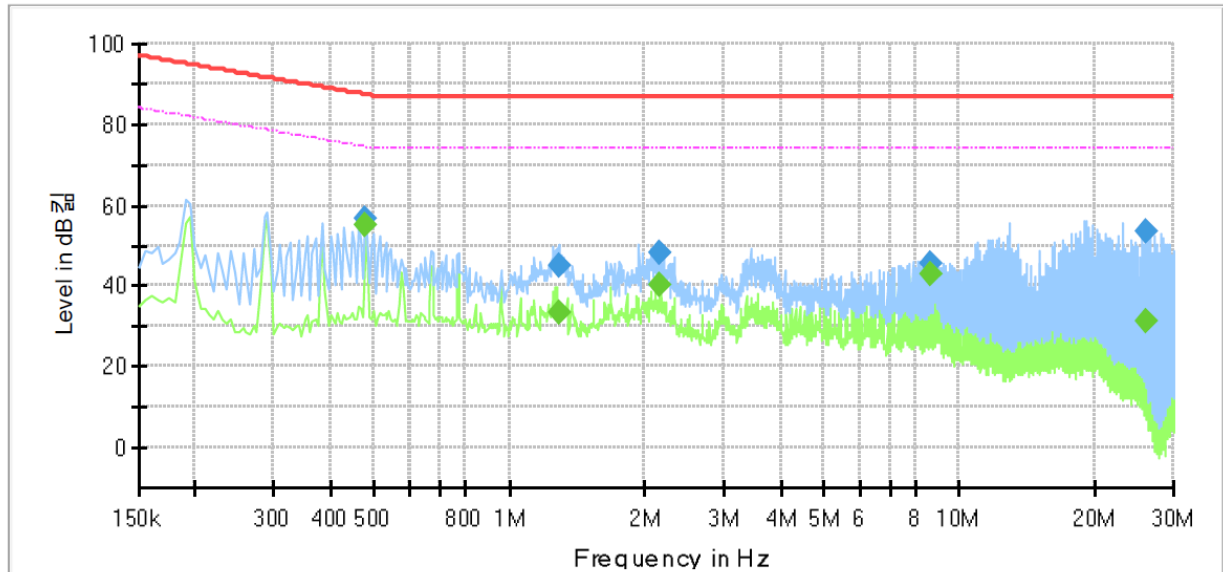

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.480000	---	55.01	74.34	19.33	1000.0	9.000	Single Line	9.6
0.480000	56.64	---	87.34	30.70	1000.0	9.000	Single Line	9.6
1.285000	---	33.35	74.00	40.65	1000.0	9.000	Single Line	9.7
1.285000	44.77	---	87.00	42.23	1000.0	9.000	Single Line	9.7
2.165000	---	40.01	74.00	33.99	1000.0	9.000	Single Line	9.7
2.165000	48.29	---	87.00	38.71	1000.0	9.000	Single Line	9.7
8.640000	---	43.12	74.00	30.88	1000.0	9.000	Single Line	9.5
8.640000	45.61	---	87.00	41.39	1000.0	9.000	Single Line	9.5
26.015000	---	31.19	74.00	42.81	1000.0	9.000	Single Line	9.5
26.015000	53.52	---	87.00	33.48	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-6080RP
Mode	DC 12 V 10 Mbps
Operator Name:	KES

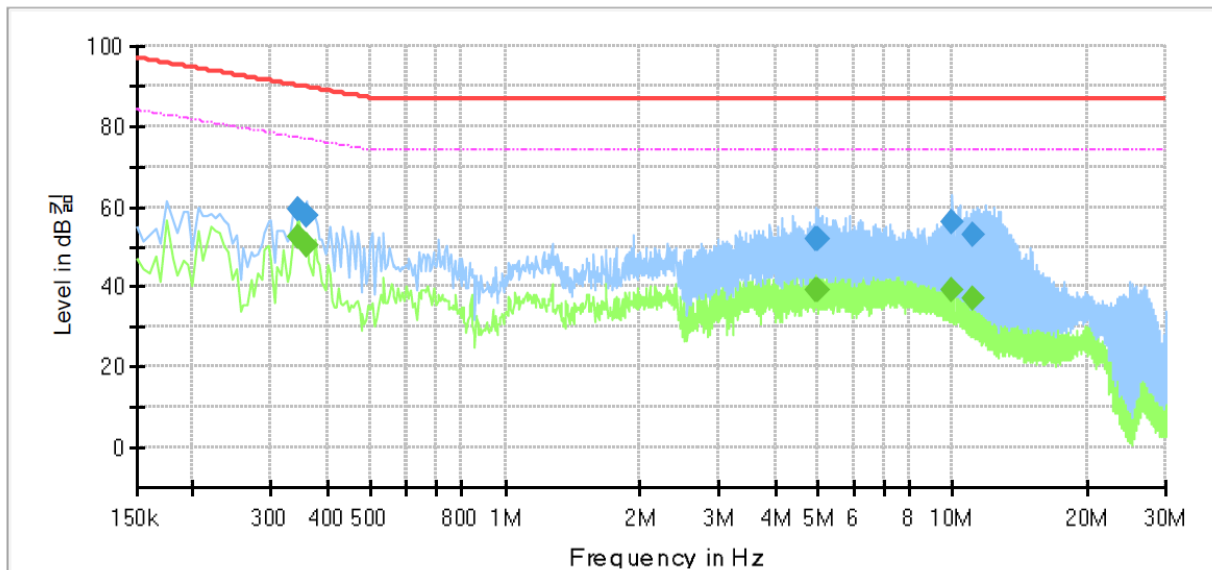

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.345000	---	52.52	77.08	24.56	1000.0	9.000	Single Line	10.1
0.345000	59.06	---	90.08	31.02	1000.0	9.000	Single Line	10.1
0.360000	---	50.10	76.73	26.63	1000.0	9.000	Single Line	10.1
0.360000	57.62	---	89.73	32.11	1000.0	9.000	Single Line	10.1
4.970000	---	39.17	74.00	34.83	1000.0	9.000	Single Line	10.1
4.970000	51.98	---	87.00	35.02	1000.0	9.000	Single Line	10.1
5.020000	---	39.06	74.00	34.94	1000.0	9.000	Single Line	10.1
5.020000	51.90	---	87.00	35.10	1000.0	9.000	Single Line	10.1
10.005000	---	39.12	74.00	34.88	1000.0	9.000	Single Line	10.0
10.005000	56.12	---	87.00	30.88	1000.0	9.000	Single Line	10.0
11.100000	---	37.09	74.00	36.91	1000.0	9.000	Single Line	10.0
11.100000	52.87	---	87.00	34.13	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-E1-16T0613-R7
Page (47) of (98)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-6080RP
Mode	DC 12 V 100 Mbps
Operator Name:	KES

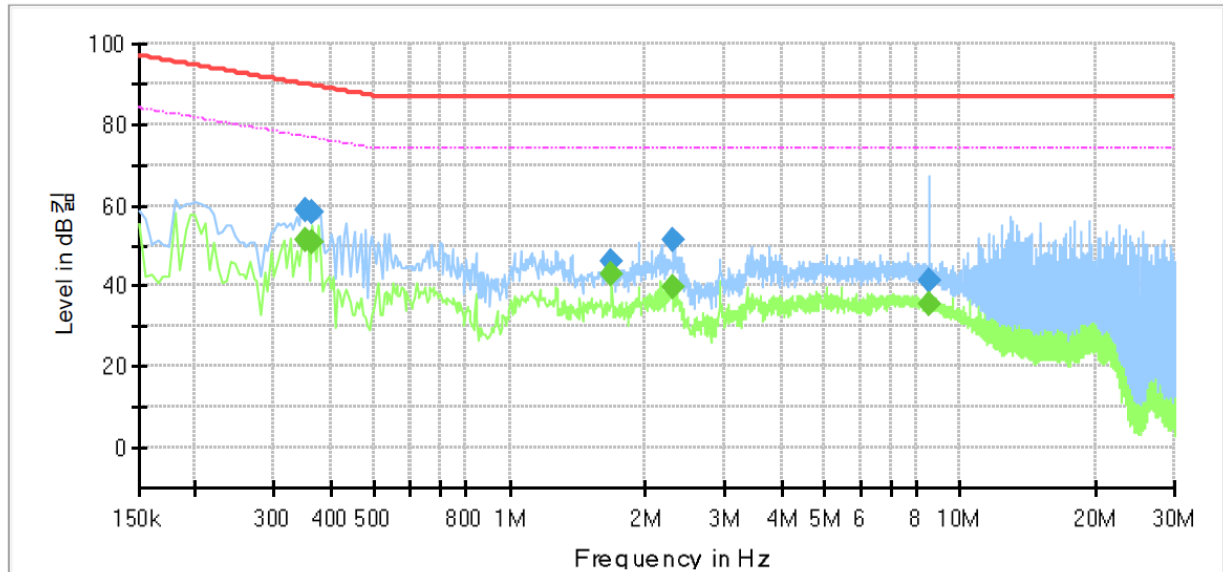

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.350000	---	51.38	76.96	25.58	1000.0	9.000	Single Line	9.6
0.350000	58.49	---	89.96	31.47	1000.0	9.000	Single Line	9.6
0.365000	---	50.81	76.61	25.80	1000.0	9.000	Single Line	9.6
0.365000	57.98	---	89.61	31.63	1000.0	9.000	Single Line	9.6
1.680000	---	42.98	74.00	31.02	1000.0	9.000	Single Line	9.7
1.680000	46.11	---	87.00	40.89	1000.0	9.000	Single Line	9.7
2.300000	---	39.69	74.00	34.31	1000.0	9.000	Single Line	9.7
2.300000	51.11	---	87.00	35.89	1000.0	9.000	Single Line	9.7
8.530000	---	35.52	74.00	38.48	1000.0	9.000	Single Line	9.5
8.530000	41.33	---	87.00	45.67	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- PoE Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNO-6080RP
 Mode: POE 10 Mbps
 Operator Name: KES

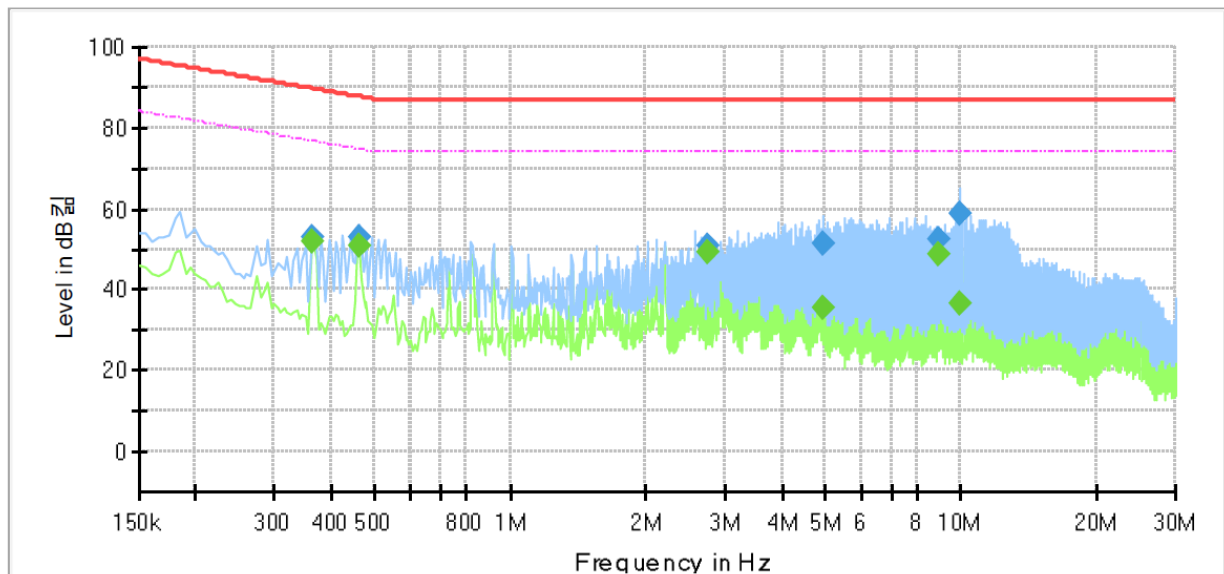

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.365000	---	51.89	76.61	24.72	1000.0	9.000	Single Line	10.1
0.365000	52.76	---	89.61	36.85	1000.0	9.000	Single Line	10.1
0.460000	---	50.91	74.69	23.78	1000.0	9.000	Single Line	10.1
0.460000	53.03	---	87.69	34.66	1000.0	9.000	Single Line	10.1
2.745000	---	49.20	74.00	24.80	1000.0	9.000	Single Line	10.2
2.745000	50.76	---	87.00	36.24	1000.0	9.000	Single Line	10.2
4.935000	---	35.22	74.00	38.78	1000.0	9.000	Single Line	10.1
4.935000	51.12	---	87.00	35.88	1000.0	9.000	Single Line	10.1
8.920000	---	48.57	74.00	25.43	1000.0	9.000	Single Line	10.0
8.920000	52.61	---	87.00	34.39	1000.0	9.000	Single Line	10.0
10.000000	---	36.44	74.00	37.56	1000.0	9.000	Single Line	10.0
10.000000	58.93	---	87.00	28.07	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNO-6080RP
 Mode: POE 100 Mbps
 Operator Name: KES

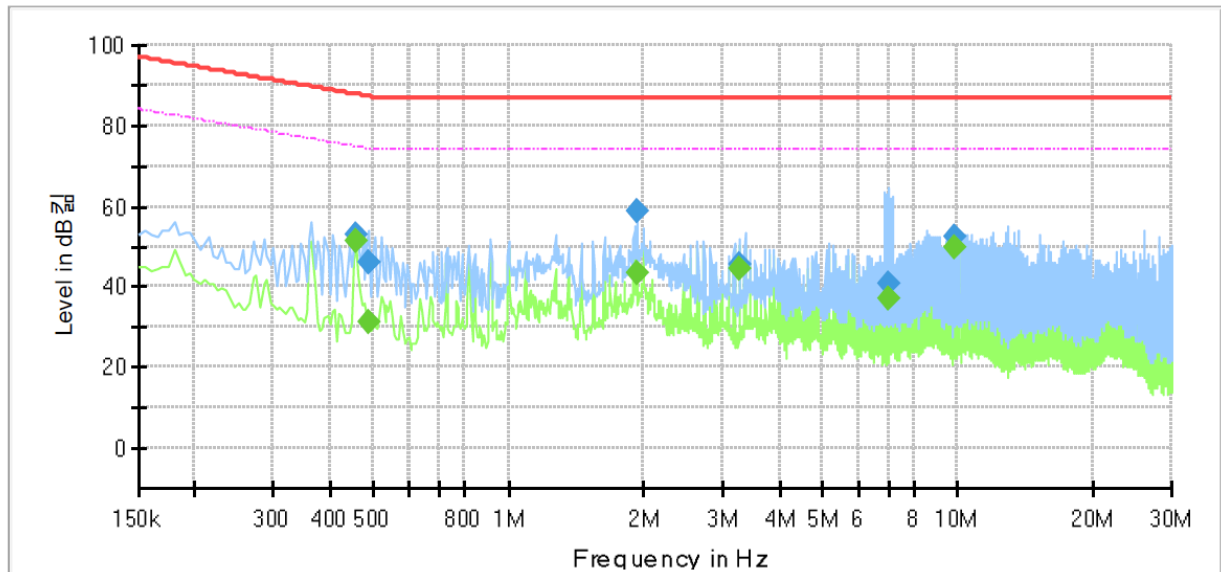

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	51.52	74.78	23.26	1000.0	9.000	Single Line	9.6
0.455000	52.97	---	87.78	34.81	1000.0	9.000	Single Line	9.6
0.490000	---	31.03	74.17	43.14	1000.0	9.000	Single Line	9.6
0.490000	45.85	---	87.17	41.32	1000.0	9.000	Single Line	9.6
1.935000	---	43.61	74.00	30.39	1000.0	9.000	Single Line	9.7
1.935000	58.86	---	87.00	28.14	1000.0	9.000	Single Line	9.7
3.270000	---	44.43	74.00	29.57	1000.0	9.000	Single Line	9.7
3.270000	45.47	---	87.00	41.53	1000.0	9.000	Single Line	9.7
7.010000	---	37.03	74.00	36.97	1000.0	9.000	Single Line	9.5
7.010000	40.64	---	87.00	46.36	1000.0	9.000	Single Line	9.5
9.880000	---	49.89	74.00	24.11	1000.0	9.000	Single Line	9.5
9.880000	52.59	---	87.00	34.41	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	
64.11	8.14	V	1.23	11.45	2.30	21.89	40.00	18.11
221.17	20.64	H	3.78	11.77	4.37	36.78	40.00	3.22
270.53	22.78	V	1.30	12.81	4.90	40.49	47.00	6.51
344.01	19.16	V	1.18	14.40	5.58	39.14	47.00	7.86
344.53	18.23	H	3.78	14.41	5.59	38.23	47.00	8.77
491.79	10.13	H	3.13	16.99	6.97	34.09	47.00	12.91

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
50.12	8.89	V	1.24	13.93	2.10	24.92	40.00	15.08
221.19	20.73	H	3.78	11.77	4.37	36.87	40.00	3.13
270.53	22.77	V	1.30	12.81	4.90	40.48	47.00	6.52
295.76	23.10	H	3.72	13.30	5.11	41.51	47.00	5.49
320.51	21.58	H	3.94	13.86	5.35	40.79	47.00	6.21
491.88	11.04	V	2.18	16.99	6.97	35.00	47.00	12.00

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
50.11	8.83	V	1.27	13.94	2.10	24.87	40.00	15.13
221.12	19.64	H	3.58	11.77	4.37	35.78	40.00	4.22
295.67	23.30	H	3.86	13.30	5.11	41.71	47.00	5.29
320.05	18.61	V	1.28	13.85	5.35	37.81	47.00	9.19
320.51	20.97	H	3.86	13.86	5.35	40.18	47.00	6.82
344.53	18.18	H	3.72	14.41	5.59	38.18	47.00	8.82
491.15	9.33	V	1.30	16.98	6.97	33.28	47.00	13.72

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

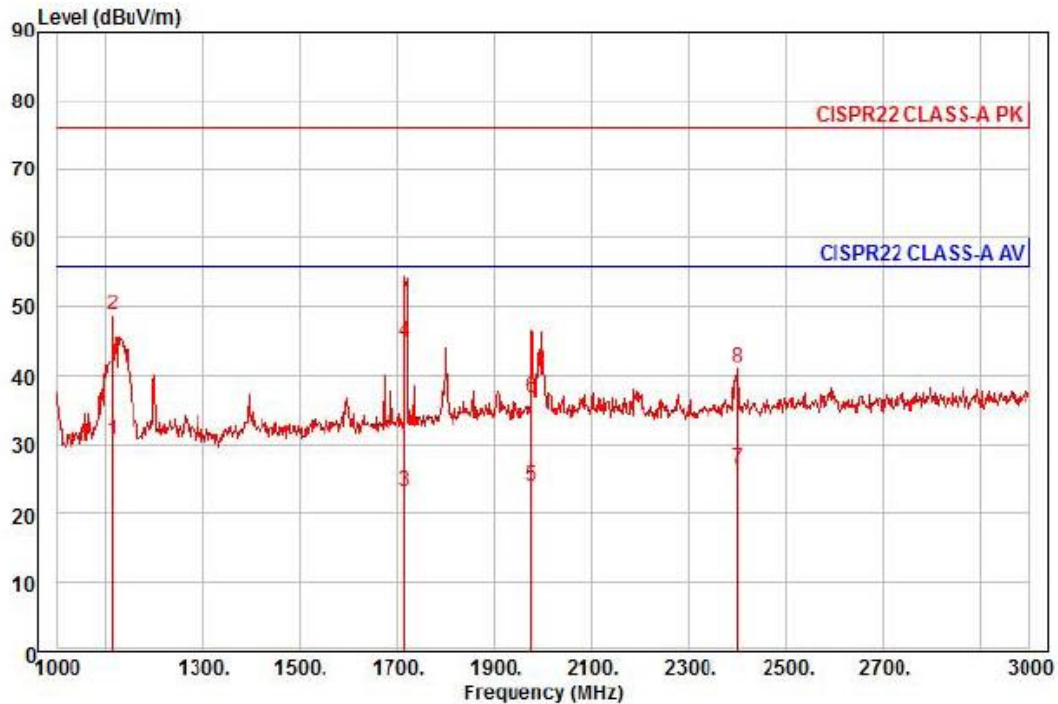

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : AC 24 V
 Memo : (1 ~ 3) GHz


		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1114.00	39.25	24.36	6.86	39.82	24	56.00	-25.35	horizontal	Average
2 pk	1114.00	57.31	24.36	6.86	39.82	24	76.00	-27.29	horizontal	Peak
3	1716.00	27.11	26.75	8.61	39.28	217	56.00	-32.81	horizontal	Average
4	1716.00	48.74	26.75	8.61	39.28	217	76.00	-31.18	horizontal	Peak
5	1976.00	26.50	27.78	9.27	39.40	306	56.00	-31.85	horizontal	Average
6	1976.00	39.02	27.78	9.27	39.40	306	76.00	-39.33	horizontal	Peak
7	2400.00	26.66	28.86	10.32	39.42	32	56.00	-29.58	horizontal	Average
8	2400.00	41.32	28.86	10.32	39.42	32	76.00	-34.92	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

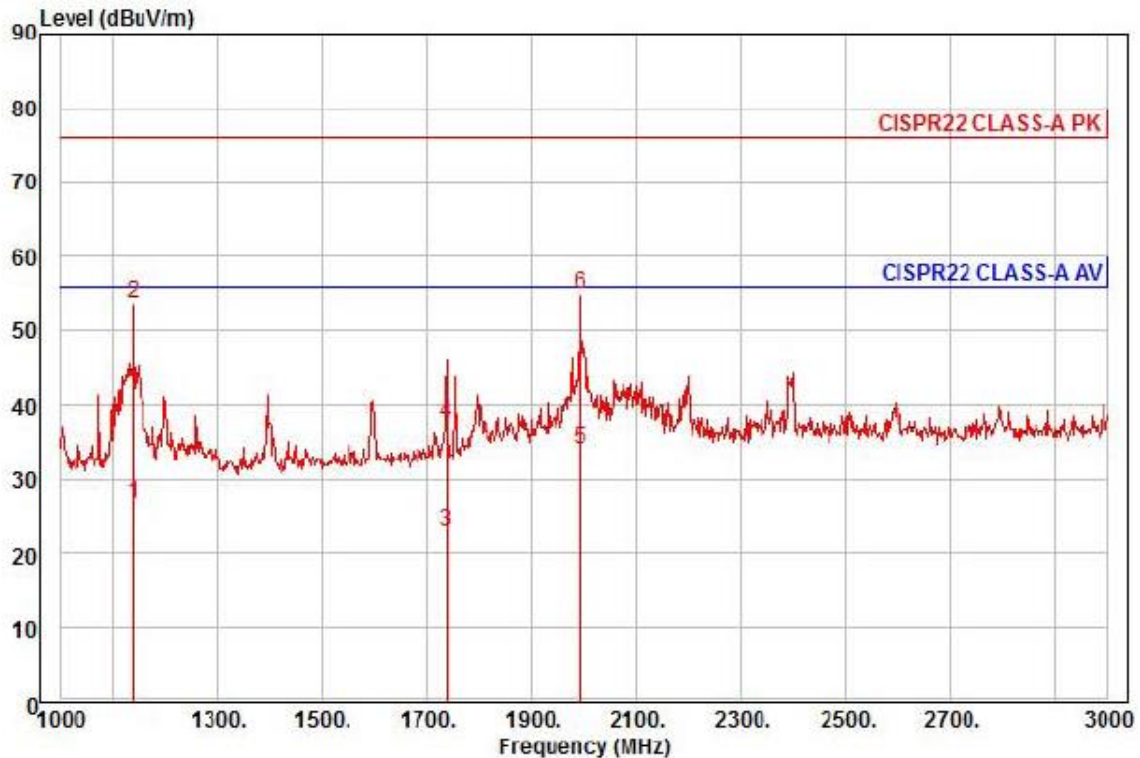


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : AC 24 V
 Memo : (1 ~ 3) GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	35.15	24.46	6.93	39.76	24	56.00	-29.22	vertical
2	1138.00	61.97	24.46	6.93	39.76	24	76.00	-22.40	vertical
3	1738.00	26.95	26.84	8.67	39.29	10	56.00	-32.83	vertical
4	1738.00	41.33	26.84	8.67	39.29	10	76.00	-38.45	vertical
5 av	1994.00	36.26	27.86	9.32	39.41	182	56.00	-21.97	vertical
6 pp	1994.00	57.12	27.86	9.32	39.41	182	76.00	-21.11	vertical

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

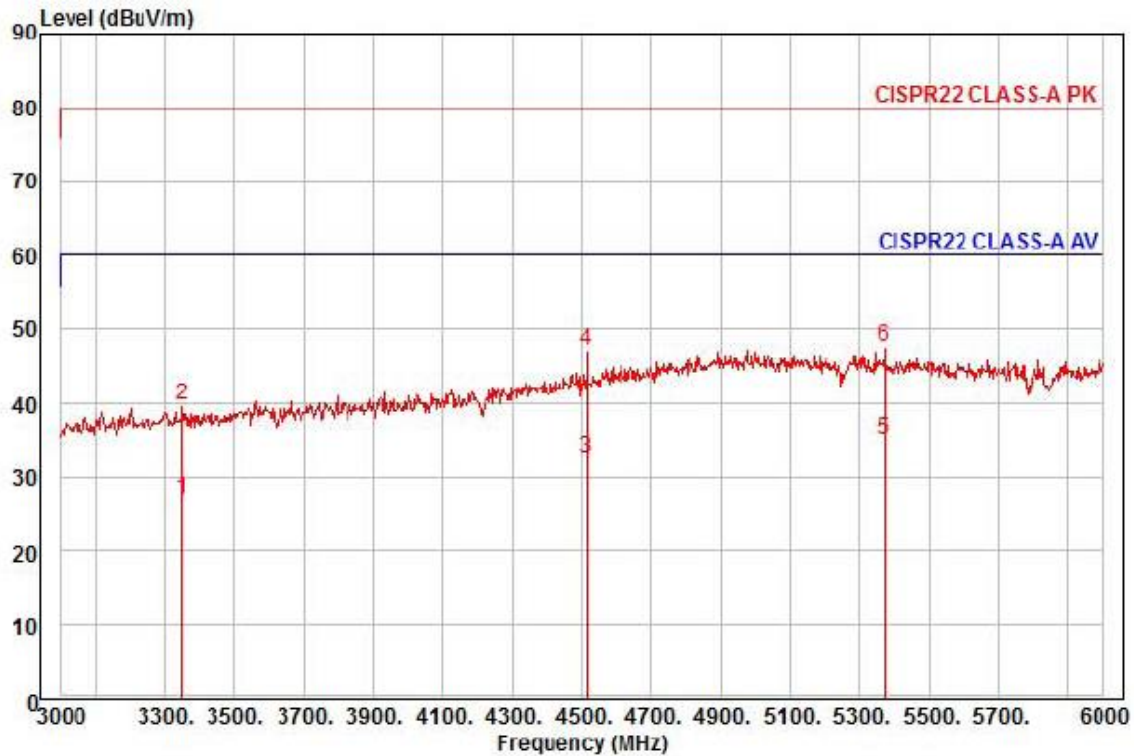

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNO-6080RP

Mode : AC 24 V


Memo : (3 ~ 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3348.00	24.46	30.91	12.35	40.65	256	60.00	-32.93	horizontal	Average
2	3348.00	37.11	30.91	12.35	40.65	256	80.00	-40.28	horizontal	Peak
3	4515.00	24.00	34.95	14.49	40.76	268	60.00	-27.32	horizontal	Average
4	4515.00	38.31	34.95	14.49	40.76	268	80.00	-33.01	horizontal	Peak
5 pp	5370.00	22.95	36.97	15.99	40.88	325	60.00	-24.97	horizontal	Average
6 pk	5370.00	35.60	36.97	15.99	40.88	325	80.00	-32.32	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

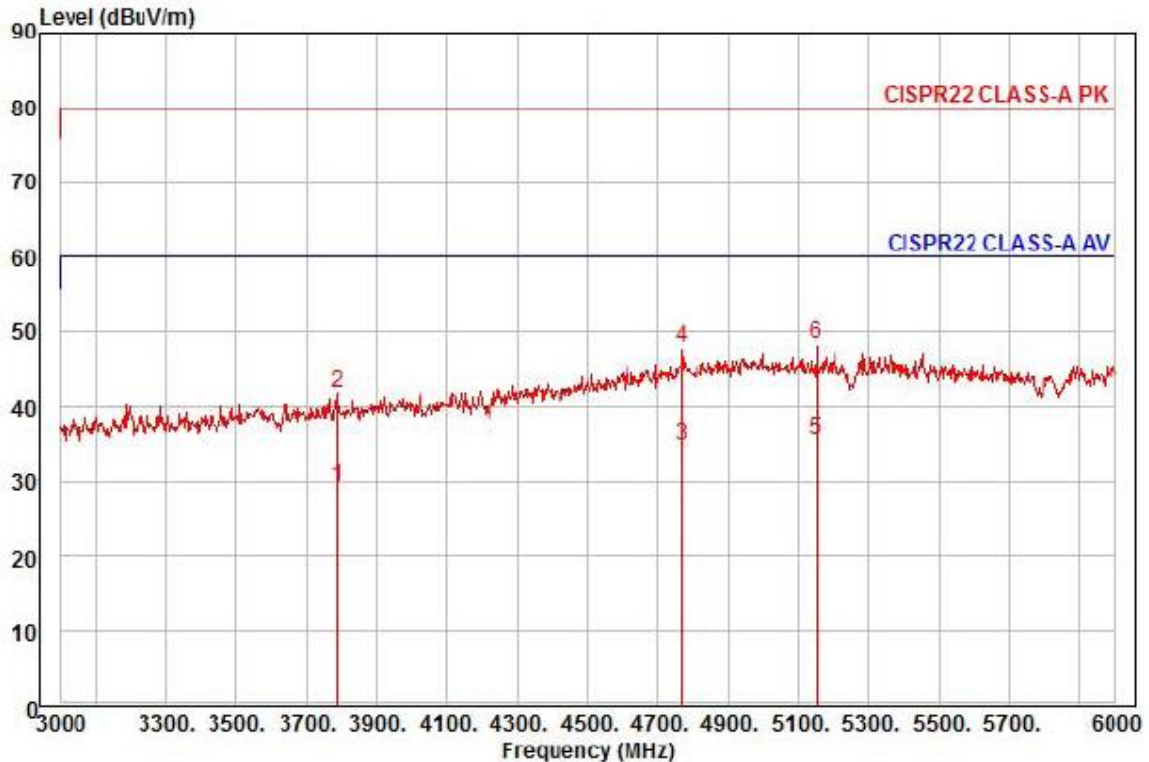

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : AC 24 V
 Memo : (3 ~ 6) GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
3786.00	25.10	31.65	13.15	40.78	4	60.00	-30.88	vertical	Average
3786.00	37.94	31.65	13.15	40.78	4	80.00	-38.04	vertical	Peak
4767.00	23.87	36.39	15.03	40.50	254	60.00	-25.21	vertical	Average
4767.00	36.94	36.39	15.03	40.50	254	80.00	-32.14	vertical	Peak
5151.00	23.06	37.41	15.61	40.52	40	60.00	-24.44	vertical	Average
5151.00	35.79	37.41	15.61	40.52	40	80.00	-31.71	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- DC 12 V Mode

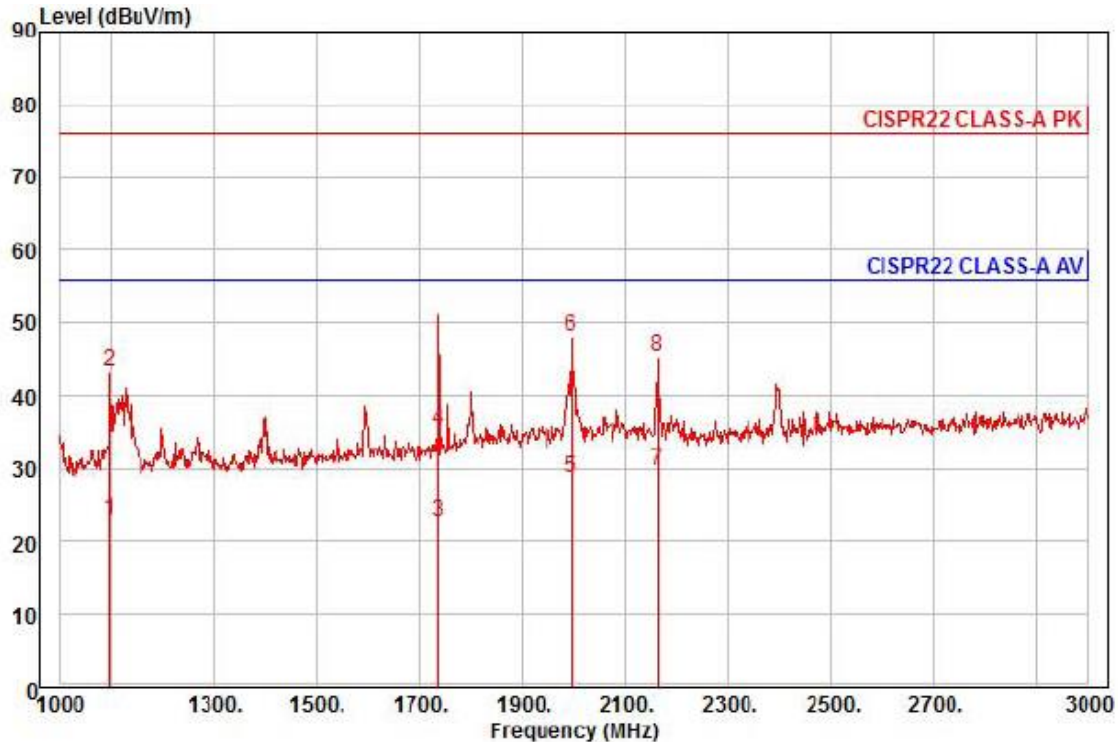


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : DC 12 V
 Memo : (1 ~ 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1096.00	31.81	24.29	6.80	39.86	338	56.00	-32.96	horizontal	Average
2	1096.00	52.26	24.29	6.80	39.86	338	76.00	-32.51	horizontal	Peak
3	1736.00	26.67	26.83	8.66	39.29	40	56.00	-33.13	horizontal	Average
4	1736.00	39.19	26.83	8.66	39.29	40	76.00	-40.61	horizontal	Peak
5	1996.00	31.02	27.86	9.33	39.41	270	56.00	-27.20	horizontal	Average
6 pk	1996.00	50.29	27.86	9.33	39.41	270	76.00	-27.93	horizontal	Peak
7 pp	2162.00	31.09	28.28	9.71	39.41	101	56.00	-26.33	horizontal	Average
8	2162.00	46.80	28.28	9.71	39.41	101	76.00	-30.62	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

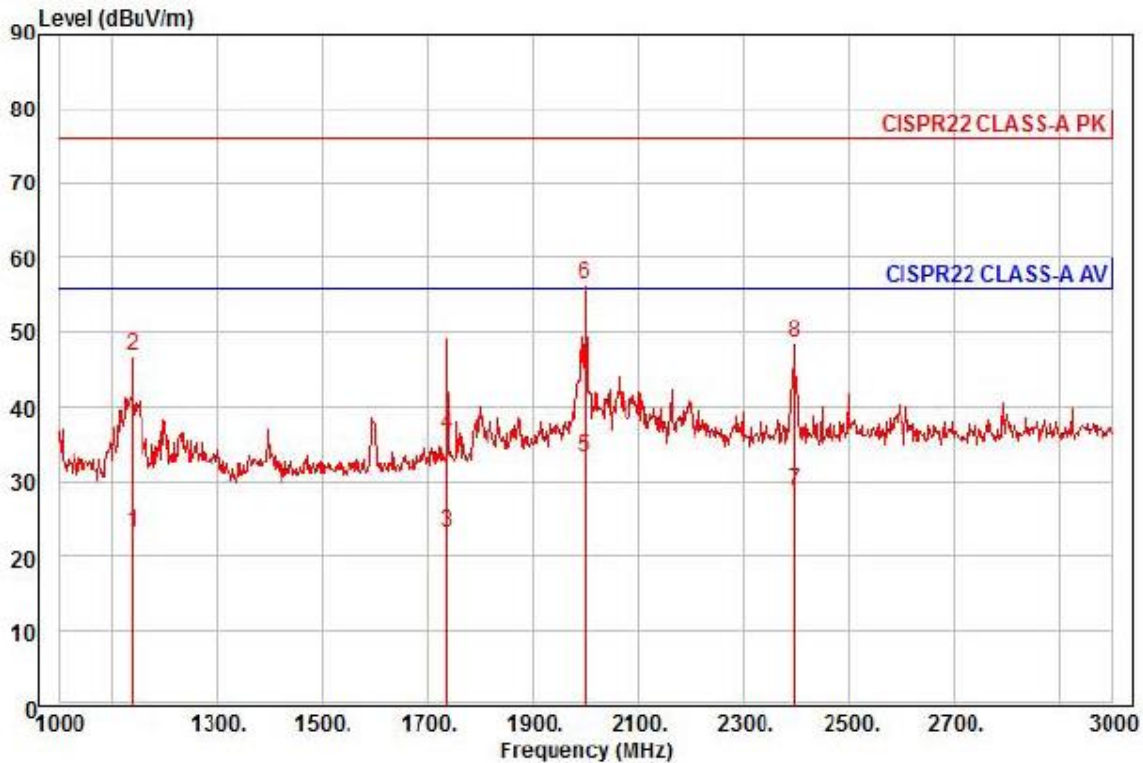


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : DC 12 V
 Memo : (1 ~ 3) GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	31.68	24.46	6.93	39.76	284	56.00	-32.69	vertical	Average
2	1138.00	55.33	24.46	6.93	39.76	284	76.00	-29.04	vertical	Peak
3	1736.00	27.20	26.83	8.66	39.29	45	56.00	-32.60	vertical	Average
4	1736.00	40.14	26.83	8.66	39.29	45	76.00	-39.66	vertical	Peak
5 av	2000.00	35.65	27.88	9.34	39.41	339	56.00	-22.54	vertical	Average
6 pp	2000.00	58.61	27.88	9.34	39.41	339	76.00	-19.58	vertical	Peak
7	2398.00	29.04	28.86	10.32	39.42	331	56.00	-27.20	vertical	Average
8	2398.00	48.89	28.86	10.32	39.42	331	76.00	-27.35	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

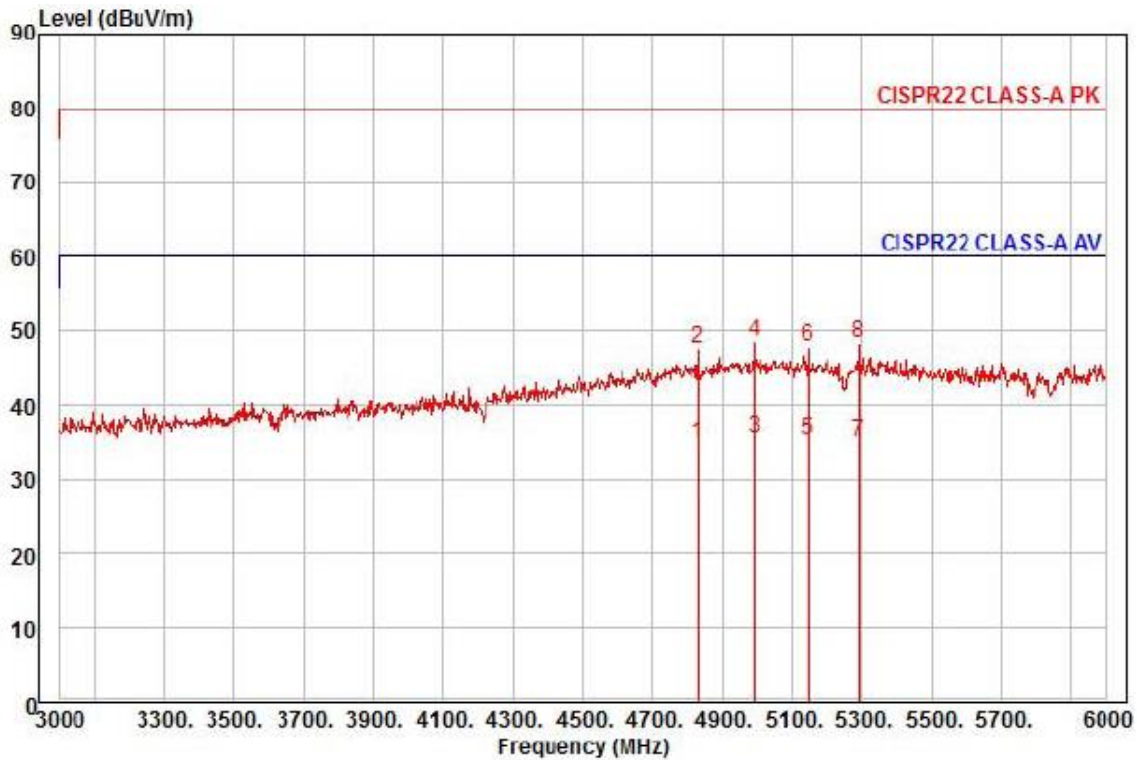


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : DC 12 V
 Memo : (3 ~ 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4833.00	23.32	36.77	15.13	40.44	284	60.00	-25.22	horizontal	Average
2	4833.00	36.14	36.77	15.13	40.44	284	80.00	-32.40	horizontal	Peak
3 pp	4992.00	22.89	37.67	15.31	40.28	123	60.00	-24.41	horizontal	Average
4 pk	4992.00	35.78	37.67	15.31	40.28	123	80.00	-31.52	horizontal	Peak
5	5145.00	22.80	37.43	15.60	40.51	71	60.00	-24.68	horizontal	Average
6	5145.00	35.24	37.43	15.60	40.51	71	80.00	-32.24	horizontal	Peak
7	5292.00	22.75	37.13	15.86	40.75	264	60.00	-25.01	horizontal	Average
8	5292.00	35.98	37.13	15.86	40.75	264	80.00	-31.78	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

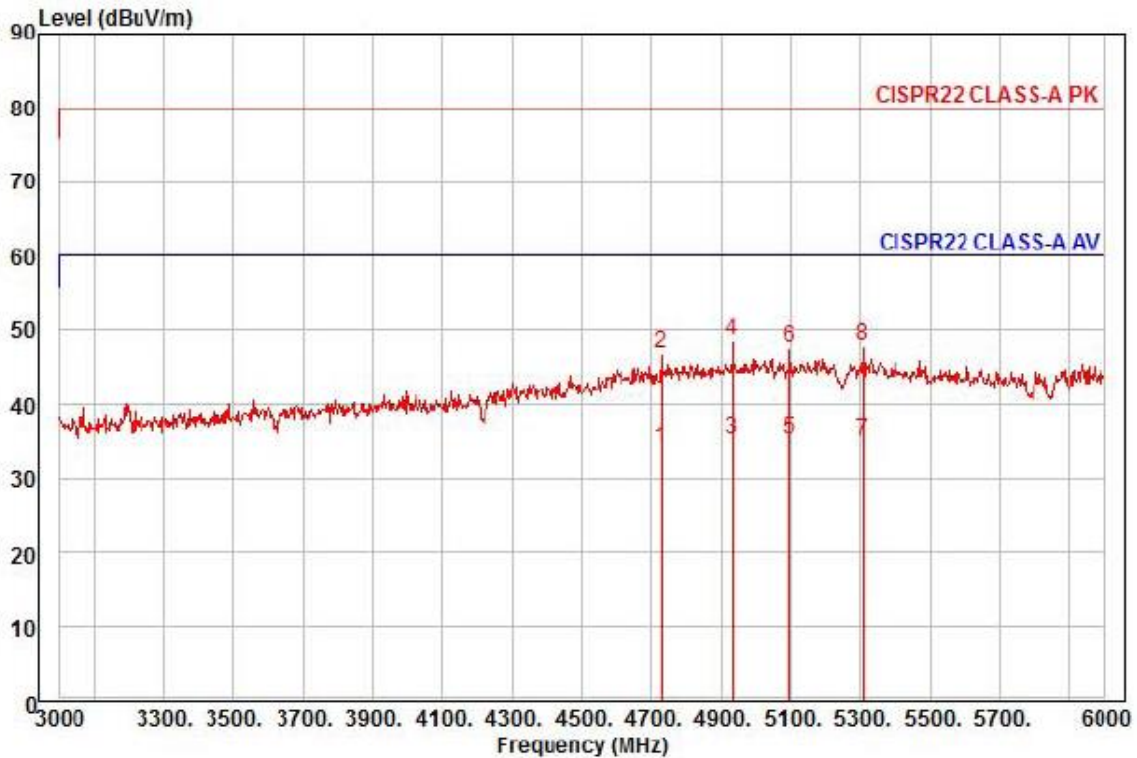

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNO-6080RP

Mode : DC 12 V

Memo : (3 ~ 6) GHz


		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4728.00	23.46	36.17	14.94	40.54	258	60.00	-25.97	vertical	Average
2	4728.00	36.37	36.17	14.94	40.54	258	80.00	-33.06	vertical	Peak
3	4932.00	23.01	37.33	15.24	40.34	116	60.00	-24.76	vertical	Average
4 pk	4932.00	36.28	37.33	15.24	40.34	116	80.00	-31.49	vertical	Peak
5 pp	5097.00	22.68	37.52	15.51	40.43	222	60.00	-24.72	vertical	Average
6	5097.00	35.08	37.52	15.51	40.43	222	80.00	-32.32	vertical	Peak
7	5307.00	22.92	37.10	15.88	40.78	141	60.00	-24.88	vertical	Average
8	5307.00	35.62	37.10	15.88	40.78	141	80.00	-32.18	vertical	Peak

Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

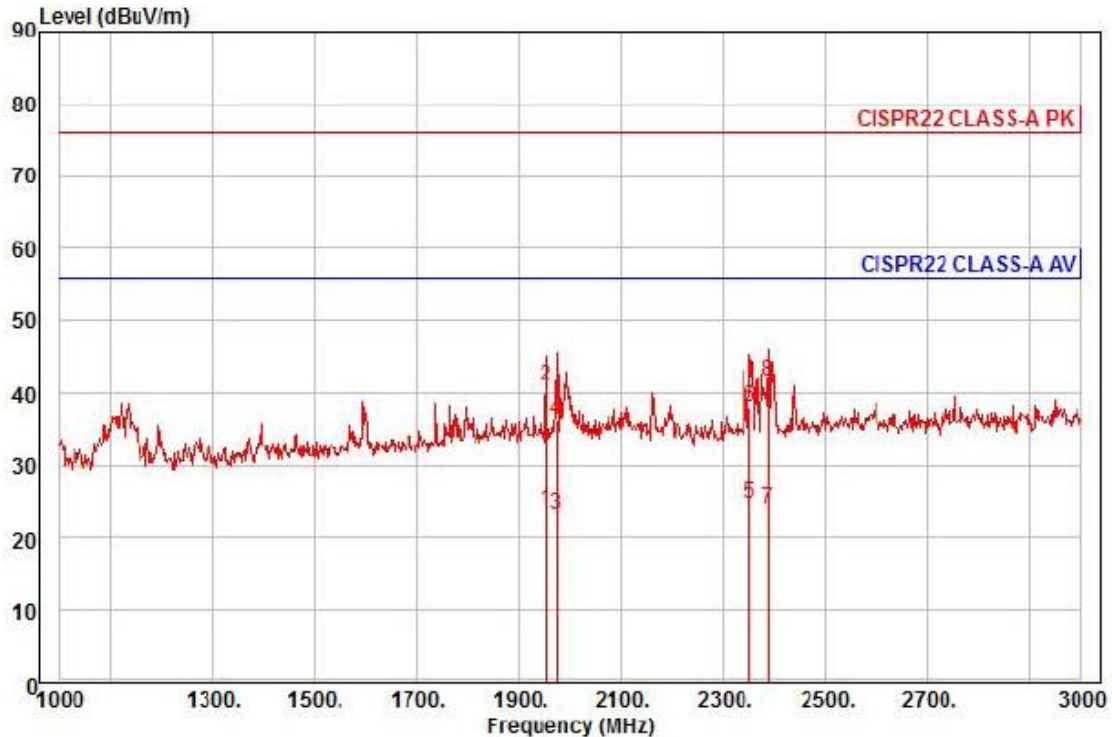

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : PoE
 Memo : (1 ~ 3) GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1954.00	26.20	27.70	9.22	39.39	118	56.00	-32.27	horizontal	Average
2	1954.00	43.34	27.70	9.22	39.39	118	76.00	-35.13	horizontal	Peak
3	1974.00	25.71	27.78	9.27	39.40	116	56.00	-32.64	horizontal	Average
4	1974.00	38.70	27.78	9.27	39.40	116	76.00	-39.65	horizontal	Peak
5 pp	2352.00	25.19	28.74	10.20	39.42	116	56.00	-31.29	horizontal	Average
6	2352.00	38.39	28.74	10.20	39.42	116	76.00	-38.09	horizontal	Peak
7	2388.00	24.42	28.83	10.29	39.42	121	56.00	-31.88	horizontal	Average
8 pk	2388.00	42.02	28.83	10.29	39.42	121	76.00	-34.28	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

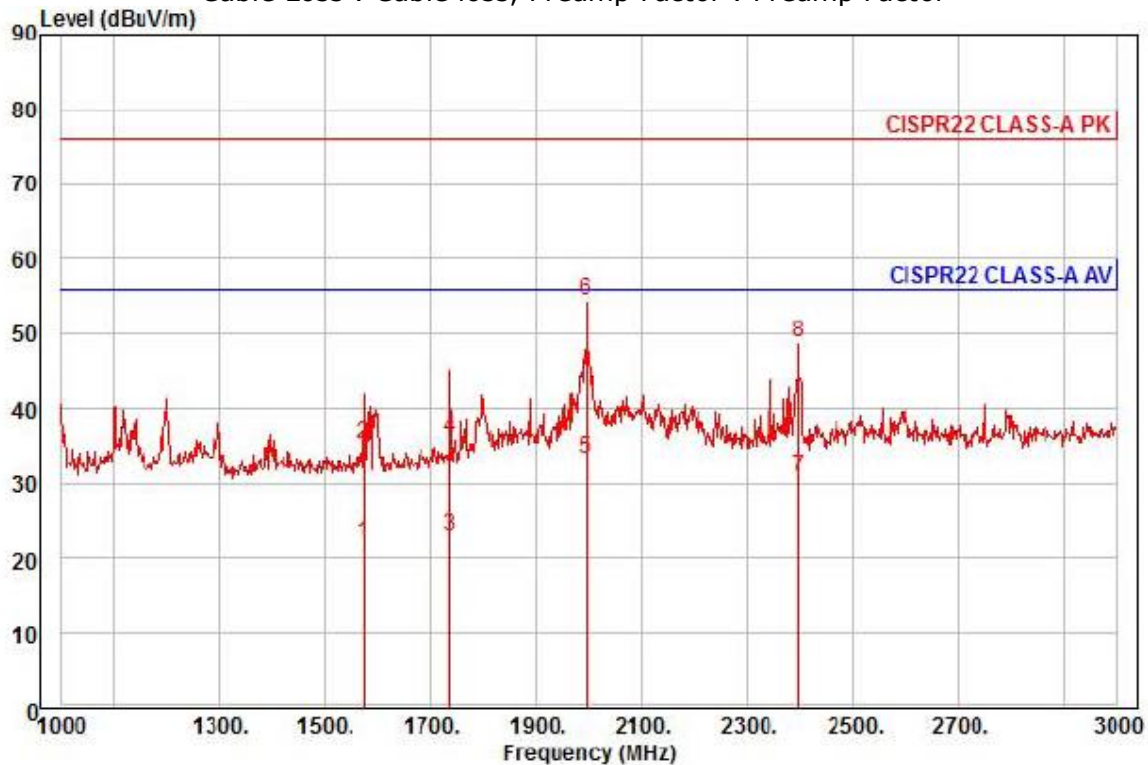


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-6080RP
Mode : PoE
Memo : (1 ~ 3) GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1574.00	26.81	26.19	8.23	39.21	275	56.00	-33.98	vertical
2	1574.00	40.06	26.19	8.23	39.21	275	76.00	-40.73	vertical
3	1736.00	26.79	26.83	8.66	39.29	17	56.00	-33.01	vertical
4	1736.00	39.73	26.83	8.66	39.29	17	76.00	-40.07	vertical
5 av	1996.00	35.52	27.86	9.33	39.41	348	56.00	-22.70	vertical
6 pp	1996.00	56.68	27.86	9.33	39.41	348	76.00	-21.54	vertical
7	2398.00	31.04	28.86	10.32	39.42	149	56.00	-25.20	vertical
8	2398.00	48.94	28.86	10.32	39.42	149	76.00	-27.30	vertical

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

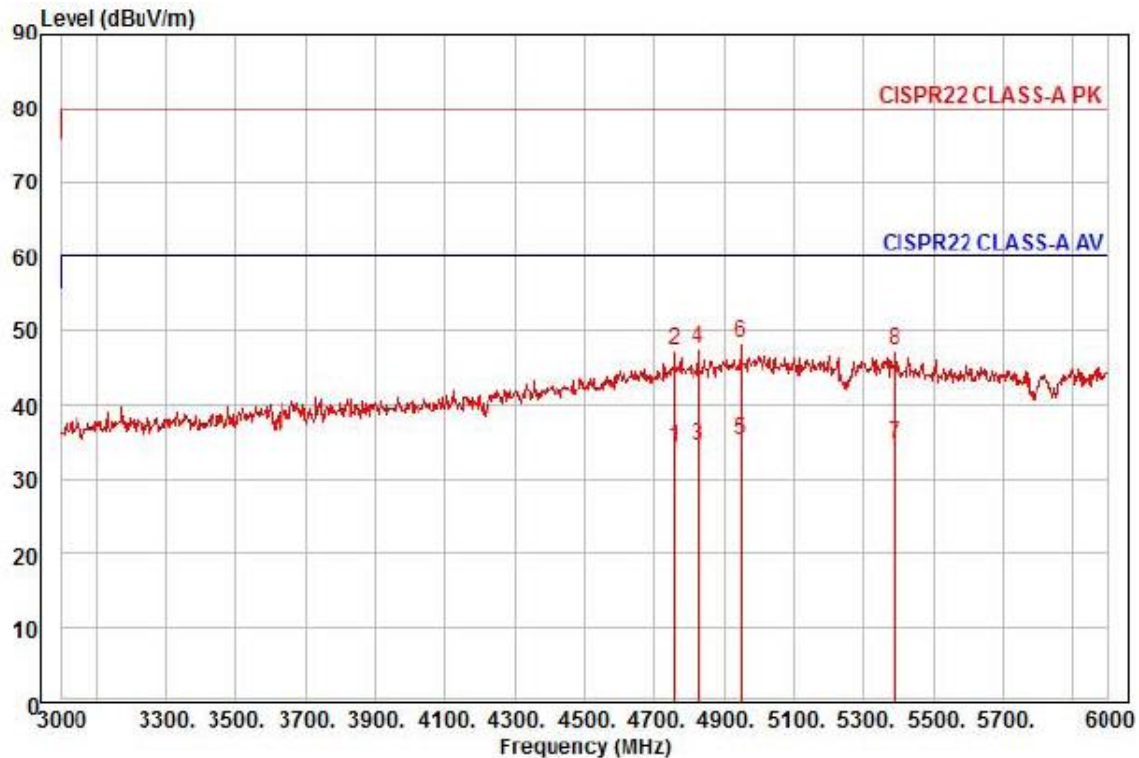


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-6080RP
 Mode : PoE
 Memo : (3 ~ 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4758.00	23.58	36.34	15.01	40.51	23	60.00	-25.58	horizontal	Average
2	4758.00	36.47	36.34	15.01	40.51	23	80.00	-32.69	horizontal	Peak
3	4827.00	23.24	36.73	15.13	40.44	299	60.00	-25.34	horizontal	Average
4	4827.00	36.14	36.73	15.13	40.44	299	80.00	-32.44	horizontal	Peak
5 pp	4947.00	22.96	37.42	15.26	40.32	320	60.00	-24.68	horizontal	Average
6 pk	4947.00	35.91	37.42	15.26	40.32	320	80.00	-31.73	horizontal	Peak
7	5388.00	22.72	36.94	16.02	40.91	239	60.00	-25.23	horizontal	Average
8	5388.00	35.30	36.94	16.02	40.91	239	80.00	-32.65	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

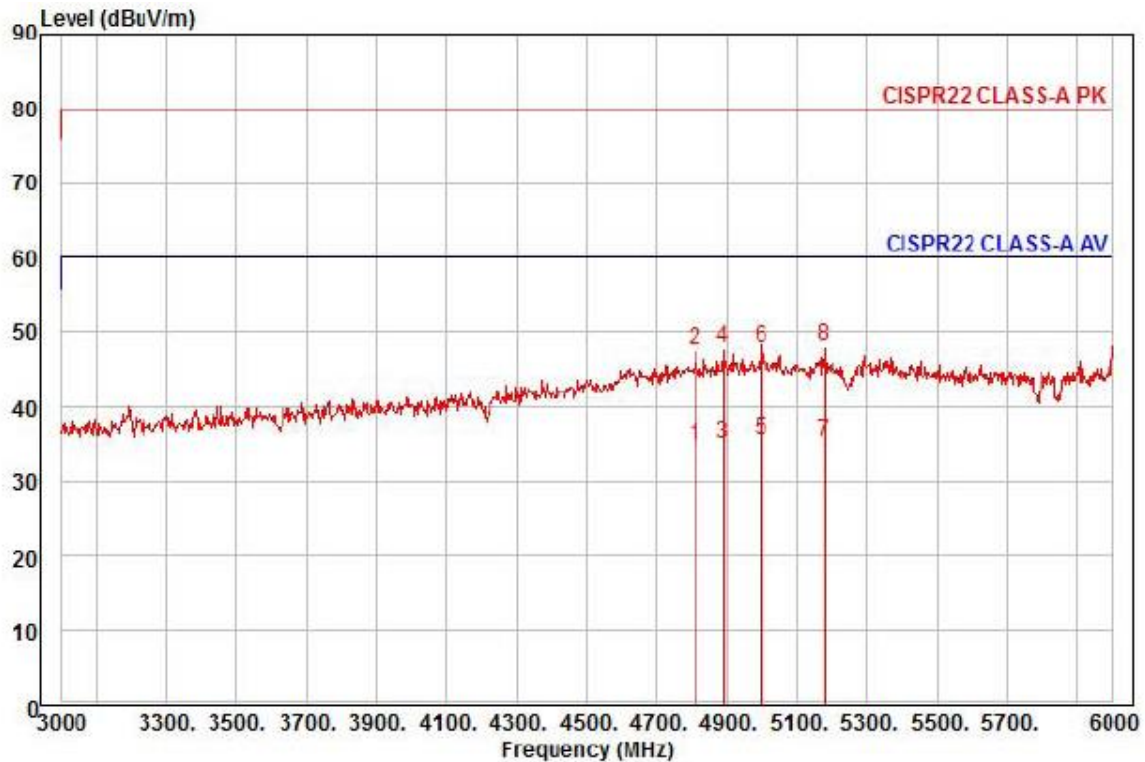

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : XNO-6080RP

Mode : PoE

Memo : (3 ~ 6) GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4809.00	23.54	36.63	15.11	40.46	295	60.00	-25.18	vertical	Average
2	4809.00	36.41	36.63	15.11	40.46	295	80.00	-32.31	vertical	Peak
3	4890.00	23.22	37.09	15.20	40.38	12	60.00	-24.87	vertical	Average
4	4890.00	35.92	37.09	15.20	40.38	12	80.00	-32.17	vertical	Peak
5 pp	4998.00	22.92	37.71	15.31	40.27	258	60.00	-24.33	vertical	Average
6	4998.00	35.09	37.71	15.31	40.27	258	80.00	-32.16	vertical	Peak
7	5178.00	22.80	37.36	15.67	40.57	278	60.00	-24.74	vertical	Average
8 pk	5178.00	35.58	37.36	15.67	40.57	278	80.00	-31.96	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0613-R7
Page (67) of (98)

Test Data - Voltage Fluctuations**Maximum Flicker results**


	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions


- AC 24 V Mode

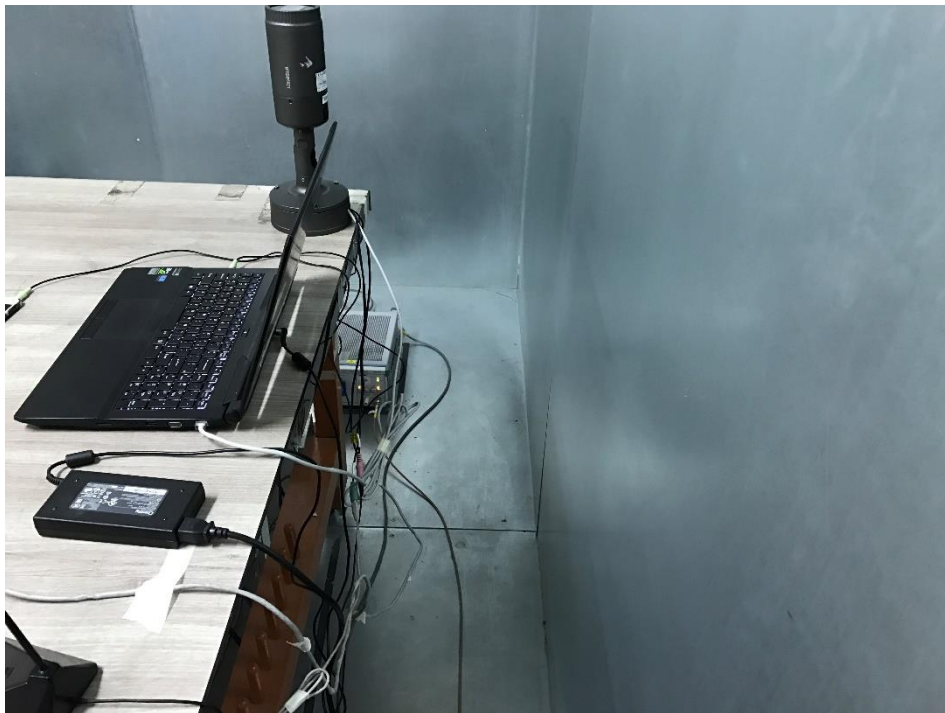

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions

- AC 24 V Mode

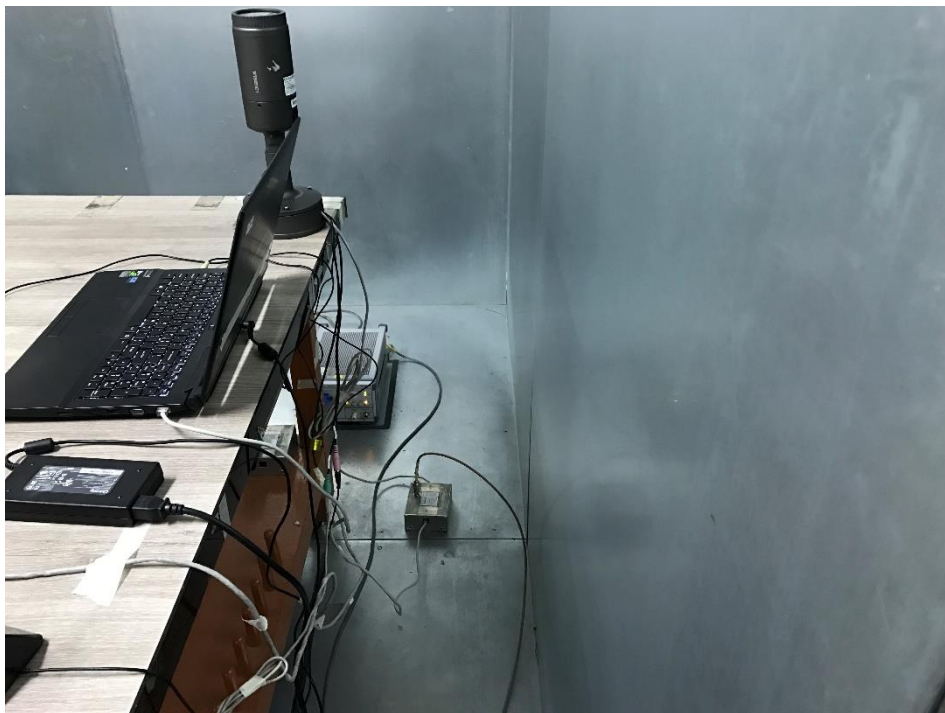

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode



- PoE Mode



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

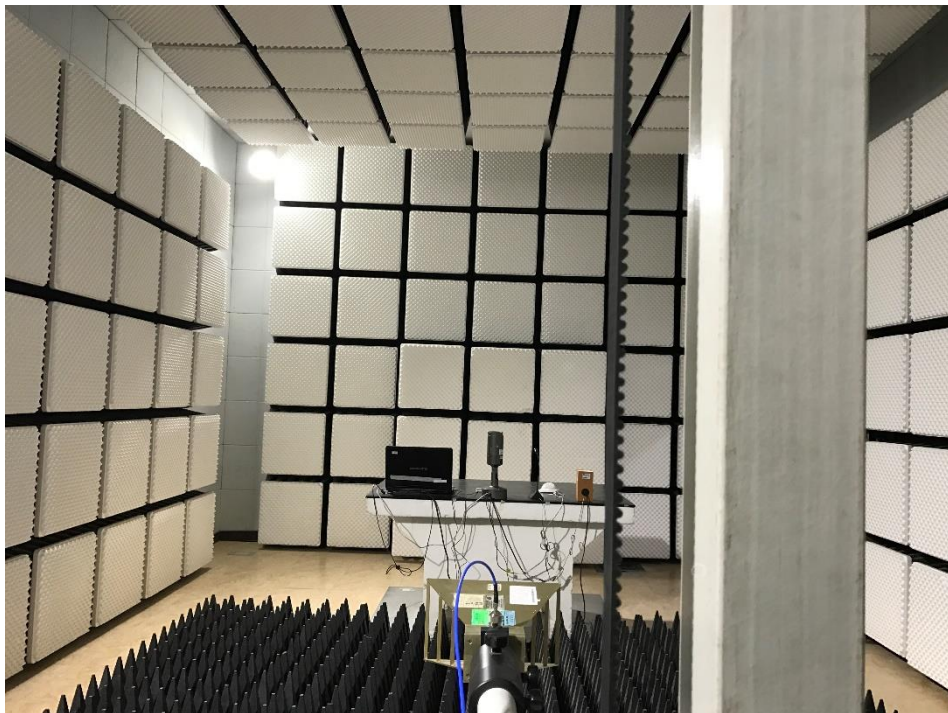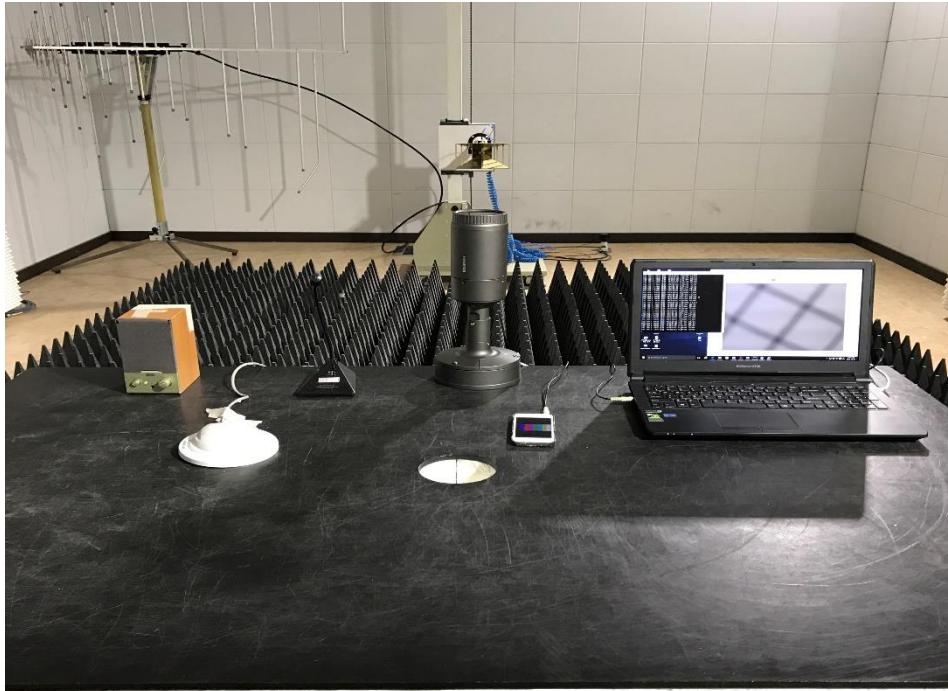



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

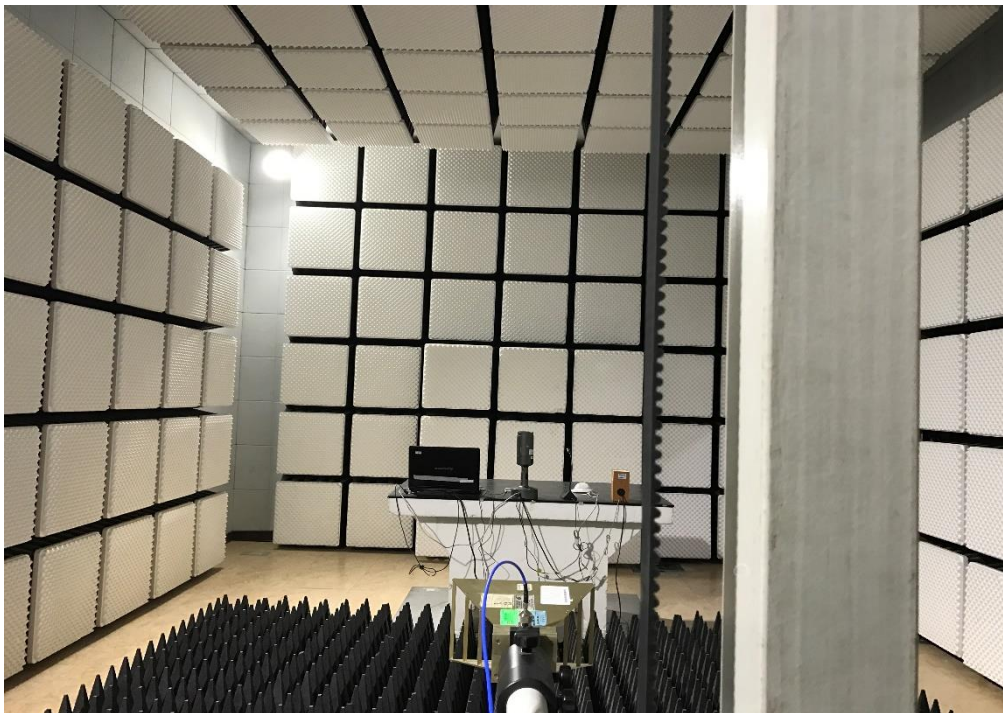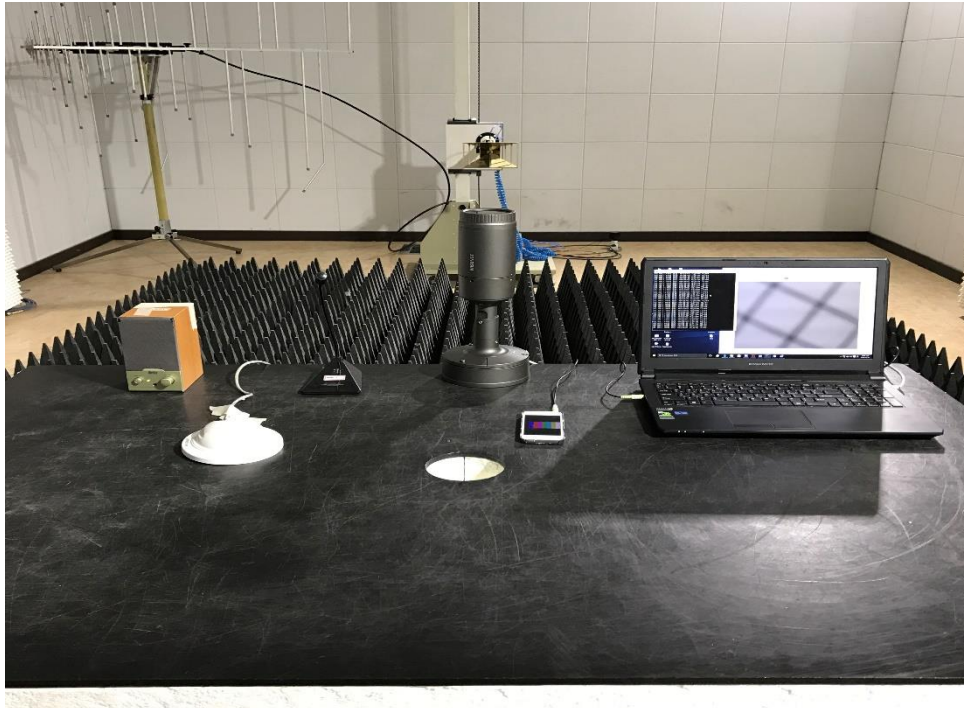

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

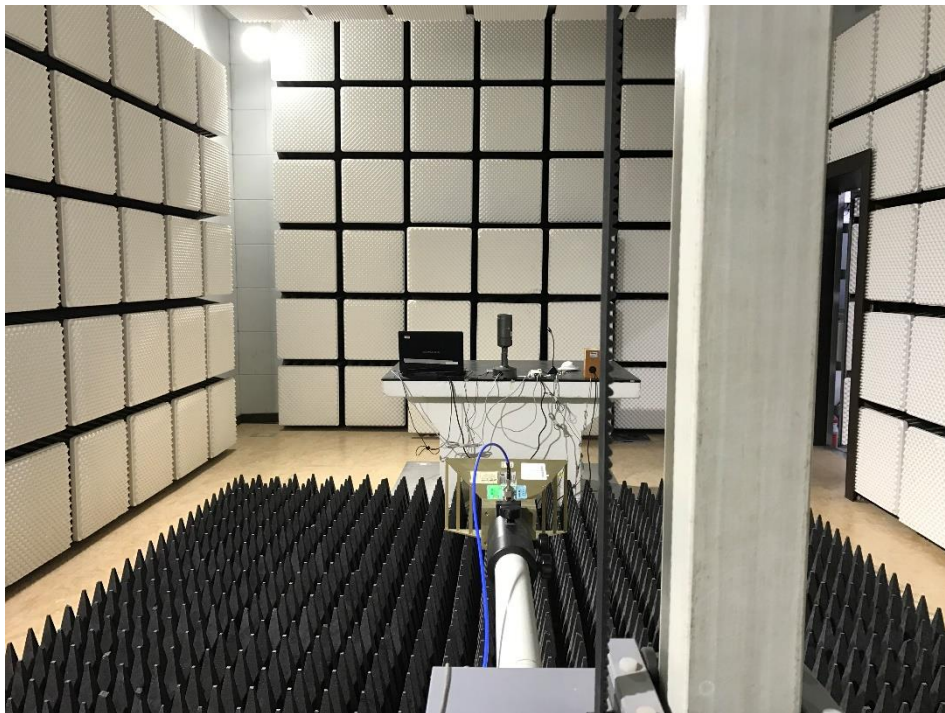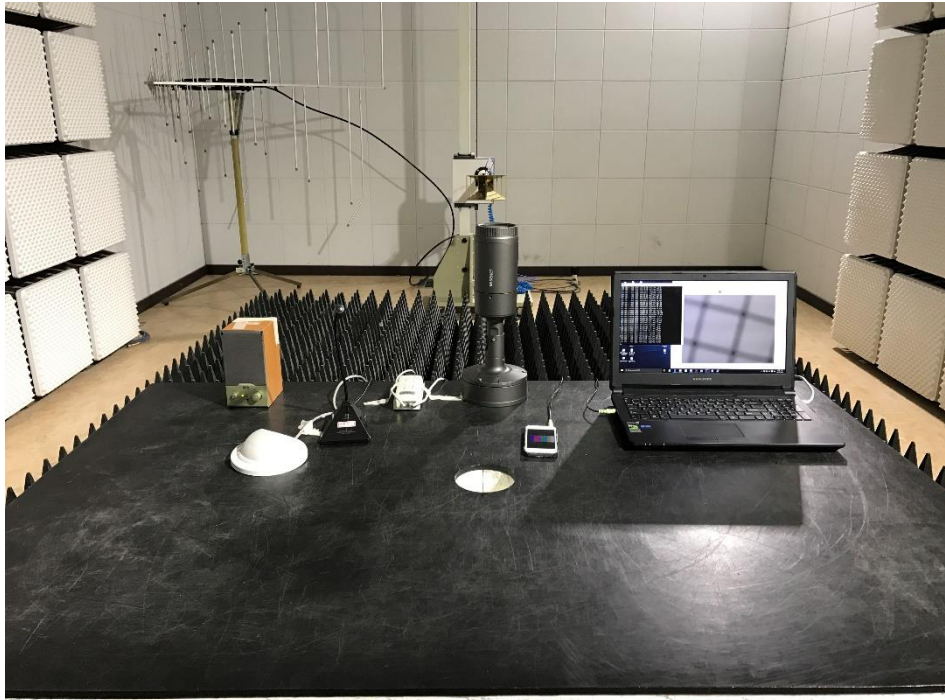

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

Electrostatic Discharge

- AC 24 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode




- POE Mode

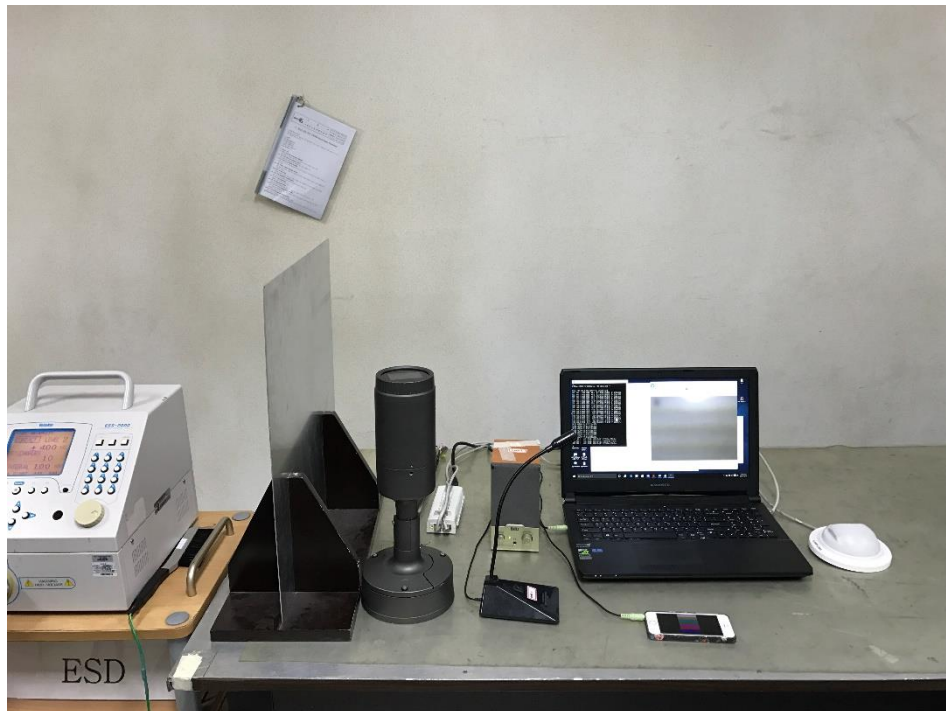


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Immunity

- AC 24 V Mode

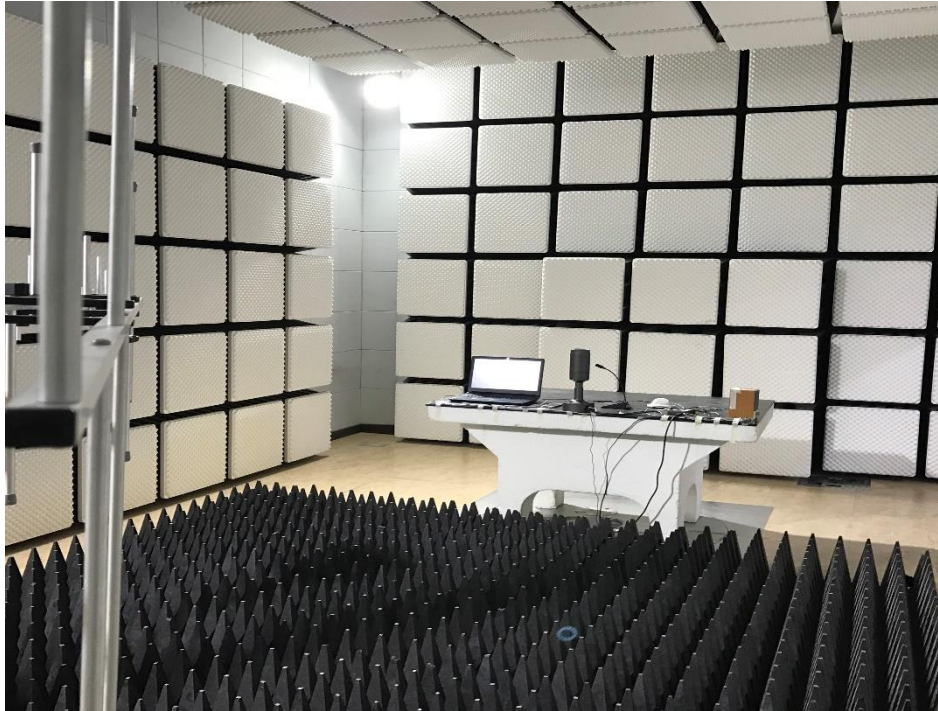


- DC 12 V Mode

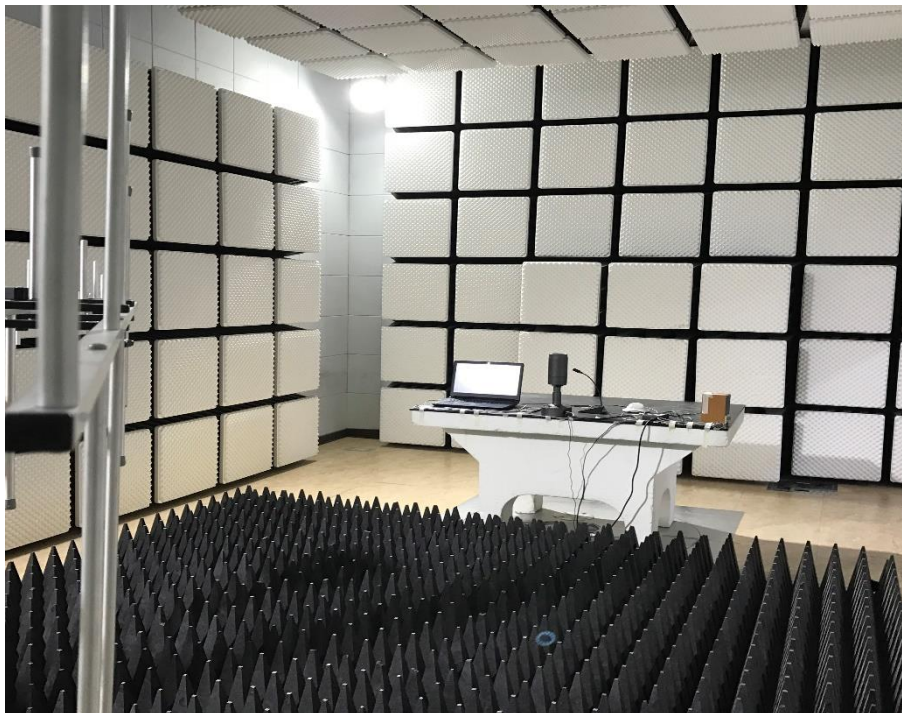

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

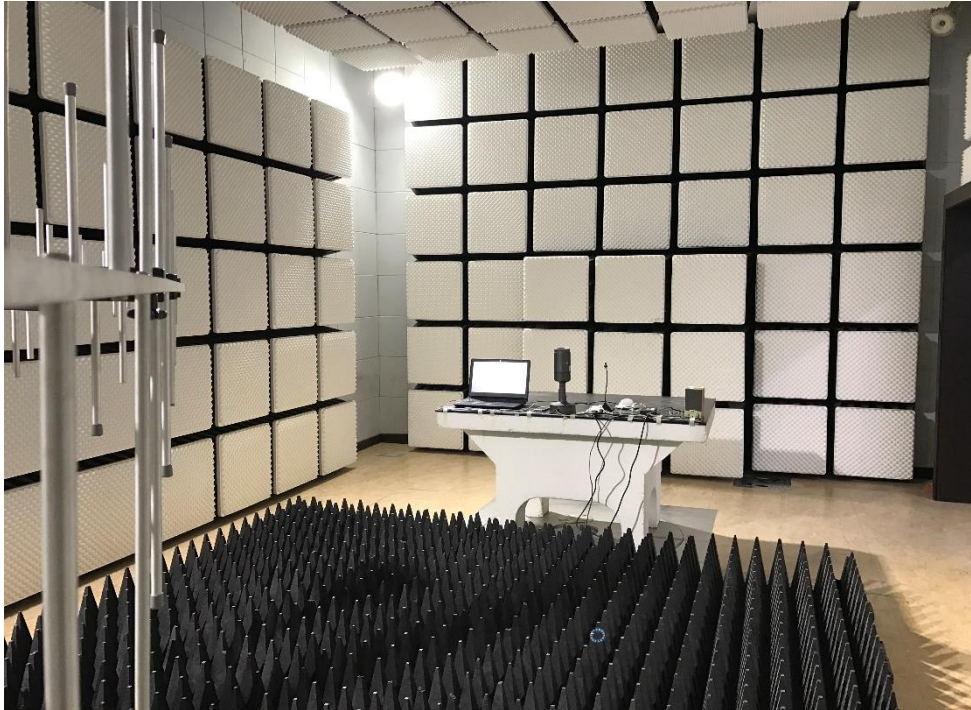

Electrical Fast Transients/Bursts

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode



- PoE Mode

N/A



Surge Transients

- AC 24 V Mode



- DC 12 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode




Conducted Disturbance

- AC 24 V Mode

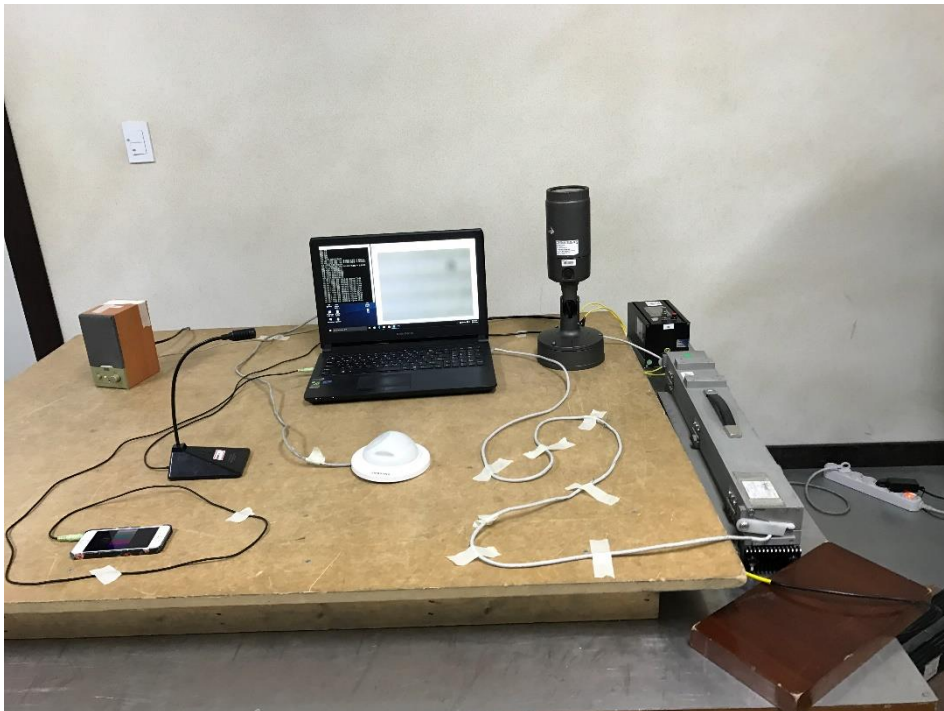

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

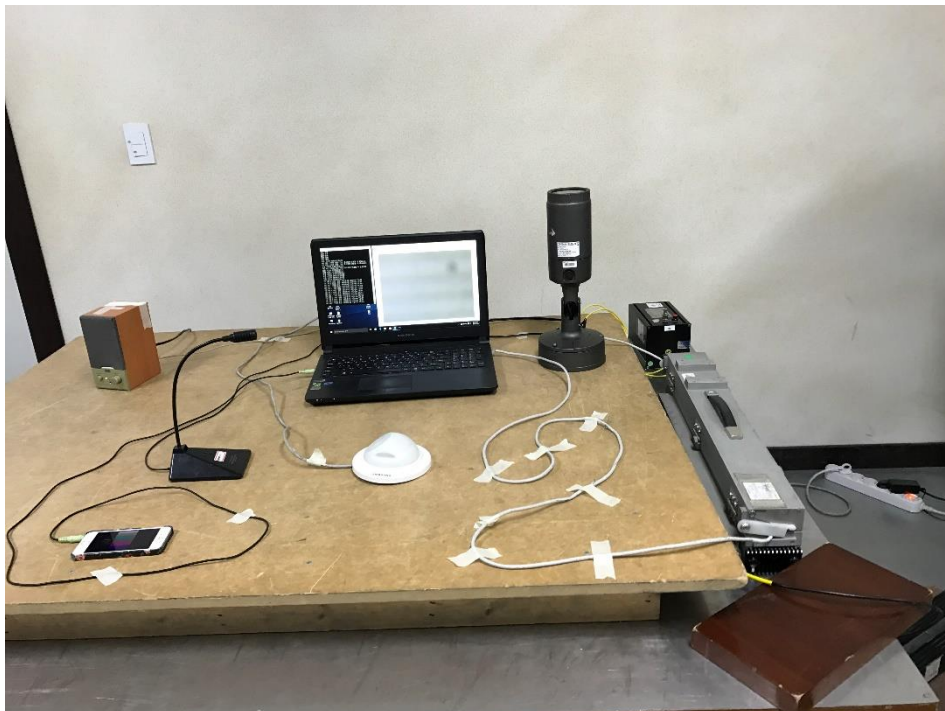

- PoE Mode

N/A



Voltage Dips and Short Interruptions

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)



EUT Internal View – Main board

(Top)

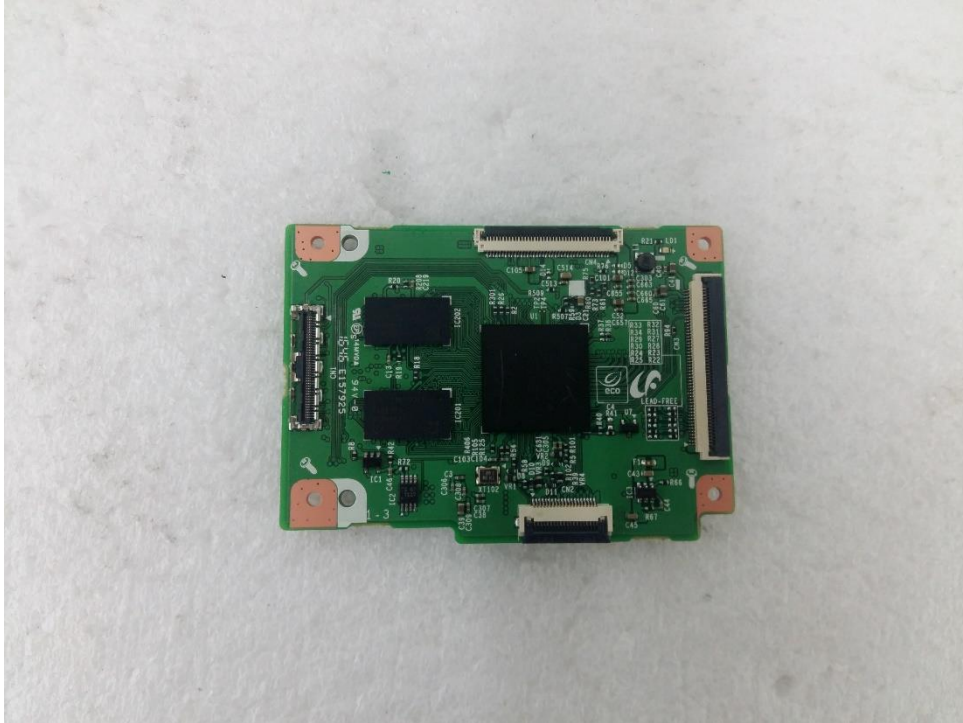


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub board

(Top)

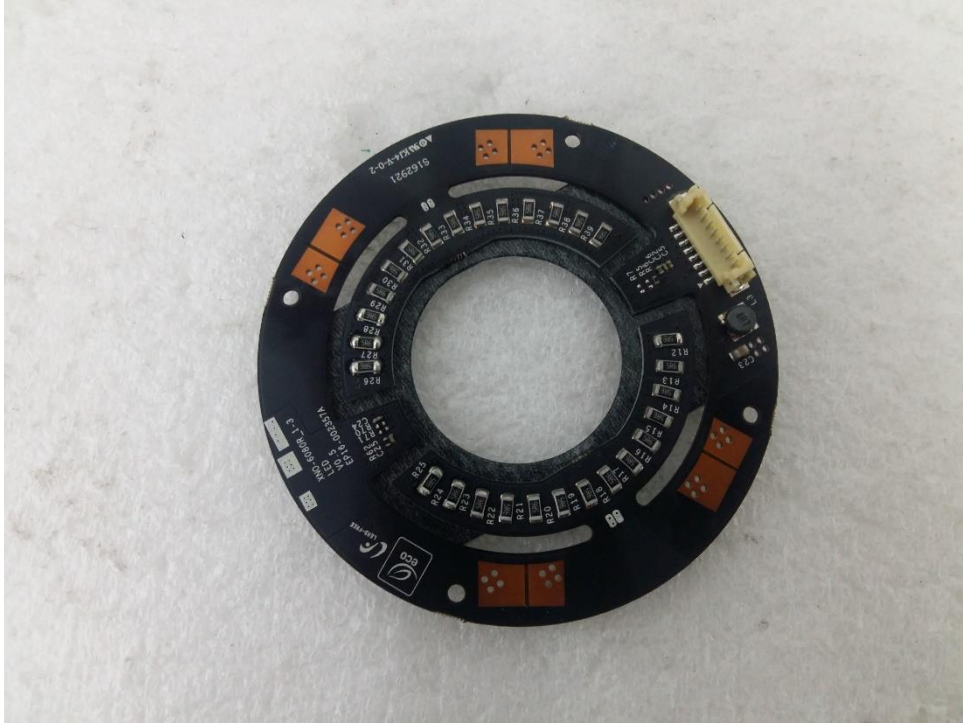

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Switch Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power Board

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens Board

(Top)

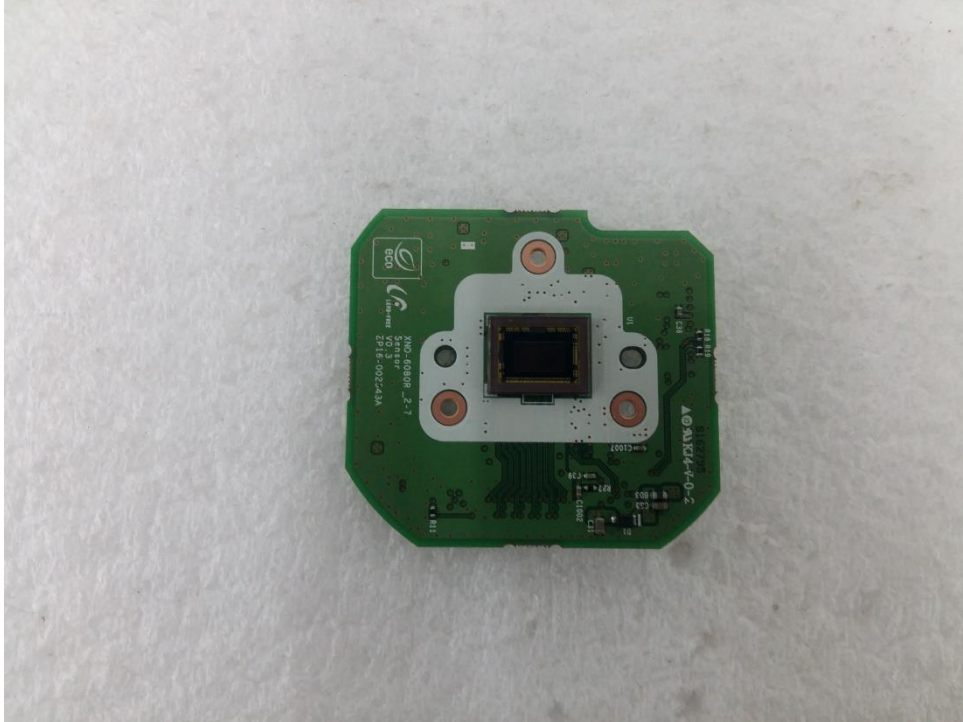


(Bottom)

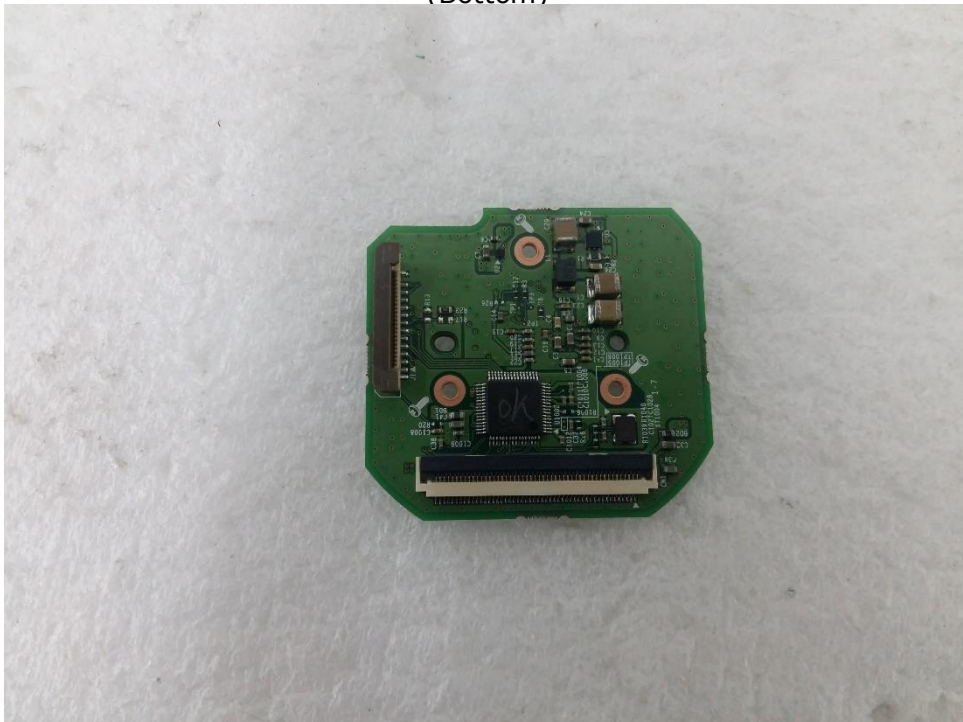

EUT Internal View Camera Lens


(Top)

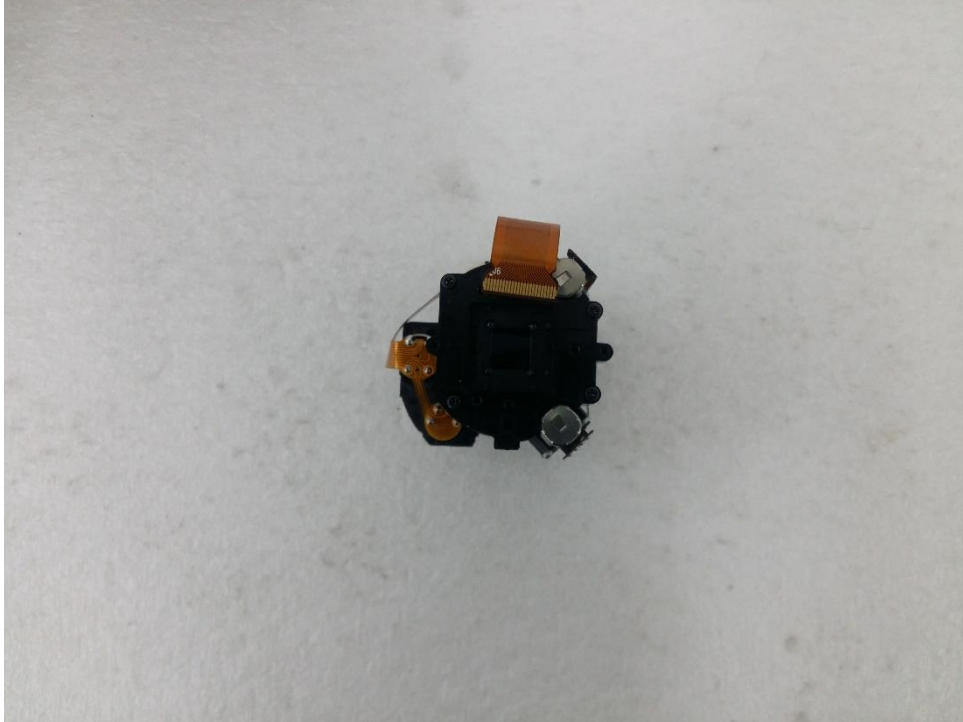

(Bottom)



Label and Location

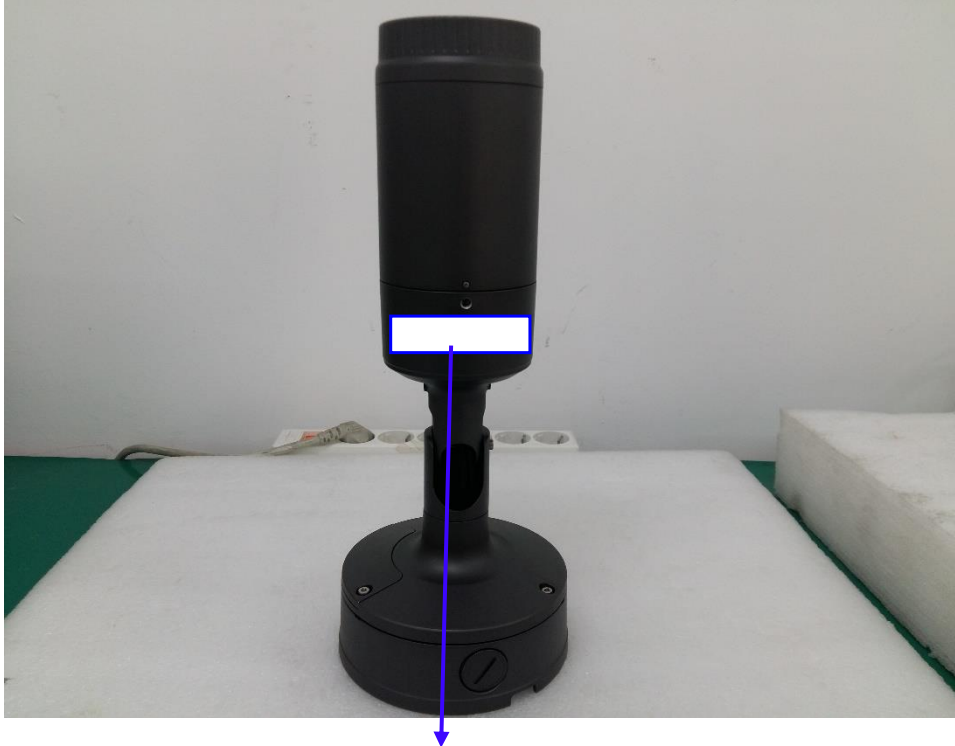

NETWORK CAMERA

Model No : XNO-6080R

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

