



EMC TEST REPORT For FCC

Test Report No. : KES-E1-16T0614-R3
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNO-6080R
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : ☐ Declaration of Conformity
☒ Verification
☐ Certification
Date of Receipt : Nav, 23, 2016
Test date : Dec. 02, 2016 ~ Dec. 03, 2016
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Tae Yeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (2) of (43)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 06, 2016	KES-E1-16T0614	Issued
Aug. 14, 2018	KES-E1-16T0614-R1	Reissue due to model name modification
May. 28, 2021	KES-E1-16T0614-R2	Reissue due to model name modification & Delete Manufacturer on Customer Request
Feb. 24, 2023	KES-E1-16T0614-R3	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (3) of (43)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Radiated Electric Field Emissions(Below 1 GHz)	16
2.3	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A	– TEST DATA.....	18
	Conducted Emissions at Mains Power Ports.....	18
	Radiated Electric Field Emissions(Below 1 GHz)	20
	Radiated Electric Field Emissions(Above 1 GHz)	22
	Test Setup Photos and Configuration	28
	Conducted Voltage Emissions	28
	Radiated Electric Field Emissions(Below 1 GHz)	29
	Radiated Electric Field Emissions(Above 1 GHz)	32
	EUT External Photographs	35
	EUT Internal Photographs	36

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (4) of (43)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS (IMX291)
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux (TBD) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
Lens	
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal
Max. Aperture Ratio	1.4(Wide) ~ 3.6(Tele)
Angular Field of View	H: 119.5°, V: 62.8°, D: 142.1° H: 27.9°, V: 15.7°, D: 32.0°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network (Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	
Operational	
IR LED	4EA
Viewable Length	50m(164.04ft)
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	150dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic ※ Zoom ratio option for mask mode (TBD)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (5) of (43)

Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576, 640x480, 640x360, 320x240, 320x180
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, * WiseStream 별도항목으로 분리 MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0614-R3
Page (6) of (43)

Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform ※ SVN 1.2 삭제 (구 기종 NVR 변경점 대응)
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Software	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	Dark gray / Aluminum
Dimension (WxHxD)	TBD
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 120 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNO-6080R	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	1.7 m
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	1.6 m
Alarm	-	-	-	-
SD card	-	-	SanDisk	16 GB



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U



- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)


Test mode	Normal operating
E.U.T Monitoring , Ping test, 1 kHz	

E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Vision Co., Ltd


1.8 Configuration

■ AC Main
 □ DC Main


- AC 24 V Mode

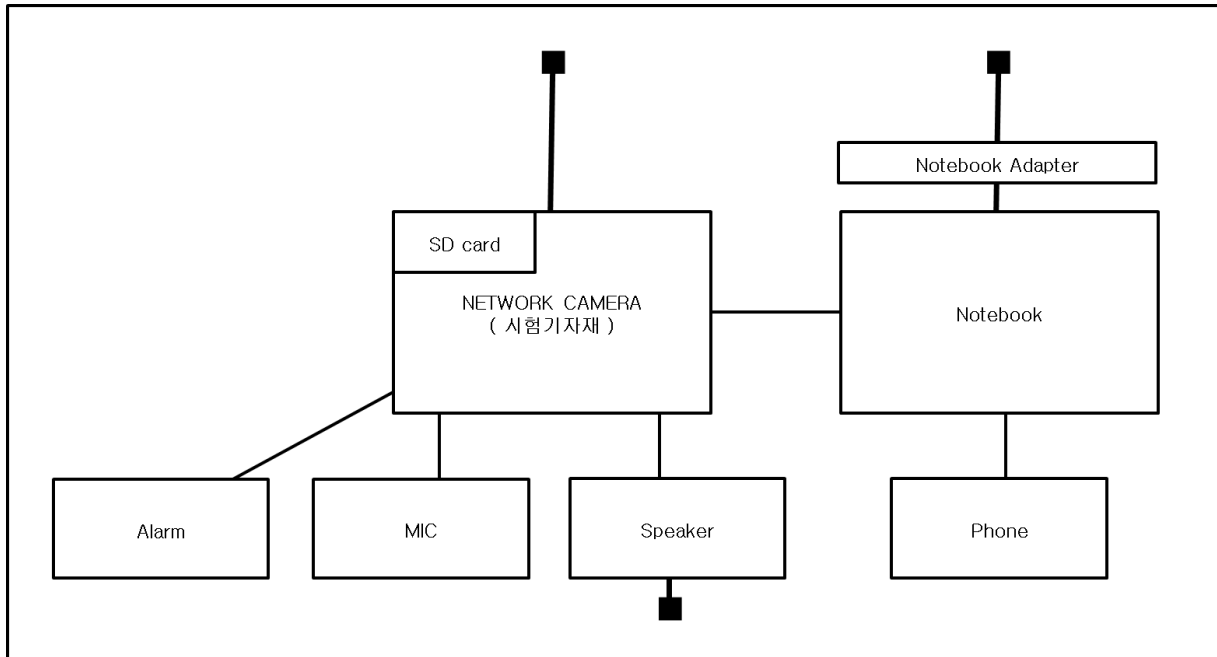

- DC 12 V Mode

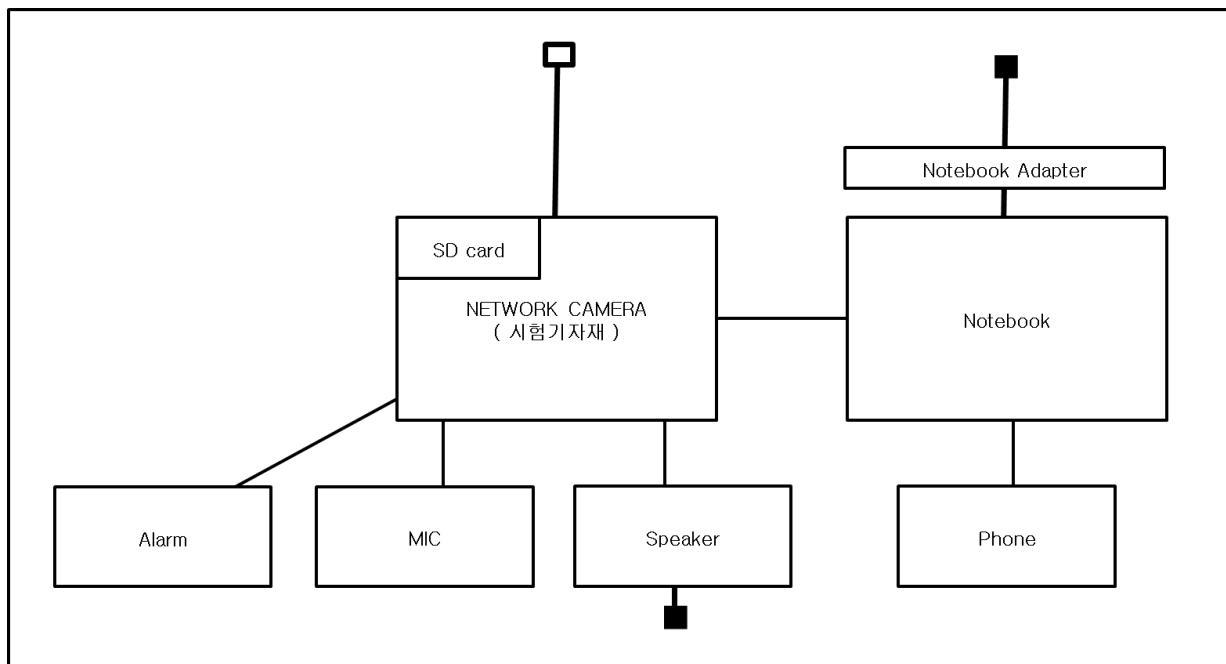

- PoE Mode

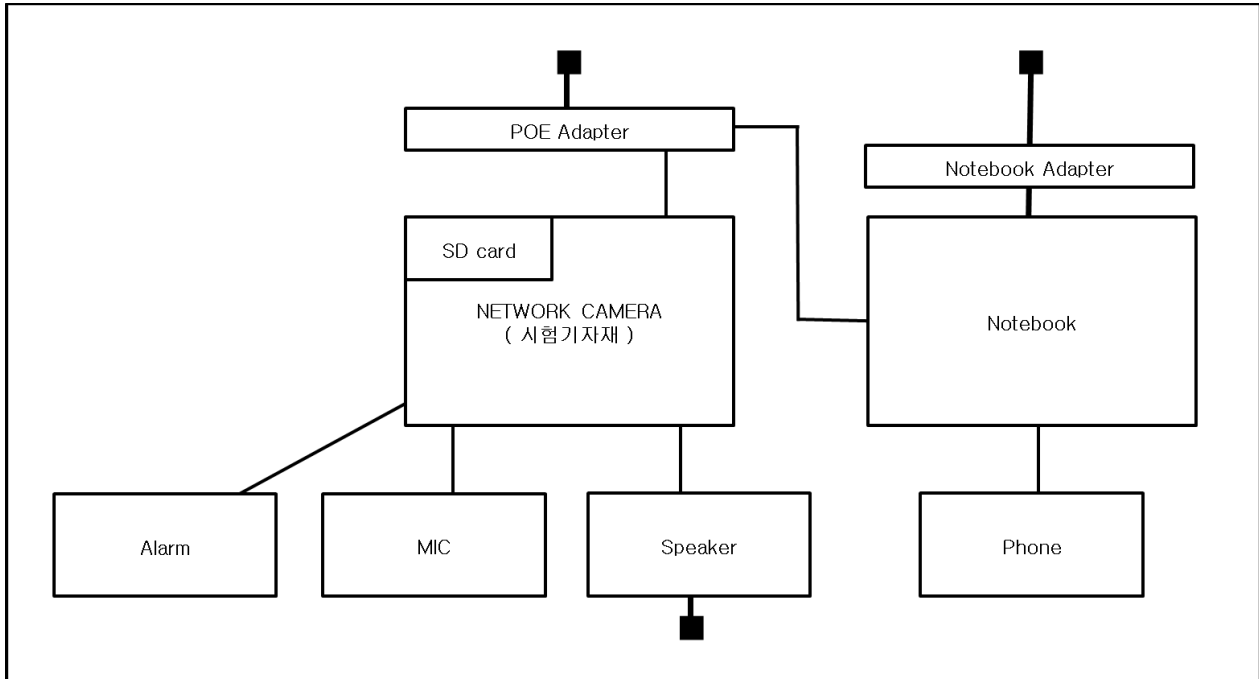

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (14) of (43)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☒ CISPR 22:2009 +A1:2010 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ MEDICAL – Directive 93/42/EEC | | |
| ☐ EN 60601-1-2 :2007 | | |
| ☐ RE– Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Dec, 02, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 16,5 °C
Relative Humidity: 39,8 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 03, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 9,8 °C
Relative Humidity: 35,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 03, 2016

Test Location

Semi Anechoic Chamber #1

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Log-Periodic Antenna	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
☒	EMI TEST Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Preamplifier	EMI TEST Receiver	R&S	102232	06, 29, 2017
☒	Semi Anechoic Chamber #1	-	KES	-	-
☒	Tilt Antenna Mast	TAM 4.0-E	maturro	18100116	-
☒	Turn Table	DT 2000-1,5T	INN-CO	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 19,6 °C

Relative Humidity: 47,2 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-6080R
Mode	AC 24 V H
Operator Name:	KES

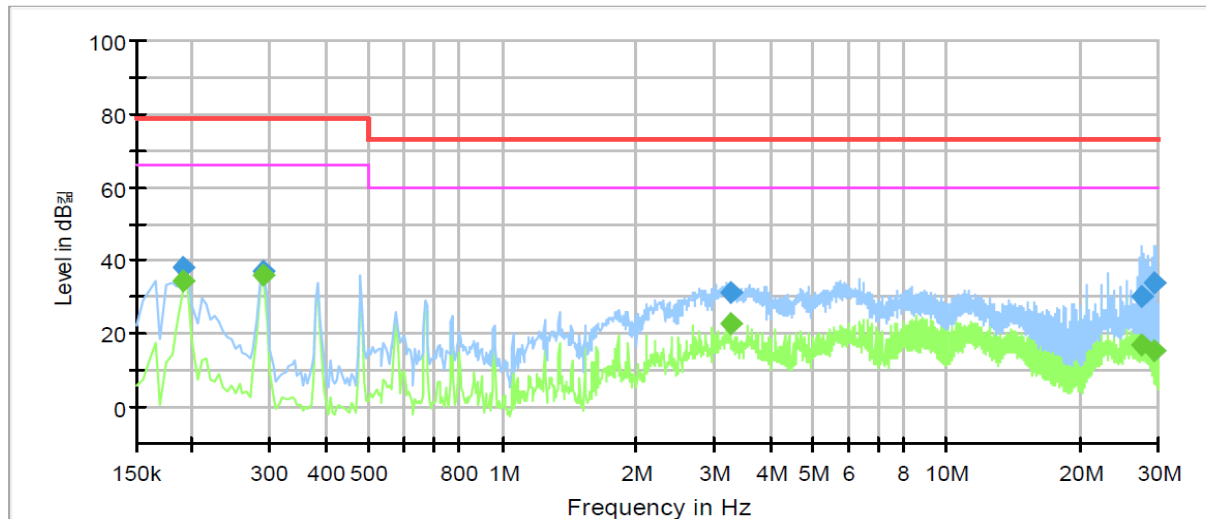

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	34.49	66.00	31.51	1000.0	9.000	L1	9.7
0.190000	38.27	---	79.00	40.73	1000.0	9.000	L1	9.7
0.290000	---	35.98	66.00	30.02	1000.0	9.000	L1	9.7
0.290000	36.99	---	79.00	42.01	1000.0	9.000	L1	9.7
3.265000	---	22.91	60.00	37.09	1000.0	9.000	L1	10.2
3.265000	31.09	---	73.00	41.91	1000.0	9.000	L1	10.2
27.485000	---	16.77	60.00	43.23	1000.0	9.000	L1	10.3
27.485000	30.34	---	73.00	42.66	1000.0	9.000	L1	10.3
29.305000	---	15.61	60.00	44.39	1000.0	9.000	L1	10.4
29.305000	33.93	---	73.00	39.07	1000.0	9.000	L1	10.4

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNO-6080R
Mode: AC 24 V N
Operator Name: KES

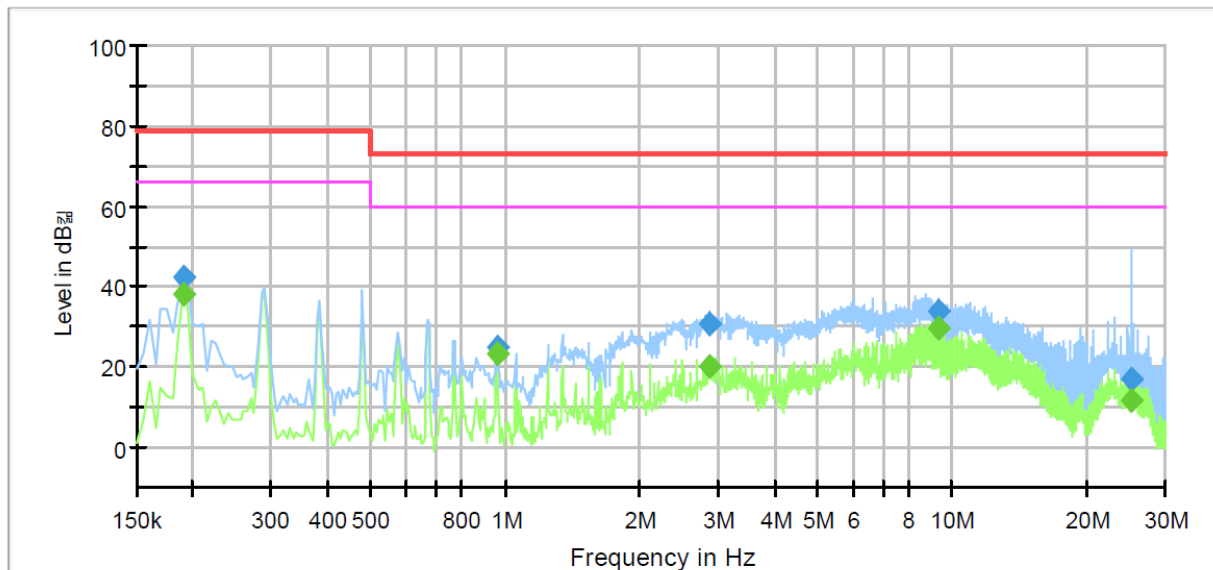

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	38.37	66.00	27.63	1000.0	9.000	N	9.7
0.190000	42.57	---	79.00	36.43	1000.0	9.000	N	9.7
0.960000	---	23.51	60.00	36.49	1000.0	9.000	N	10.0
0.960000	25.02	---	73.00	47.98	1000.0	9.000	N	10.0
2.870000	---	20.39	60.00	39.61	1000.0	9.000	N	10.2
2.870000	30.57	---	73.00	42.43	1000.0	9.000	N	10.2
9.310000	---	29.79	60.00	30.21	1000.0	9.000	N	9.8
9.310000	34.01	---	73.00	38.99	1000.0	9.000	N	9.8
25.270000	---	11.83	60.00	48.17	1000.0	9.000	N	10.3
25.270000	16.72	---	73.00	56.28	1000.0	9.000	N	10.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
64.11	8.14	V	1.23	11.45	2.30	21.89	39.00	17.11
221.17	20.64	H	3.78	11.77	4.37	36.78	46.40	9.62
270.53	22.78	V	1.30	12.81	4.90	40.49	46.40	5.91
344.01	19.16	V	1.18	14.40	5.58	39.14	46.40	7.26
344.53	18.23	H	3.78	14.41	5.59	38.23	46.40	8.17
491.79	10.13	H	3.13	16.99	6.97	34.09	46.40	12.31

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
50.12	8.89	V	1.24	13.93	2.10	24.92	39.00	14.08
221.19	20.73	H	3.78	11.77	4.37	36.87	46.40	9.53
270.53	22.77	V	1.30	12.81	4.90	40.48	46.40	5.92
295.76	23.10	H	3.72	13.30	5.11	41.51	46.40	4.89
320.51	21.58	H	3.94	13.86	5.35	40.79	46.40	5.61
491.88	11.04	V	2.18	16.99	6.97	35.00	46.40	11.40

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0614-R3
Page (21) of (43)

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
50.11	8.83	V	1.27	13.94	2.10	24.87	39.00	14.13
221.12	19.64	H	3.58	11.77	4.37	35.78	46.40	10.62
295.67	23.30	H	3.86	13.30	5.11	41.71	46.40	4.69
320.05	18.61	V	1.28	13.85	5.35	37.81	46.40	8.59
320.51	20.97	H	3.86	13.86	5.35	40.18	46.40	6.22
344.53	18.18	H	3.72	14.41	5.59	38.18	46.40	8.22
491.15	9.33	V	1.30	16.98	6.97	33.28	46.40	13.12

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (22) of (43)

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

- PK

Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]		[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
1 136.000	61.180	H	1.000	21.180	3.290	43.640	42.010	76.000	33.990
1 136.000	71.570	V	1.000	21.180	3.290	43.640	52.400	76.000	23.600
1 200.000	56.930	H	1.000	21.510	3.380	43.640	38.180	76.000	37.820
1 713.000	59.240	H	1.000	24.130	4.110	43.690	43.790	76.000	32.210
1 793.000	55.510	V	1.000	24.540	4.280	43.720	40.610	76.000	35.390
1 993.000	55.630	H	1.000	25.560	4.400	43.780	41.810	76.000	34.190
1 993.000	61.740	V	1.000	25.560	4.400	43.780	47.920	76.000	28.080
2 386.000	58.190	V	1.000	27.220	4.890	43.960	46.340	76.000	29.660
2 394.000	54.520	H	1.000	27.250	4.900	43.960	42.710	76.000	33.290
2 594.000	55.790	V	1.000	28.090	5.190	44.050	45.020	76.000	30.980
5 983.000	47.310	H	1.000	36.490	7.820	44.430	47.190	80.000	32.810
6 000.000	46.730	V	1.000	36.550	7.680	44.430	46.530	80.000	33.470

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (23) of (43)

- AV

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 144.000	50.490	H	1.000	21.230	3.300	43.640	31.380	56.000	24.620
1 144.000	49.110	V	1.000	21.230	3.300	43.640	30.000	56.000	26.000
1 793.000	38.420	H	1.000	24.540	4.280	43.720	23.520	56.000	32.480
1 993.000	40.630	H	1.000	25.560	4.400	43.780	26.810	56.000	29.190
1 993.000	42.940	V	1.000	25.560	4.400	43.780	29.120	56.000	26.880
2 065.000	38.570	V	1.000	25.870	4.530	43.810	25.160	56.000	30.840
2 514.000	39.620	H	1.000	27.750	5.070	44.020	28.420	56.000	27.580
2 594.000	38.560	V	1.000	28.090	5.190	44.050	27.790	56.000	28.210
4 902.000	38.520	H	1.000	33.050	6.990	44.320	34.240	60.000	25.760
4 902.000	38.110	V	1.000	33.050	6.990	44.320	33.830	60.000	26.170
5 975.000	34.920	V	1.000	36.470	7.820	44.430	34.780	60.000	25.220
5 983.000	35.390	H	1.000	36.490	7.820	44.430	35.270	60.000	24.730

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor
[dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (24) of (43)

- DC 12 V Mode

- PK

Frequency [MHz]	Amplitude [dB μ V]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dB μ V/m]	Applicable Limit [dB μ V/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 136.000	63.320	H	1.000	21.180	3.290	43.640	44.150	76.000	31.850
1 136.000	66.550	V	1.000	21.180	3.290	43.640	47.380	76.000	28.620
1 440.000	60.250	H	1.000	22.740	3.690	43.630	43.050	76.000	32.950
1 705.000	62.980	H	1.000	24.090	4.090	43.690	47.470	76.000	28.530
1 737.000	60.530	H	1.000	24.260	4.160	43.700	45.250	76.000	30.750
1 993.000	59.910	V	1.000	25.560	4.400	43.780	46.090	76.000	29.910
2 394.000	53.790	V	1.000	27.250	4.900	43.960	41.980	76.000	34.020
2 594.000	53.870	V	1.000	28.090	5.190	44.050	43.100	76.000	32.900
2 626.000	58.760	H	1.000	28.220	5.210	44.060	48.130	76.000	27.870
4 878.000	50.560	V	1.000	33.010	7.000	44.310	46.260	80.000	33.740
5 799.000	47.170	V	1.000	35.880	8.070	44.470	46.650	80.000	33.350
5 951.000	46.930	H	1.000	36.390	7.800	44.440	46.680	80.000	33.320

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0614-R3
Page (25) of (43)

- AV

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 112.000	50.050	V	1.000	21.060	3.260	43.640	30.730	56.000	25.270
1 128.000	52.120	H	1.000	21.140	3.280	43.640	32.900	56.000	23.100
1 136.000	50.840	V	1.000	21.180	3.290	43.640	31.670	56.000	24.330
1 264.000	42.540	H	1.000	21.840	3.470	43.630	24.220	56.000	31.780
1 993.000	40.840	H	1.000	25.560	4.400	43.780	27.020	56.000	28.980
1 993.000	46.330	V	1.000	25.560	4.400	43.780	32.510	56.000	23.490
2 394.000	39.450	H	1.000	27.250	4.900	43.960	27.640	56.000	28.360
2 594.000	40.200	V	1.000	28.090	5.190	44.050	29.430	56.000	26.570
4 902.000	38.710	H	1.000	33.050	6.990	44.320	34.430	60.000	25.570
4 902.000	38.510	V	1.000	33.050	6.990	44.320	34.230	60.000	25.770
5 959.000	35.320	H	1.000	36.410	7.810	44.440	35.100	60.000	24.900
6 000.000	35.270	V	1.000	36.550	7.680	44.430	35.070	60.000	24.930

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor
[dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0614-R3

Page (26) of (43)

- PoE Mode

- PK

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 128.000	63.830	V	1.000	21.140	3.280	43.640	44.610	76.000	31.390
1 136.000	61.390	H	1.000	21.180	3.290	43.640	42.220	76.000	33.780
1 152.000	61.940	H	1.000	21.270	3.320	43.640	42.890	76.000	33.110
1 200.000	60.970	V	1.000	21.510	3.380	43.640	42.220	76.000	33.780
1 592.000	51.520	H	1.000	23.520	3.850	43.660	35.230	76.000	40.770
1 993.000	55.450	H	1.000	25.560	4.400	43.780	41.630	76.000	34.370
1 993.000	61.520	V	1.000	25.560	4.400	43.780	47.700	76.000	28.300
2 386.000	52.490	V	1.000	27.220	4.890	43.960	40.640	76.000	35.360
2 594.000	55.120	V	1.000	28.090	5.190	44.050	44.350	76.000	31.650
4 894.000	49.880	H	1.000	33.030	7.000	44.320	45.590	80.000	34.410
5 895.000	46.940	H	1.000	36.200	7.770	44.450	46.460	80.000	33.540
5 951.000	46.730	V	1.000	36.390	7.800	44.440	46.480	80.000	33.520

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-16T0614-R3
Page (27) of (43)

- AV

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB /m]	Cable [dB]	AMP [dB]			
1 128.000	49.870	H	1.000	21.140	3.280	43.640	30.650	56.000	25.350
1 128.000	50.210	V	1.000	21.140	3.280	43.640	30.990	56.000	25.010
1 200.000	42.230	H	1.000	21.510	3.380	43.640	23.480	56.000	32.520
1 993.000	61.280	H	1.000	25.560	4.400	43.780	47.460	56.000	8.540
1 993.000	48.180	V	1.000	25.560	4.400	43.780	34.360	56.000	21.640
2 185.000	38.350	H	1.000	26.380	4.760	43.870	25.620	56.000	30.380
2 394.000	38.340	V	1.000	27.250	4.900	43.960	26.530	56.000	29.470
2 594.000	40.230	V	1.000	28.090	5.190	44.050	29.460	56.000	26.540
4 902.000	38.770	H	1.000	33.050	6.990	44.320	34.490	60.000	25.510
4 902.000	38.810	V	1.000	33.050	6.990	44.320	34.530	60.000	25.470
5 975.000	35.440	H	1.000	36.470	7.820	44.430	35.300	60.000	24.700
6 000.000	35.550	V	1.000	36.550	7.680	44.430	35.350	60.000	24.650

◆ Calculation


Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration

Conducted Voltage Emissions


- AC 24 V Mode

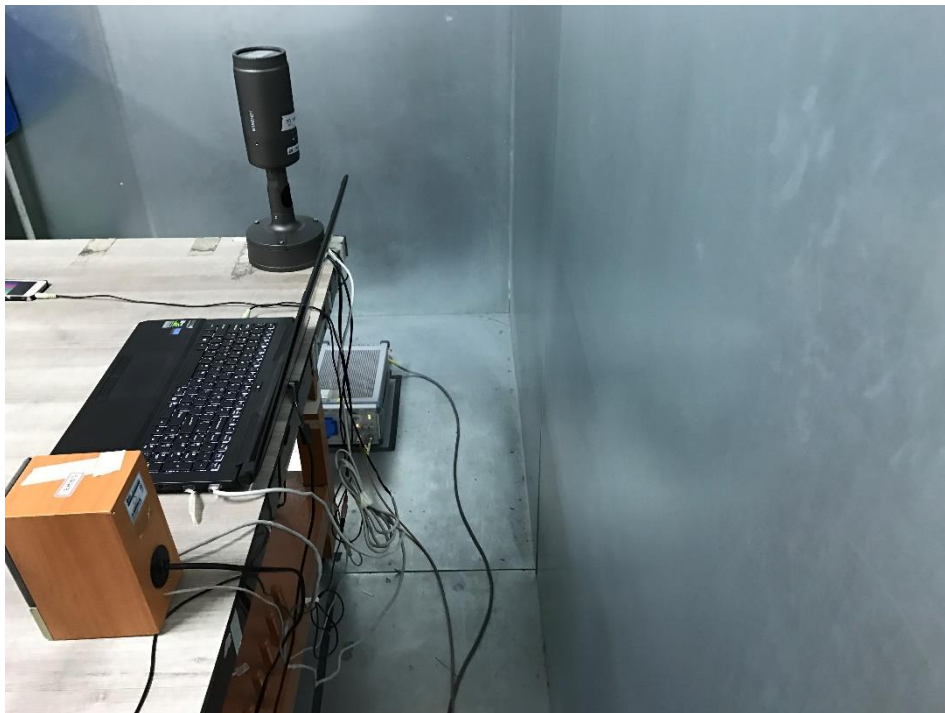

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

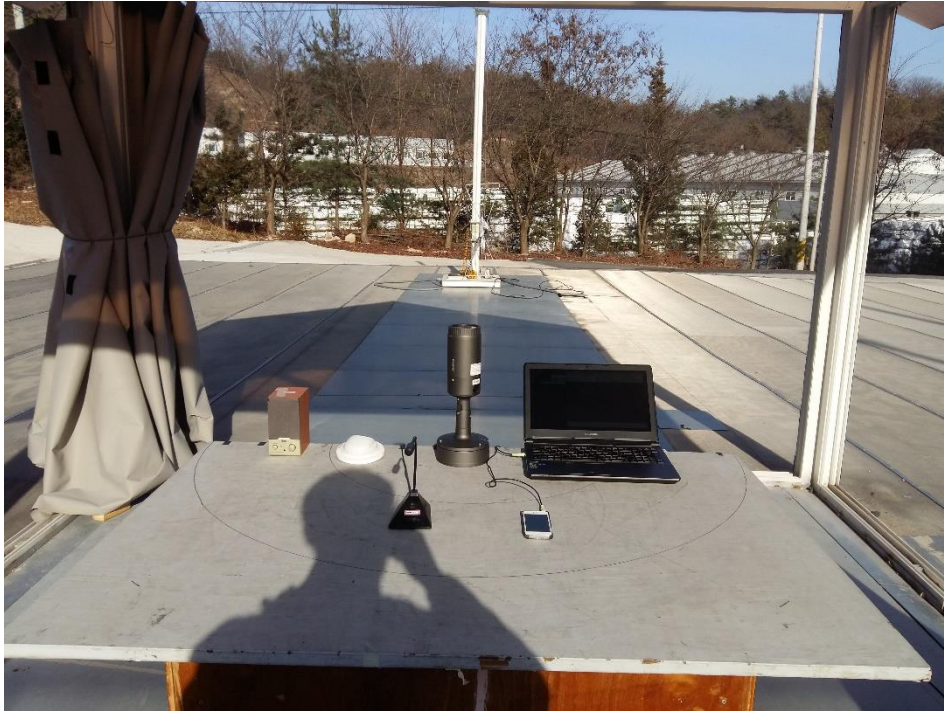


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

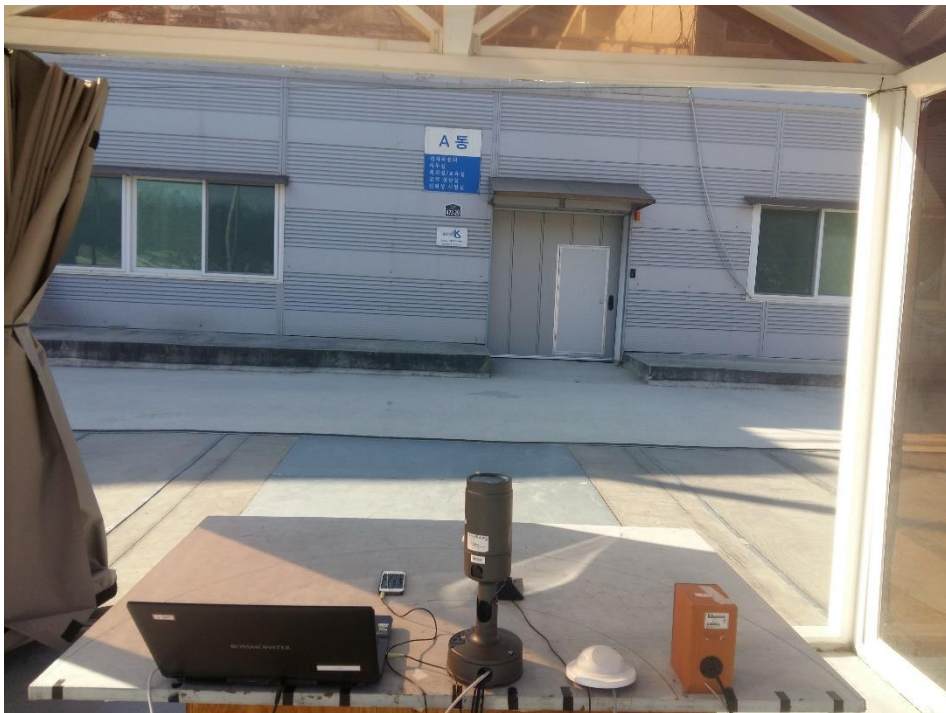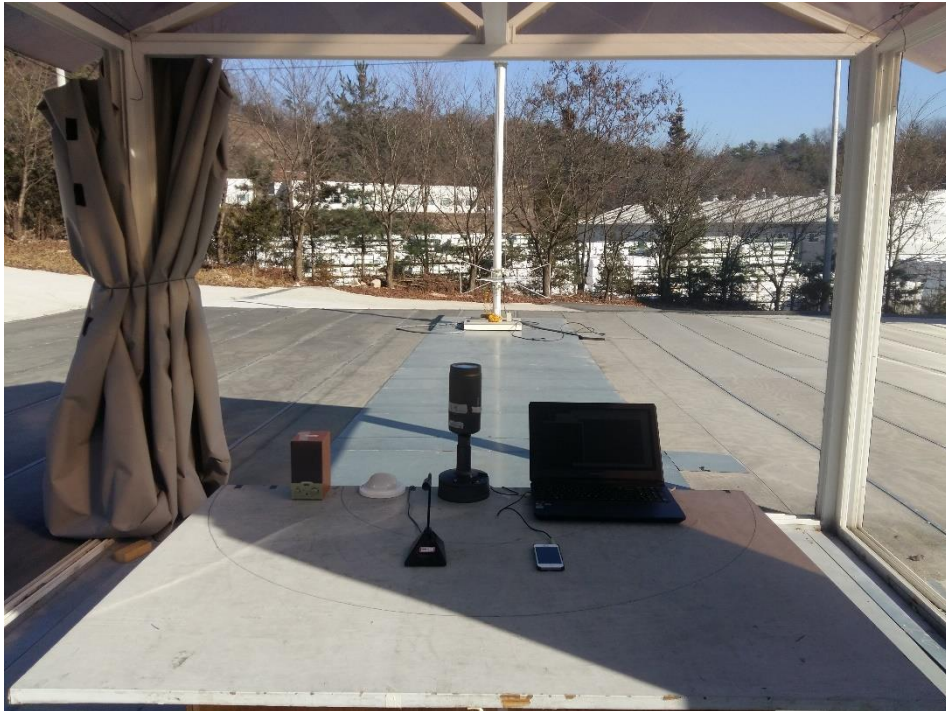



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- PoE Mode

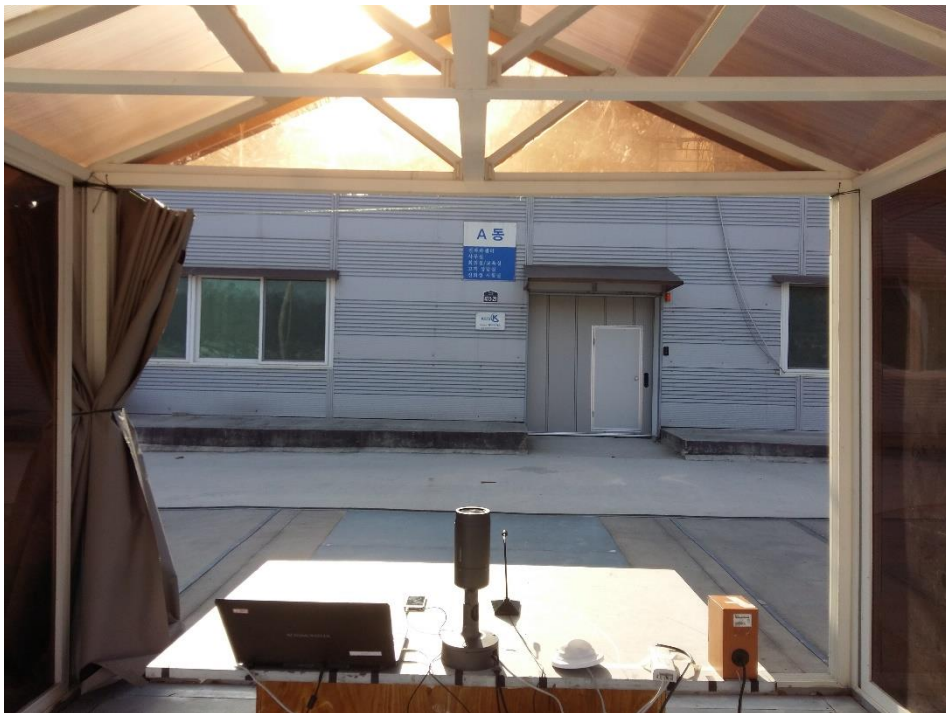



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

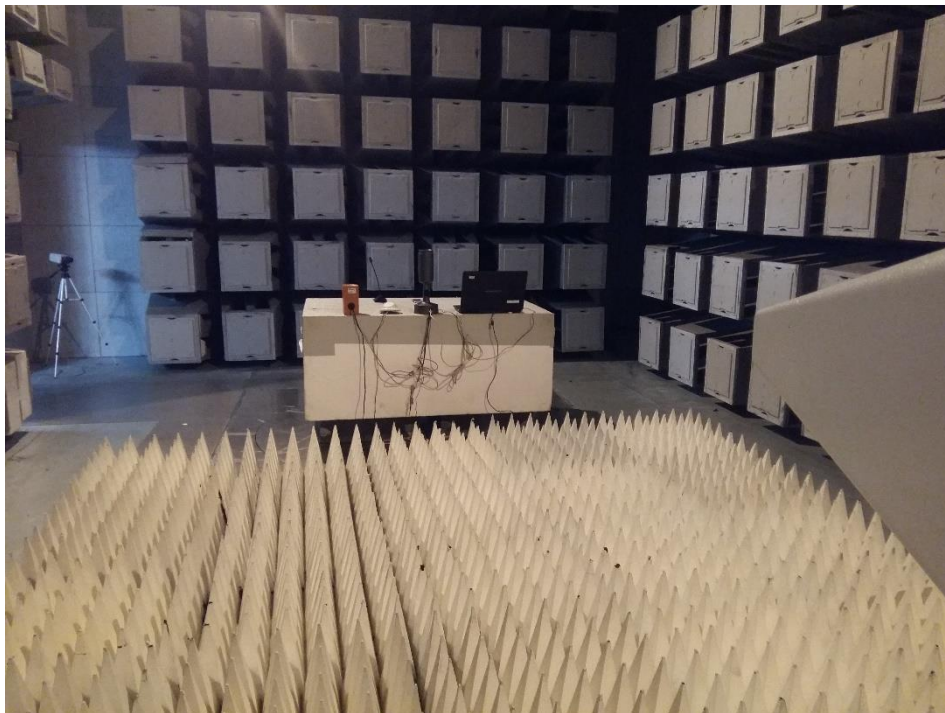
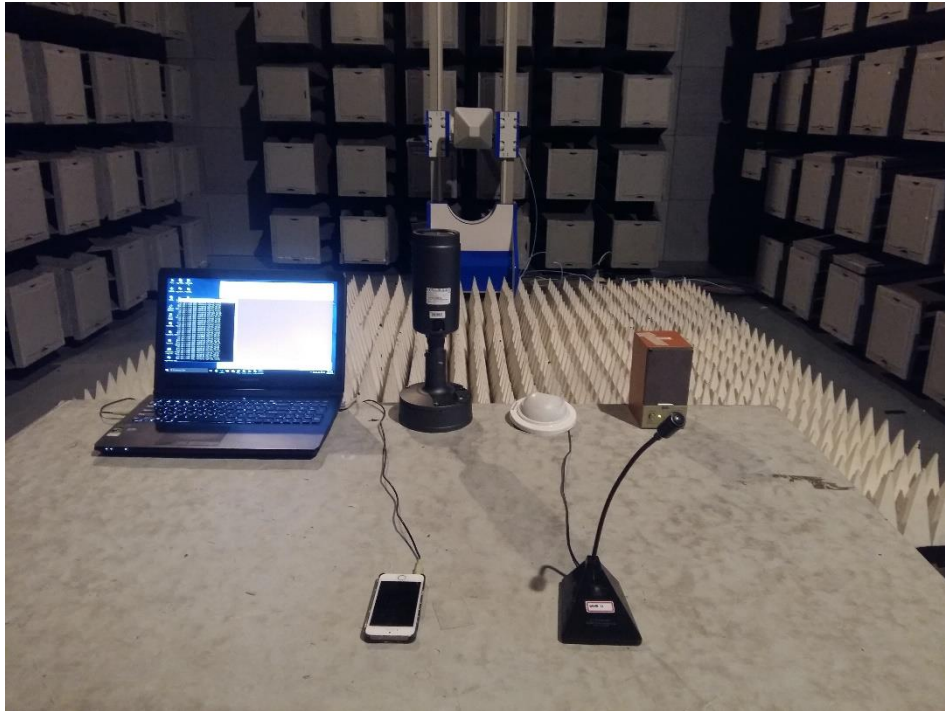


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

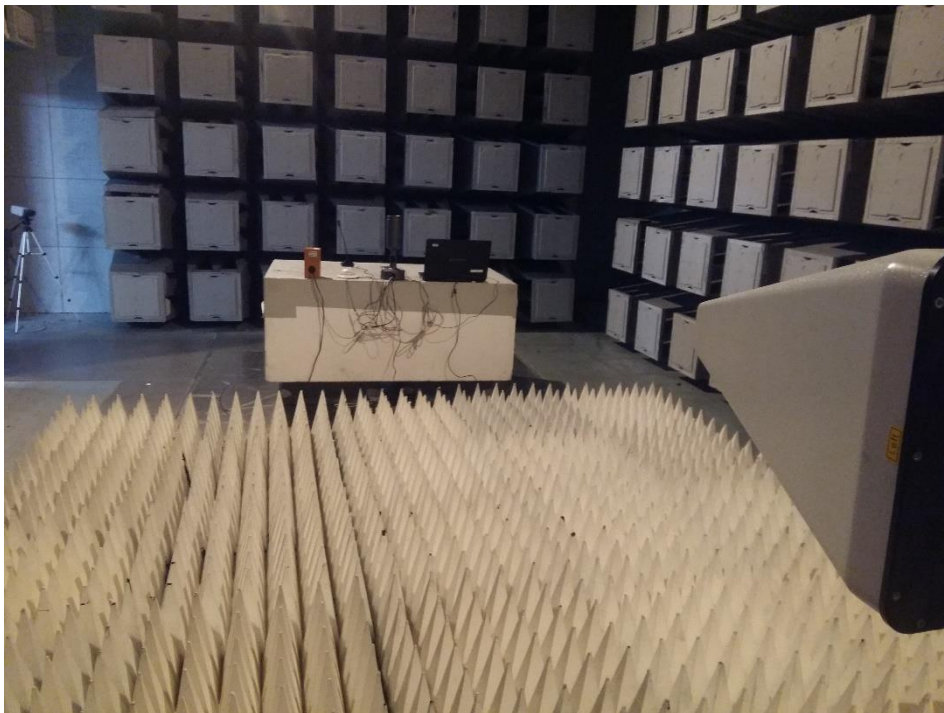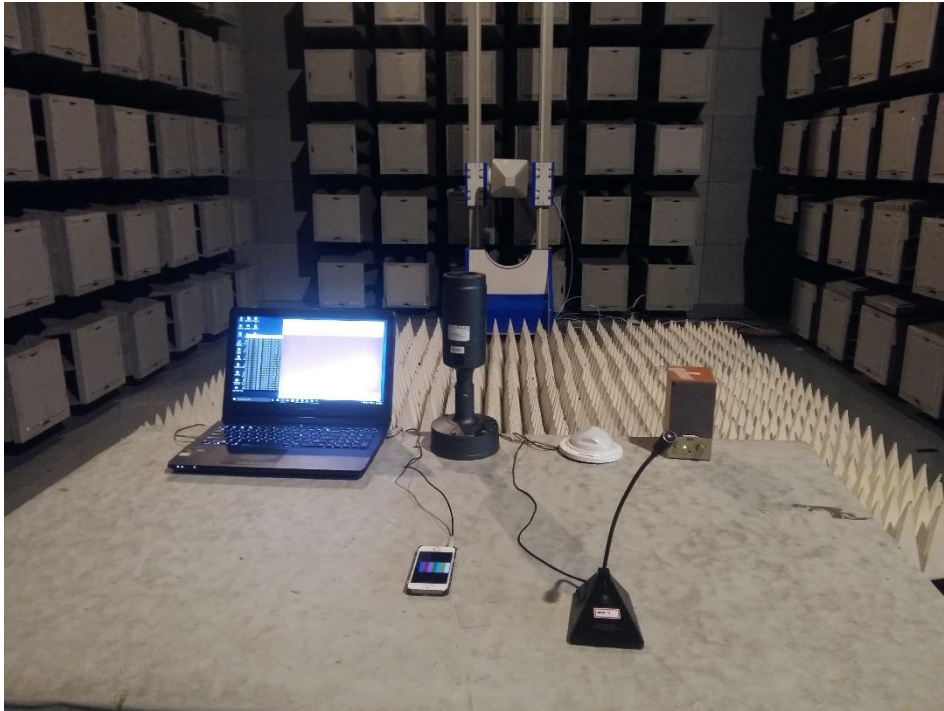

- PoE Mode

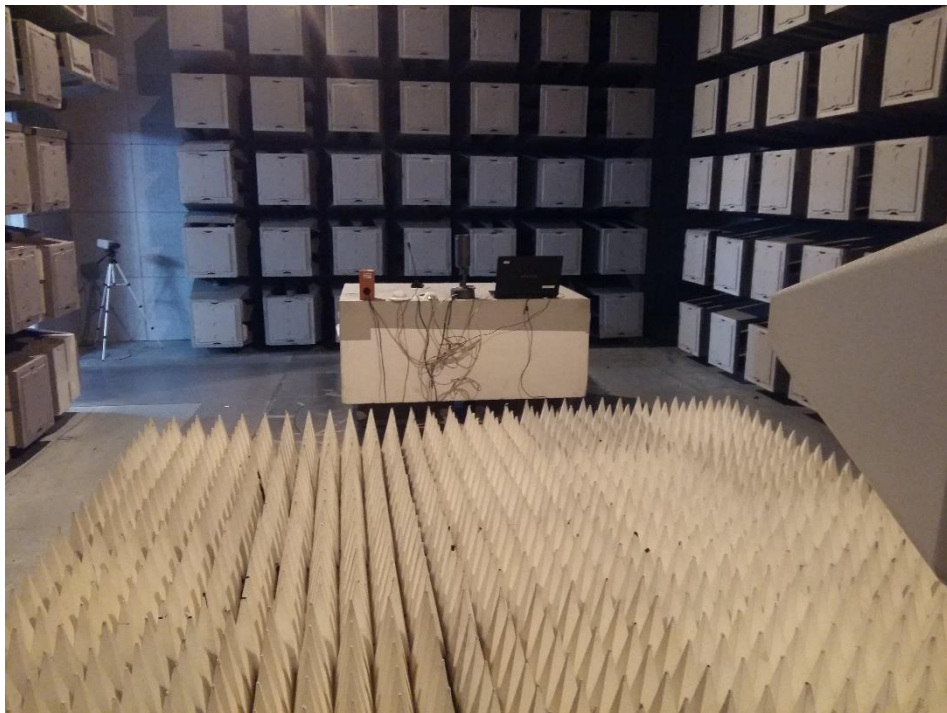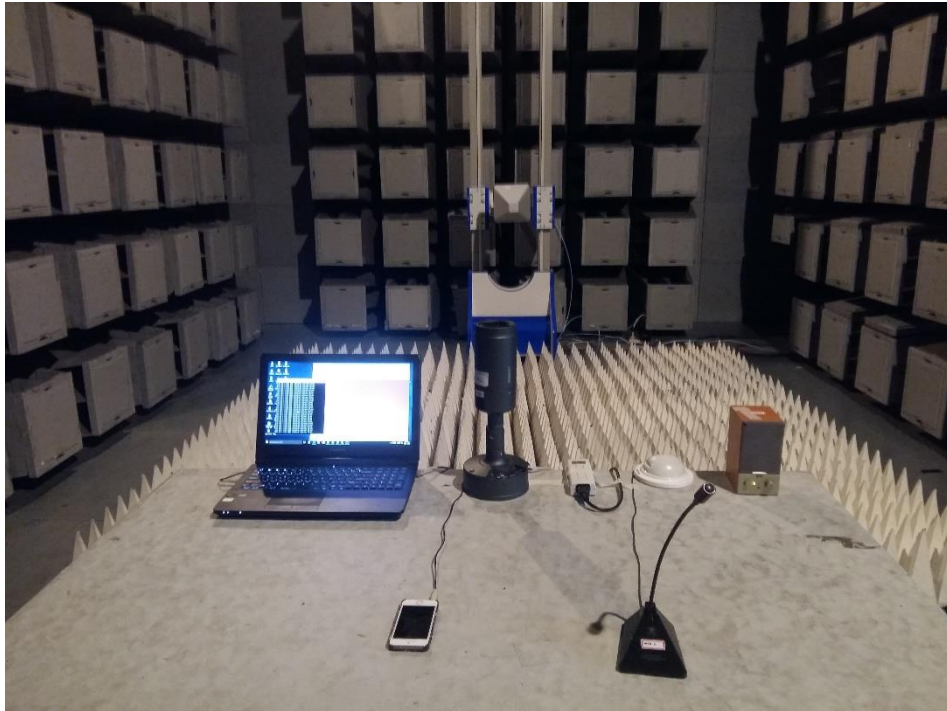

EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)



EUT Internal View – Main board

(Top)

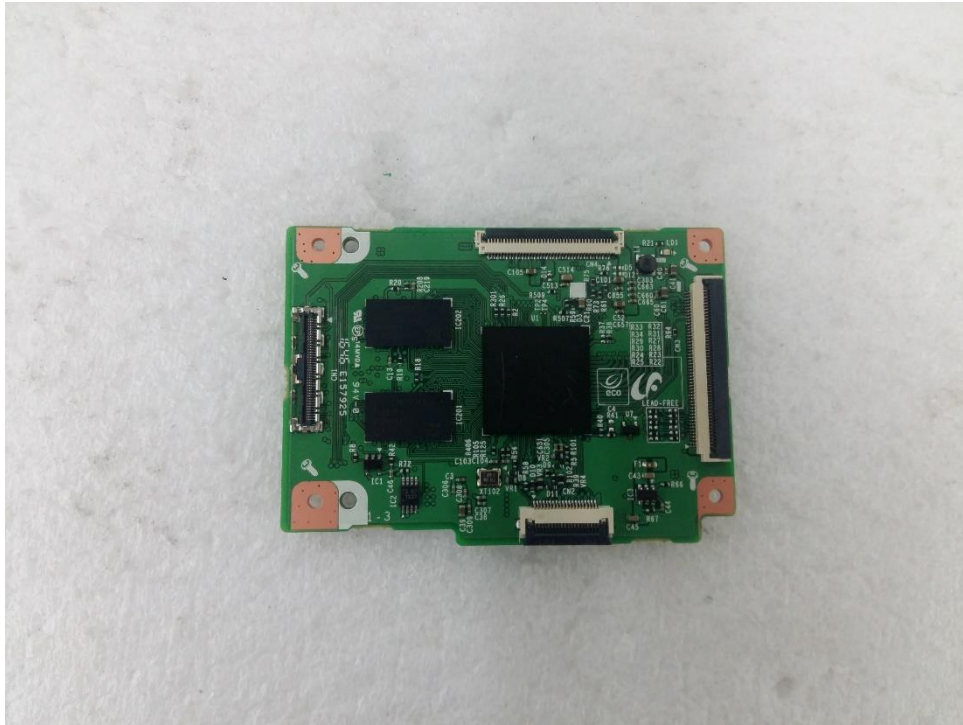


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub board

(Top)

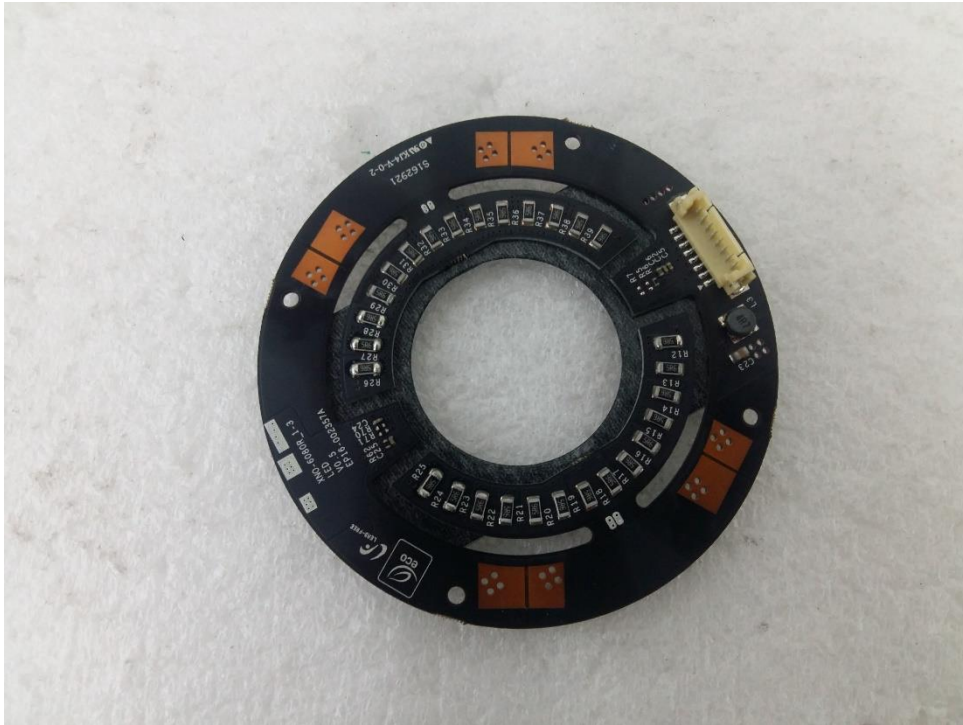

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Switch Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power Board

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens Board

(Top)

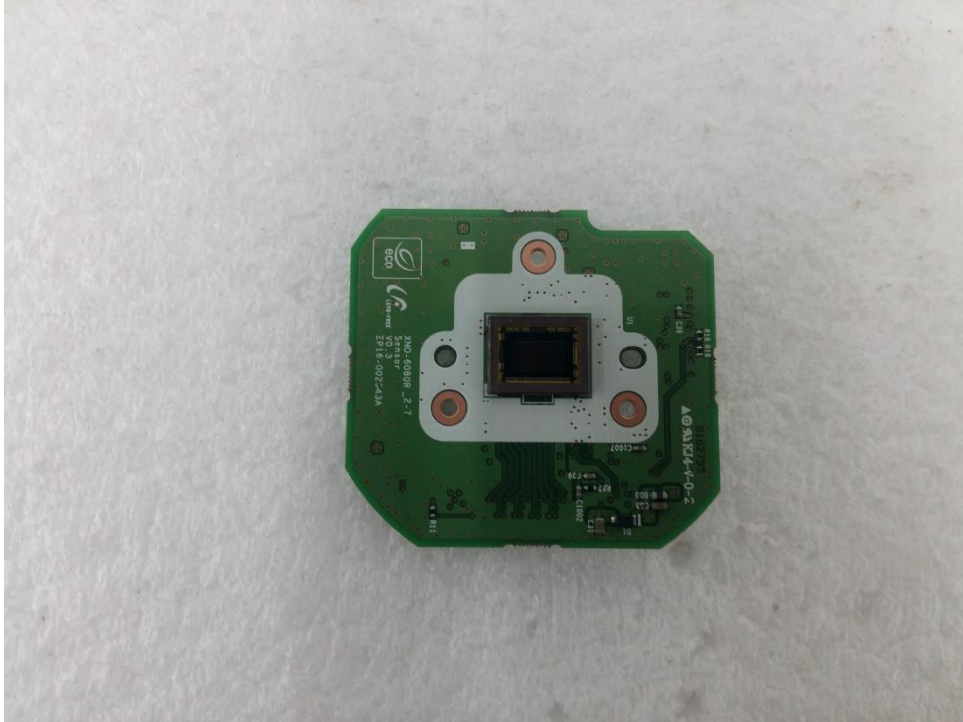


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View Camera Lens


(Top)

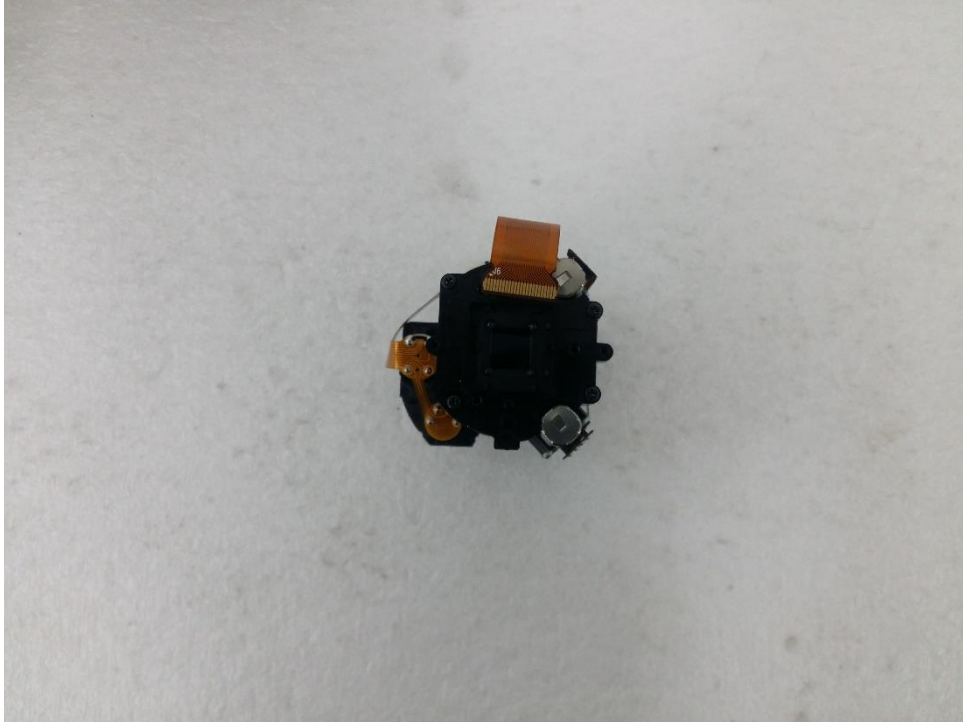

(Bottom)



Label Photographs

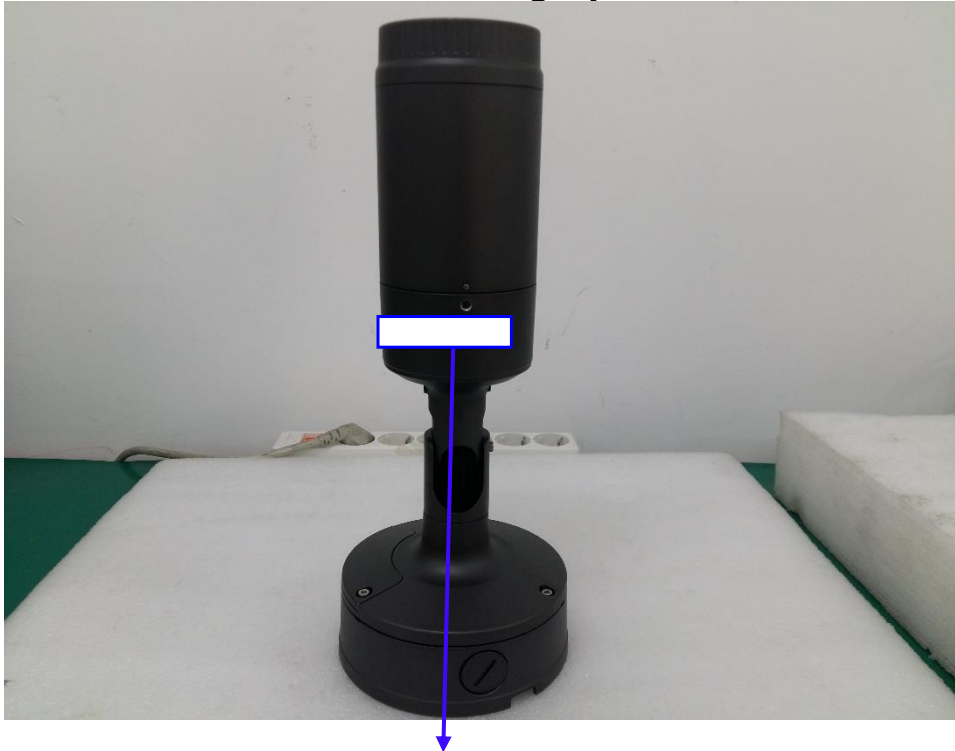

This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.