



## EMC TEST REPORT

Test Report No. : KES-EM-22T0650-R1  
Date of Issue : Feb. 24, 2023  
Product name : NETWORK CAMERA  
Model/Type No. : XNO-6083R  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Jul. 08, 2022  
Test date : Jul. 09, 2022 ~ Jul. 15, 2022  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong-Hyun, Won  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



## REPORT REVISION HISTORY

| Date          | Test Report No.   | Revision History                                                     |
|---------------|-------------------|----------------------------------------------------------------------|
| Jul. 28, 2022 | KES-EM-22T0650    | Issued                                                               |
| Feb. 24, 2023 | KES-EM-22T0650-R1 | Change the Applicant and manufacturer at the request of the customer |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |
|               |                   |                                                                      |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

## TABLE OF CONTENTS

|                                                                       |                                                             |    |
|-----------------------------------------------------------------------|-------------------------------------------------------------|----|
| 1.0                                                                   | General Product Description .....                           | 4  |
| 1.1                                                                   | Test Voltage & Frequency .....                              | 7  |
| 1.2                                                                   | Variant Model Differences.....                              | 7  |
| 1.3                                                                   | Device Modifications .....                                  | 7  |
| 1.4                                                                   | Equipment Under Test.....                                   | 7  |
| 1.5                                                                   | Support Equipments .....                                    | 8  |
| 1.6                                                                   | External I/O Cabling .....                                  | 9  |
| 1.7                                                                   | EUT Operating Mode(s) .....                                 | 10 |
| 1.8                                                                   | Configuration.....                                          | 11 |
| 1.9                                                                   | Remarks when standards applied .....                        | 12 |
| 1.10                                                                  | Calibration Details of Equipment Used for Measurement ..... | 12 |
| 1.11                                                                  | Test Facility .....                                         | 12 |
| 1.12                                                                  | Laboratory Accreditations and Listings .....                | 13 |
| 2.0                                                                   | Test Regulations.....                                       | 14 |
| 2.1                                                                   | Conducted Emissions at Mains Power Ports .....              | 15 |
| 2.2                                                                   | Conducted Emissions at Telecommunication Ports .....        | 16 |
| 2.3                                                                   | Radiated Electric Field Emissions(Below 1 GHz) .....        | 17 |
| 2.4                                                                   | Radiated Electric Field Emissions(Above 1 GHz) .....        | 18 |
| 2.5                                                                   | Harmonic Current Emissions .....                            | 19 |
| 2.6                                                                   | Voltage Fluctuations and Flicker .....                      | 20 |
| 3.0                                                                   | Criteria for compliance .....                               | 21 |
| 3.1                                                                   | Electrostatic Discharge.....                                | 23 |
| 3.2                                                                   | Radiated Electric Field Immunity .....                      | 29 |
| 3.3                                                                   | Electrical Fast Transients/Bursts .....                     | 32 |
| 3.4                                                                   | Surge Transients .....                                      | 35 |
| 3.5                                                                   | Conducted Disturbance .....                                 | 39 |
| 3.6                                                                   | Voltage Dips and Short Interruptions .....                  | 43 |
| APPENDIX A – TEST DATA.....                                           |                                                             | 45 |
| Conducted Emissions at Mains Power Ports .....                        |                                                             | 45 |
| Conducted Emissions at Telecommunication Ports .....                  |                                                             | 47 |
| Radiated Electric Field Emissions(Below 1 GHz).....                   |                                                             | 49 |
| Radiated Electric Field Emissions(Above 1 GHz) .....                  |                                                             | 51 |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |                                                             | 53 |
| Test Setup Photos and Configuration .....                             |                                                             | 56 |
| Conducted Emissions at Mains Power Ports .....                        |                                                             | 56 |
| Conducted Emissions at Telecommunication Ports .....                  |                                                             | 57 |
| Radiated Electric Field Emissions(Below 1 GHz).....                   |                                                             | 59 |
| Radiated Electric Field Emissions(Above 1 GHz) .....                  |                                                             | 61 |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |                                                             | 63 |
| Electrostatic Discharge .....                                         |                                                             | 64 |
| Radiated Electric Field Immunity .....                                |                                                             | 65 |
| Electrical Fast Transients/Bursts .....                               |                                                             | 66 |
| Surge Transients .....                                                |                                                             | 67 |
| Conducted Disturbance .....                                           |                                                             | 68 |
| Voltage Dips and Short Interruptions .....                            |                                                             | 69 |
| EUT External Photographs .....                                        |                                                             | 70 |
| EUT Internal Photographs .....                                        |                                                             | 71 |



## 1.0 General Product Description

### Main Specifications of EUT are:

|                             | XNO-6083R                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Video</b>                |                                                                                                                                                                                                                                                                                                                                                                              |
| Imaging Device              | 1/2.8" progressive CMOS                                                                                                                                                                                                                                                                                                                                                      |
| Resolution                  | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240                                                                                                                                                                                                                                                            |
| Max. Framerate              | H.265/H.264: Max. 120fps/100fps(60Hz/50Hz)(WDR off)<br>Max. 60fps/50fps(60Hz/50Hz)(WDR on)<br>MJPEG: Max. 30fps/25fps(60Hz/50Hz)                                                                                                                                                                                                                                             |
| NETD                        | None                                                                                                                                                                                                                                                                                                                                                                         |
| Pixel Size                  | None                                                                                                                                                                                                                                                                                                                                                                         |
| Min. Illumination           | (TBD)<br>Color: 0.011Lux(F1.4, 1/30sec, 30IRE)<br>B/W : 0.0011Lux(F1.4, 1/30sec, 30IRE), 0Lux(IR LED on), 30/25fps<br><br>Color: 0.022Lux(F1.4, 1/60sec, 30IRE)<br>B/W : 0.0022Lux(F1.4, 1/60sec, 30IRE), 0Lux(IR LED on), 60/50fps<br><br>Color: 0.022Lux(F1.4, 1/60sec, 30IRE)<br>B/W : 0.0022Lux(F1.4, 1/60sec, 30IRE), 0Lux(IR LED on), 120/100fps                       |
| Video Out                   | CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation<br>USB: Micro USB Type B, 1280x720 for installation                                                                                                                                                                                                                                                  |
| Video Transmission Distance | None                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Lens</b>                 |                                                                                                                                                                                                                                                                                                                                                                              |
| Focal Length (Zoom Ratio)   | 2.8~12mm(4.3x) motorized varifocal                                                                                                                                                                                                                                                                                                                                           |
| Max. Aperture Ratio         | F1.4                                                                                                                                                                                                                                                                                                                                                                         |
| Angular Field of View       | H : 119.5°(Wide) ~ 27.9°(Tele)<br>V : 62.8°(Wide) ~ 15.7°(Tele)<br>D : 142.1°(Wide) ~ 32.0°(Tele)                                                                                                                                                                                                                                                                            |
| Min. Object Distance        | 0.5m(1.64ft)                                                                                                                                                                                                                                                                                                                                                                 |
| Focus Control               | Simple focus, Manual                                                                                                                                                                                                                                                                                                                                                         |
| Lens Type                   | DC auto iris with hall sensor (IR corrected)                                                                                                                                                                                                                                                                                                                                 |
| Mount Type                  | None                                                                                                                                                                                                                                                                                                                                                                         |
| Optional Lens               | None                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Pan / Tilt / Rotate</b>  |                                                                                                                                                                                                                                                                                                                                                                              |
| Pan / Tilt / Rotate Range   | None                                                                                                                                                                                                                                                                                                                                                                         |
| Pan Range                   | None                                                                                                                                                                                                                                                                                                                                                                         |
| Pan Speed                   | None                                                                                                                                                                                                                                                                                                                                                                         |
| Tilt Range                  | None                                                                                                                                                                                                                                                                                                                                                                         |
| Tilt Speed                  | None                                                                                                                                                                                                                                                                                                                                                                         |
| Rotate Range                | None                                                                                                                                                                                                                                                                                                                                                                         |
| Sequence                    | None                                                                                                                                                                                                                                                                                                                                                                         |
| Preset Accuracy             | None                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Operational</b>          |                                                                                                                                                                                                                                                                                                                                                                              |
| Camera Title                | Displayed up to 85 characters                                                                                                                                                                                                                                                                                                                                                |
| Direction Indicator         | None                                                                                                                                                                                                                                                                                                                                                                         |
| Day & Night                 | Auto(ICR)                                                                                                                                                                                                                                                                                                                                                                    |
| Backlight Compensation      | BLC, HLC, WDR, SDR                                                                                                                                                                                                                                                                                                                                                           |
| Wide Dynamic Range          | extremeWDR (150dB)                                                                                                                                                                                                                                                                                                                                                           |
| Digital Noise Reduction     | WiseNRⅡ(Based on AI engine), SSNR V                                                                                                                                                                                                                                                                                                                                          |
| Digital Image Stabilization | Support(built-in gyro sensor)                                                                                                                                                                                                                                                                                                                                                |
| Defog                       | Support                                                                                                                                                                                                                                                                                                                                                                      |
| Motion Detection            | 8ea, 8point Polygonal zones                                                                                                                                                                                                                                                                                                                                                  |
| Privacy Masking             | 32ea, Quadrangle zones<br>- Color : Gray, Green, Red, Blue, Black, White<br>- Mosaic                                                                                                                                                                                                                                                                                         |
| Gain Control                | Support                                                                                                                                                                                                                                                                                                                                                                      |
| White Balance               | ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor                                                                                                                                                                                                                                                                                                                           |
| LDC                         | Support (Fill/stretch mode)                                                                                                                                                                                                                                                                                                                                                  |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker (2~1/12,000sec)<br>Auto prefer shutter control(Based on AI engine)                                                                                                                                                                                                                                                                          |
| Digital PTZ                 | Support                                                                                                                                                                                                                                                                                                                                                                      |
| Video Rotation              | Flip, Mirror, Hallway view(90°/270°)                                                                                                                                                                                                                                                                                                                                         |
| Analytics                   | - Analytics events based on AI engine(NPU) : Object detection<br>(Person/Face/Vehicle(car/truck/bus/bicycle/motorcycle)/Licence plate), IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion)<br>- Analytics events : Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Shock detection, Appear/Disappear |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0650-R1  
Page (5) of (78)

|                                       |                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Business Intelligence                 | Based on AI engine(NPU) : People counting, Queue management, Heatmap                                                                                                                                                                                                                                                                                           |
| Serial Interface                      | None                                                                                                                                                                                                                                                                                                                                                           |
| Alarm I/O                             | 2 configurable I/O ports, DC 12V output(Max. 50mA)                                                                                                                                                                                                                                                                                                             |
| Alarm Triggers                        | Analytics, Network disconnect, Alarm input, App event, Time schedule                                                                                                                                                                                                                                                                                           |
| Alarm Events                          | When alarm trigger occurred<br>- File upload(image) : e-mail/FTP<br>- Notification : e-mail<br>- Recording : SD/SDHC/SDXC or NAS recording at event triggers<br>- Alarm output<br>- Handover(PTZ preset, Send message by HTTP/HTTPS/TCP)<br>- Audio clip playback<br>- PTZ preset                                                                              |
| Audio In                              | Selectable(mic in/line in)<br>Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm                                                                                                                                                                                                                                                                             |
| Audio Out                             | Line out, Max.output level: 1Vrms                                                                                                                                                                                                                                                                                                                              |
| IR Viewable Length                    | WiseIR 50m(164.04ft)(TBD)                                                                                                                                                                                                                                                                                                                                      |
| IR Illuminator (Optional)             | None                                                                                                                                                                                                                                                                                                                                                           |
| Water Removal                         | None                                                                                                                                                                                                                                                                                                                                                           |
| Auto Tracking                         | None                                                                                                                                                                                                                                                                                                                                                           |
| Coaxial Protocol                      | None                                                                                                                                                                                                                                                                                                                                                           |
| Color Palettes                        | None                                                                                                                                                                                                                                                                                                                                                           |
| <b>Radiometry</b>                     |                                                                                                                                                                                                                                                                                                                                                                |
| Temperature Detect Range              | None                                                                                                                                                                                                                                                                                                                                                           |
| Temperature Accuracy                  | None                                                                                                                                                                                                                                                                                                                                                           |
| Temperature Detection                 | None                                                                                                                                                                                                                                                                                                                                                           |
| Additional                            | None                                                                                                                                                                                                                                                                                                                                                           |
| <b>Network</b>                        |                                                                                                                                                                                                                                                                                                                                                                |
| Ethernet                              | Metal shielded RJ-45(10/100/1000BASE-T)                                                                                                                                                                                                                                                                                                                        |
| Video Compression                     | H.265/H.264: Main/High, MJPEG                                                                                                                                                                                                                                                                                                                                  |
| Audio Compression                     | G.711 u-law /G.726 Selectable<br>G.726(ADPCM) 8KHz, G.711 8KHz<br>G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps<br>AAC-LC: 48Kbps at 16KHz                                                                                                                                                                                                                             |
| Smart Codec                           | Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)                                                                                                                                                                                                                                                                                              |
| Video Quality Adjustment              | H.264/H.265: Target bitrate level control<br>MJPEG: Target bitrate level control                                                                                                                                                                                                                                                                               |
| Bitrate Control                       | H.264/H.265: CBR or VBR<br>MJPEG: VBR                                                                                                                                                                                                                                                                                                                          |
| Streaming                             | Unicast(20 users) / Multicast<br>Multiple streaming(Up to 10 profiles, 3 virtual channel support)                                                                                                                                                                                                                                                              |
| Protocol                              | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)                                                                                                                                                     |
| Security                              | TPM 2.0 (FIPS 140-2 level 2)<br>HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access log<br>802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)<br>Device Certificate(Hanwha Techwin Root CA, pre-installed)<br>Secure by default certificate(TBD)<br>Secure OS/Boot/Storage, Verify firmware forgery |
| Application Programming Interface     | ONVIF Profile S/G/T<br>SUNAPI(HTTP API)<br>Wisenet open platform                                                                                                                                                                                                                                                                                               |
| <b>General</b>                        |                                                                                                                                                                                                                                                                                                                                                                |
| Webpage Language                      | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian                                                                                                                                                                                                           |
| Web Viewer                            | None                                                                                                                                                                                                                                                                                                                                                           |
| Edge Storage                          | Micro SD/SDHC/SDXC 2slot Max. 1TB (512GB * 2)                                                                                                                                                                                                                                                                                                                  |
| Memory                                | 2GB RAM, 512MB Flash                                                                                                                                                                                                                                                                                                                                           |
| <b>Environmental &amp; Electrical</b> |                                                                                                                                                                                                                                                                                                                                                                |
| Operating Temperature / Humidity      | -50°C ~ +60°C(-58°F ~ +140°F)<br>NEMA TS-2 : 74°C<br>* Start up should be done at above -30°C<br>less than 95%RH(non-condensing)<br>Humidity control /w GORE vent                                                                                                                                                                                              |
| Storage Temperature / Humidity        | -50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH                                                                                                                                                                                                                                                                                                               |
| Certification                         | IP66/IP67, NEMA4X, IK10                                                                                                                                                                                                                                                                                                                                        |
| Input Voltage                         | PoE+(IEEE802.3at, Class4), 12VDC                                                                                                                                                                                                                                                                                                                               |
| Power Consumption                     | TBD<br>Power redundancy failover                                                                                                                                                                                                                                                                                                                               |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0650-R1  
Page (6) of (78)

|                                   |                                                     |
|-----------------------------------|-----------------------------------------------------|
| <b>Mechanical</b>                 |                                                     |
| Color / Material                  | White / Aluminum<br>Hard-coated window              |
| RAL Code                          | RAL7022                                             |
| Product Dimensions / Weight       | Ø91x368.6mm(Ø3.85"x14.51"), 2.2kg(4.85 lb) (TBD)    |
| Compatible Conduit hole / Gangbox | 3/4" (M25)<br>single, double, 4" octagon, 4" square |
| Hanging Mount (Dome)              | None                                                |
| Skin Cover (Dome)                 | None                                                |
| Weather Cap (Dome)                | None                                                |
| Power Module                      | None                                                |
| Backbox                           | None                                                |
| <b>DORI (EN62676-4 standard)</b>  |                                                     |
| Detect (25PPM/ 8PPF)              | Wide: 22.4m(73.47ft) / Tele: 154.6m(507.18ft)       |
| Observe (63PPM/ 19PPF)            | Wide: 9.0m(29.39ft) / Tele: 61.8m(202.87ft)         |
| Recognize (125PPM/ 38PPF)         | Wide: 4.5m(14.69ft) / Tele: 30.9m(101.44ft)         |
| Identify (250PPM/ 76PPF)          | Wide: 2.2m(7.35ft) / Tele: 15.5m(50.72ft)           |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V , 50 Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                                | Remarks |
|----------------|--------------|---------------|---------------------------------------------|---------|
| NETWORK CAMERA | XNO-6083R    | -             | HANWHA VISION<br>VIETNAM COMPANY<br>LIMITED | EUT     |



## 1.5 Support Equipments

| Description      | Model Number         | Serial Number     | Manufacturer                                 | Remarks |
|------------------|----------------------|-------------------|----------------------------------------------|---------|
| AC/DC Adapter    | 2ACB022F             | -                 | ChAnnel Well Technology (Guangzhou) Co.,Ltd. | -       |
| PoE Adapter      | PT-PSE109GBRO-AH     | -                 | Dongguan PROCET Network Technology Co.,Ltd   | -       |
| Notebook         | LG15N54              | 503NZWY038929     | LG Electronics Inc.                          | -       |
| Notebook Adapter | PA-1900-14           | OF2R2633487017764 | LITE-ON TECHNOLOGY COPORATION                | -       |
| Alarm            | PRO-SL               |                   | SENSOR PRO                                   | -       |
| Button Alarm     | -                    | -                 | -                                            | -       |
| Speaker          | BR1000A Cuve Black 2 | -                 | DONGGUAN EDIFIER TECHNOLOGY Co., Ltd         | -       |
| Mic              | MP1000               | -                 | -                                            | -       |
| SmartPhone       | iPhone 6s            | -                 | Apple Inc.                                   | -       |
| Micro SD Card    | -                    | -                 | SanDisk                                      | -       |

## 1.6 External I/O Cabling

### ■ DC MODE

| Start                |                    | END              |                    | Cable Spec. |        |
|----------------------|--------------------|------------------|--------------------|-------------|--------|
| Description          | I/O Port           | Description      | I/O Port           | Length      | Shield |
| NETWORK CAMERA (EUT) | 2 Pin              | AC/DC Adapter    | 2 Pin              | 1.6         | U      |
|                      | RJ-45              | Notebook         | RJ-45              | 3.0         | S      |
|                      | Alarm OUT          | Alarm            | Alarm IN           | 4.0         | U      |
|                      | Alarm IN           | Button Alarm     | Alarm OUT          | 3.5         | U      |
|                      | 3.5 mm             | Speaker          | 3.5 mm             | 1.7         | U      |
|                      | 3.5 mm             | Mic              | 3.5 mm             | 1.8         | U      |
|                      | Micro SD Card Slot | Micro SD Card    | Micro SD Card Slot | -           | -      |
| Notebook             | 3.5 mm             | SmartPhone       | 3.5 mm             | 1.1         | U      |
|                      | DC Jack            | Notebook Adapter | DC Jack            | 1.9         | S      |

\* Unshielded=U, Shielded=S

### ■ PoE MODE

| Start                |                    | END              |                    | Cable Spec. |        |
|----------------------|--------------------|------------------|--------------------|-------------|--------|
| Description          | I/O Port           | Description      | I/O Port           | Length      | Shield |
| NETWORK CAMERA (EUT) | RJ-45              | PoE Adapter      | RJ-45              | 3.0         | S      |
|                      | Alarm OUT          | Alarm            | Alarm IN           | 4.0         | U      |
|                      | Alarm IN           | Button Alarm     | Alarm OUT          | 3.5         | U      |
|                      | 3.5 mm             | Speaker          | 3.5 mm             | 1.7         | U      |
|                      | 3.5 mm             | Mic              | 3.5 mm             | 1.8         | U      |
|                      | Micro SD Card Slot | Micro SD Card    | Micro SD Card Slot | -           | -      |
| PoE Adapter          | RJ-45              | Notebook         | RJ-45              | 2.0         | S      |
| Notebook             | 3.5 mm             | SmartPhone       | 3.5 mm             | 1.1         | U      |
|                      | DC Jack            | Notebook Adapter | DC Jack            | 1.9         | S      |

\* Unshielded=U, Shielded=S



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0650-R1  
Page (10) of (78)

### 1.7 EUT Operating Mode(s)

#### ■ DC, PoE MODE

| Test Mode  | operating                                                                                                            |
|------------|----------------------------------------------------------------------------------------------------------------------|
| - DC Mode  | Check the Normal Operation status.<br>after testing, check if the recording is normally done on the Micro SD<br>Card |
| - PoE Mode |                                                                                                                      |


| EUT Test operating S/W |         |                        |
|------------------------|---------|------------------------|
| Name                   | Version | Manufacture Company    |
| Web Viewer             | -       | Hanwha Vision Co., Ltd |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr


## 1.8 Configuration

■ AC Main  
 □ DC Main

### ■ DC MODE

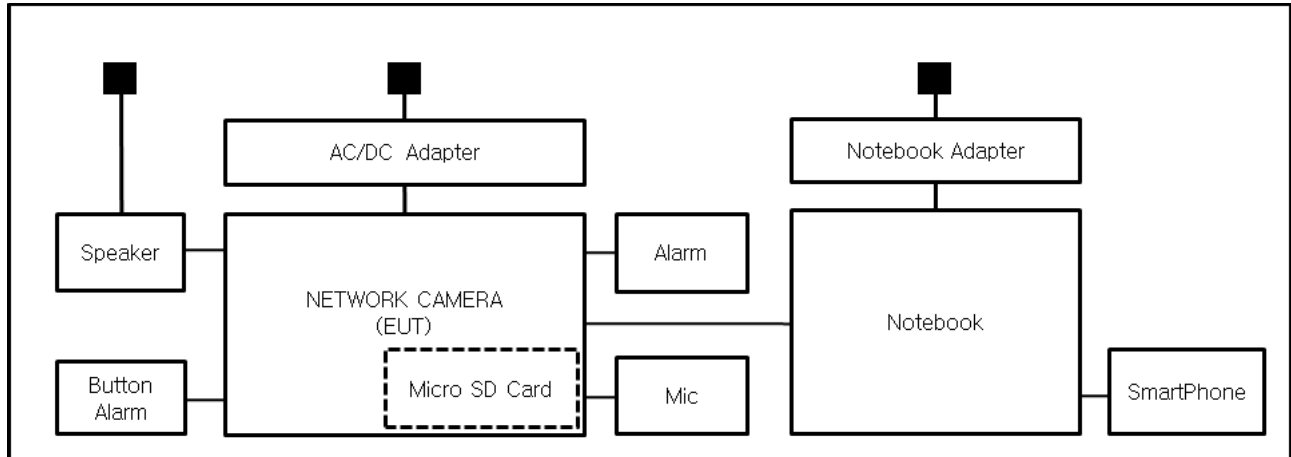

### ■ PoE MODE

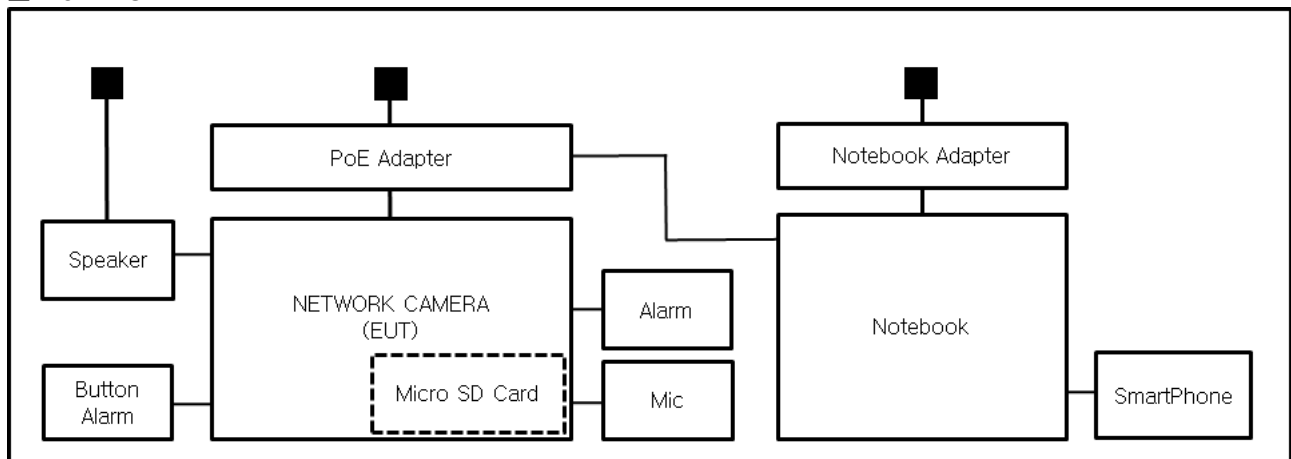

## 1.9 Remarks when standards applied

The USB, VIDEO ports were excluded from the test as administrator ports.



## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency         | Scope of Accreditation                                                                                                                  | Logo                                                                                                                           |
|---------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| KOREA         | <b>RRA</b>     | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KR0100                                  |
| International | <b>KOLAS</b>   | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KT489                                   |
| USA           | <b>FCC</b>     | 3 m & 10 m Semi-Anechoic Chamber<br>Conducted test site to perform FCC Part 15/18 measurements.                                         | <br>KR0100                                  |
| Canada        | <b>ISED</b>    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site                                                                                | <br>23298                                  |
| JAPAN         | <b>VCCI</b>    | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)                                                                          | <br>C-20136, T-20137,<br>R-20181, G-20176 |
| Europe        | <b>TÜV SÜD</b> | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>CARAT 001633 0004                     |

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

Jul. 09, 2022

### Test Location

Electro wave Shieldroom #6

### Test Equipment

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101783        | 12, 28, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 12, 27, 2022 |

### Test Conditions

Temperature: (24,4 ± 0,1) °C

Relative Humidity: (44,7 ± 0,1) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Jul. 09, 2022

### Test Location

Electro wave Shieldroom #6

### Test Equipment

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101783        | 12, 28, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 12, 27, 2022 |
| <input type="checkbox"/>            | 8-WIRE ISN CAT3,5 | ENY81        | R & S        | 100174        | 12, 28, 2022 |
| <input type="checkbox"/>            | 8-WIRE ISN CAT6   | ENY81-CAT6   | R & S        | 101665        | 12, 28, 2022 |
| <input checked="" type="checkbox"/> | ISN               | ISN S8       | SCHWARZBECK  | ISN-S8-0019   | 03, 07, 2023 |

### Test Conditions

Temperature: (24,4 ± 0,1) °C  
Relative Humidity: (44,7 ± 0,1) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Jul. 09, 2022

### Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 715           | 12, 08, 2022 |
| <input checked="" type="checkbox"/> | ATTENUATOR               | 8491A        | HP               | 32173         | 03, 08, 2023 |

### Test Conditions

Temperature: (24,3 ± 0,1) °C  
Relative Humidity: (44,2 ± 0,1) % R.H.

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

Jul. 12, 2022

**Test Location**

SEMI ANECHOIC CHAMBER #5

**Test Equipment**

| Used                                | Description       | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | ES10/RE      | TOYO Corporation | 2022.01.000   | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESU26        | Rohde & Schwarz  | 100552        | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | HORN ANTENNA      | BBHA 9120D   | SCHWARZBECK      | 9120D-1802    | 12, 16, 2022 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER      | 8449B        | HP               | 3008A00538    | 06, 02, 2023 |

**Test Conditions**

Temperature: (24,6 ± 0,2) °C

Relative Humidity: (45,5 ± 0,1) % R.H.

**Frequency Range of Measurement**

1 GHz to 6 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.5 Harmonic Current Emissions

### Test Date

Jul. 09, 2022

### Test Location

Electro wave Shieldroom #3

### Test Equipment

| Used                                | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W           | net.control  | EM TEST      | 2.1.4         | -            |
| <input checked="" type="checkbox"/> | DIGITAL POWER ANALYZER | DPA 500N     | EM TEST      | V1024106759   | 04, 06, 2023 |
| <input checked="" type="checkbox"/> | POWER SOURCE           | ACS 500N6    | EM TEST      | V1024106760   | -            |

### Test Conditions

Temperature: (24,4 ± 0,1) °C

Relative Humidity: (46,3 ± 0,1) % R.H.

### Classification of Equipment for Harmonic Current Emissions

- ☒ Class A  
☐ Class B  
☐ Class C(Below 25 W)  
☐ Class C(Above 25 W)  
☐ Class D

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.6 Voltage Fluctuations and Flicker

### Test Date

Jul. 09, 2022

### Test Location

Electro wave Shieldroom #3

### Test Equipment

| Used                                | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W           | net.control  | EM TEST      | 2.1.4         | -            |
| <input checked="" type="checkbox"/> | DIGITAL POWER ANALYZER | DPA 500N     | EM TEST      | V1024106759   | 04, 06, 2023 |
| <input checked="" type="checkbox"/> | POWER SOURCE           | ACS 500N6    | EM TEST      | V1024106760   | -            |

### Test Conditions

Temperature: (24,4 ± 0,1) °C

Relative Humidity: (46,3 ± 0,1) % R.H.

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family  
standard: Immunity requirements for components of fire, intruder and social alarm systems

**The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.**

**If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.**

**A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:**

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

---

### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .  
For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:  
(a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)  
(b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could  
still be used; and  
(c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the conditioning is permissible, providing that there is no  
residual  
change in the EUT or any change in outputs, which could be interpreted by associated  
equipment  
as a change. The EUT shall meet the acceptance criteria for the functional test, after the  
conditioning.

### 3.1 Electrostatic Discharge

#### Reference Standard

EN 61000-4-2:2009

#### Test Date

Jul. 12, 2022

#### Test Location

EMS-ESD: Electro wave Shieldroom #7

#### Test Equipment

| Used                                | Description   | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | ESD SIMULATOR | ESS-2000     | Noise Ken    | ESS01Z0454    | 02, 24, 2023 |
| <input checked="" type="checkbox"/> | HCP           | -            | KES          | -             | -            |
| <input checked="" type="checkbox"/> | VCP           | -            | Noise Ken    | -             | -            |

#### Test Conditions

Temperature: (24,6 ± 0,1) °C  
Relative Humidity: (45,7 ± 0,1) % R.H.  
Atmospheric Pressure: (99,5 ± 0,1) kPa

#### Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge


|                    |                                                                                                                                                                                                 |                                                                                                                                                                                                                   |                                                                                                                                                                                             |                                                                                                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Discharge Voltage: | <b>Contact</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>Air</b><br><input checked="" type="checkbox"/> 2 kV<br><input checked="" type="checkbox"/> 4 kV<br><input type="checkbox"/> 6 kV<br><input checked="" type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>HCP</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>VCP</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Notes: HCP: Horizontal coupling plane  
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

**Location of Discharge:**

|         |
|---------|
| Air     |
| Contact |



■ DC MODE

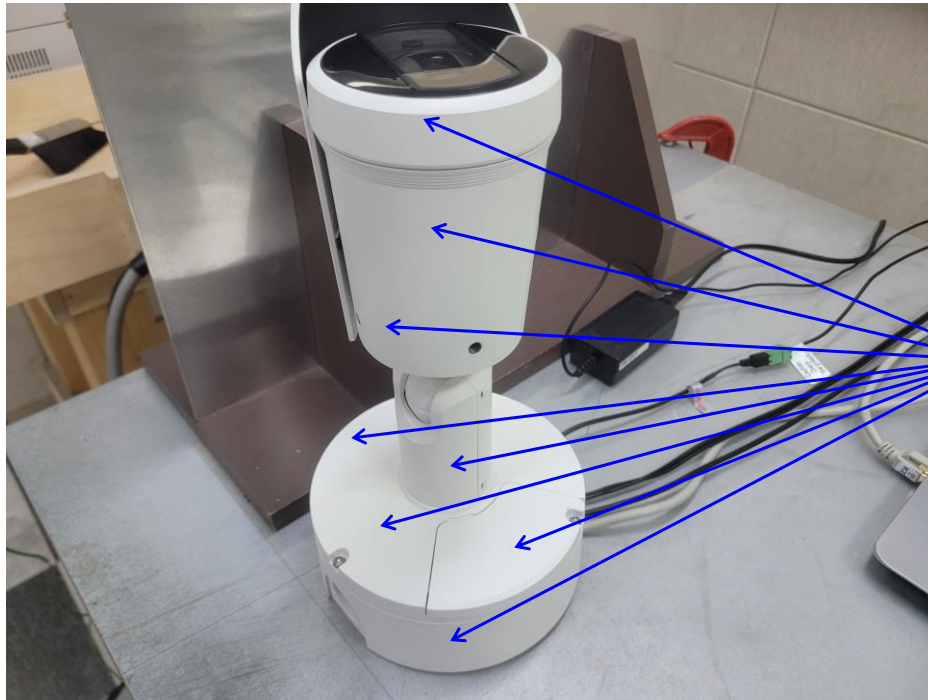


1



2


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

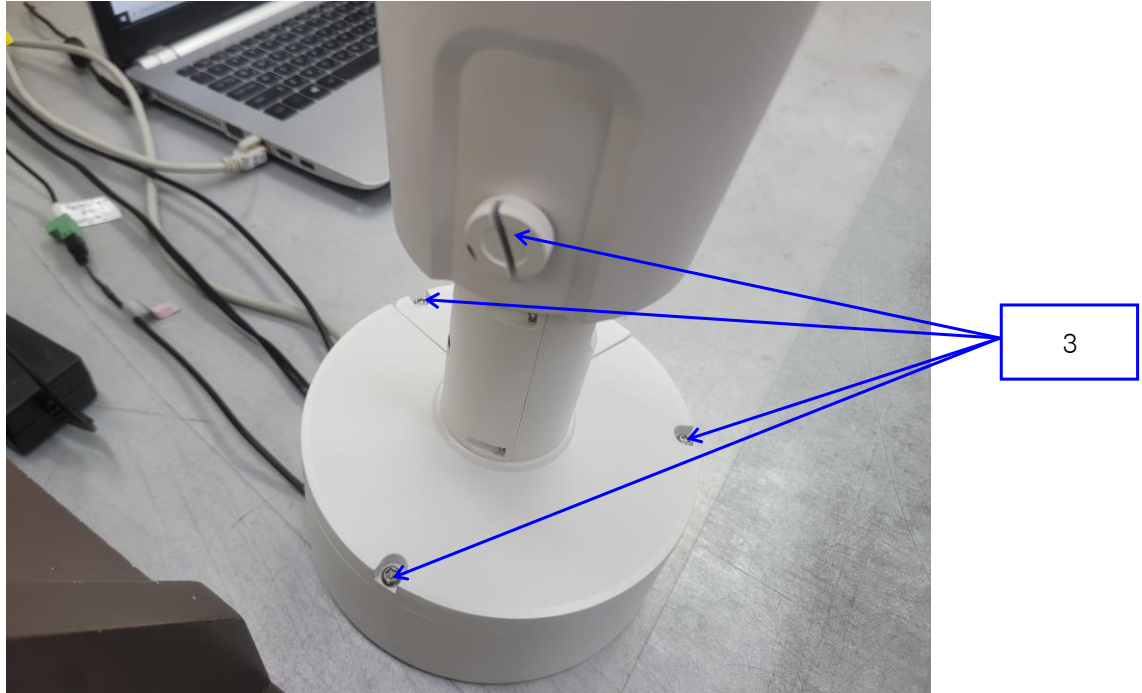

**■ PoE MODE**

[시험기자재]



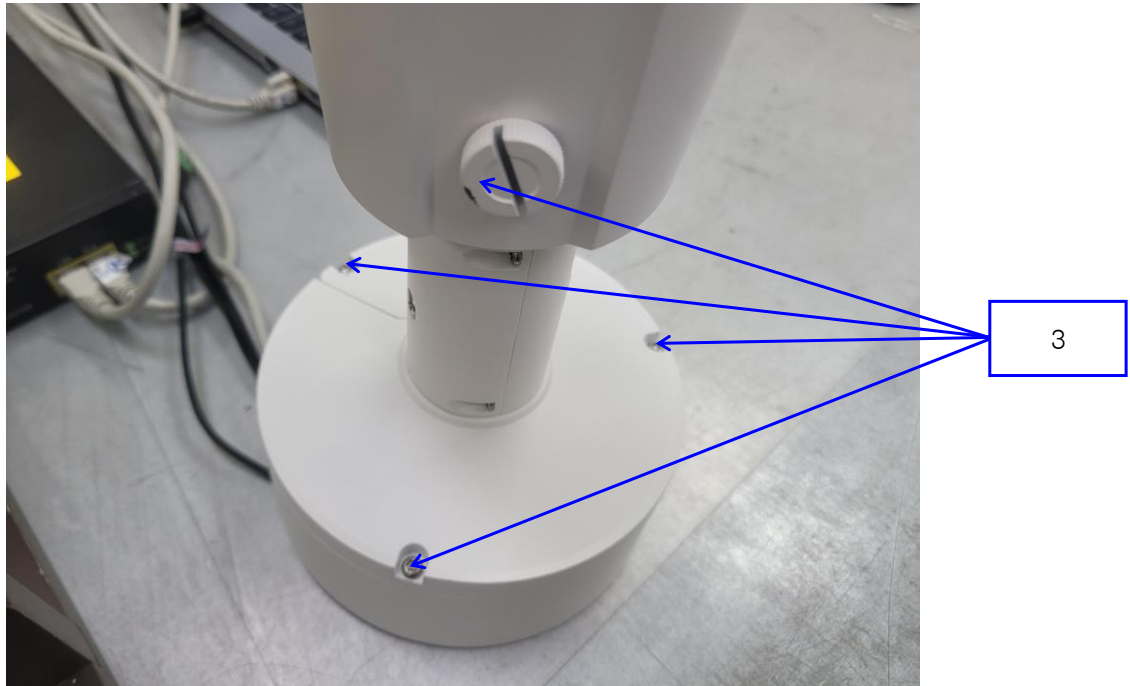

## Test Data

### ■ DC MODE

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

### Direct Discharge

| No. | Test Point | Discharge Method  | Observations | Remarks |
|-----|------------|-------------------|--------------|---------|
| 1   | Enclosure  | Contact Discharge | Complied     | -       |
| 2   | Lens       | Air Discharge     | Complied     | -       |
| 3   | Screw      | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

### ■ PoE MODE

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

### Direct Discharge

| No. | Test Point | Discharge Method  | Observations | Remarks |
|-----|------------|-------------------|--------------|---------|
| 1   | Enclosure  | Contact Discharge | Complied     | -       |
| 2   | Lens       | Air Discharge     | Complied     | -       |
| 3   | Screw      | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

Observations:  
Complied – No degradation of function

## Test Results

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

## Remarks

PASS Required Performance Criteria

## 3.2 Radiated Electric Field Immunity

### Reference Standard

EN IEC 61000-4-3:2020

### Test Date

Jul. 10, 2022

### Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

### Test Equipment

| Used                                | Description                     | Model Number | Manufacturer    | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------------|--------------|-----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W                    | EMC32        | R & S           | 10.10.02      | -            |
| <input checked="" type="checkbox"/> | SIGNAL GENERATOR                | SMB 100A     | Rohde & Schwarz | 108252        | 08, 03, 2022 |
| <input checked="" type="checkbox"/> | HIGH POWER DUAL AMP             | SSA532       | SUNGSAN         | SSA532-001    | -            |
| <input checked="" type="checkbox"/> | POWER METER                     | E4419B       | Agilent         | GB40203000    | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | AVERAGE POWER SENSOR            | E9301A       | Agilent         | MY52170007    | 04, 04, 2023 |
| <input checked="" type="checkbox"/> | AVERAGE POWER SENSOR            | E9301A       | Agilent         | MY41498669    | 04, 04, 2023 |
| <input checked="" type="checkbox"/> | STACKED DOUBLE LOG-PER- ANTENNA | STPL9128 E   | Schwarzbeck     | 9128ES-121    | -            |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA      | SAS-571      | A.H.SYSTEM,INC  | 781           | 03, 03, 2023 |

### Test Conditions

Temperature: (23,9 ± 0,2) °C  
Relative Humidity: (43,8 ± 0,1) % R.H.  
Atmospheric Pressure: (100,1 ± 0,1) kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-22T0650-R1

Page (30) of (78)

### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m  
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz  
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**Test Data**

## ■ DC MODE

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

## ■ PoE MODE

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**PASS Required Performance Criteria

### 3.3 Electrical Fast Transients/Bursts

#### Reference Standard

EN 61000-4-4:2012

#### Test Date

Jul. 15, 2022

#### Test Location

EMS-EFT: Electro wave Shieldroom #7

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | iec.control  | EM TEST      | 5.4.8         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR   | UCS 500N7    | EM TEST      | P1608172950   | 12, 03, 2022 |
| <input checked="" type="checkbox"/> | MOTOR VARIAC              | MV2616       | EM TEST      | P1552169719   | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | CAPACITIVE COUPLING CLAMP | HFK          | EM TEST      | P1633183115   | 12, 03, 2022 |

#### Test Conditions

Temperature: (24,6 ± 0,1) °C  
Relative Humidity: (45,1 ± 0,1) % R.H.  
Atmospheric Pressure: (100,0 ± 0,1) kPa

#### Test Specifications

Pulse Amplitude & Polarity: ☐ ± 1.0 kV ☒ ± 2.0 kV  
(AC Power Lines) ☐ ± 4.0 kV

Pulse Amplitude & Polarity: ☐ ± 0.5 kV ☒ ± 1.0 kV  
(Other supply / Signal Lines) ☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

## Test Data

### ■ DC MODE

☒ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| L                   | Complied       | Complied       |
| N                   | Complied       | Complied       |
| PE                  | -              | -              |
| L – N               | Complied       | Complied       |
| L – PE              | -              | -              |
| N – PE              | -              | -              |
| L – N – PE          | -              | -              |

☐ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45               | Complied       | Complied       |
| Alarm IN            | Complied       | Complied       |
| Alarm OUT           | Complied       | Complied       |

Note: “Blank” = Not performed

☒ **PoE MODE**

☐ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| L                   | -              | -              |
| N                   | -              | -              |
| PE                  | -              | -              |
| L – N               | -              | -              |
| L – PE              | -              | -              |
| N – PE              | -              | -              |
| L – N – PE          | -              | -              |

☐ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45               | Complied       | Complied       |
| Alarm IN            | Complied       | Complied       |
| Alarm OUT           | Complied       | Complied       |

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria

### 3.4 Surge Transients

**Reference Standard**

EN 61000-4-5:2014/A1:2017

**Test Date**

Jul. 15, 2022

**Test Location**

EMS-EFT: Electro wave Shieldroom #7

**Test Equipment**

| Used                                | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.4.8         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 12, 03, 2022 |
| <input checked="" type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | P1552169719   | 03, 31, 2023 |
| <input type="checkbox"/>            | CDN                     | CNV 508N1    | EM TEST      | P1610176296   | 12, 03, 2022 |

**Test Conditions**

Temperature: (24,6 ± 0,2) °C  
Relative Humidity: (45,1 ± 0,1) % R.H.  
Atmospheric Pressure: (100,0 ± 0,1) kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-22T0650-R1

Page (36) of (78)

### Test Specifications

#### AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

#### Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

### Test Data

■ DC MODE

☒ Line to Line – Differential Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – N               | Complied       | Complied       |

☐ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – PE              | -              | -              |
| N – PE              | -              | -              |

### Signal Lines

☒ Line to Earth – Common Mode

| Mode of Application | Coupling Method | Observations   |                |
|---------------------|-----------------|----------------|----------------|
|                     |                 | (+) Surge (kV) | (-) Surge (kV) |
| RJ-45               | CDN             | Complied       | Complied       |
|                     | LINE            | Complied       | Complied       |

Note: "Blank" = Not performed

☒ **PoE MODE**

☐ **Line to Line – Differential Mode**

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – N               | -              | -              |

☐ **Line to Earth – Common Mode**

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – PE              | -              | -              |
| N – PE              | -              | -              |

**Signal Lines**

☒ **Line to Earth – Common Mode**

| Mode of Application | Coupling Method | Observations   |                |
|---------------------|-----------------|----------------|----------------|
|                     |                 | (+) Surge (kV) | (-) Surge (kV) |
| RJ-45               | CDN             | Complied       | Complied       |
|                     | LINE            | Complied       | Complied       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☐ NOT APPLICABLE

**Remarks**

PASS Required Performance Criteria

### 3.5 Conducted Disturbance

#### Reference Standard

EN 61000-4-6:2014

#### Test Date

Jul. 13, 2022

#### Test Location

EMS-CS: Electro wave Shieldroom #6

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | icd.control  | EM TEST      | 5.3.12        | -            |
| <input checked="" type="checkbox"/> | CONTINUOUS WAVE SIMULATOR | CWS 500N1.4  | EM TEST      | P1602169880   | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | ATTENUATOR                | ATT 6/80     | EM TEST      | P1614178148   | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | CDN                       | CDN M016     | TESEQ        | 43694         | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | CDN                       | CDN M016     | TESEQ        | 43697         | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | CDN                       | CDN ST08A    | TESEQ        | 43886         | 11, 24, 2022 |
| <input type="checkbox"/>            | CDN                       | CDN T8RJ45   | EM TEST      | 0909-09       | 08, 03, 2022 |
| <input checked="" type="checkbox"/> | EM CLAMP                  | KEMZ 801A    | TESEQ        | 44099         | 11, 25, 2022 |

#### Test Conditions

Temperature: (24,0 ± 0,2) °C  
Relative Humidity: (45,0 ± 0,2) % R.H.  
Atmospheric Pressure: (99,7 ± 0,1) kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0650-R1  
Page (40) of (78)

### Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms  
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**Test Data**

## ■ DC MODE

☒ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| L – N                                | CDN             | Complied     |

☐ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| -                                    | -               | -            |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45                                | CDN             | Complied     |
| Alarm IN                             | Clamp           | Complied     |
| Alarm OUT                            | Clamp           | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

**■ PoE MODE**☐ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| -                                    | -               | -            |

☐ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| -                                    | -               | -            |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45                                | CDN             | Complied     |
| Alarm IN                             | Clamp           | Complied     |
| Alarm OUT                            | Clamp           | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**PASS Required Performance Criteria

### 3.6 Voltage Dips and Short Interruptions

**Reference Standard**

EN IEC 61000-4-11:2020

**Test Date**

Jul. 15, 2022

**Test Location**

EMS-Voltage dip: Electro wave Shieldroom #7

**Test Equipment**

| Used                                | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.4.8         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | P1552169719   | 03, 31, 2023 |

**Test Conditions**

Temperature: (24,6 ± 0,1) °C  
Relative Humidity: (45,1 ± 0,1) % R.H.  
Atmospheric Pressure: (100,0 ± 0,1) kPa



## Test Specifications & Observations/Remarks

### - Voltage Dips and Short Interruptions

| <u>Test Level</u>                             | <u>Duration [in period/ms (50 Hz)]</u>          | <u>Results</u>     |
|-----------------------------------------------|-------------------------------------------------|--------------------|
| <input checked="" type="checkbox"/> 20 % dip  | <input checked="" type="checkbox"/> 250 / 5 000 | <u>Complied</u>    |
| <input checked="" type="checkbox"/> 30 % dip  | <input checked="" type="checkbox"/> 25 / 500    | <u>Complied</u>    |
| <input checked="" type="checkbox"/> 60 % dip  | <input checked="" type="checkbox"/> 10 / 200    | <u>Complied</u>    |
| <input checked="" type="checkbox"/> 100 % dip | <input checked="" type="checkbox"/> 250 / 5 000 | <u>Degradation</u> |

### - Voltage variations

|                                                 |                                                  |                 |
|-------------------------------------------------|--------------------------------------------------|-----------------|
| <input checked="" type="checkbox"/> Unom + 10 % | <input checked="" type="checkbox"/> 253.0 V (ac) | <u>Complied</u> |
| <input checked="" type="checkbox"/> Unom - 15 % | <input checked="" type="checkbox"/> 195.5 V (ac) | <u>Complied</u> |

#### Observations:

Complied – No degradation of function

Degradation - See "Remarks "

### Test Results

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☐ NOT APPLICABLE

### Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

## APPENDIX A – TEST DATA


### Conducted Emissions at Mains Power Ports

■ DC MODE

[HOT]

### Common Information

Test Description: Conducted Emission  
 Model No.: XNO-6083R  
 Phase:  
 Mode: DC\_H  
 Operator Name: KES

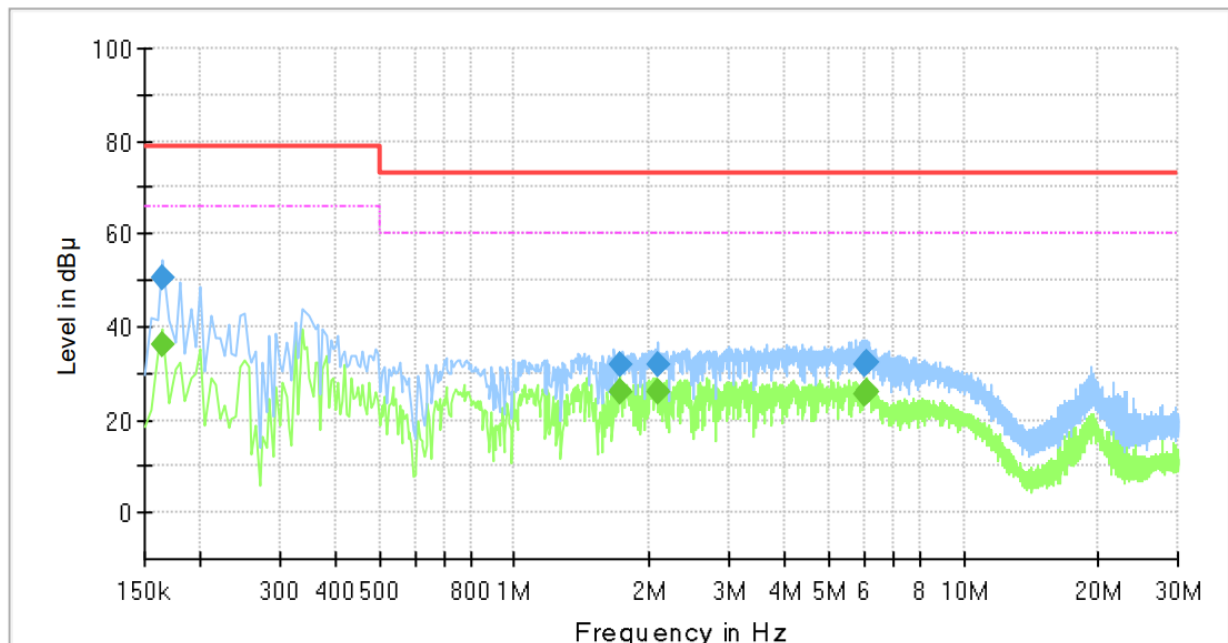


### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.165000        | ---              | 36.16           | 66.00        | 29.84       | 1000.0          | 9.000           | L1   | 19.4       |
| 0.165000        | 50.54            | ---             | 79.00        | 28.46       | 1000.0          | 9.000           | L1   | 19.4       |
| 1.710000        | ---              | 26.14           | 60.00        | 33.86       | 1000.0          | 9.000           | L1   | 20.3       |
| 1.710000        | 31.64            | ---             | 73.00        | 41.36       | 1000.0          | 9.000           | L1   | 20.3       |
| 2.080000        | ---              | 26.24           | 60.00        | 33.76       | 1000.0          | 9.000           | L1   | 20.3       |
| 2.080000        | 31.97            | ---             | 73.00        | 41.03       | 1000.0          | 9.000           | L1   | 20.3       |
| 6.005000        | ---              | 25.72           | 60.00        | 34.28       | 1000.0          | 9.000           | L1   | 19.5       |
| 6.005000        | 31.76            | ---             | 73.00        | 41.24       | 1000.0          | 9.000           | L1   | 19.5       |
| 6.090000        | ---              | 26.22           | 60.00        | 33.78       | 1000.0          | 9.000           | L1   | 19.5       |
| 6.090000        | 32.25            | ---             | 73.00        | 40.75       | 1000.0          | 9.000           | L1   | 19.5       |

**[NEUTRAL]**

## Common Information

Test Description: Conducted Emission  
 Model No.: XNO-6083R  
 Phase:  
 Mode: DC\_N  
 Operator Name: KES

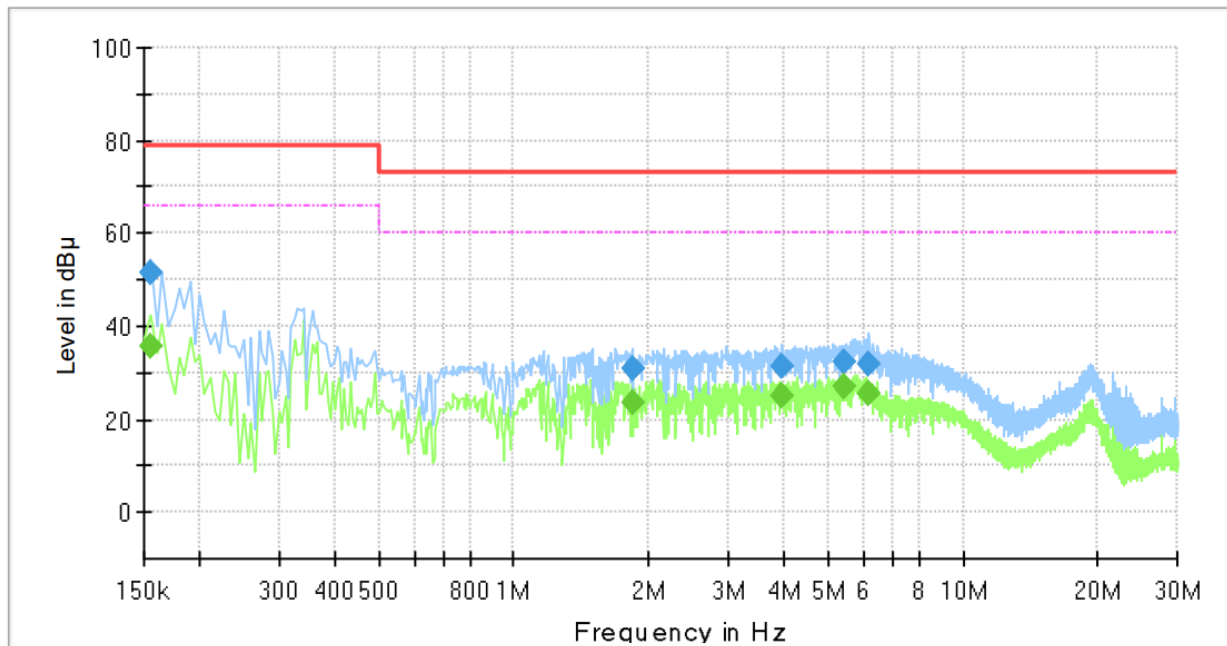

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.155000        | ---              | 35.74           | 66.00        | 30.26       | 1000.0          | 9.000           | N    | 19.4       |
| 0.155000        | 51.52            | ---             | 79.00        | 27.48       | 1000.0          | 9.000           | N    | 19.4       |
| 1.830000        | ---              | 23.68           | 60.00        | 36.32       | 1000.0          | 9.000           | N    | 20.3       |
| 1.830000        | 30.69            | ---             | 73.00        | 42.31       | 1000.0          | 9.000           | N    | 20.3       |
| 3.965000        | ---              | 25.03           | 60.00        | 34.97       | 1000.0          | 9.000           | N    | 19.9       |
| 3.965000        | 31.33            | ---             | 73.00        | 41.67       | 1000.0          | 9.000           | N    | 19.9       |
| 5.400000        | ---              | 26.82           | 60.00        | 33.18       | 1000.0          | 9.000           | N    | 19.6       |
| 5.400000        | 32.47            | ---             | 73.00        | 40.53       | 1000.0          | 9.000           | N    | 19.6       |
| 6.190000        | ---              | 25.52           | 60.00        | 34.48       | 1000.0          | 9.000           | N    | 19.5       |
| 6.190000        | 31.81            | ---             | 73.00        | 41.19       | 1000.0          | 9.000           | N    | 19.5       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


## Conducted Emissions at Telecommunication Ports

■ DC MODE

[1 000 Mbps]

### Common Information

Test Description: Telecommunication Emission  
 Model No.: XNO-6083R  
 Mode : DC\_ 1 000 Mbps  
 Speed :  
 Operator Name: KES

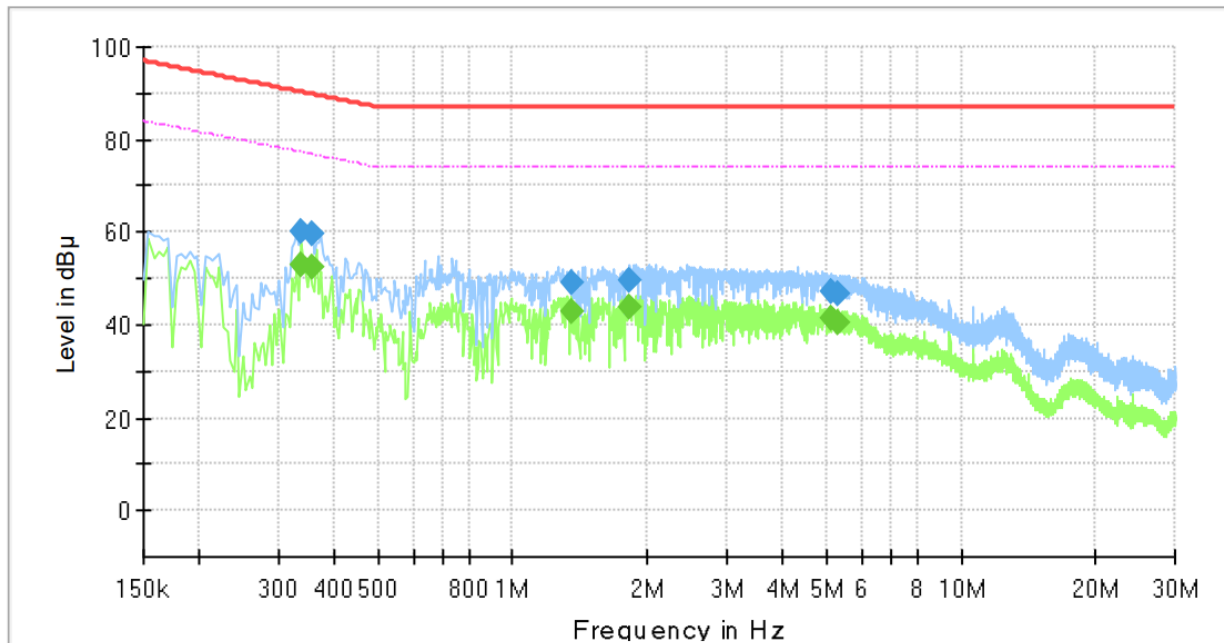

### Final Result


| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.338000        | ---              | 52.84           | 77.25        | 24.41       | 1000.0          | 9.000           | Single Line | 19.3       |
| 0.338000        | 60.21            | ---             | 90.25        | 30.04       | 1000.0          | 9.000           | Single Line | 19.3       |
| 0.358000        | ---              | 52.42           | 76.77        | 24.35       | 1000.0          | 9.000           | Single Line | 19.4       |
| 0.358000        | 59.64            | ---             | 89.77        | 30.13       | 1000.0          | 9.000           | Single Line | 19.4       |
| 1.346000        | ---              | 42.83           | 74.00        | 31.17       | 1000.0          | 9.000           | Single Line | 20.1       |
| 1.346000        | 48.97            | ---             | 87.00        | 38.03       | 1000.0          | 9.000           | Single Line | 20.1       |
| 1.826000        | ---              | 43.78           | 74.00        | 30.22       | 1000.0          | 9.000           | Single Line | 20.2       |
| 1.826000        | 49.70            | ---             | 87.00        | 37.30       | 1000.0          | 9.000           | Single Line | 20.2       |
| 5.138000        | ---              | 41.33           | 74.00        | 32.67       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.138000        | 47.32            | ---             | 87.00        | 39.68       | 1000.0          | 9.000           | Single Line | 19.5       |
| 5.334000        | ---              | 40.58           | 74.00        | 33.42       | 1000.0          | 9.000           | Single Line | 19.4       |
| 5.334000        | 46.84            | ---             | 87.00        | 40.16       | 1000.0          | 9.000           | Single Line | 19.4       |

■ PoE MODE

[1 000 Mbps]

## Common Information

Test Description: Telecommunication Emission  
 Model No.: XNO-6083R  
 Mode : PoE\_ 1 000 Mbps  
 Speed :  
 Operator Name: KES

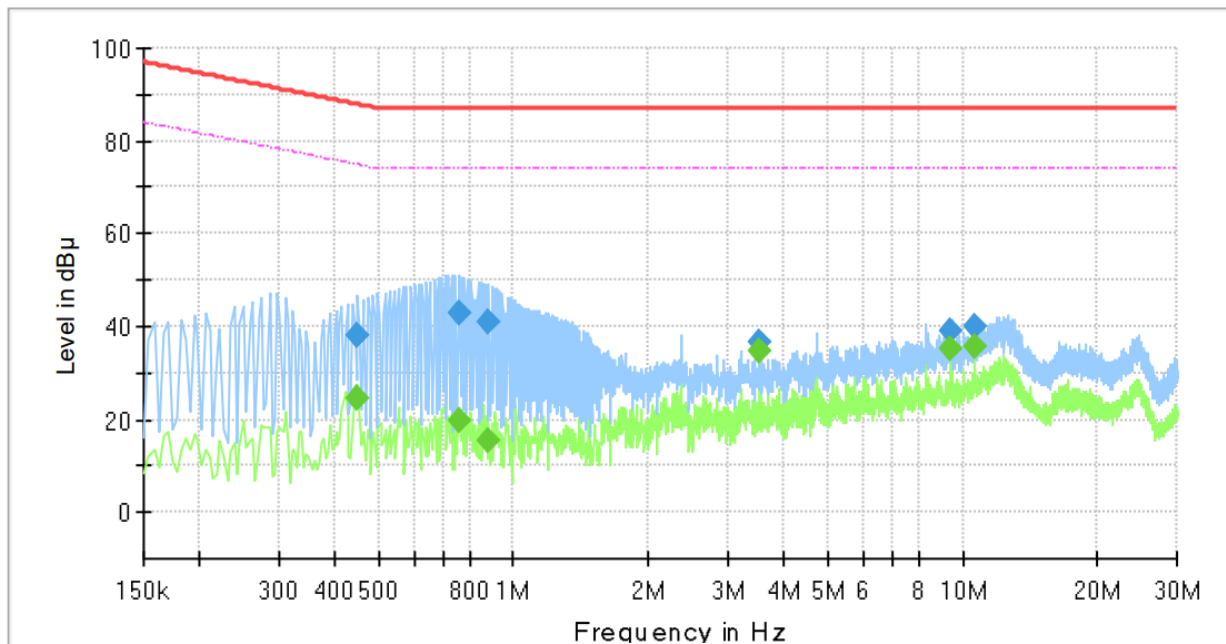

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.450000        | ---              | 24.37           | 74.88        | 50.51       | 1000.0          | 9.000           | Single Line | 19.5       |
| 0.450000        | 37.82            | ---             | 87.88        | 50.06       | 1000.0          | 9.000           | Single Line | 19.5       |
| 0.754000        | ---              | 19.80           | 74.00        | 54.20       | 1000.0          | 9.000           | Single Line | 19.9       |
| 0.754000        | 42.83            | ---             | 87.00        | 44.17       | 1000.0          | 9.000           | Single Line | 19.9       |
| 0.882000        | ---              | 15.35           | 74.00        | 58.65       | 1000.0          | 9.000           | Single Line | 20.0       |
| 0.882000        | 40.99            | ---             | 87.00        | 46.01       | 1000.0          | 9.000           | Single Line | 20.0       |
| 3.538000        | ---              | 34.72           | 74.00        | 39.28       | 1000.0          | 9.000           | Single Line | 19.9       |
| 3.538000        | 36.62            | ---             | 87.00        | 50.38       | 1000.0          | 9.000           | Single Line | 19.9       |
| 9.434000        | ---              | 35.18           | 74.00        | 38.82       | 1000.0          | 9.000           | Single Line | 19.6       |
| 9.434000        | 39.16            | ---             | 87.00        | 47.84       | 1000.0          | 9.000           | Single Line | 19.6       |
| 10.614000       | ---              | 35.65           | 74.00        | 38.35       | 1000.0          | 9.000           | Single Line | 19.8       |
| 10.614000       | 39.75            | ---             | 87.00        | 47.25       | 1000.0          | 9.000           | Single Line | 19.8       |

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)


### DC MODE

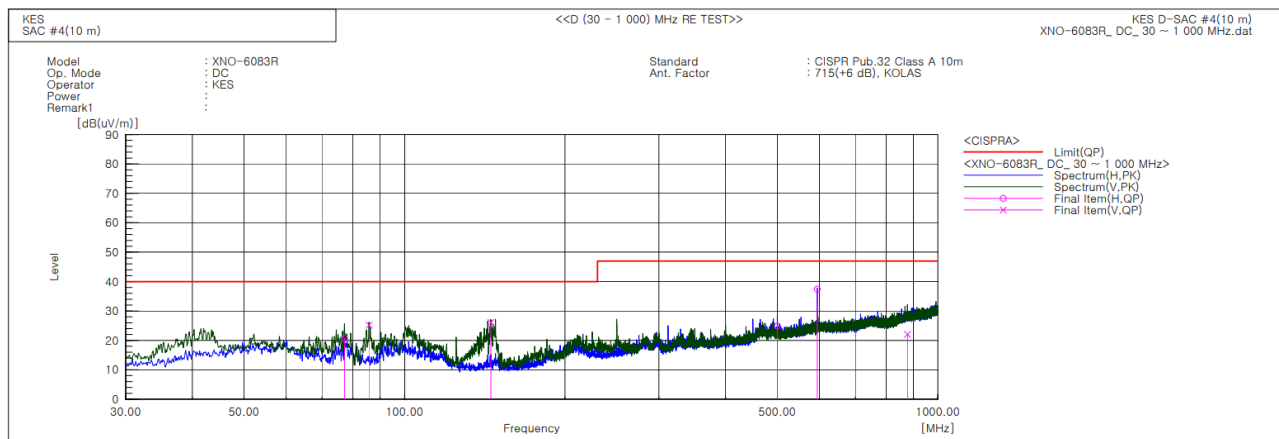

### Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 77.166             | H   | 48.1                      | -27.4            | 20.7                       | 40.0                      | 19.3                 | 394.0          | 325.0          |        |
| 2   | 85.775             | V   | 51.0                      | -25.8            | 25.2                       | 40.0                      | 14.8                 | 112.0          | 131.6          |        |
| 3   | 145.188            | V   | 51.5                      | -25.4            | 26.1                       | 40.0                      | 13.9                 | 106.0          | 325.0          |        |
| 4   | 499.965            | H   | 36.4                      | -11.5            | 24.9                       | 47.0                      | 22.1                 | 400.0          | 113.5          |        |
| 5   | 594.055            | H   | 46.0                      | -8.6             | 37.4                       | 47.0                      | 9.6                  | 392.0          | 32.7           |        |
| 6   | 876.931            | V   | 26.6                      | -4.5             | 22.1                       | 47.0                      | 24.9                 | 100.0          | 160.2          |        |

## PoE MODE

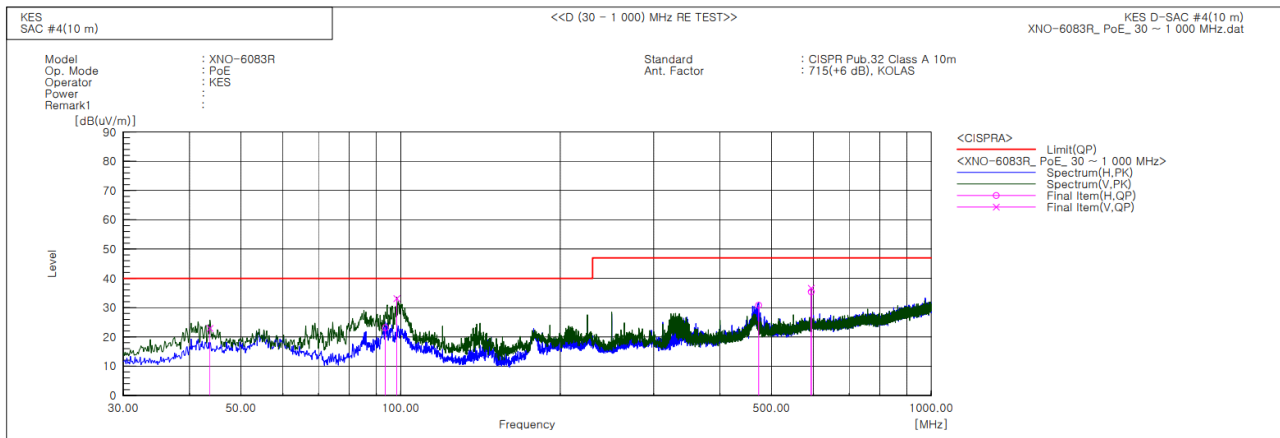

## Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 43.701             | V   | 44.5                      | -21.6            | 22.9                       | 40.0                      | 17.1                 | 110.0          | 38.4           |        |
| 2   | 93.535             | H   | 46.9                      | -23.7            | 23.2                       | 40.0                      | 16.8                 | 359.0          | 196.1          |        |
| 3   | 98.385             | V   | 55.8                      | -22.7            | 33.1                       | 40.0                      | 6.9                  | 149.0          | 261.8          |        |
| 4   | 473.048            | H   | 43.1                      | -12.3            | 30.8                       | 47.0                      | 16.2                 | 385.0          | 99.1           |        |
| 5   | 594.055            | V   | 45.2                      | -8.6             | 36.6                       | 47.0                      | 10.4                 | 100.0          | 289.3          |        |
| 6   | 594.125            | H   | 44.0                      | -8.6             | 35.4                       | 47.0                      | 11.6                 | 400.0          | 159.3          |        |

## ◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB( $\mu$ V/m)] = (Reading(QP)[dB( $\mu$ V)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB( $\mu$ V/m)] - Result(QP) [dB( $\mu$ V/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



## Radiated Electric Field Emissions(Above 1 GHz)

### DC MODE

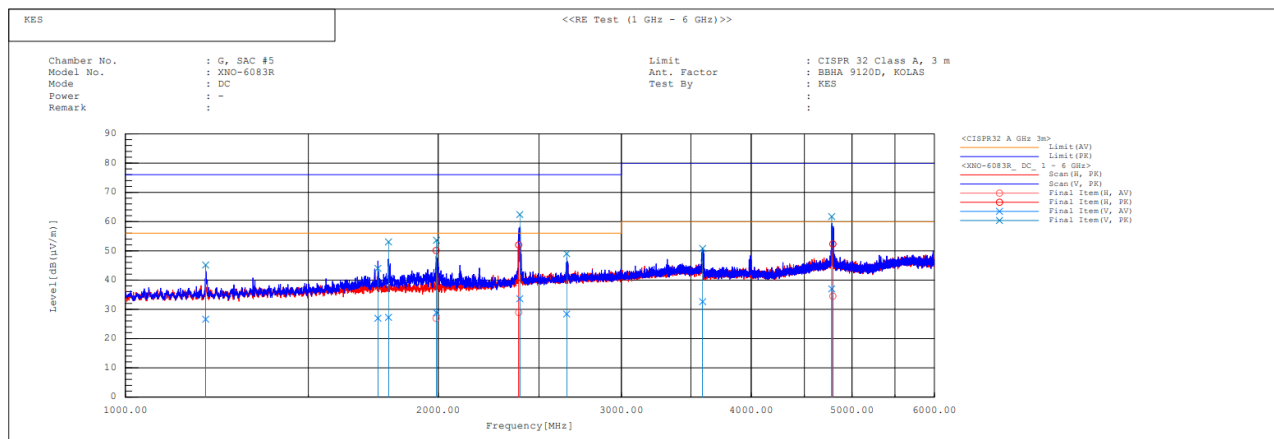


### Final Result

| No. | Frequency [MHz] | Pol | Reading AV [dB(μV)] | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result AV [dB(μV/m)] | Result PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin AV [dB] | Margin PK [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-------------|
| 1   | 1195.139        | V   | 33.3                | 51.8                | -6.7          | 26.6                 | 45.1                 | 56.0                | 76.0                | 29.4           | 30.9           | 100.0       | 208.5       |
| 2   | 1749.776        | V   | 30.8                | 47.9                | -3.9          | 26.9                 | 44.0                 | 56.0                | 76.0                | 29.1           | 32.0           | 100.0       | 300.5       |
| 3   | 1791.676        | V   | 30.9                | 56.7                | -3.7          | 27.2                 | 53.0                 | 56.0                | 76.0                | 28.8           | 23.0           | 100.0       | 201.2       |
| 4   | 1990.748        | H   | 29.7                | 52.9                | -2.8          | 26.9                 | 50.1                 | 56.0                | 76.0                | 29.1           | 25.9           | 100.0       | 305.9       |
| 5   | 1992.670        | V   | 31.6                | 56.4                | -2.8          | 28.8                 | 53.6                 | 56.0                | 76.0                | 27.2           | 22.4           | 100.0       | 198.8       |
| 6   | 2390.653        | H   | 30.4                | 53.5                | -1.5          | 28.9                 | 52.0                 | 56.0                | 76.0                | 27.1           | 24.0           | 100.0       | 305.9       |
| 7   | 2396.453        | V   | 35.1                | 63.9                | -1.5          | 33.6                 | 62.4                 | 56.0                | 76.0                | 22.4           | 13.6           | 100.0       | 135.5       |
| 8   | 2658.380        | V   | 28.8                | 49.4                | -0.4          | 28.4                 | 49.0                 | 56.0                | 76.0                | 27.6           | 27.0           | 100.0       | 156.6       |
| 9   | 3591.419        | V   | 30.6                | 48.8                | 2.0           | 32.6                 | 50.8                 | 60.0                | 80.0                | 27.4           | 29.2           | 100.0       | 120.9       |
| 10  | 4781.478        | V   | 30.6                | 55.3                | 6.4           | 37.0                 | 61.7                 | 60.0                | 80.0                | 23.0           | 18.3           | 100.0       | 354.5       |
| 11  | 4791.769        | H   | 28.1                | 45.9                | 6.4           | 34.5                 | 52.3                 | 60.0                | 80.0                | 25.5           | 27.7           | 100.0       | 318.5       |



## ■ PoE MODE

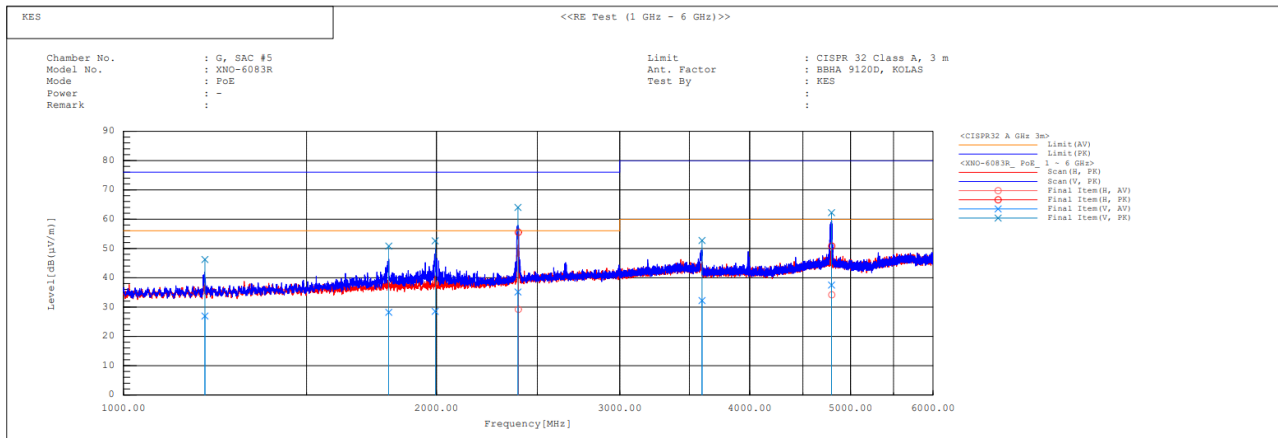

### Final Result

| No. | Frequency [MHz] | Pol | Reading AV [dB (μV)] | Reading PK [dB (μV)] | c.f [dB (1/m)] | Result AV [dB (μV/m)] | Result PK [dB (μV/m)] | Limit AV [dB (μV/m)] | Limit PK [dB (μV/m)] | Margin AV [dB] | Margin PK [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|----------------------|----------------------|----------------|-----------------------|-----------------------|----------------------|----------------------|----------------|----------------|-------------|-------------|
| 1   | 1198.152        | V   | 33.6                 | 52.9                 | -6.7           | 26.9                  | 46.2                  | 56.0                 | 76.0                 | 29.1           | 29.8           | 100.0       | 202.1       |
| 2   | 1799.731        | V   | 31.9                 | 54.5                 | -3.7           | 28.2                  | 50.8                  | 56.0                 | 76.0                 | 27.8           | 25.2           | 100.0       | 5.0         |
| 3   | 1994.376        | V   | 31.3                 | 55.4                 | -2.8           | 28.5                  | 52.6                  | 56.0                 | 76.0                 | 27.5           | 23.4           | 100.0       | 164.0       |
| 4   | 2395.365        | V   | 36.6                 | 65.5                 | -1.5           | 35.1                  | 64.0                  | 56.0                 | 76.0                 | 20.9           | 12.0           | 100.0       | 142.9       |
| 5   | 2397.021        | H   | 30.7                 | 57.0                 | -1.5           | 29.2                  | 55.5                  | 56.0                 | 76.0                 | 26.8           | 20.5           | 100.0       | 1.0         |
| 6   | 3599.851        | V   | 30.2                 | 50.7                 | 2.0            | 32.2                  | 52.7                  | 60.0                 | 80.0                 | 27.8           | 27.3           | 100.0       | 167.8       |
| 7   | 4793.903        | V   | 31.1                 | 55.8                 | 6.4            | 37.5                  | 62.2                  | 60.0                 | 80.0                 | 22.5           | 17.8           | 100.0       | 165.1       |
| 8   | 4796.650        | H   | 27.7                 | 44.3                 | 6.5            | 34.2                  | 50.8                  | 60.0                 | 80.0                 | 25.8           | 29.2           | 100.0       | 347.3       |

### ◆ Calculation

Result(PK/CAV) [dB (μV/m)] = (Reading(PK/CAV) [dB (μV)] + c.f [dB (1/m)])

Margin(PK/CAV) [dB] = Limit [dB (μV/m)] - Result(PK/CAV) [dB (μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

## Harmonic Current Emissions and Voltage Fluctuations and Flicker

| <b>Average harmonic current results</b> |                      |            |           |        |
|-----------------------------------------|----------------------|------------|-----------|--------|
| Hn                                      | I <sub>eff</sub> [A] | % of Limit | Limit [A] | Result |
| 1                                       | 0.045                |            |           |        |
| 2                                       | 0.002                | 0.154      | 1.080     | n/a    |
| 3                                       | 0.038                | 1.671      | 2.300     | PASS   |
| 4                                       | 0.002                | 0.465      | 0.430     | n/a    |
| 5                                       | 0.039                | 3.427      | 1.140     | PASS   |
| 6                                       | 0.002                | 0.590      | 0.300     | n/a    |
| 7                                       | 0.039                | 5.020      | 0.770     | PASS   |
| 8                                       | 0.002                | 0.788      | 0.230     | n/a    |
| 9                                       | 0.036                | 8.985      | 0.400     | PASS   |
| 10                                      | 0.002                | 0.925      | 0.184     | n/a    |
| 11                                      | 0.034                | 10.319     | 0.330     | PASS   |
| 12                                      | 0.002                | 1.074      | 0.153     | n/a    |
| 13                                      | 0.032                | 15.329     | 0.210     | PASS   |
| 14                                      | 0.002                | 1.325      | 0.131     | n/a    |
| 15                                      | 0.030                | 19.886     | 0.150     | PASS   |
| 16                                      | 0.002                | 1.433      | 0.115     | n/a    |
| 17                                      | 0.028                | 20.803     | 0.132     | PASS   |
| 18                                      | 0.002                | 1.594      | 0.102     | n/a    |
| 19                                      | 0.025                | 21.261     | 0.118     | PASS   |
| 20                                      | 0.002                | 1.728      | 0.092     | n/a    |
| 21                                      | 0.023                | 14.164     | 0.161     | PASS   |
| 22                                      | 0.002                | 1.947      | 0.084     | n/a    |
| 23                                      | 0.020                | 13.709     | 0.147     | PASS   |
| 24                                      | 0.002                | 2.118      | 0.077     | n/a    |
| 25                                      | 0.018                | 13.215     | 0.135     | PASS   |
| 26                                      | 0.002                | 2.215      | 0.071     | n/a    |
| 27                                      | 0.016                | 12.494     | 0.125     | PASS   |
| 28                                      | 0.002                | 2.463      | 0.066     | n/a    |
| 29                                      | 0.013                | 11.338     | 0.116     | PASS   |
| 30                                      | 0.002                | 2.479      | 0.061     | n/a    |
| 31                                      | 0.011                | 10.453     | 0.109     | PASS   |
| 32                                      | 0.002                | 2.652      | 0.058     | n/a    |
| 33                                      | 0.010                | 9.318      | 0.102     | PASS   |
| 34                                      | 0.001                | 2.714      | 0.054     | n/a    |
| 35                                      | 0.008                | 8.473      | 0.096     | PASS   |
| 36                                      | 0.001                | 2.793      | 0.051     | n/a    |
| 37                                      | 0.007                | 7.723      | 0.091     | PASS   |
| 38                                      | 0.001                | 2.888      | 0.048     | n/a    |
| 39                                      | 0.006                | 7.198      | 0.087     | PASS   |
| 40                                      | 0.001                | 2.750      | 0.046     | n/a    |

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

\* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

**Maximum harmonic current results**

| Hn | I <sub>eff</sub> [A] | % of Limit | Limit [A] | Result |
|----|----------------------|------------|-----------|--------|
| 1  | 0.046                |            |           |        |
| 2  | 0.002                | 0.124      | 1.620     | n/a    |
| 3  | 0.039                | 1.127      | 3.450     | PASS   |
| 4  | 0.002                | 0.361      | 0.645     | n/a    |
| 5  | 0.039                | 2.310      | 1.710     | PASS   |
| 6  | 0.002                | 0.460      | 0.450     | n/a    |
| 7  | 0.039                | 3.385      | 1.155     | PASS   |
| 8  | 0.002                | 0.602      | 0.345     | n/a    |
| 9  | 0.036                | 6.057      | 0.600     | PASS   |
| 10 | 0.002                | 0.725      | 0.276     | n/a    |
| 11 | 0.034                | 6.951      | 0.495     | PASS   |
| 12 | 0.002                | 0.869      | 0.230     | n/a    |
| 13 | 0.033                | 10.321     | 0.315     | PASS   |
| 14 | 0.002                | 1.026      | 0.197     | n/a    |
| 15 | 0.030                | 13.380     | 0.225     | PASS   |
| 16 | 0.002                | 1.127      | 0.173     | n/a    |
| 17 | 0.028                | 13.997     | 0.199     | PASS   |
| 18 | 0.002                | 1.248      | 0.153     | n/a    |
| 19 | 0.025                | 14.295     | 0.178     | PASS   |
| 20 | 0.002                | 1.349      | 0.138     | n/a    |
| 21 | 0.023                | 14.290     | 0.161     | PASS   |
| 22 | 0.002                | 1.507      | 0.125     | n/a    |
| 23 | 0.020                | 13.836     | 0.147     | PASS   |
| 24 | 0.002                | 1.644      | 0.115     | n/a    |
| 25 | 0.018                | 13.320     | 0.135     | PASS   |
| 26 | 0.002                | 1.735      | 0.106     | n/a    |
| 27 | 0.016                | 12.605     | 0.125     | PASS   |
| 28 | 0.002                | 1.952      | 0.099     | n/a    |
| 29 | 0.013                | 11.454     | 0.116     | PASS   |
| 30 | 0.002                | 1.888      | 0.092     | n/a    |
| 31 | 0.012                | 10.585     | 0.109     | PASS   |
| 32 | 0.002                | 2.035      | 0.086     | n/a    |
| 33 | 0.010                | 9.523      | 0.102     | PASS   |
| 34 | 0.002                | 2.123      | 0.081     | n/a    |
| 35 | 0.008                | 8.613      | 0.096     | PASS   |
| 36 | 0.002                | 2.151      | 0.077     | n/a    |
| 37 | 0.007                | 7.859      | 0.091     | PASS   |
| 38 | 0.002                | 2.207      | 0.073     | n/a    |
| 39 | 0.006                | 7.389      | 0.087     | PASS   |
| 40 | 0.001                | 2.110      | 0.069     | n/a    |

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

\* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0650-R1  
Page (55) of (78)

## Test Data - Voltage Fluctuations

**Maximum Flicker results**

| Flicker Measurements |       |         |        |          |          |
|----------------------|-------|---------|--------|----------|----------|
|                      | Plt   | Max Pst | Max Dc | Max Dmax | Max Tmax |
| Line 1:              | 0.028 | 0.028   | 0      | < 0.2    | 0        |
| Limits:              | 0.65  | 1       | 3.3    | 4        | 0.5      |
| Results:             | PASS  | PASS    | PASS   | PASS     | PASS     |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports

#### ■ DC MODE



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Emissions at Telecommunication Ports

### ■ DC MODE





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**■ PoE MODE**

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC MODE

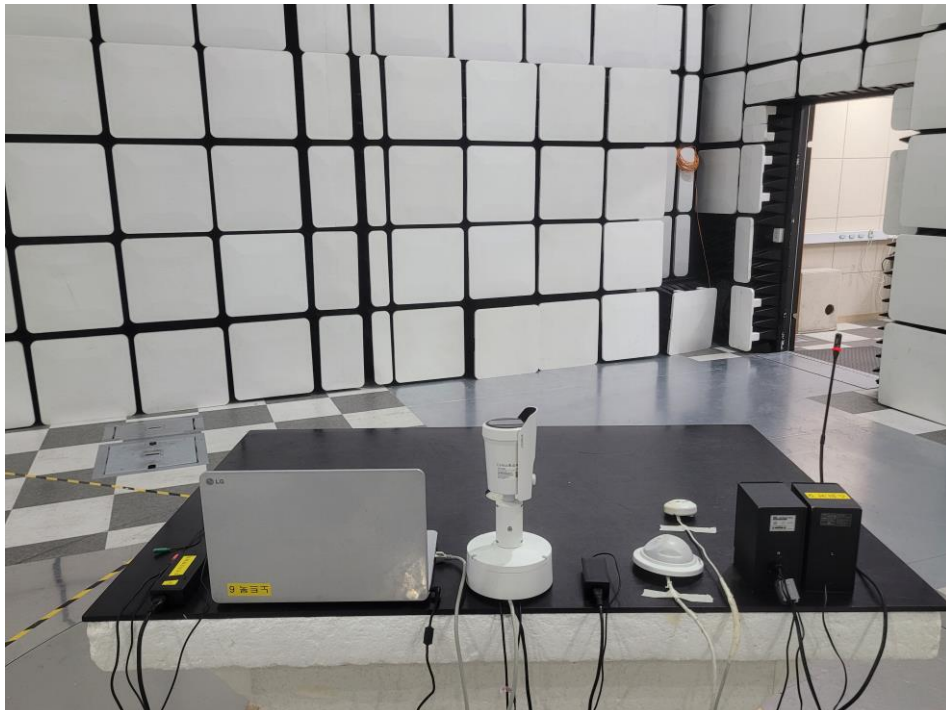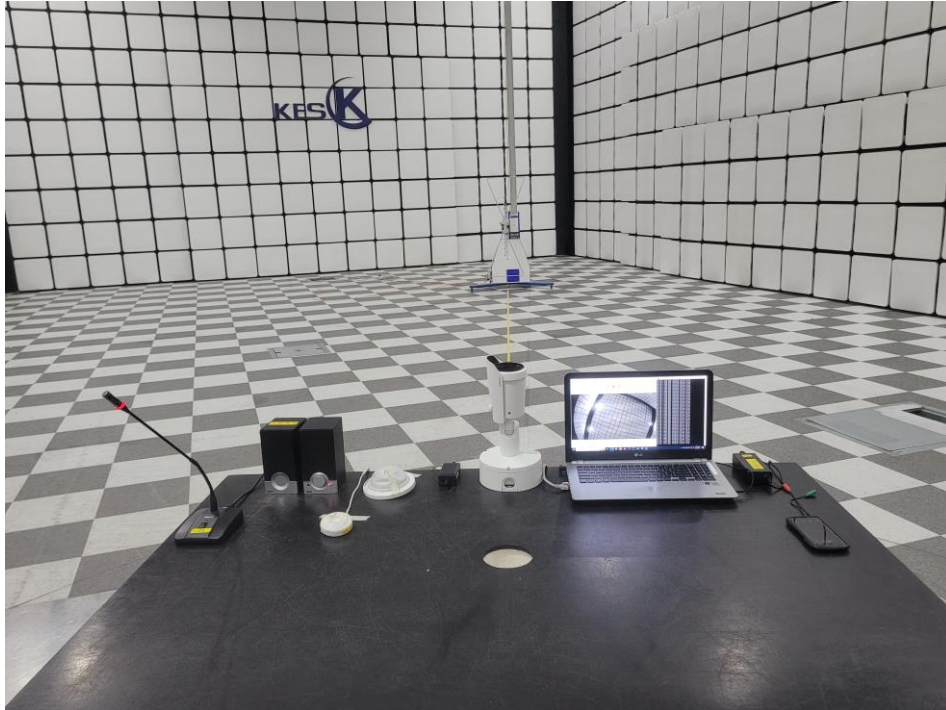

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



■ PoE MODE

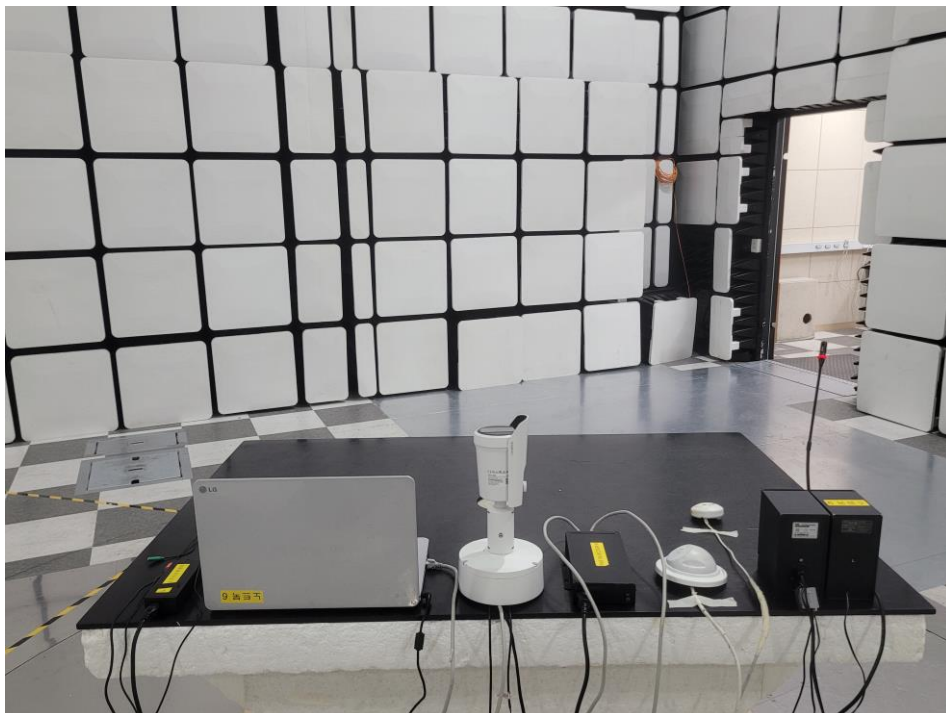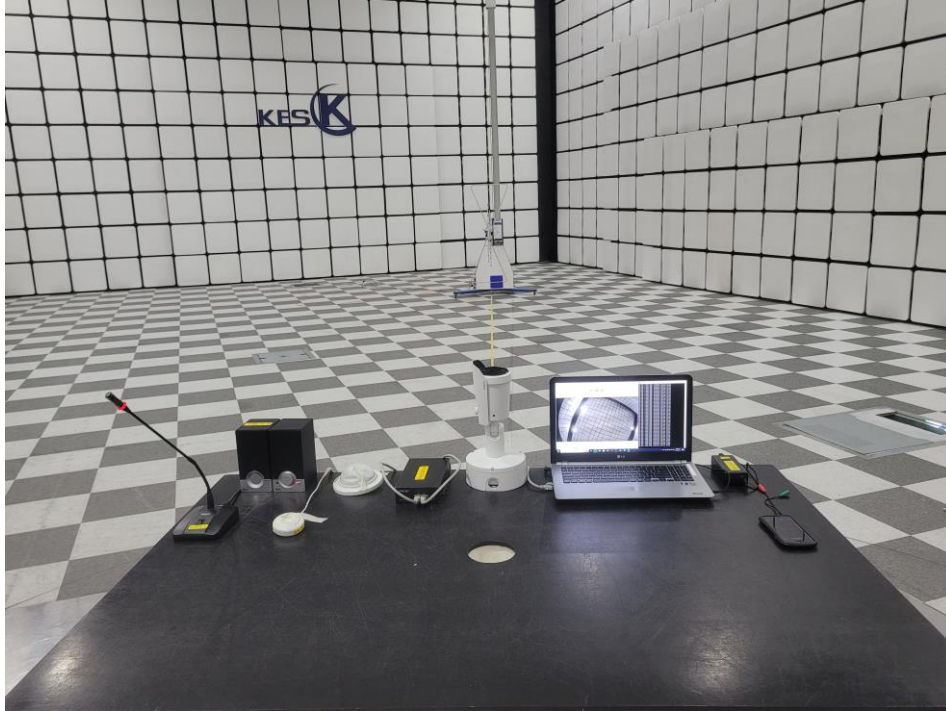

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC MODE

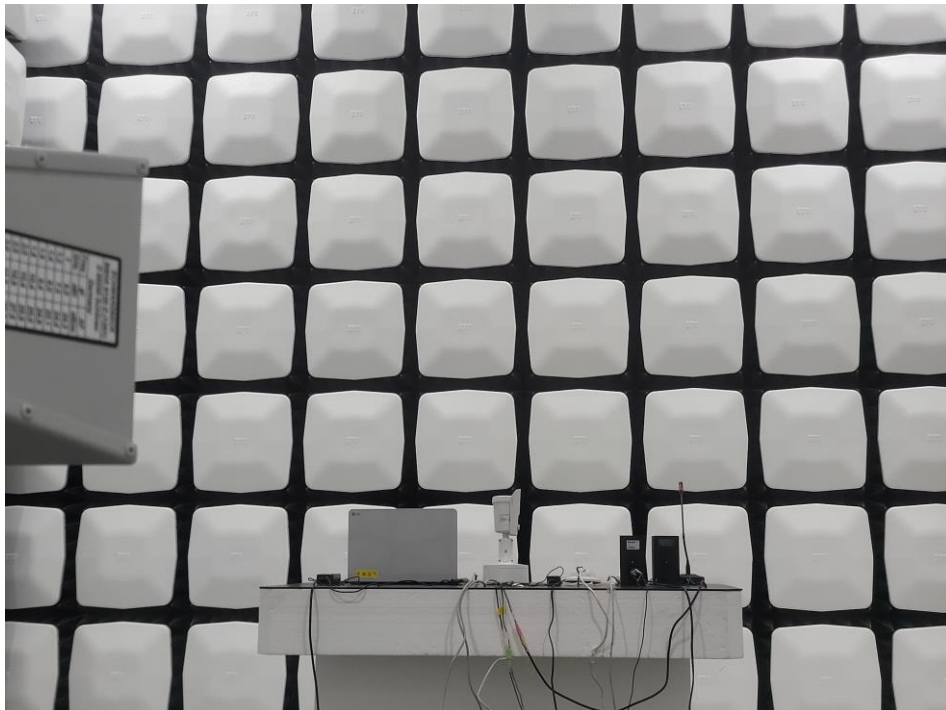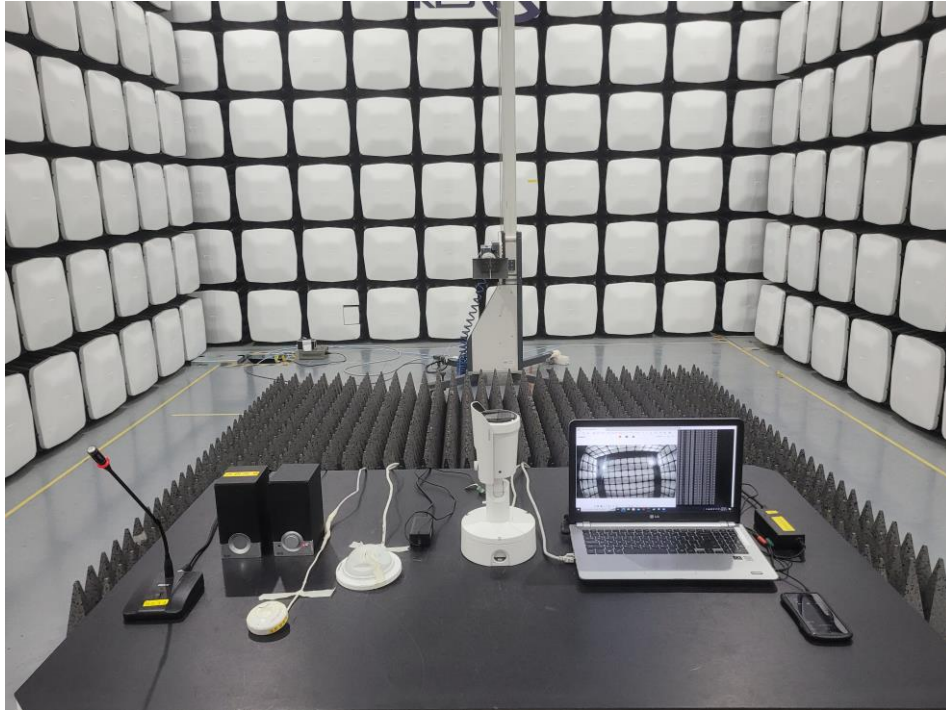

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

■ PoE MODE

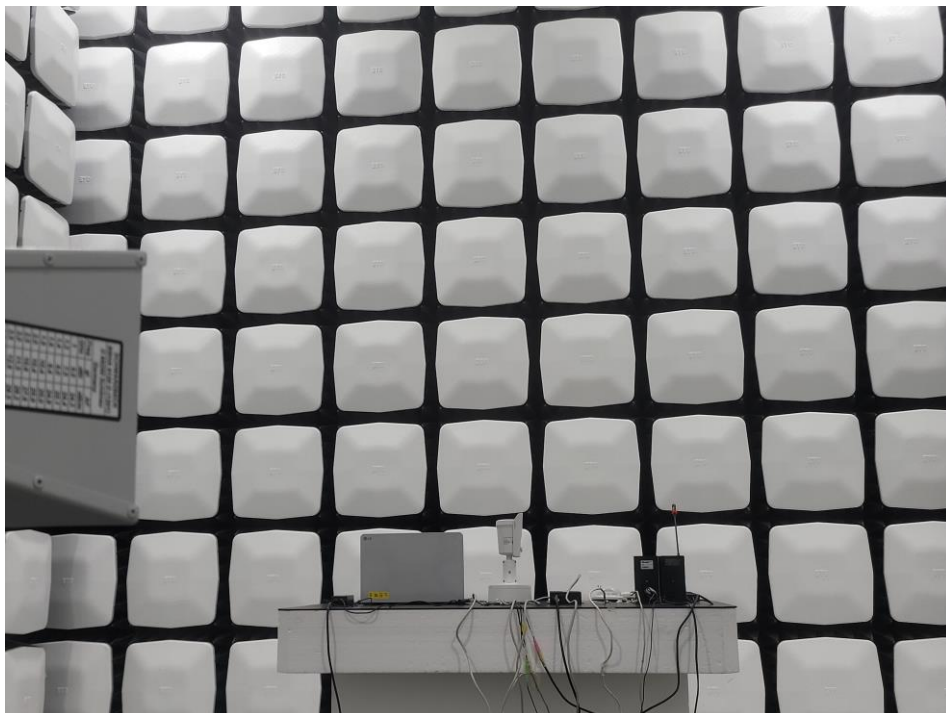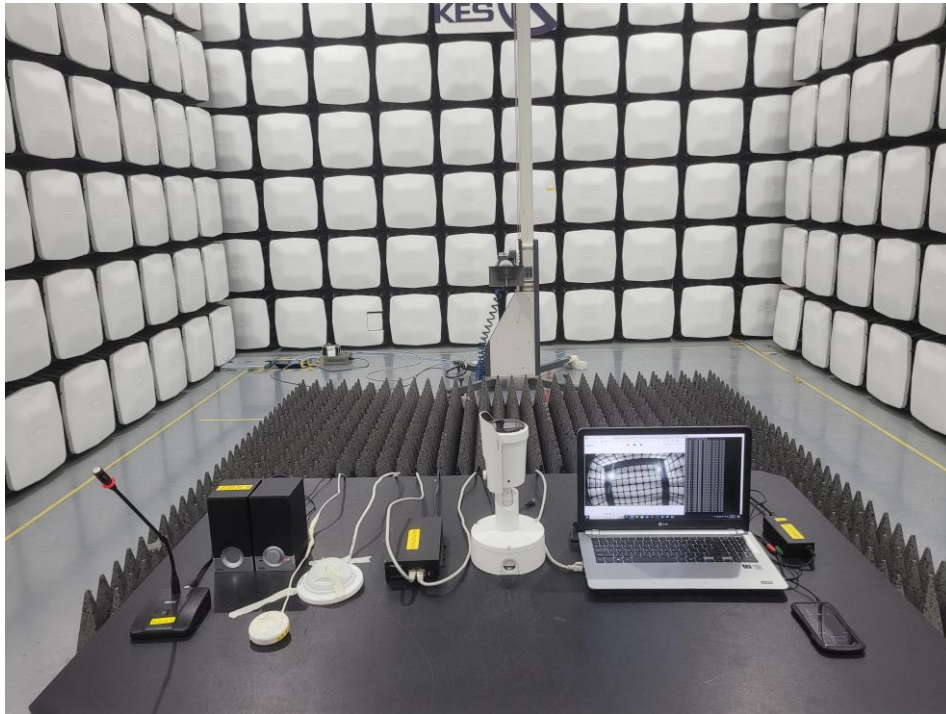

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Harmonic Current Emissions and Voltage Fluctuations and Flicker



## Electrostatic Discharge

### ■ DC MODE



### ■ PoE MODE




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Immunity

### ■ DC MODE



### ■ PoE MODE

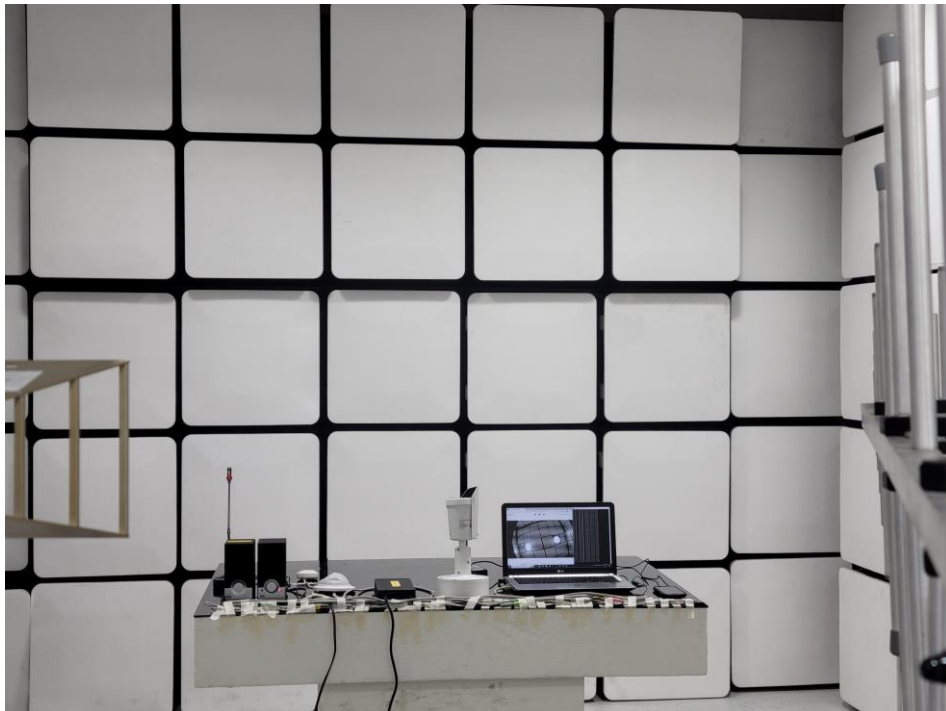

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Electrical Fast Transients/Bursts

### ■ DC MODE



### ■ PoE MODE



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Surge Transients

### ■ DC MODE



### ■ PoE MODE



## Conducted Disturbance

### ■ DC MODE




### ■ PoE MODE



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Voltage Dips and Short Interruptions

### ■ DC MODE

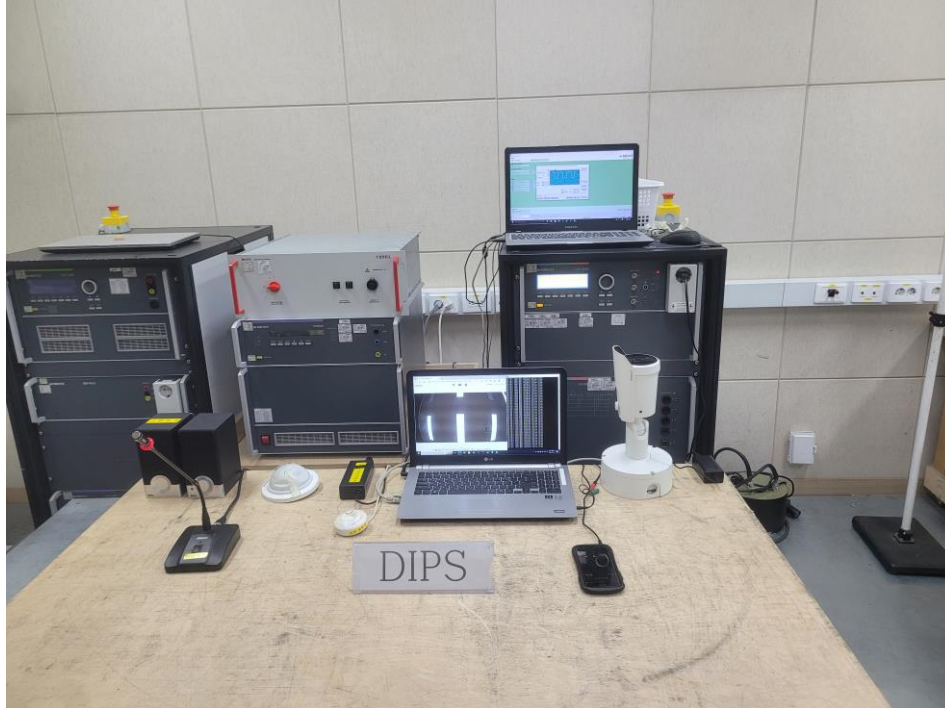

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)




## EUT Internal Photographs

(Internal View)




## EUT Internal View –Main Board

(Top)

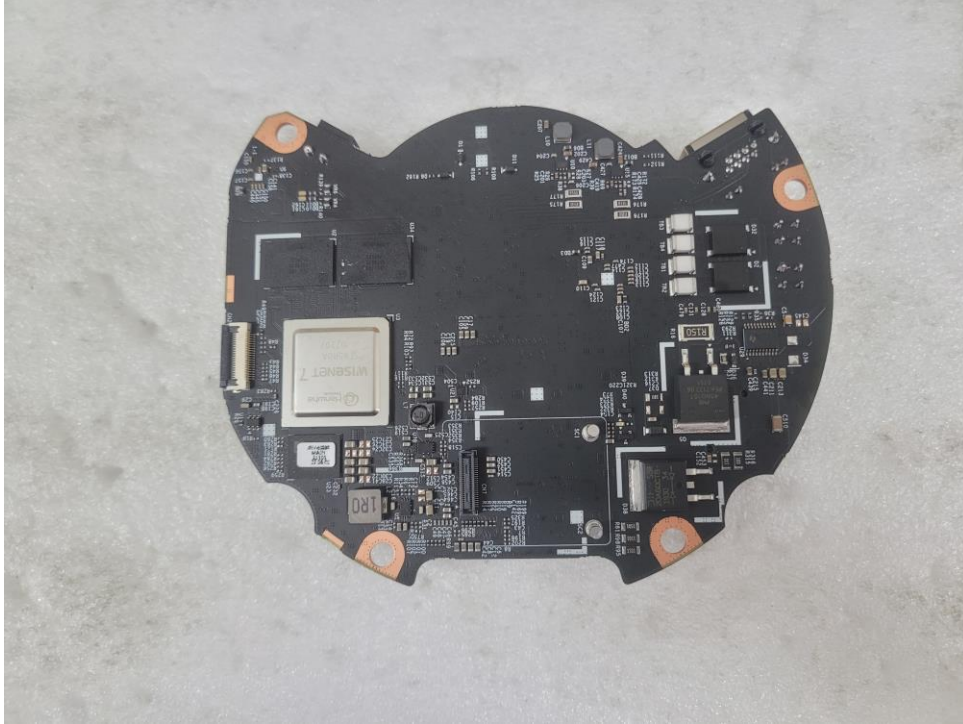


(Bottom)

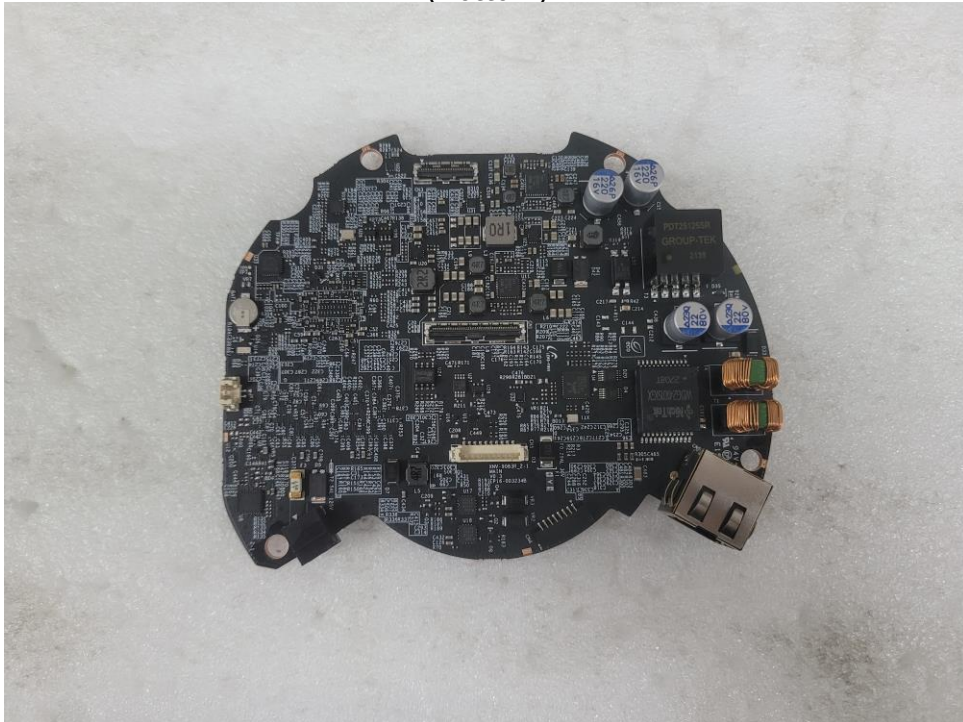

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – LED Board

(Top)

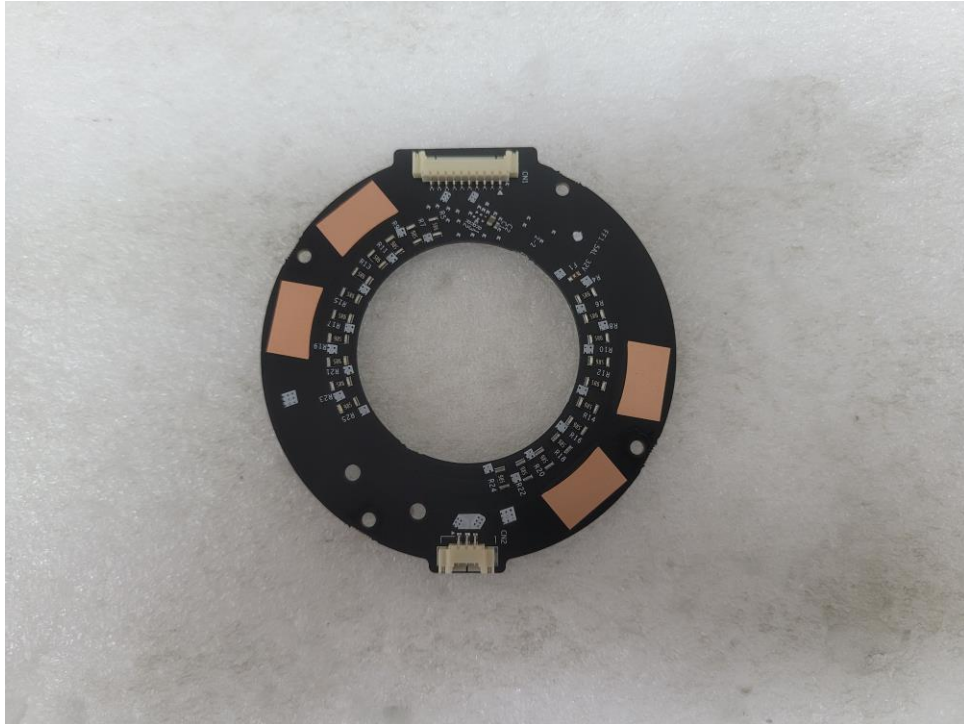

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Module Board

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Port Board

(Top)

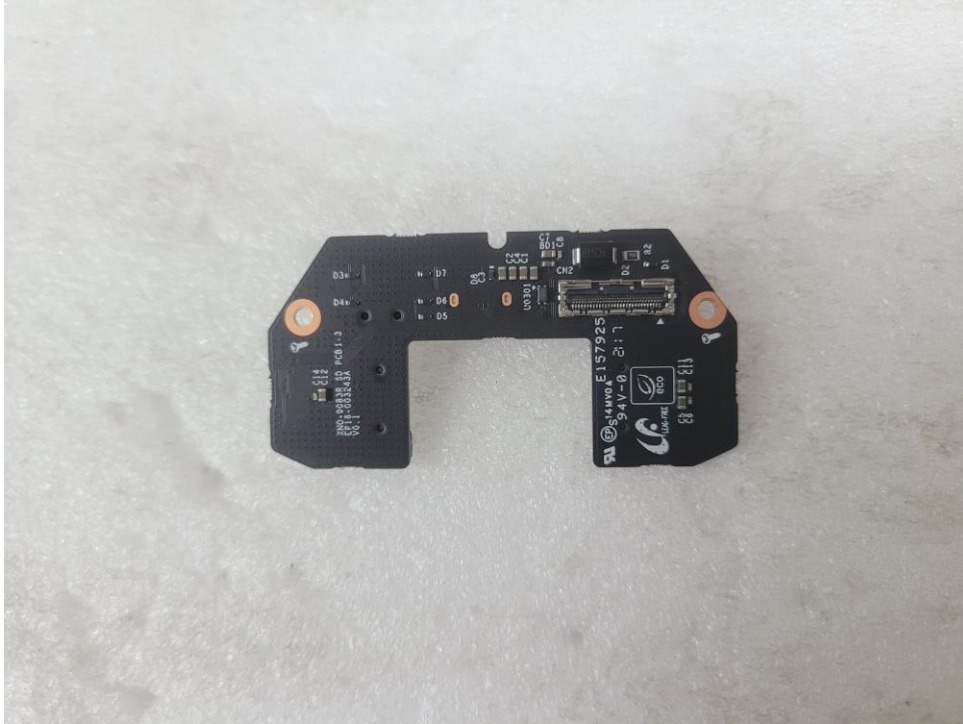

(Bottom)

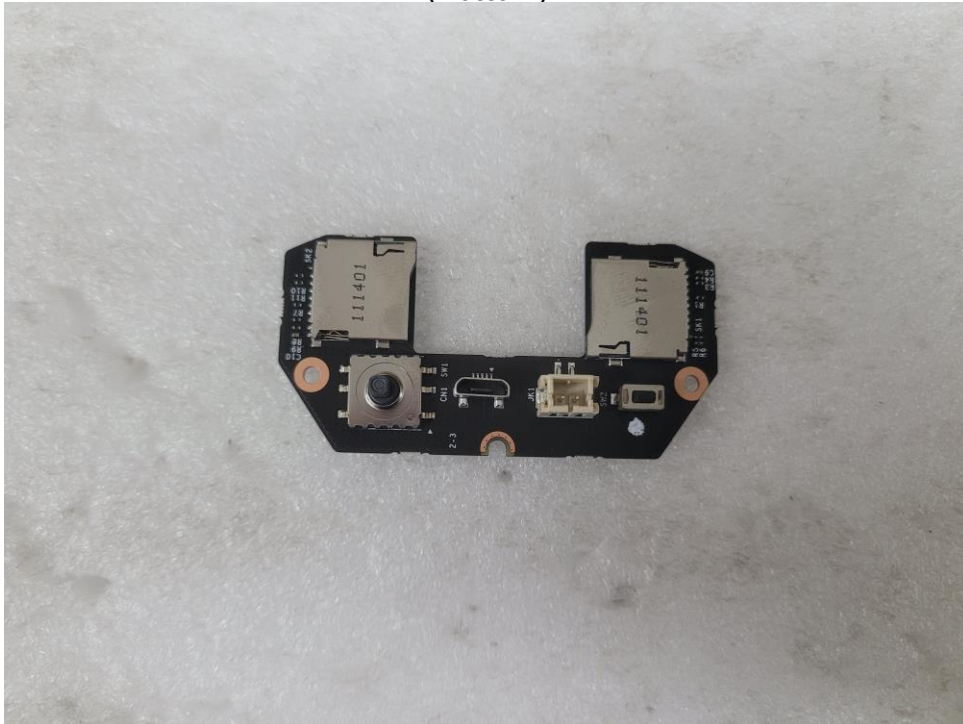


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT EUT Internal View – Lens

(Top)




(Bottom)

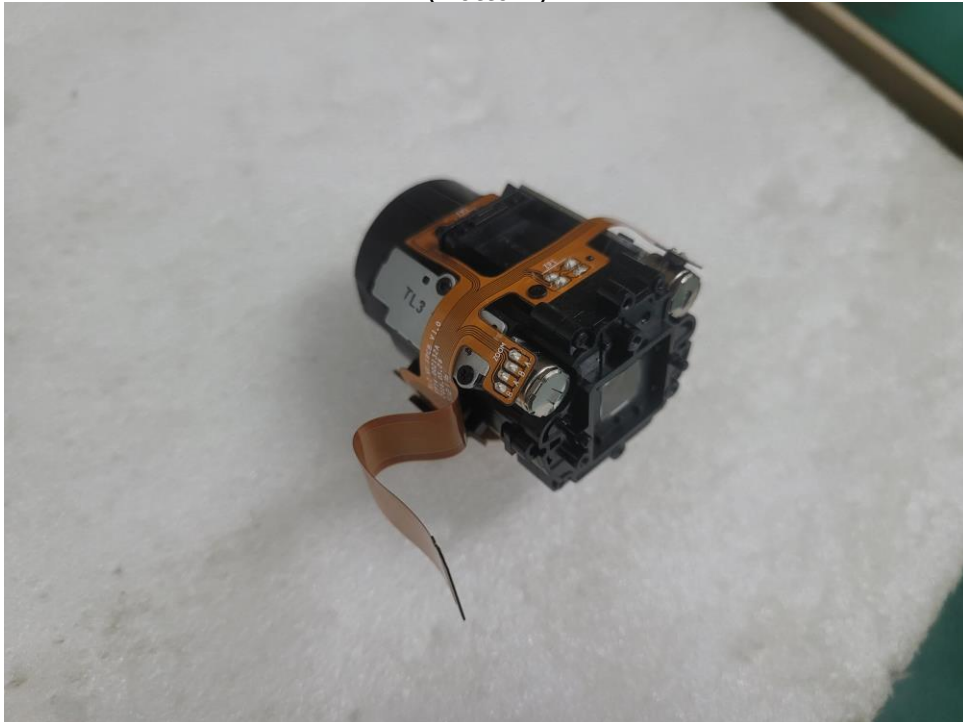


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT EUT Internal View – Lens Board

(Top)

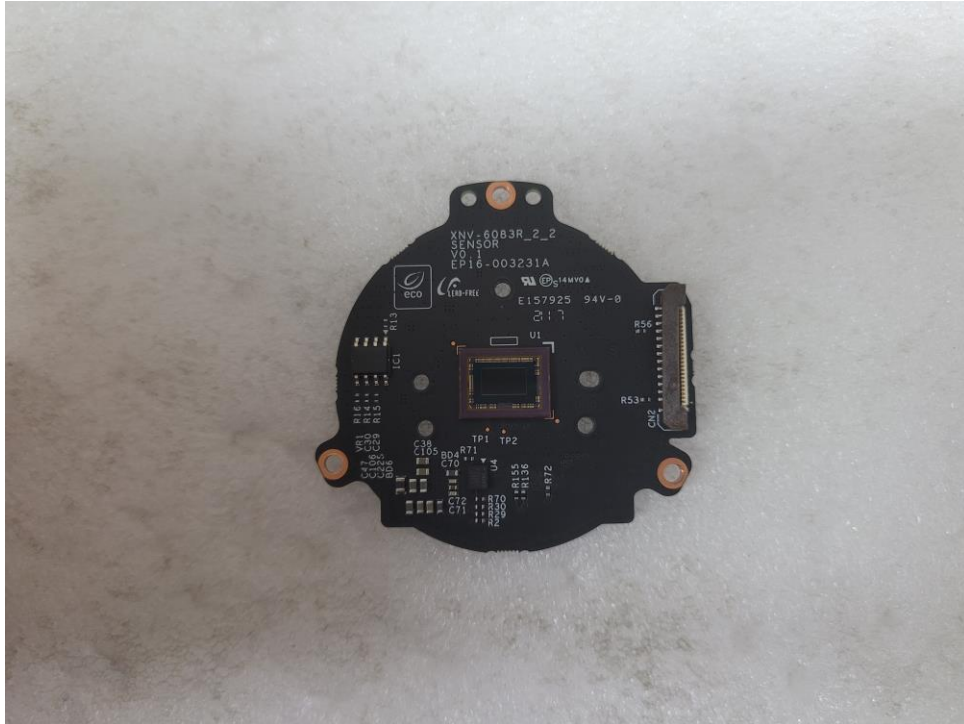

(Bottom)

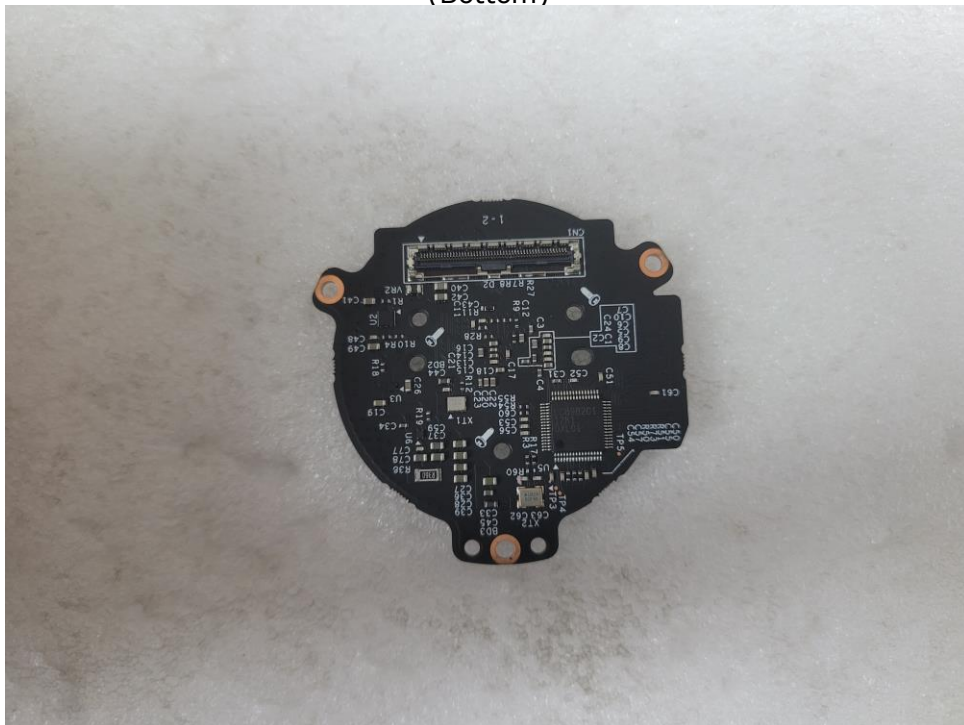

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Label and Location



### **NETWORK CAMERA**

Model No : XNO-6083R

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED.

Made in Vietnam

