



EMC TEST REPORT For VCCI

Test Report No. : KES-E1-16T0621-R1
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNO-8080R
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Nov, 23, 2016
Test date : Dec, 02, 2016 ~ Dec, 03, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

Tested by Kyeng Sun, Min
(Retired person)
Proxy signature : Dae Hyun, Kim

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (2) of (59)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 11, 2016	KES-E1-16T0621	Issued
Feb. 24, 2023	KES-E1-16T0621-R1	Change the Model No, Applicant, Applicant address and manufacturer, manufacturer address at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions Mains Power Ports.....	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Conducted Emissions at Telecommunication Ports		21
Radiated Electric Field Emissions(Below 1 GHz)		27
Radiated Electric Field Emissions(Above 1 GHz)		29
Test Setup Photos and Configuration		41
Conducted Voltage Emissions		41
Conducted Telecommunication Emissions		42
Radiated Electric Field Emissions(Below 1 GHz)		45
Radiated Electric Field Emissions(Above 1 GHz)		48
EUT External Photographs		51
EUT Internal Photographs		52

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.1 lux (TBD) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
Lens	
Focal Length (Zoom Ratio)	3.9~9.4mm(2.4x) motorized varifocal (Wide 확대검토중)
Max. Aperture Ratio	F1.3
Angular Field of View	TBD
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network(Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	
Operational	
IR LED	TBD
Viewable Length	(TBD)50m(164.04ft)
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	120dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog&Dust detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic ※ Zoom ratio option for mask mode (TBD)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (5) of (59)

Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio Analy	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	5M mode : 2592 x 1944, 2592 x 1464, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240 2M mode : 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576 640x480, 640x360, 320x240, 320x180
Max. Framerate	5M mode : H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps 2M mode : H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (6) of (59)

Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method
Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming Interface	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 Plug-in Webviewer Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Software SmartViewer, SSM	
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH *Start up should be done at above -20°C
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	Dark gray / Aluminum
Dimension (WxHxD)	TBD
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNO-8080R	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD935608201696420 0	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	1.7 m
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	1.6 m
Alarm	-	-	-	-
SD card	-	-	SanDisk	16 GB



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	-

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (9) of (59)

- POE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	-
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)

Test mode	Normal operating
E.U.T Monitoring , Ping test, 1 kHz	


E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC 24 V Main
 □ DC 12 V Main


- AC 24 V Mode

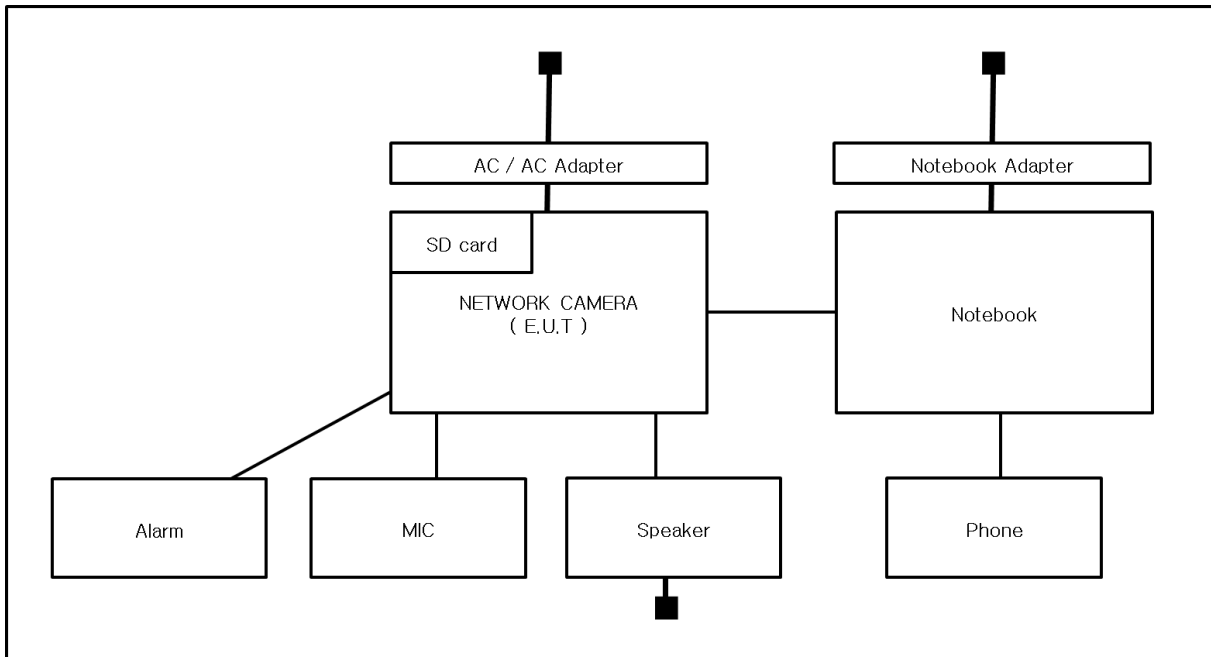

- DC 12 V Mode

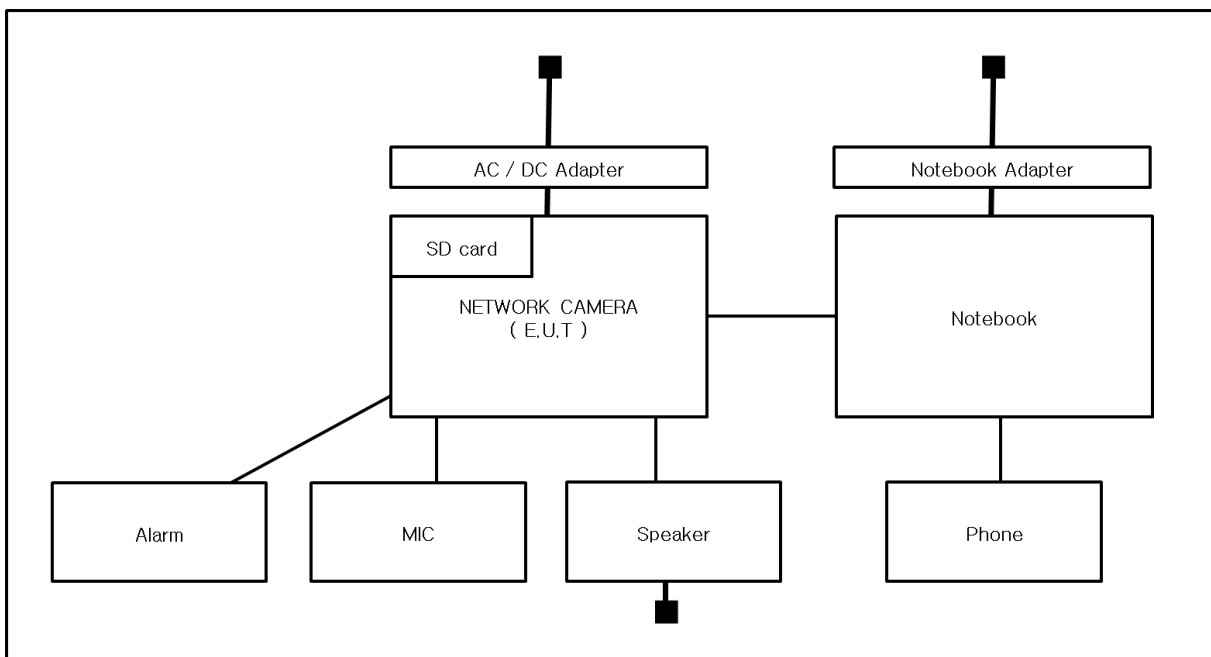

- POE Mode

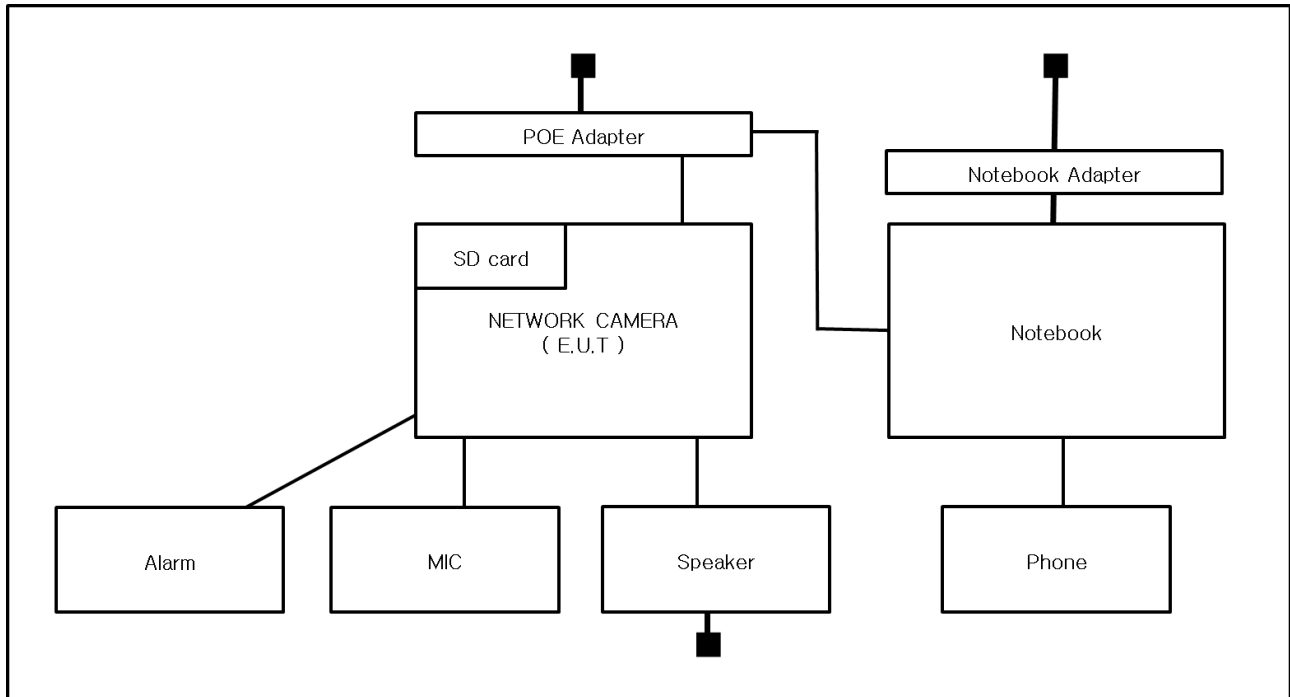

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (14) of (59)

☒ **VCCI V-3 / 2015.04**

☒ Class A

☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010**

☐ Class A

☐ Class B

☐ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☒ Class A

☐ Class B

☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

☐ CAN/CSA CISPR 22-10

☐ Class A

☐ Class B

☐ ANSI C63.4-2014

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

☐ Equipment for fixed use

☐ Equipment for vehicular use

☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions Mains Power Ports

Test Date

Dec, 02, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 16,5 °C
Relative Humidity: 39,8 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec, 02, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 16,5 °C

Relative Humidity: 39,8 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 03, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2018
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	N/A	N/A	N/A	N/A

Test Conditions

Temperature: 9,8 °C
Relative Humidity: 35,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 03, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 24, 2017
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 17,8 °C

Relative Humidity: 47,2 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-8080RN
Mode	AC 24 V
Operator Name:	KES

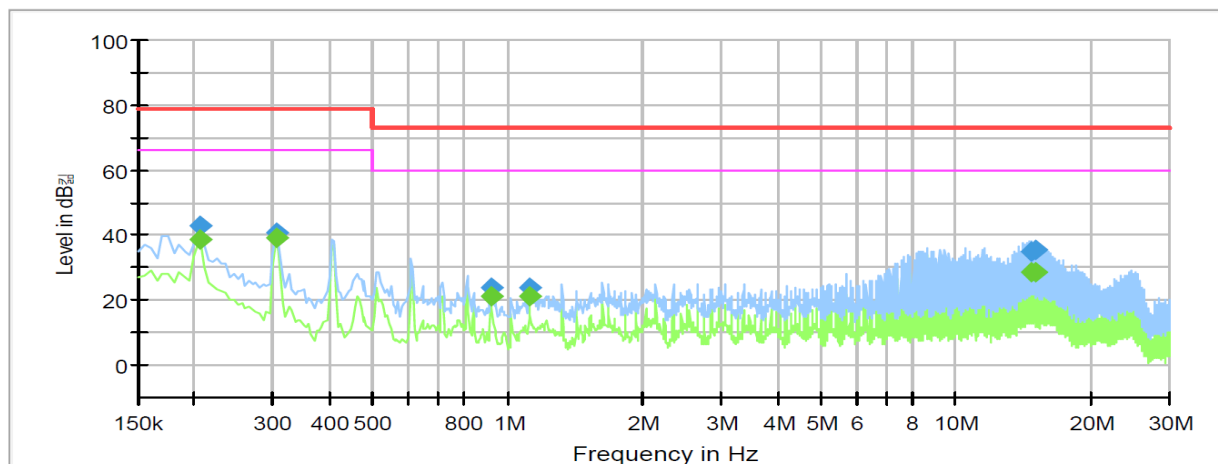

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	38.81	66.00	27.19	1000.0	9.000	L1	9.7
0.205000	42.85	---	79.00	36.15	1000.0	9.000	L1	9.7
0.305000	---	39.41	66.00	26.59	1000.0	9.000	L1	9.7
0.305000	40.68	---	79.00	38.32	1000.0	9.000	L1	9.7
0.915000	---	21.04	60.00	38.96	1000.0	9.000	L1	10.0
0.915000	23.73	---	73.00	49.27	1000.0	9.000	L1	10.0
1.120000	---	21.02	60.00	38.98	1000.0	9.000	L1	10.1
1.120000	24.11	---	73.00	48.89	1000.0	9.000	L1	10.1
14.775000	---	28.39	60.00	31.61	1000.0	9.000	L1	10.1
14.775000	34.76	---	73.00	38.24	1000.0	9.000	L1	10.1
15.080000	---	28.65	60.00	31.35	1000.0	9.000	L1	10.1
15.080000	35.70	---	73.00	37.30	1000.0	9.000	L1	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-8080RN
Mode	AC 24 V
Operator Name:	KES

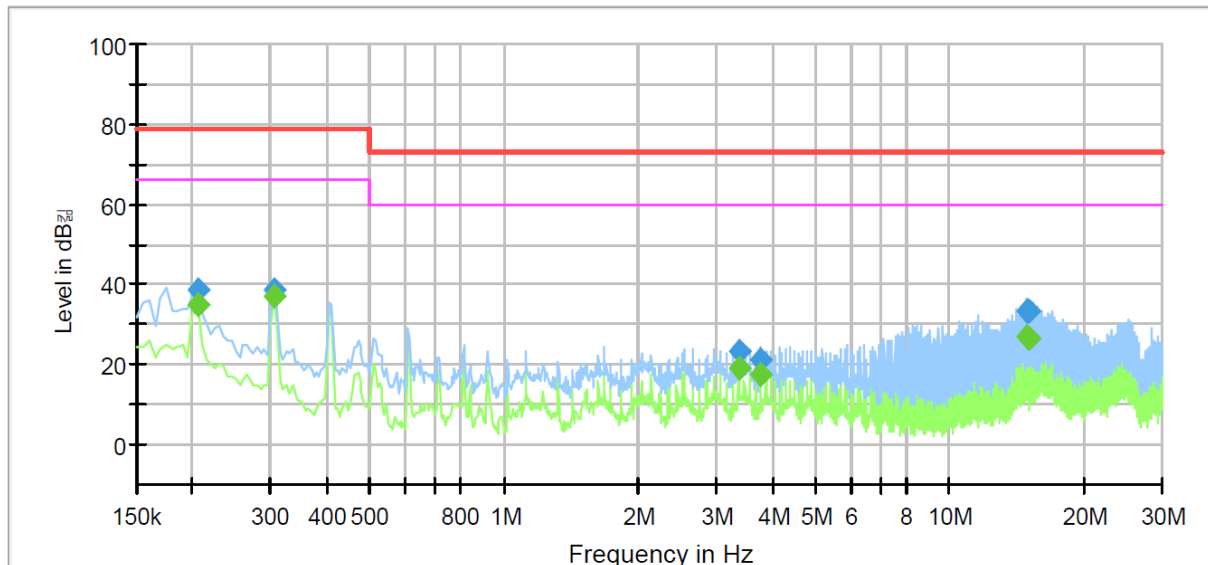

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	34.81	66.00	31.19	1000.0	9.000	N	9.7
0.205000	38.89	---	79.00	40.11	1000.0	9.000	N	9.7
0.305000	---	37.25	66.00	28.75	1000.0	9.000	N	9.7
0.305000	38.58	---	79.00	40.42	1000.0	9.000	N	9.7
3.360000	---	18.83	60.00	41.17	1000.0	9.000	N	10.1
3.360000	23.57	---	73.00	49.43	1000.0	9.000	N	10.1
3.770000	---	17.41	60.00	42.59	1000.0	9.000	N	10.1
3.770000	21.06	---	73.00	51.94	1000.0	9.000	N	10.1
14.875000	---	26.92	60.00	33.08	1000.0	9.000	N	10.1
14.875000	33.41	---	73.00	39.59	1000.0	9.000	N	10.1
15.080000	---	26.31	60.00	33.69	1000.0	9.000	N	10.1
15.080000	33.60	---	73.00	39.40	1000.0	9.000	N	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)


Conducted Emissions at Telecommunication Ports

- AC 24 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	AC 24 V 10 Mbps
Operator Name:	KES

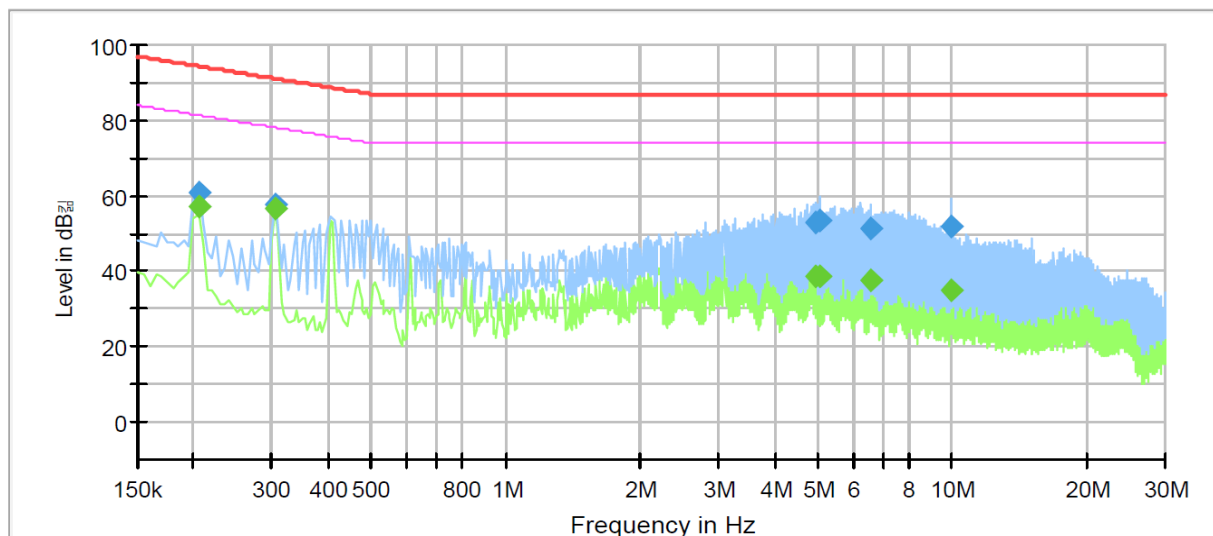

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	57.22	81.41	24.19	1000.0	9.000	Single Line	10.1
0.205000	60.83	---	94.41	33.58	1000.0	9.000	Single Line	10.1
0.305000	---	56.66	78.11	21.45	1000.0	9.000	Single Line	10.1
0.305000	57.64	---	91.11	33.47	1000.0	9.000	Single Line	10.1
4.940000	---	38.58	74.00	35.42	1000.0	9.000	Single Line	10.1
4.940000	52.83	---	87.00	34.17	1000.0	9.000	Single Line	10.1
5.065000	---	38.39	74.00	35.61	1000.0	9.000	Single Line	10.1
5.065000	53.38	---	87.00	33.62	1000.0	9.000	Single Line	10.1
6.545000	---	37.47	74.00	36.53	1000.0	9.000	Single Line	10.0
6.545000	51.13	---	87.00	35.87	1000.0	9.000	Single Line	10.0
9.995000	---	35.15	74.00	38.85	1000.0	9.000	Single Line	10.0
9.995000	52.10	---	87.00	34.90	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	AC 24 V 100 Mbps
Operator Name:	KES

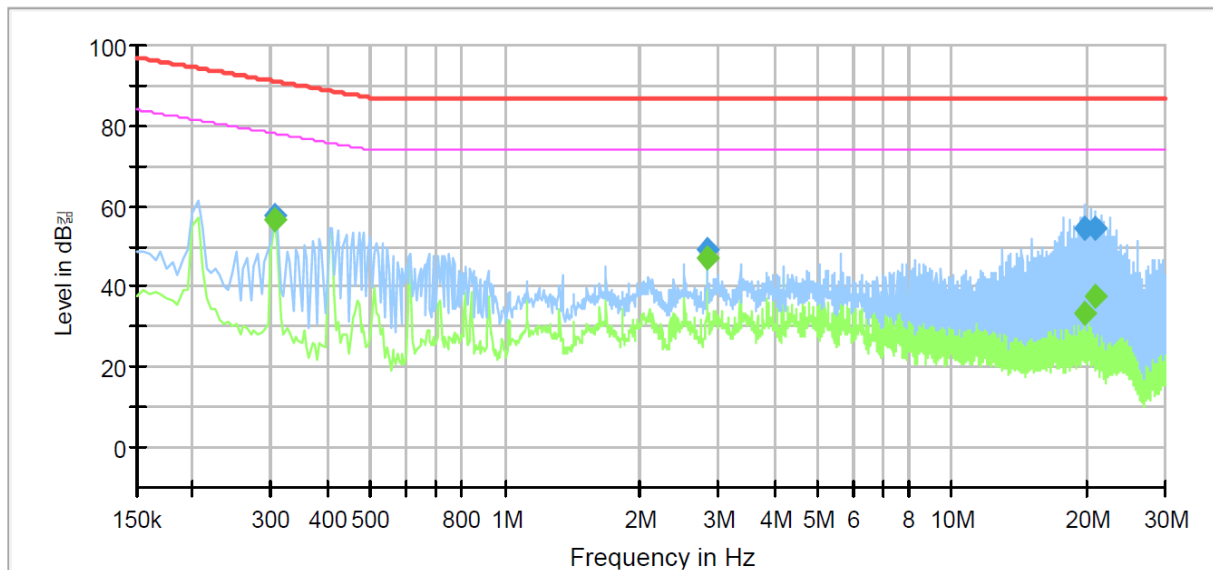

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.305000	---	56.78	78.11	21.33	1000.0	9.000	Single Line	9.6
0.305000	57.84	---	91.11	33.27	1000.0	9.000	Single Line	9.6
2.830000	---	46.91	74.00	27.09	1000.0	9.000	Single Line	9.7
2.830000	49.27	---	87.00	37.73	1000.0	9.000	Single Line	9.7
19.710000	---	33.36	74.00	40.64	1000.0	9.000	Single Line	9.6
19.710000	54.68	---	87.00	32.32	1000.0	9.000	Single Line	9.6
20.810000	---	37.54	74.00	36.46	1000.0	9.000	Single Line	9.6
20.810000	54.29	---	87.00	32.71	1000.0	9.000	Single Line	9.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	DC 12 V 10 Mbps
Operator Name:	KES

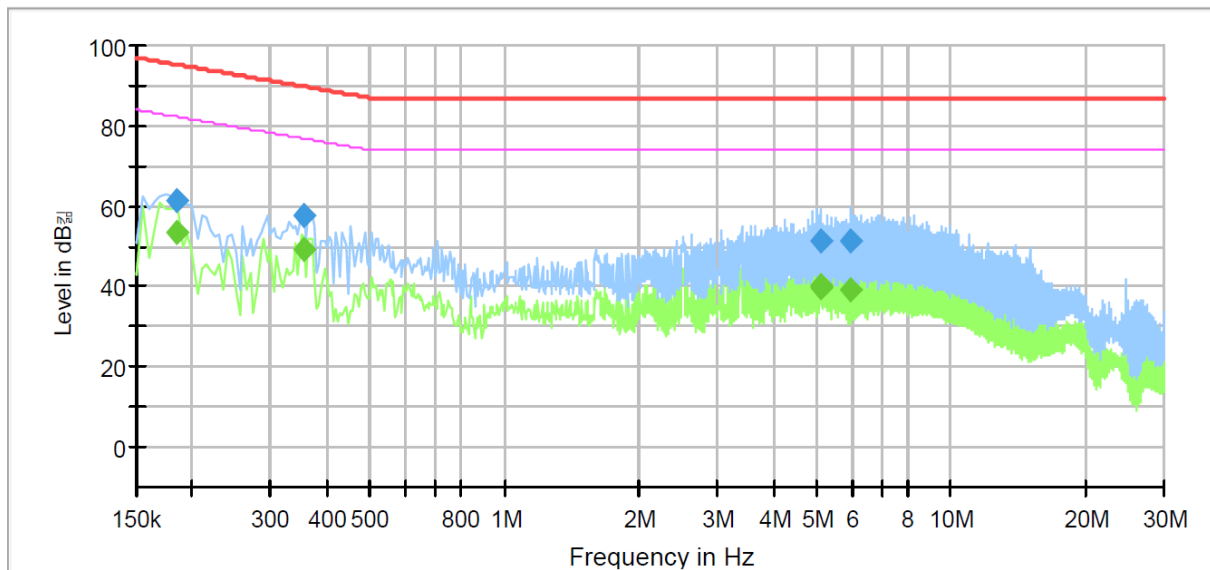

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.185000	---	53.41	82.26	28.85	1000.0	9.000	Single Line	10.1
0.185000	61.21	---	95.26	34.05	1000.0	9.000	Single Line	10.1
0.355000	---	49.10	76.84	27.74	1000.0	9.000	Single Line	10.1
0.355000	57.88	---	89.84	31.96	1000.0	9.000	Single Line	10.1
5.085000	---	40.01	74.00	33.99	1000.0	9.000	Single Line	10.1
5.085000	51.19	---	87.00	35.81	1000.0	9.000	Single Line	10.1
5.120000	---	39.93	74.00	34.07	1000.0	9.000	Single Line	10.1
5.120000	51.42	---	87.00	35.58	1000.0	9.000	Single Line	10.1
5.965000	---	38.98	74.00	35.02	1000.0	9.000	Single Line	10.1
5.965000	51.27	---	87.00	35.73	1000.0	9.000	Single Line	10.1
5.975000	---	39.31	74.00	34.69	1000.0	9.000	Single Line	10.1
5.975000	51.26	---	87.00	35.74	1000.0	9.000	Single Line	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

[100 Mbps]


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	DC 12 V 100 Mbps
Operator Name:	KES

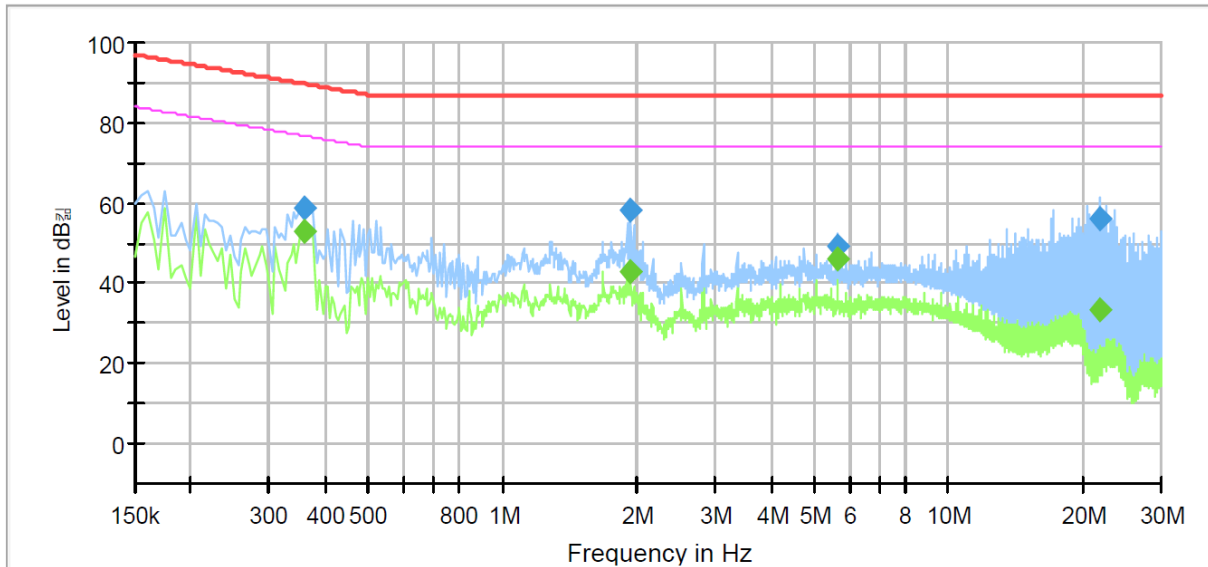

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.360000	---	52.67	76.73	24.06	1000.0	9.000	Single Line	9.6
0.360000	58.77	---	89.73	30.96	1000.0	9.000	Single Line	9.6
1.935000	---	42.98	74.00	31.02	1000.0	9.000	Single Line	9.7
1.935000	58.48	---	87.00	28.52	1000.0	9.000	Single Line	9.7
5.640000	---	45.91	74.00	28.09	1000.0	9.000	Single Line	9.6
5.640000	49.37	---	87.00	37.63	1000.0	9.000	Single Line	9.6
21.860000	---	33.42	74.00	40.58	1000.0	9.000	Single Line	9.6
21.860000	56.26	---	87.00	30.74	1000.0	9.000	Single Line	9.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- POE Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	POE 10 Mbps
Operator Name:	KES

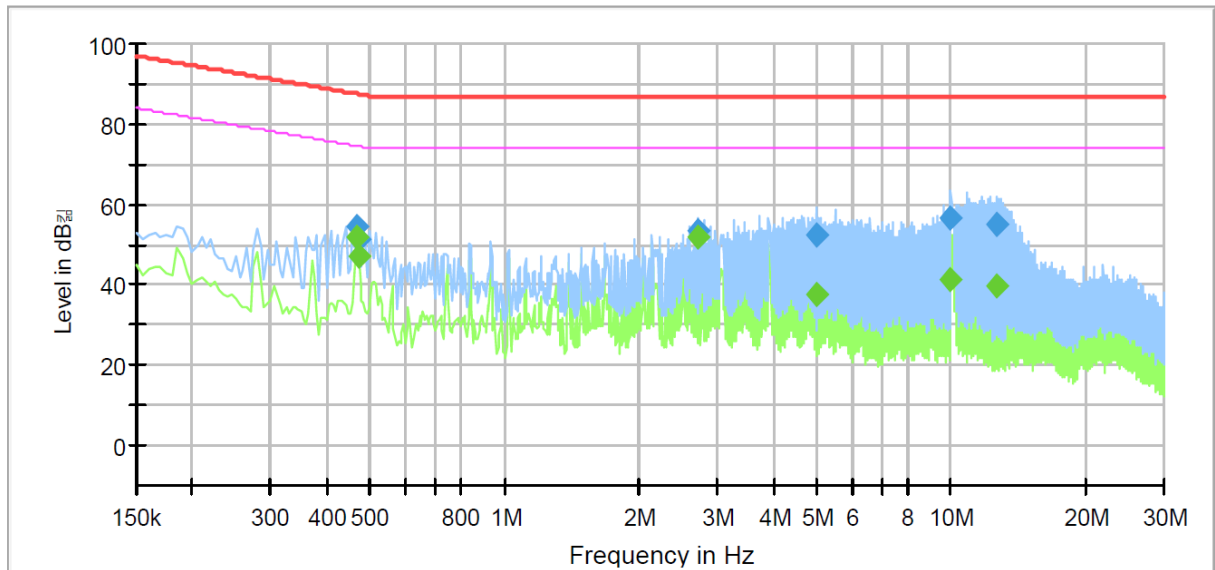

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.465000	---	51.82	74.60	22.78	1000.0	9.000	Single Line	10.1
0.465000	54.37	---	87.60	33.23	1000.0	9.000	Single Line	10.1
0.470000	---	47.03	74.51	27.48	1000.0	9.000	Single Line	10.1
0.470000	51.30	---	87.51	36.21	1000.0	9.000	Single Line	10.1
2.700000	---	52.08	74.00	21.92	1000.0	9.000	Single Line	10.2
2.700000	53.38	---	87.00	33.62	1000.0	9.000	Single Line	10.2
4.975000	---	37.34	74.00	36.66	1000.0	9.000	Single Line	10.1
4.975000	52.57	---	87.00	34.43	1000.0	9.000	Single Line	10.1
10.005000	---	41.05	74.00	32.95	1000.0	9.000	Single Line	10.0
10.005000	56.49	---	87.00	30.51	1000.0	9.000	Single Line	10.0
12.635000	---	39.82	74.00	34.18	1000.0	9.000	Single Line	10.0
12.635000	55.31	---	87.00	31.69	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-8080RN
Mode	POE 100 Mbps
Operator Name:	KES

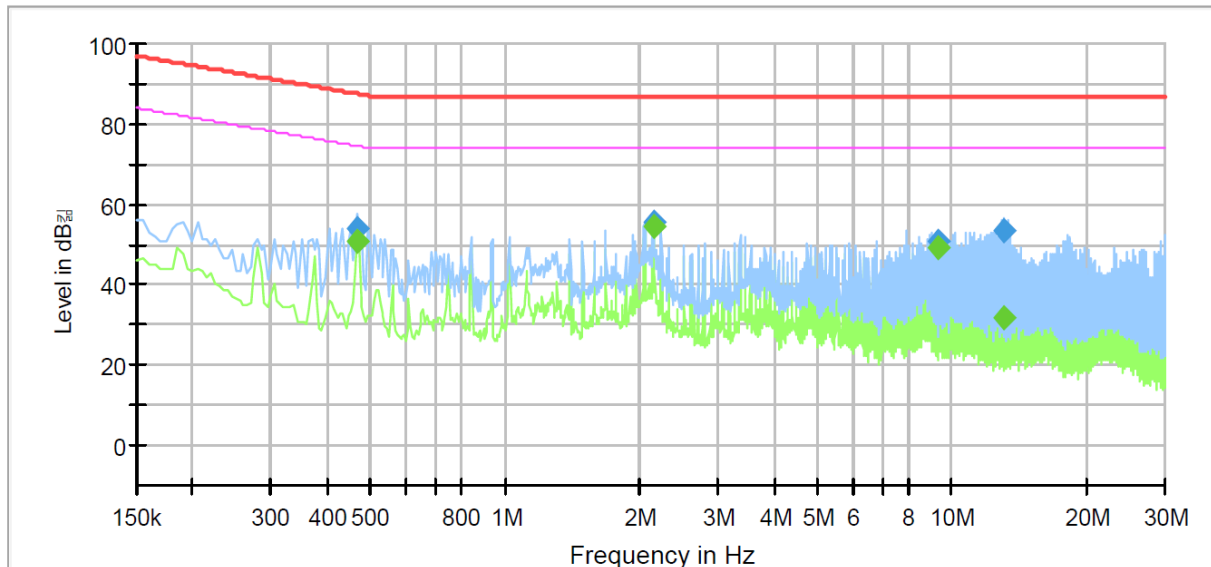

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.465000	---	50.97	74.60	23.63	1000.0	9.000	Single Line	9.6
0.465000	53.82	---	87.60	33.78	1000.0	9.000	Single Line	9.6
2.145000	---	54.34	74.00	19.66	1000.0	9.000	Single Line	9.7
2.145000	55.33	---	87.00	31.67	1000.0	9.000	Single Line	9.7
9.360000	---	49.03	74.00	24.97	1000.0	9.000	Single Line	9.5
9.360000	50.58	---	87.00	36.42	1000.0	9.000	Single Line	9.5
13.010000	---	31.64	74.00	42.36	1000.0	9.000	Single Line	9.5
13.010000	53.57	---	87.00	33.43	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-16T0621-R1

Page (27) of (59)

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
196.60	20.02	H	4.00	10.98	4.08	35.08	40.00	4.92
221.18	20.33	H	4.00	11.77	4.37	36.47	40.00	3.53
221.19	19.48	V	1.00	11.77	4.37	35.62	40.00	4.38
319.49	22.41	H	4.00	13.83	5.34	41.58	47.00	5.42
344.15	20.85	H	4.00	14.40	5.58	40.83	47.00	6.17
491.09	16.37	H	3.30	16.98	6.97	40.32	47.00	6.68

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
196.63	19.86	H	4.00	10.98	4.08	34.92	40.00	5.08
221.18	19.94	H	4.00	11.77	4.37	36.08	40.00	3.92
221.23	19.46	V	1.00	11.77	4.37	35.60	40.00	4.40
319.77	21.16	H	4.00	13.84	5.34	40.34	47.00	6.66
344.29	20.67	H	4.00	14.41	5.58	40.66	47.00	6.34
491.50	16.81	H	3.50	16.98	6.97	40.76	47.00	6.24

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- POE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
196.62	19.76	H	4.00	10.98	4.08	34.82	40.00	5.18
221.18	20.23	H	4.00	11.77	4.37	36.37	40.00	3.63
319.47	22.34	V	1.10	13.83	5.34	41.51	47.00	5.49
319.50	21.84	H	3.90	13.83	5.34	41.01	47.00	5.99
344.13	20.71	H	4.00	14.40	5.58	40.69	47.00	6.31
369.63	18.35	H	4.00	15.00	5.85	39.20	47.00	7.80

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dBμV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

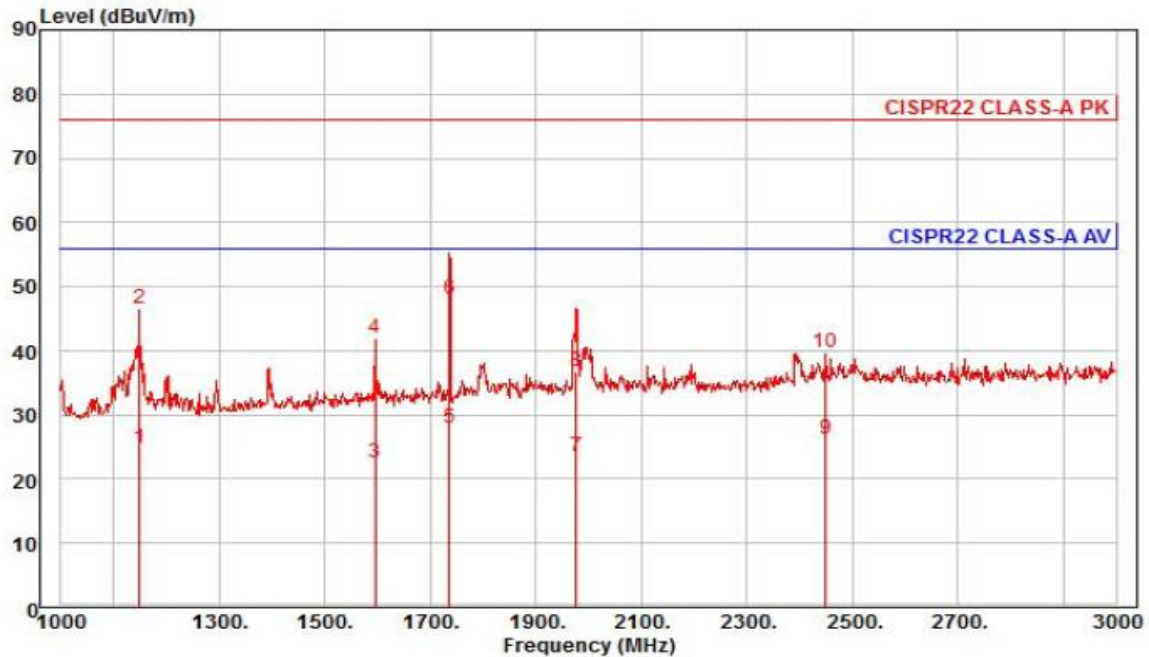

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : XNO-8080RN
 Mode : AC 24 V
 Memo : (1 ~ 3) GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1148.00	33.12	24.50	6.97	39.73	37	56.00	-31.14	horizontal	Average
2	1148.00	54.82	24.50	6.97	39.73	37	76.00	-29.44	horizontal	Peak
3	1596.00	27.26	26.28	8.30	39.22	275	56.00	-33.38	horizontal	Average
4	1596.00	46.47	26.28	8.30	39.22	275	76.00	-34.17	horizontal	Peak
5 av	1736.00	31.85	26.83	8.66	39.29	337	56.00	-27.95	horizontal	Average
6 pp	1736.00	51.92	26.83	8.66	39.29	337	76.00	-27.88	horizontal	Peak
7	1976.00	25.90	27.78	9.27	39.40	242	56.00	-32.45	horizontal	Average
8	1976.00	39.11	27.78	9.27	39.40	242	76.00	-39.24	horizontal	Peak
9	2450.00	26.28	28.98	10.43	39.48	83	56.00	-29.79	horizontal	Average
10	2450.00	39.91	28.98	10.43	39.48	83	76.00	-36.16	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

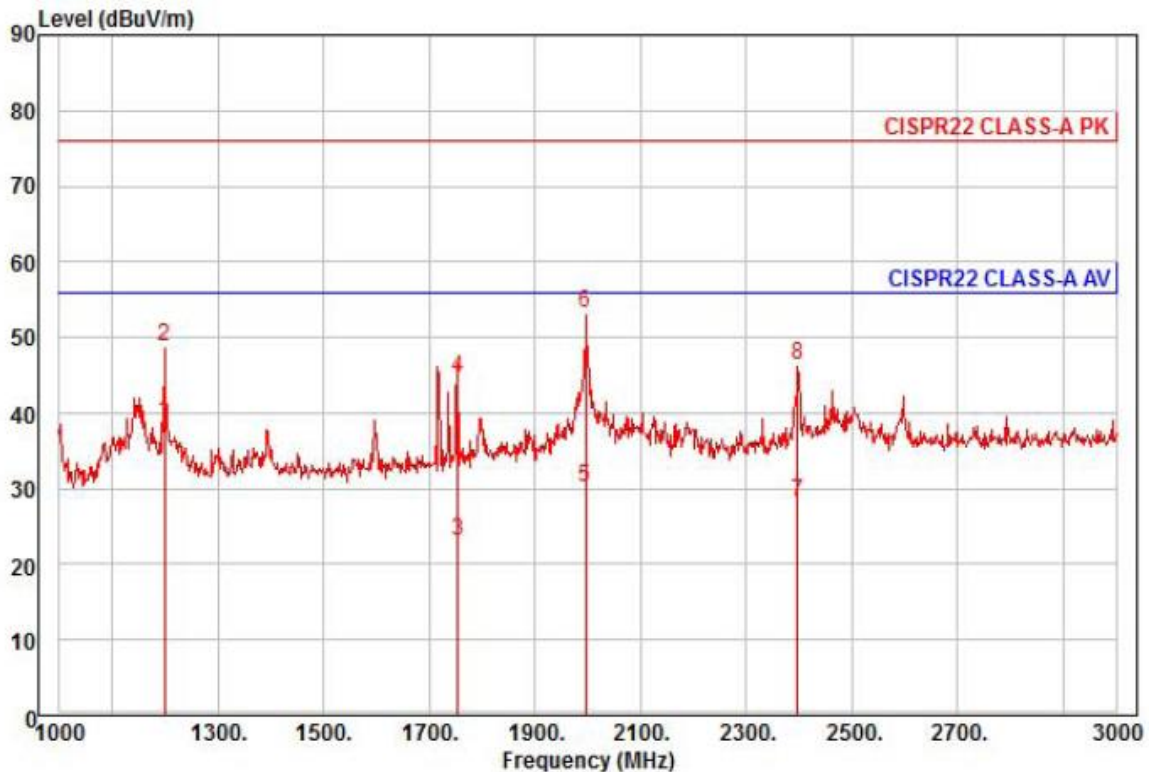

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : AC 24 V
Memo : (1 ~ 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	1200.00	46.56	24.70	7.14	39.61	217	56.00	-17.21	vertical	Average
2	1200.00	56.60	24.70	7.14	39.61	217	76.00	-27.17	vertical	Peak
3	1754.00	26.76	26.90	8.71	39.30	209	56.00	-32.93	vertical	Average
4	1754.00	48.36	26.90	8.71	39.30	209	76.00	-31.33	vertical	Peak
5	1996.00	32.42	27.86	9.33	39.41	320	56.00	-25.80	vertical	Average
6 pk	1996.00	55.52	27.86	9.33	39.41	320	76.00	-22.70	vertical	Peak
7	2398.00	28.43	28.86	10.32	39.42	112	56.00	-27.81	vertical	Average
8	2398.00	46.60	28.86	10.32	39.42	112	76.00	-29.64	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]


Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

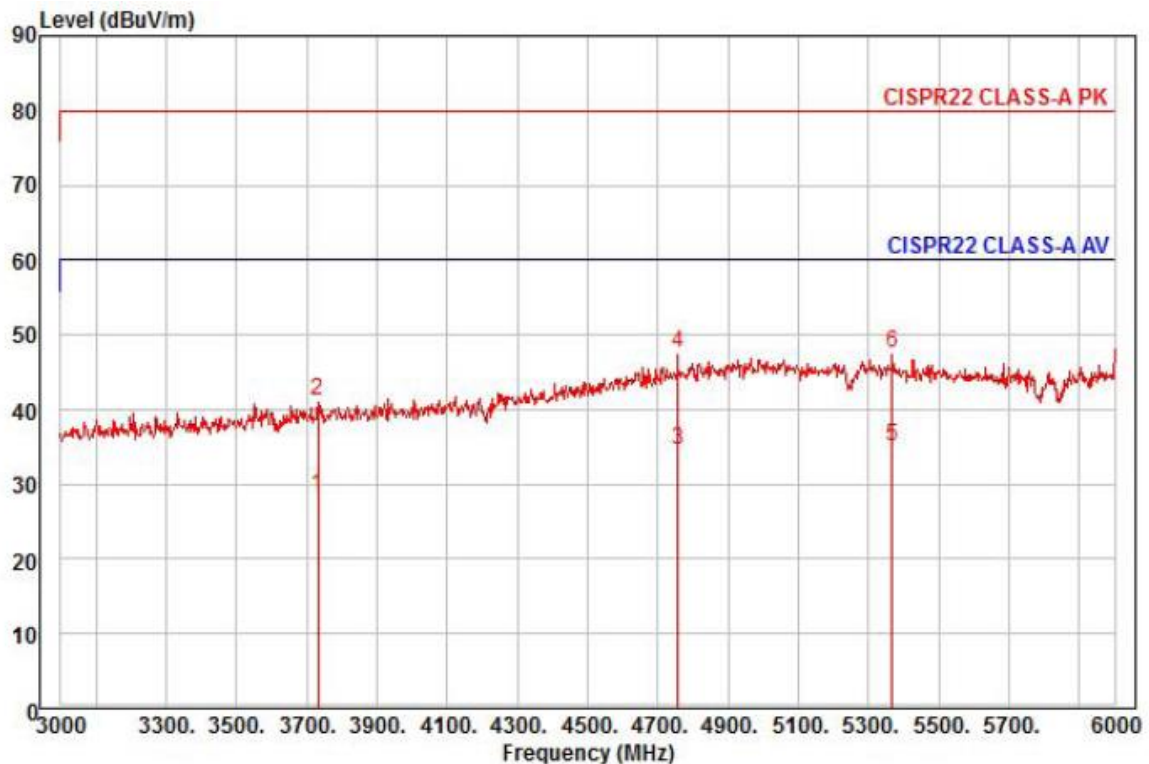


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : AC 24 V
Memo : (3 ~ 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3732.00	24.71	31.56	13.05	40.80	232	60.00	-31.48	horizontal	Average
2	3732.00	37.50	31.56	13.05	40.80	232	80.00	-38.69	horizontal	Peak
3	4758.00	23.67	36.34	15.01	40.51	166	60.00	-25.49	horizontal	Average
4 pk	4758.00	36.86	36.34	15.01	40.51	166	80.00	-32.30	horizontal	Peak
5 pp	5367.00	22.87	36.98	15.98	40.88	343	60.00	-25.05	horizontal	Average
6	5367.00	35.59	36.98	15.98	40.88	343	80.00	-32.33	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

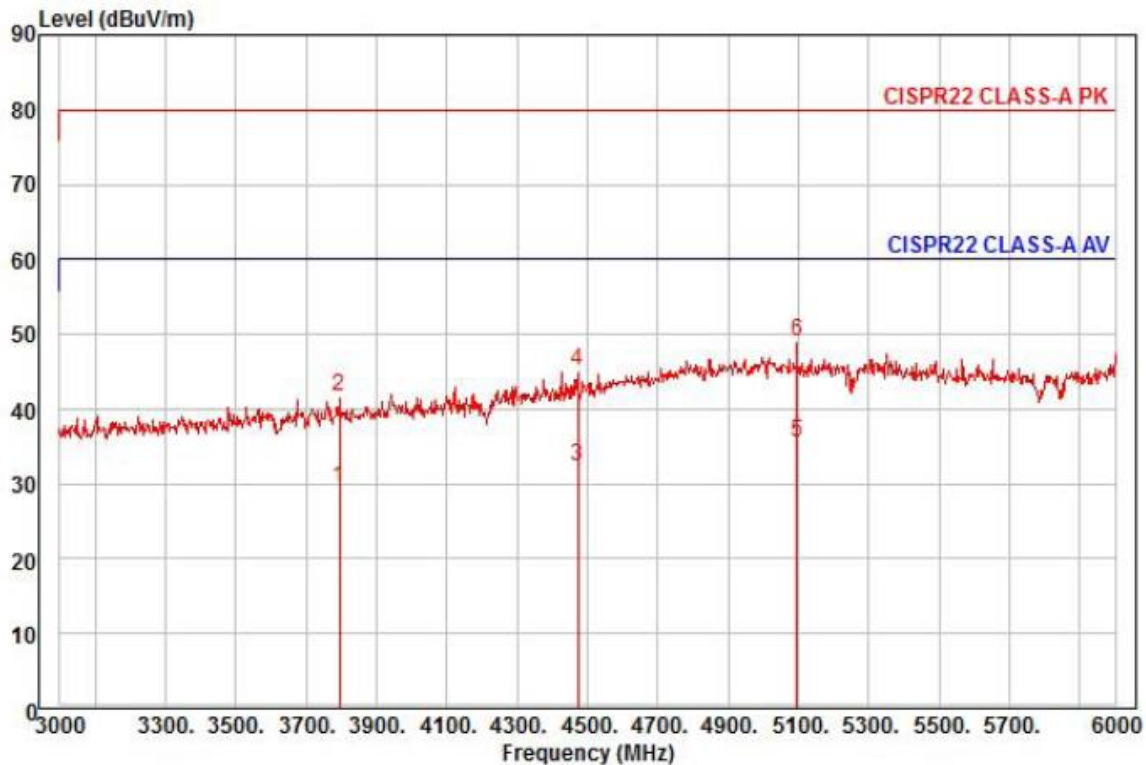

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : AC 24 V
Memo : (3 ~ 6) GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3795.00	25.31	31.67	13.17	40.77	346	60.00	-30.62 vertical	Average
2	3795.00	37.68	31.67	13.17	40.77	346	80.00	-38.25 vertical	Peak
3	4473.00	24.01	34.71	14.41	40.77	301	60.00	-27.64 vertical	Average
4	4473.00	36.76	34.71	14.41	40.77	301	80.00	-34.89 vertical	Peak
5 pp	5097.00	22.85	37.52	15.51	40.43	210	60.00	-24.55 vertical	Average
6 pk	5097.00	36.34	37.52	15.51	40.43	210	80.00	-31.06 vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- DC 12 V Mode

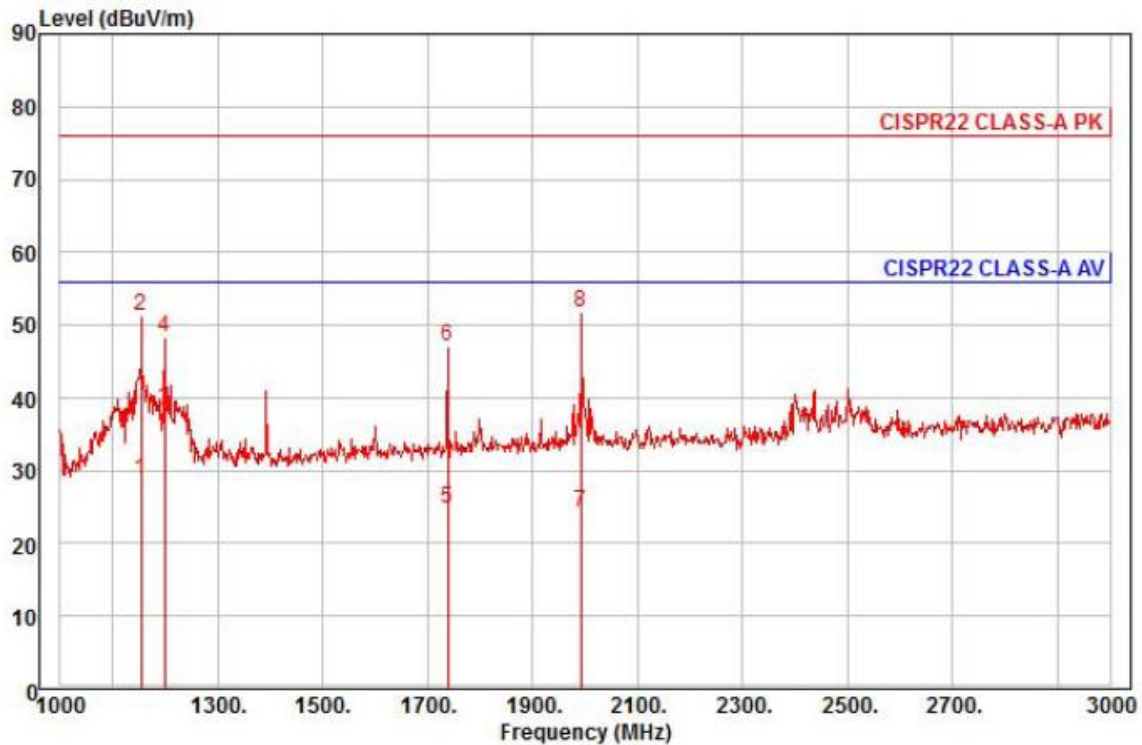


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : DC 12 V
Memo : (1 ~ 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1154.00	36.83	24.52	6.99	39.72	149	56.00	-27.38	horizontal	Average
2	1154.00	59.53	24.52	6.99	39.72	149	76.00	-24.68	horizontal	Peak
3 pp	1200.00	45.92	24.70	7.14	39.61	149	56.00	-17.85	horizontal	Average
4	1200.00	56.10	24.70	7.14	39.61	149	76.00	-27.67	horizontal	Peak
5	1738.00	28.55	26.84	8.67	39.29	158	56.00	-31.23	horizontal	Average
6	1738.00	50.97	26.84	8.67	39.29	158	76.00	-28.81	horizontal	Peak
7	1992.00	26.61	27.85	9.32	39.41	25	56.00	-31.63	horizontal	Average
8 pk	1992.00	53.96	27.85	9.32	39.41	25	76.00	-24.28	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

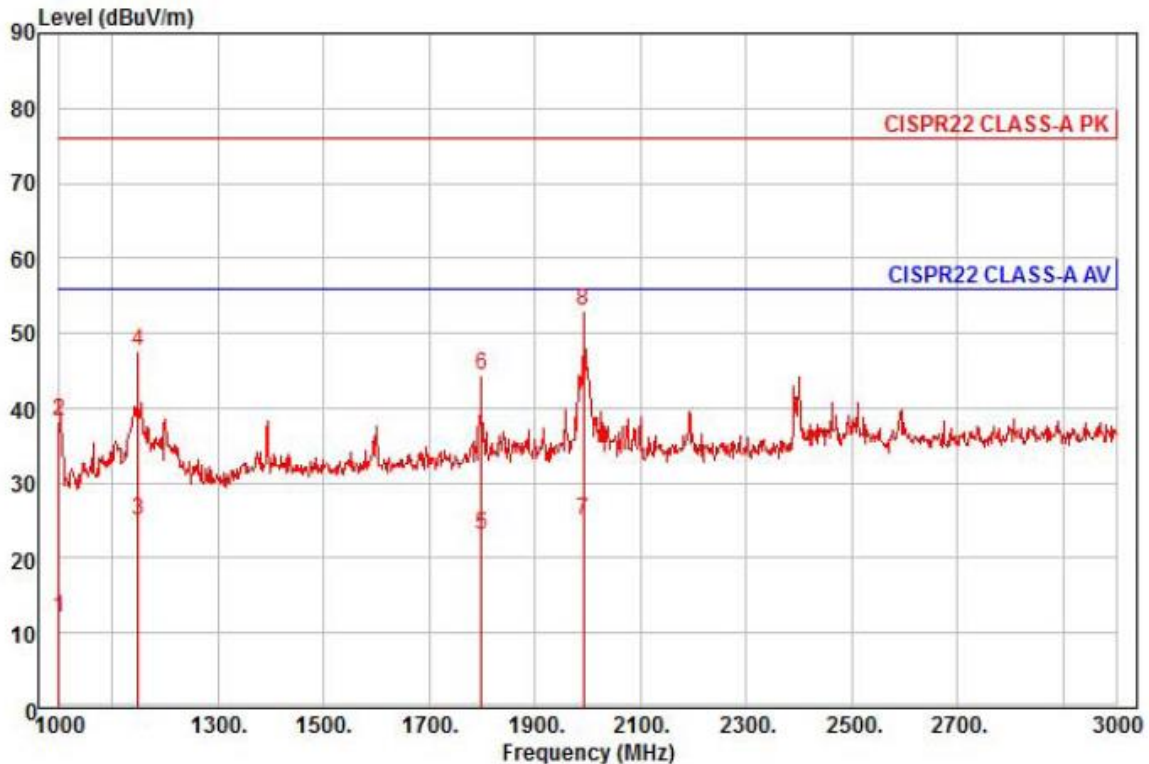


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : DC 12 V
Memo : (1 ~ 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1000.00	21.76	23.91	6.48	40.09	191	56.00	-43.94	vertical	Average
2	1000.00	48.02	23.91	6.48	40.09	191	76.00	-37.68	vertical	Peak
3 av	1148.00	33.28	24.50	6.97	39.73	169	56.00	-30.98	vertical	Average
4	1148.00	55.82	24.50	6.97	39.73	169	76.00	-28.44	vertical	Peak
5	1800.00	26.42	27.09	8.83	39.32	266	56.00	-32.98	vertical	Average
6	1800.00	47.88	27.09	8.83	39.32	266	76.00	-31.52	vertical	Peak
7	1992.00	27.17	27.85	9.32	39.41	149	56.00	-31.07	vertical	Average
8 pp	1992.00	55.16	27.85	9.32	39.41	149	76.00	-23.08	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

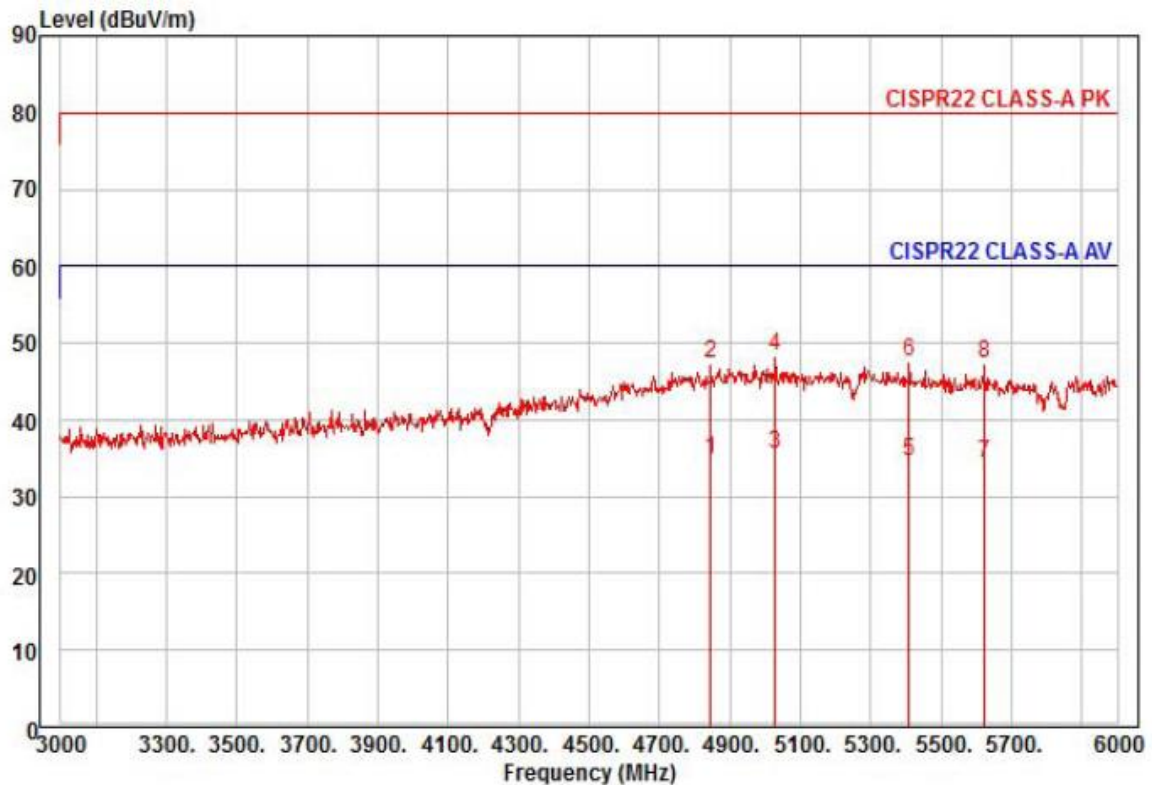

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : DC 12 V
Memo : (3 ~ 6) GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4845.00	23.36	36.83	15.15	40.42	18	60.00	-25.08	horizontal Average
2	4845.00	35.82	36.83	15.15	40.42	18	80.00	-32.62	horizontal Peak
3 pp	5028.00	22.80	37.66	15.37	40.32	140	60.00	-24.49	horizontal Average
4 pk	5028.00	35.63	37.66	15.37	40.32	140	80.00	-31.66	horizontal Peak
5	5409.00	22.69	36.89	16.05	40.95	350	60.00	-25.32	horizontal Average
6	5409.00	35.68	36.89	16.05	40.95	350	80.00	-32.33	horizontal Peak
7	5622.00	22.39	36.46	16.38	40.94	309	60.00	-25.71	horizontal Average
8	5622.00	35.33	36.46	16.38	40.94	309	80.00	-32.77	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

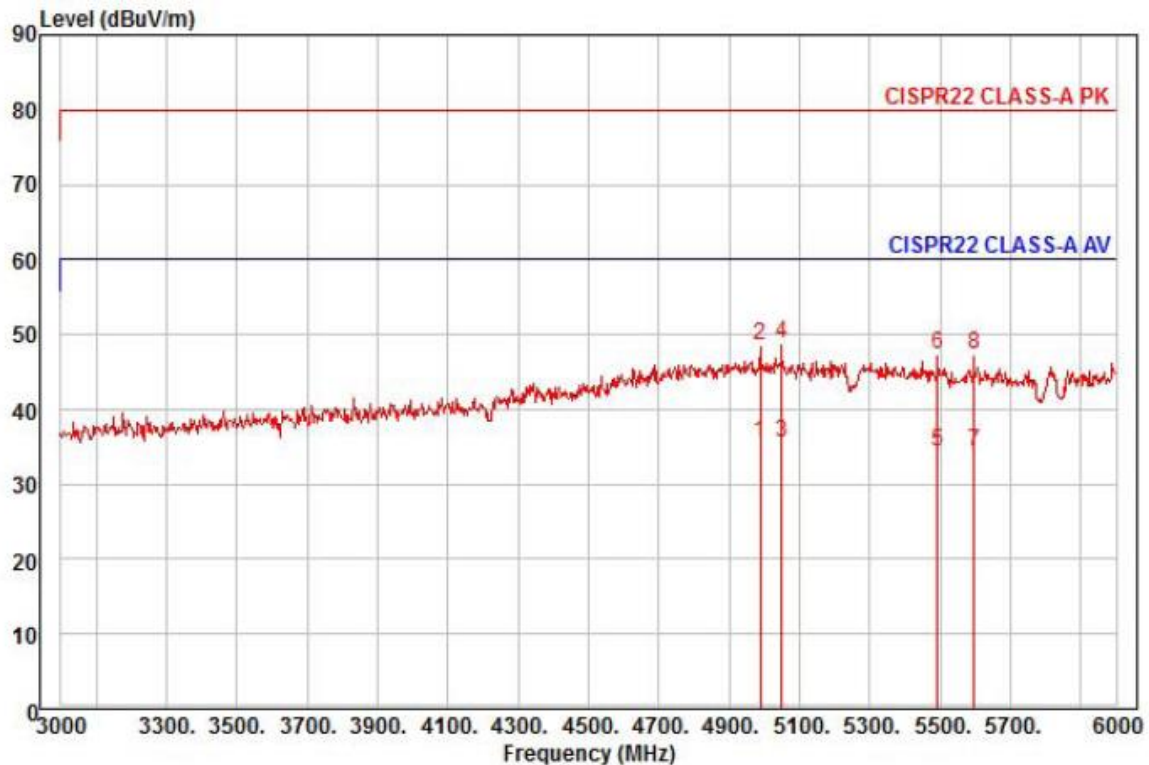

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : DC 12 V
Memo : (3 ~ 6) GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 pp	4989.00	22.90	37.66	15.30	40.28	172	60.00	-24.42	vertical
2	4989.00	35.77	37.66	15.30	40.28	172	80.00	-31.55	vertical
3	5049.00	22.76	37.62	15.41	40.35	337	60.00	-24.56	vertical
4 pk	5049.00	36.12	37.62	15.41	40.35	337	80.00	-31.20	vertical
5	5493.00	22.63	36.72	16.18	41.09	255	60.00	-25.56	vertical
6	5493.00	35.59	36.72	16.18	41.09	255	80.00	-32.60	vertical
7	5598.00	22.50	36.51	16.34	40.97	353	60.00	-25.62	vertical
8	5598.00	35.57	36.51	16.34	40.97	353	80.00	-32.55	vertical

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- POE Mode

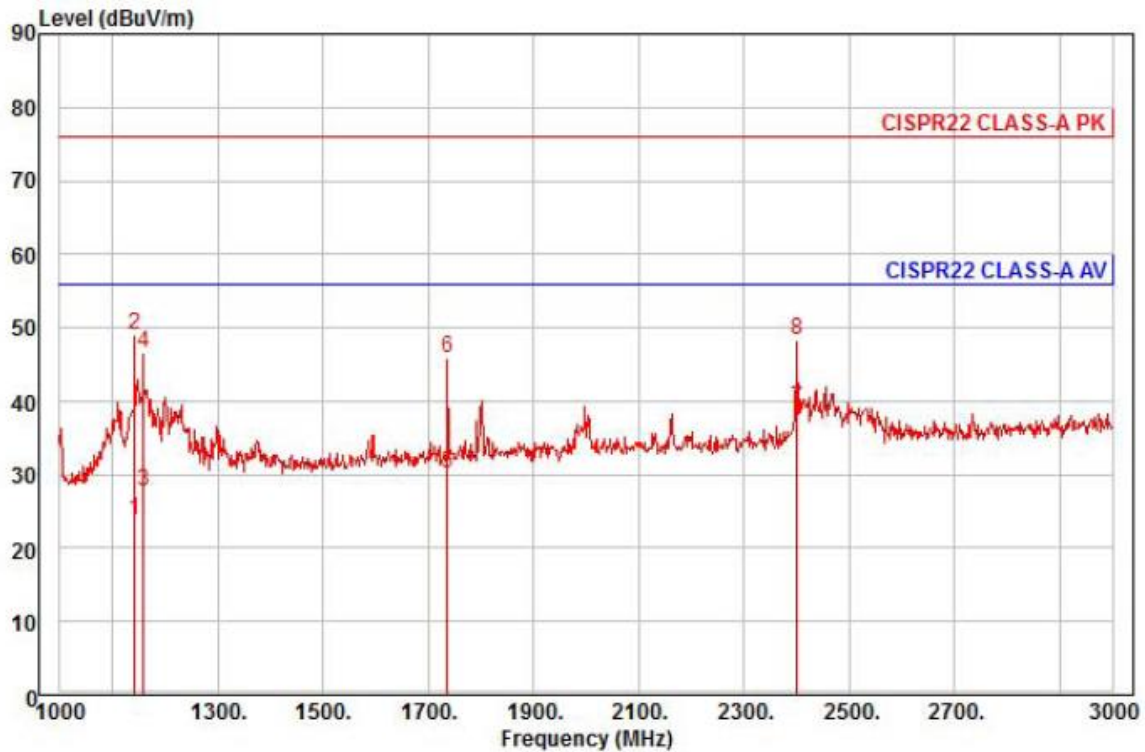

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : PoE
Memo : (1 ~ 3) GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1142.00	32.20	24.47	6.95	39.75	7	56.00	-32.13	horizontal	Average
2 pk	1142.00	57.39	24.47	6.95	39.75	7	76.00	-26.94	horizontal	Peak
3	1160.00	35.82	24.55	7.01	39.71	103	56.00	-28.33	horizontal	Average
4	1160.00	54.75	24.55	7.01	39.71	103	76.00	-29.40	horizontal	Peak
5	1736.00	33.85	26.83	8.66	39.29	158	56.00	-25.95	horizontal	Average
6	1736.00	49.54	26.83	8.66	39.29	158	76.00	-30.26	horizontal	Peak
7 pp	2400.00	39.13	28.86	10.32	39.42	244	56.00	-17.11	horizontal	Average
8	2400.00	48.65	28.86	10.32	39.42	244	76.00	-27.59	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

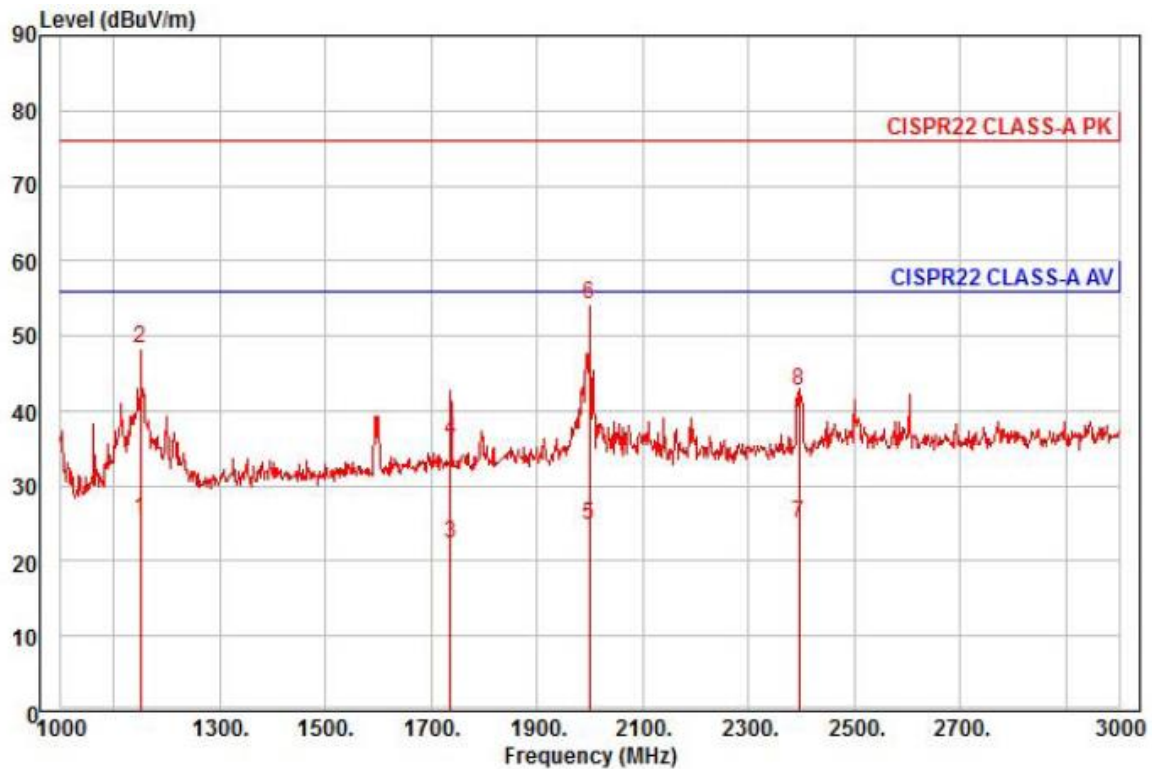


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : PoE
Memo : (1 ~ 3) GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 av	1150.00	33.81	24.51	6.97	39.73	214	56.00	-30.44	vertical	Average
2	1150.00	56.46	24.51	6.97	39.73	214	76.00	-27.79	vertical	Peak
3	1736.00	26.06	26.83	8.66	39.29	119	56.00	-33.74	vertical	Average
4	1736.00	39.83	26.83	8.66	39.29	119	76.00	-39.97	vertical	Peak
5	2000.00	26.89	27.88	9.34	39.41	300	56.00	-31.30	vertical	Average
6 pp	2000.00	56.27	27.88	9.34	39.41	300	76.00	-21.92	vertical	Peak
7	2396.00	25.34	28.85	10.31	39.42	272	56.00	-30.92	vertical	Average
8	2396.00	43.04	28.85	10.31	39.42	272	76.00	-33.22	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

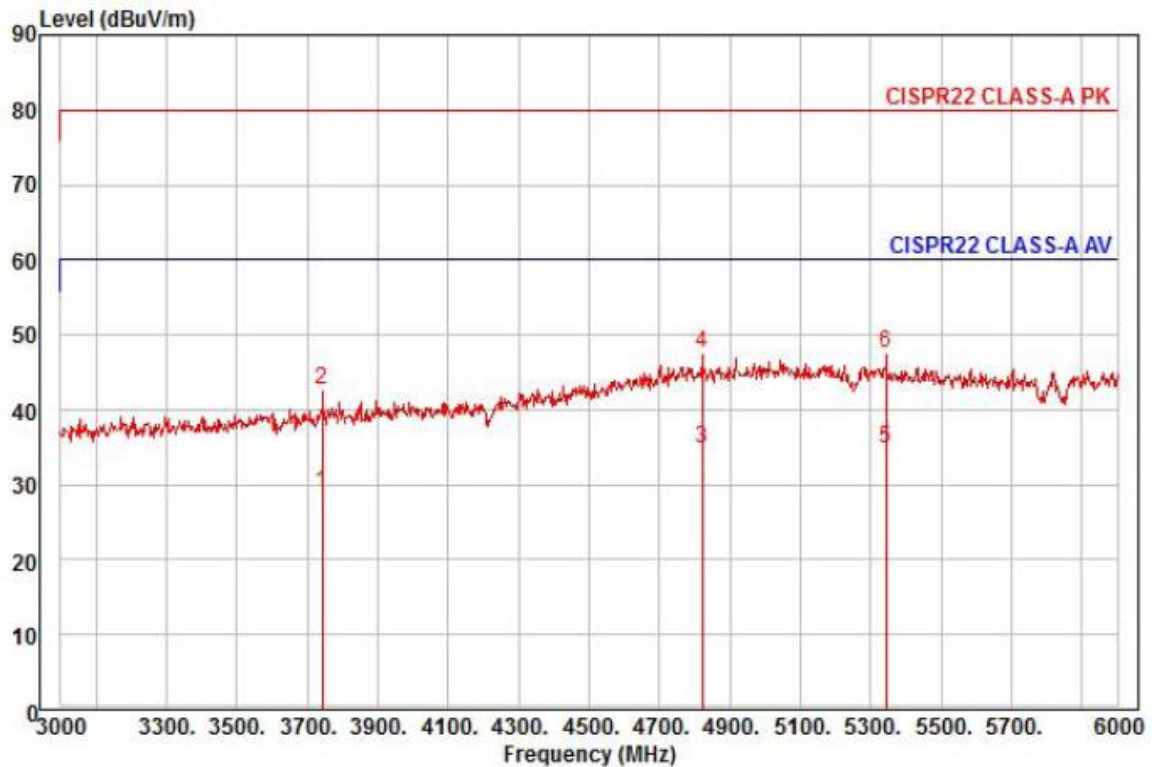


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : PoE
Memo : (3 ~ 6) GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3741.00	25.04	31.57	13.07	40.79	225	60.00	-31.11	horizontal Average
2	3741.00	38.70	31.57	13.07	40.79	225	80.00	-37.45	horizontal Peak
3	4821.00	23.36	36.70	15.12	40.45	113	60.00	-25.27	horizontal Average
4	4821.00	36.15	36.70	15.12	40.45	113	80.00	-32.48	horizontal Peak
5 pp	5343.00	22.75	37.03	15.94	40.84	158	60.00	-25.12	horizontal Average
6 pk	5343.00	35.50	37.03	15.94	40.84	158	80.00	-32.37	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

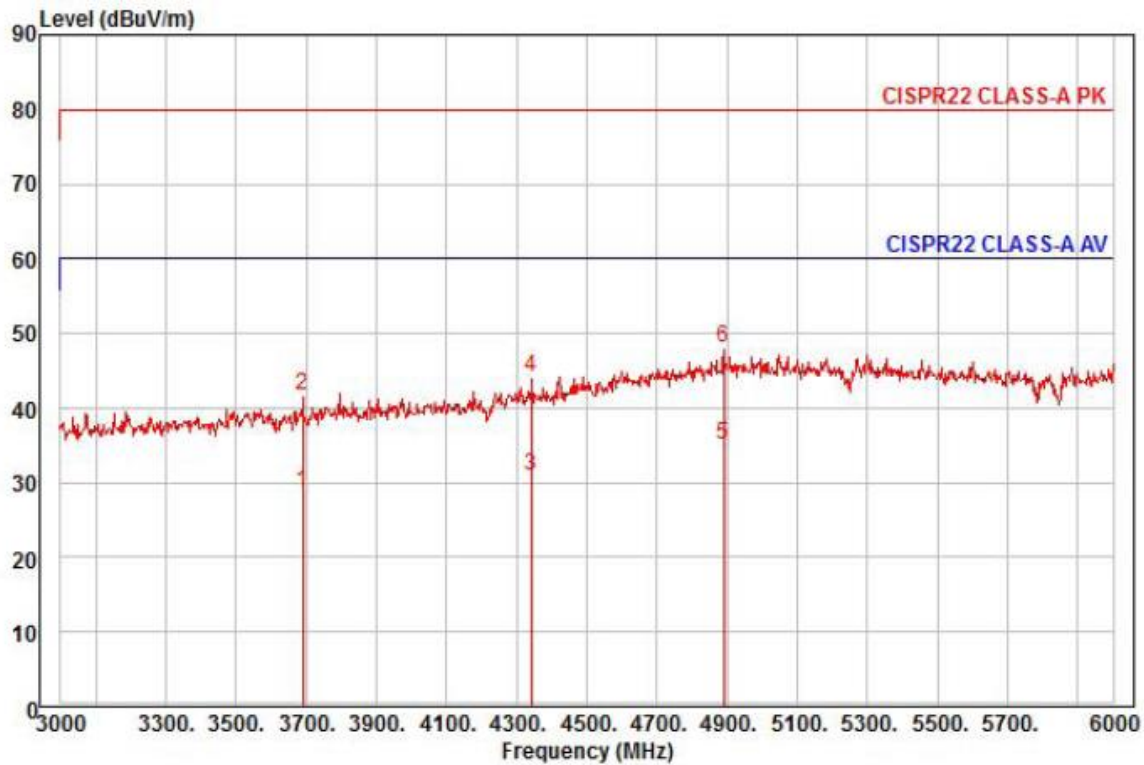

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNO-8080RN
Mode : PoE
Memo : (3 ~ 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3690.00	25.08	31.49	12.97	40.81	25	60.00	-31.27	vertical	Average
2	3690.00	38.07	31.49	12.97	40.81	25	80.00	-38.28	vertical	Peak
3	4341.00	23.59	33.96	14.17	40.75	282	60.00	-29.03	vertical	Average
4	4341.00	36.84	33.96	14.17	40.75	282	80.00	-35.78	vertical	Peak
5 pp	4890.00	23.28	37.09	15.20	40.38	79	60.00	-24.81	vertical	Average
6 pk	4890.00	36.26	37.09	15.20	40.38	79	80.00	-31.83	vertical	Peak

◆ Calculation


Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

Test Setup Photos and Configuration

Conducted Voltage Emissions

- AC 24 V Mode

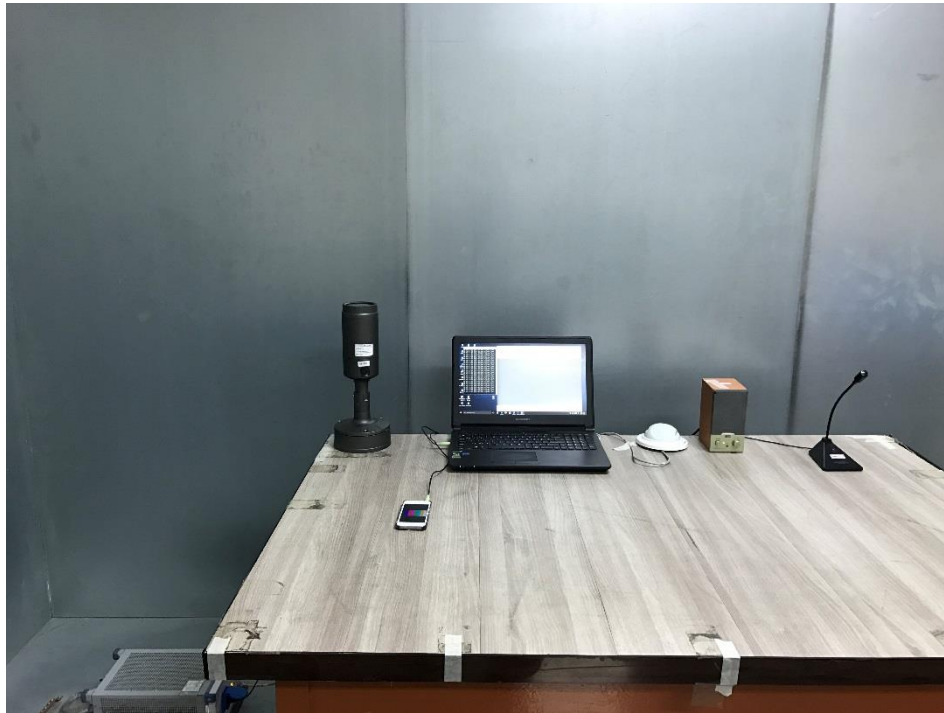

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions

- AC 24 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



- POE Mode

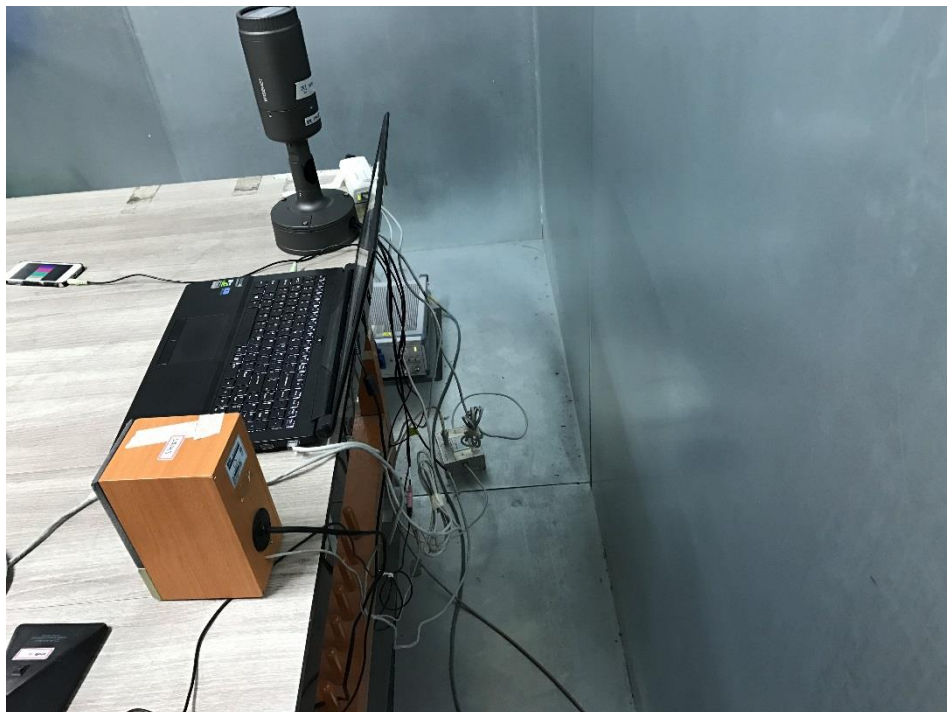

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

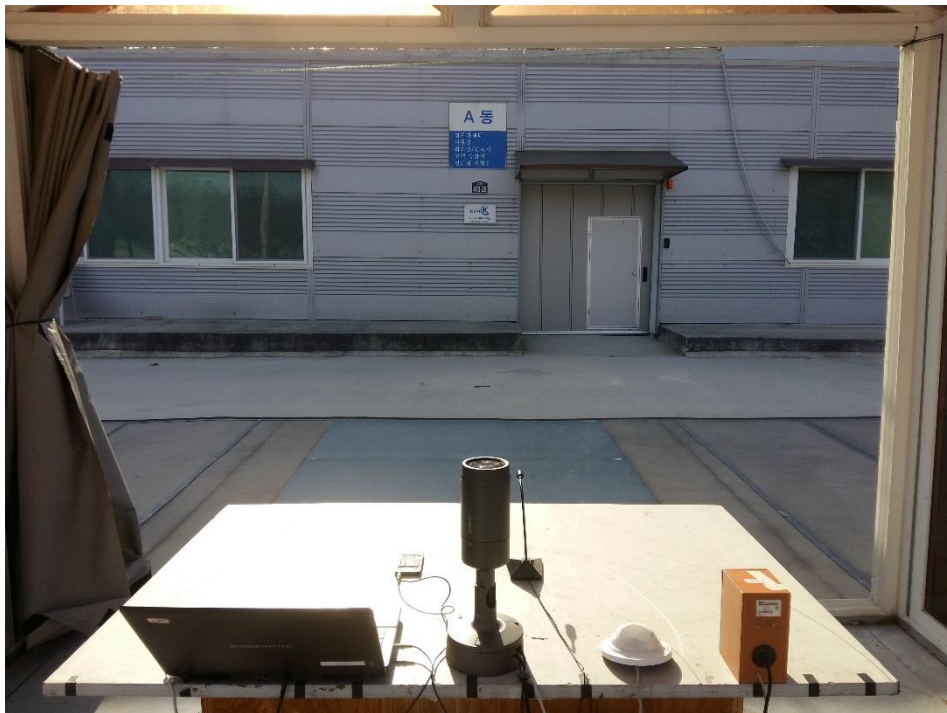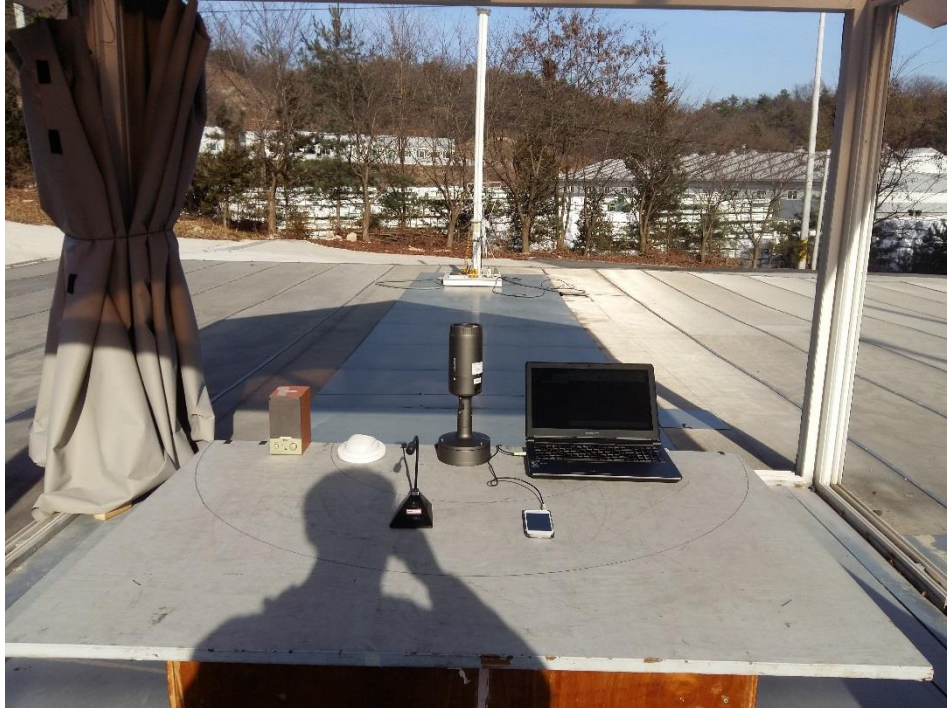


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

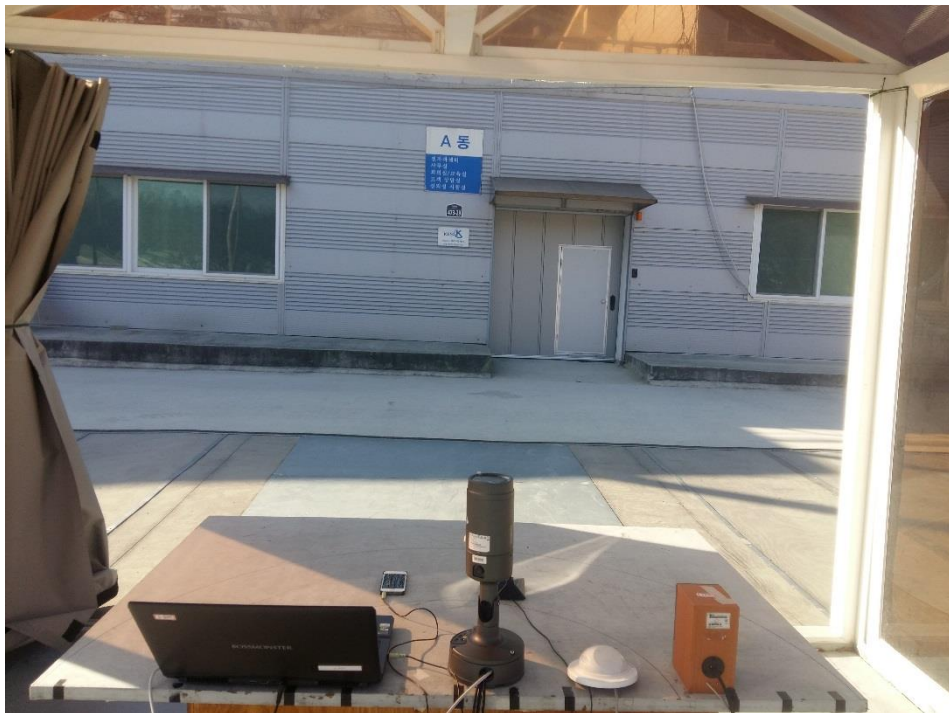

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



- POE Mode

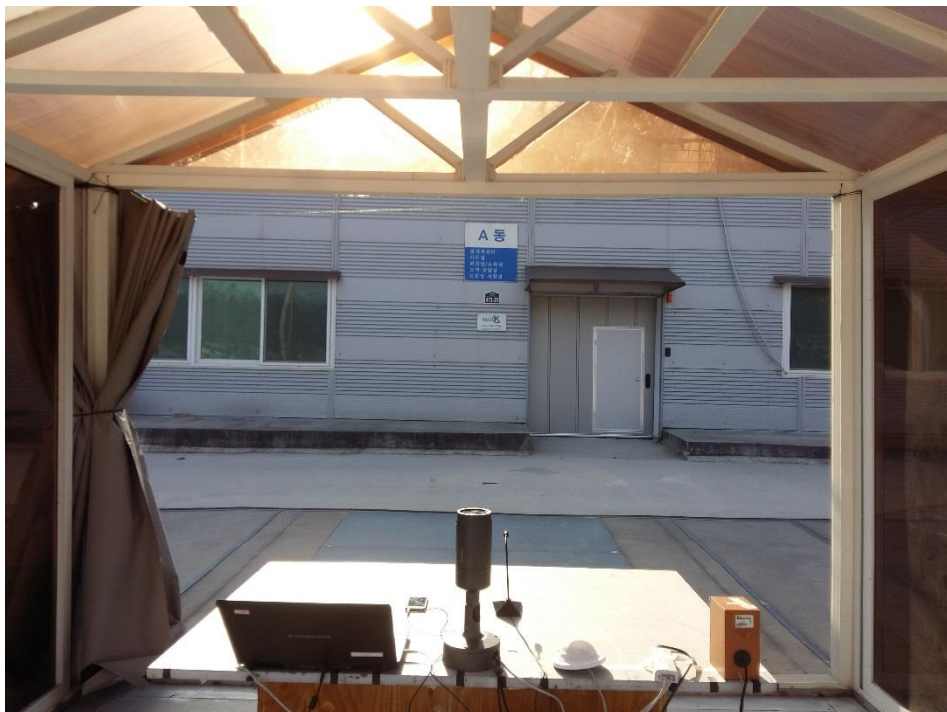

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

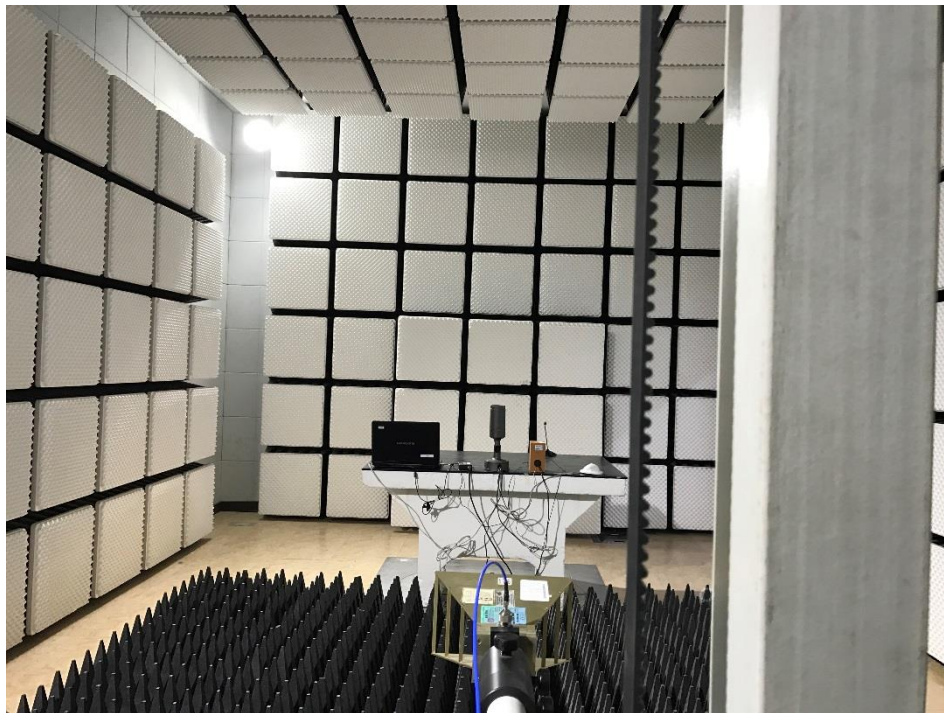
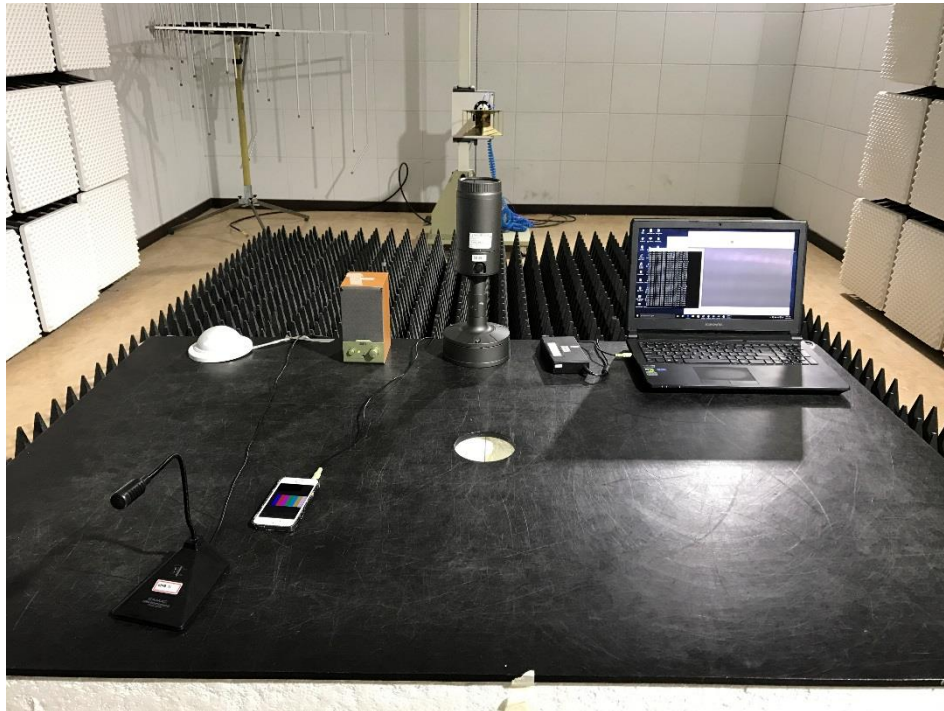


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

- DC 12 V Mode

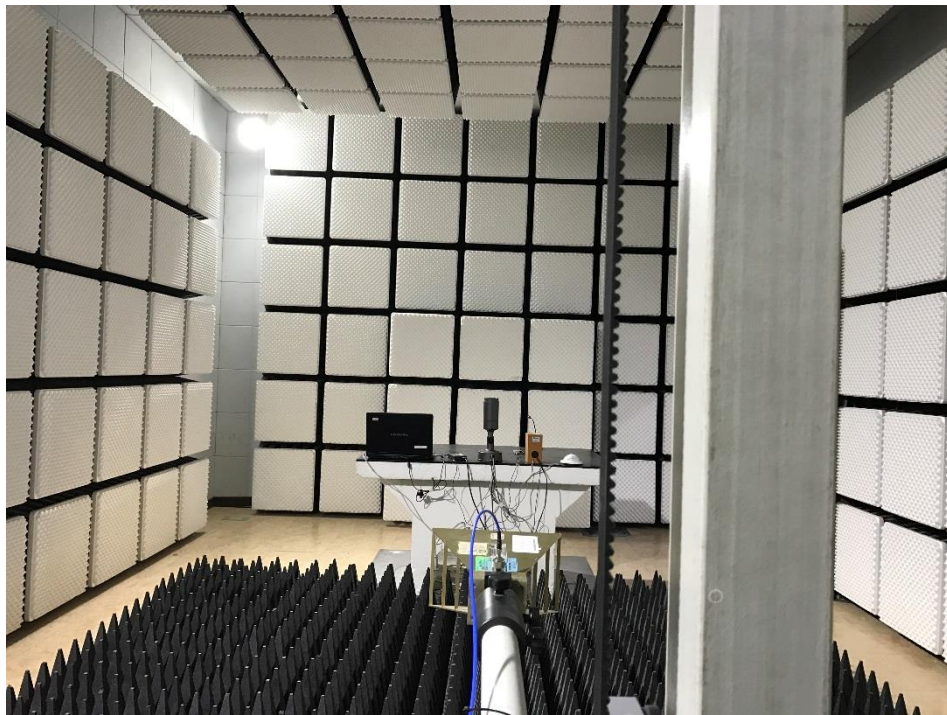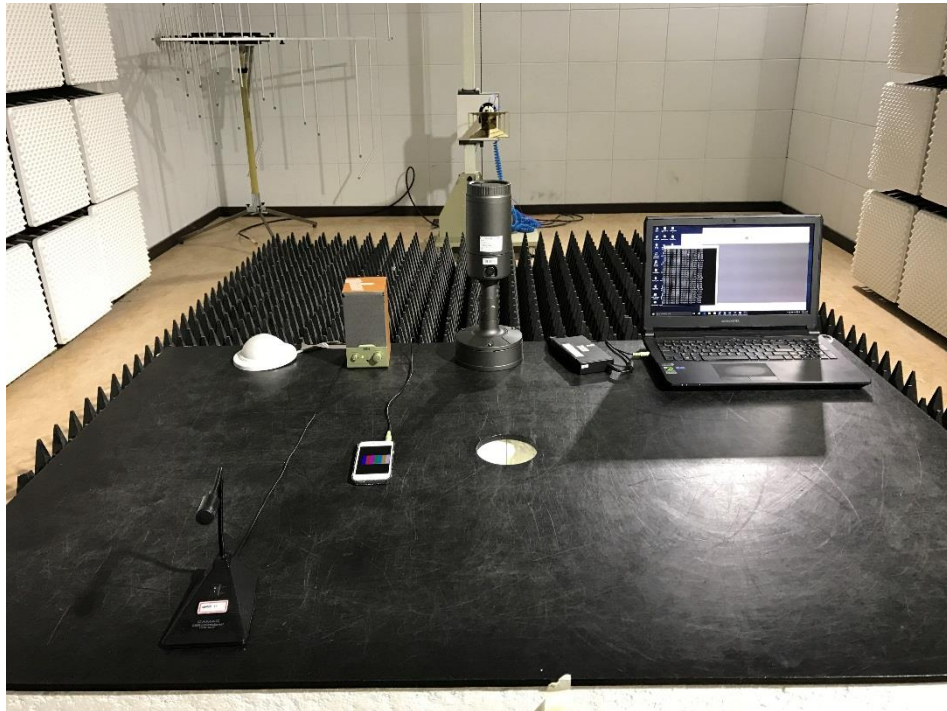

- POE Mode

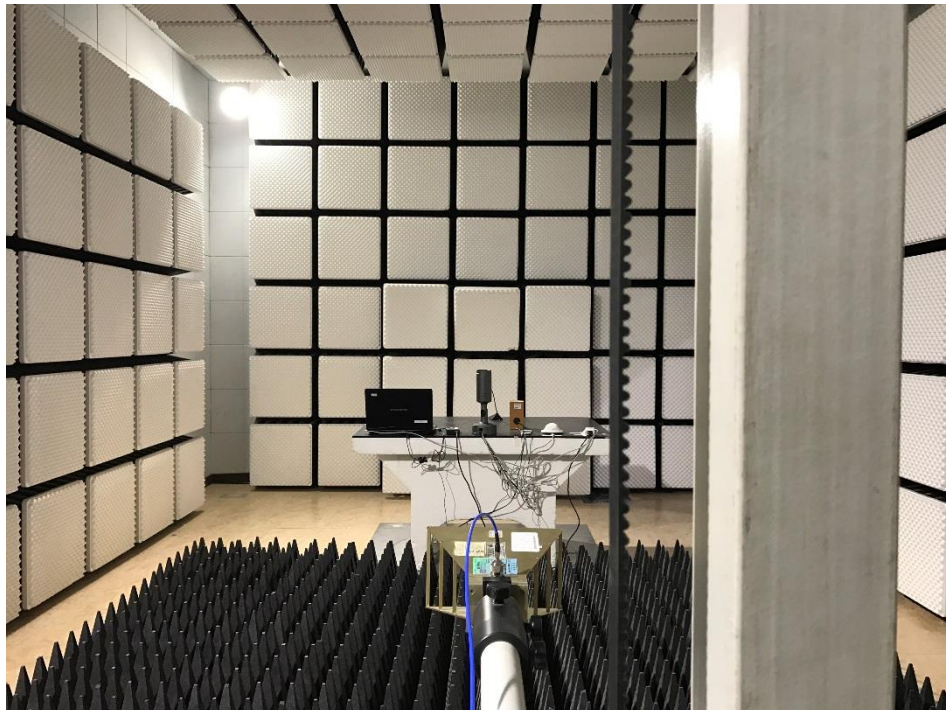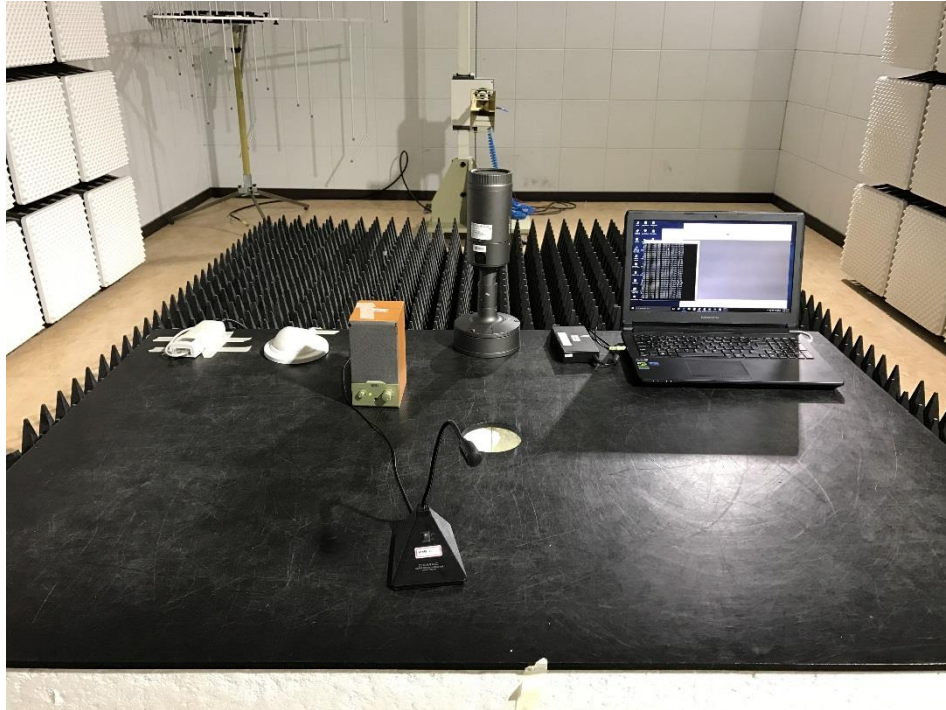

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)



EUT Internal View – Main Board

(Top)

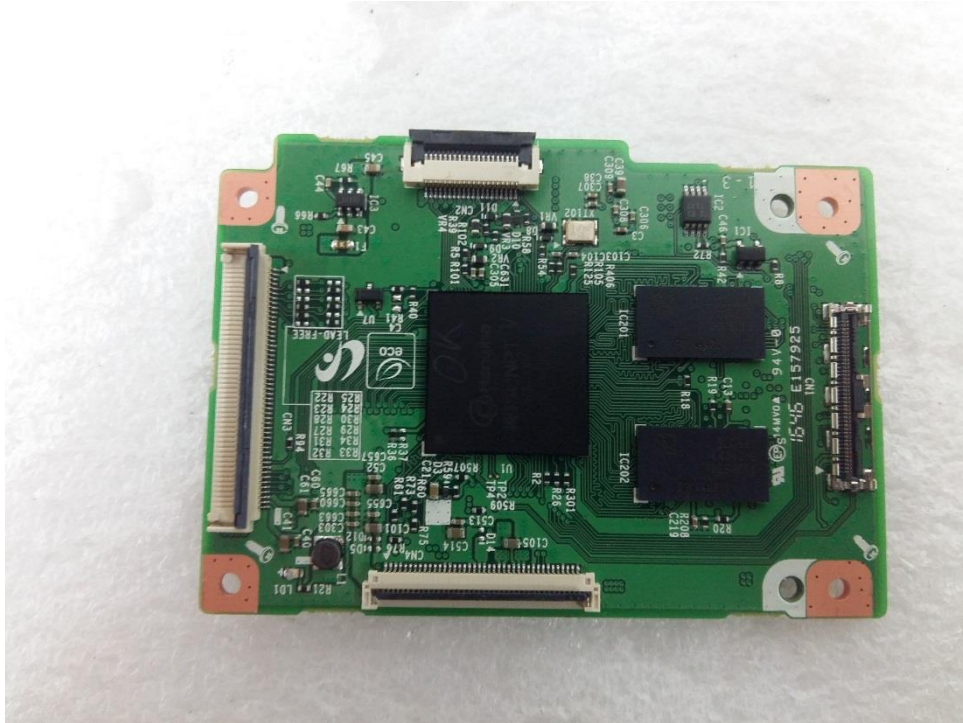


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens Board

(Top)

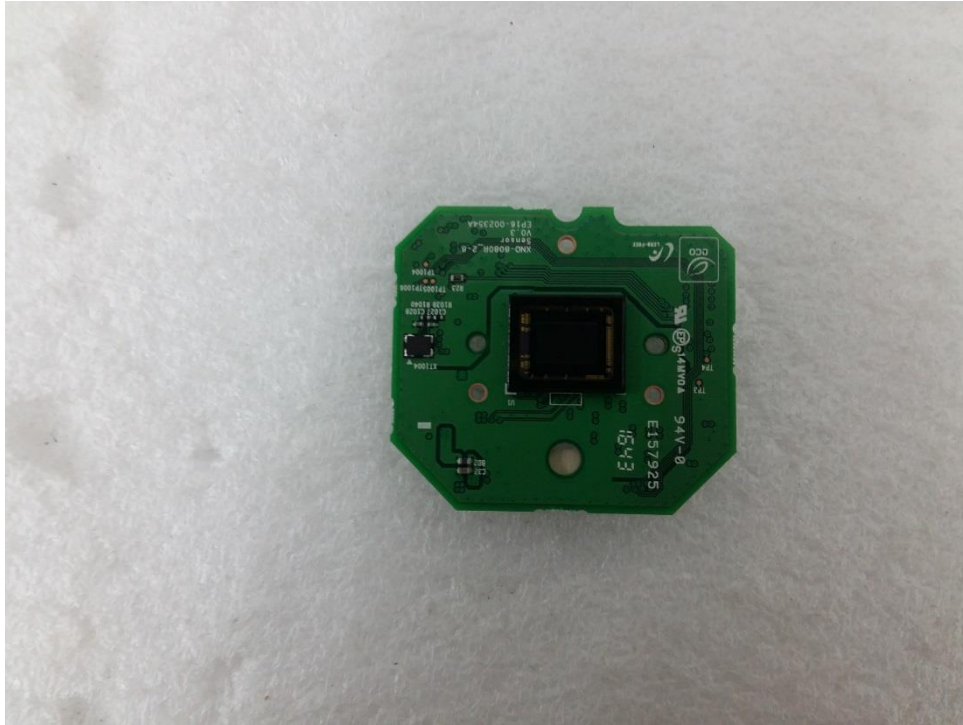


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 1

(Top)

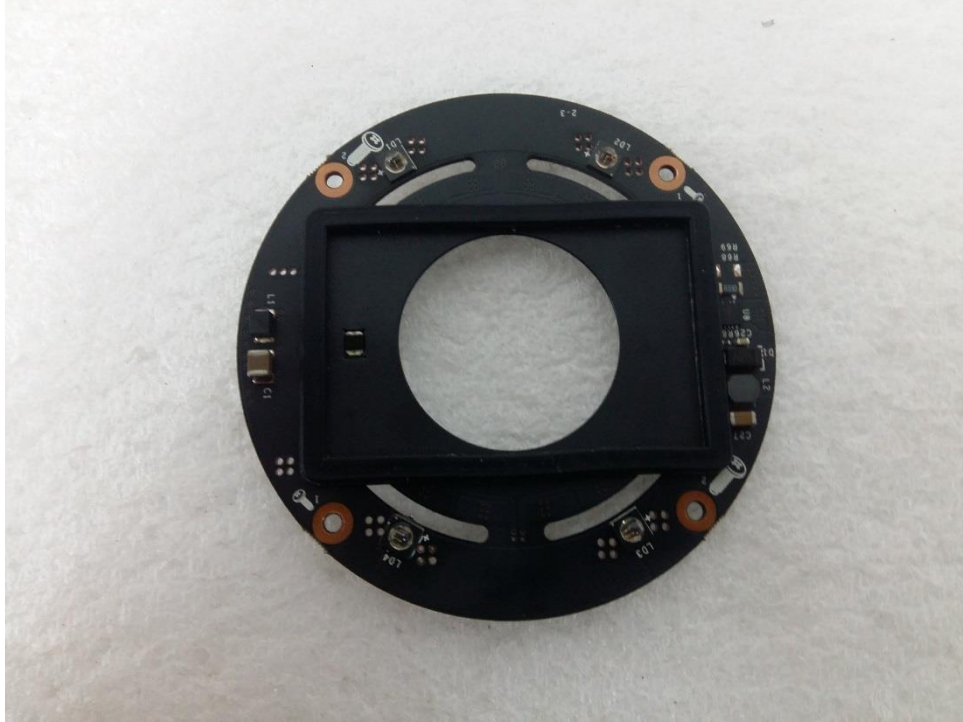


(Bottom)

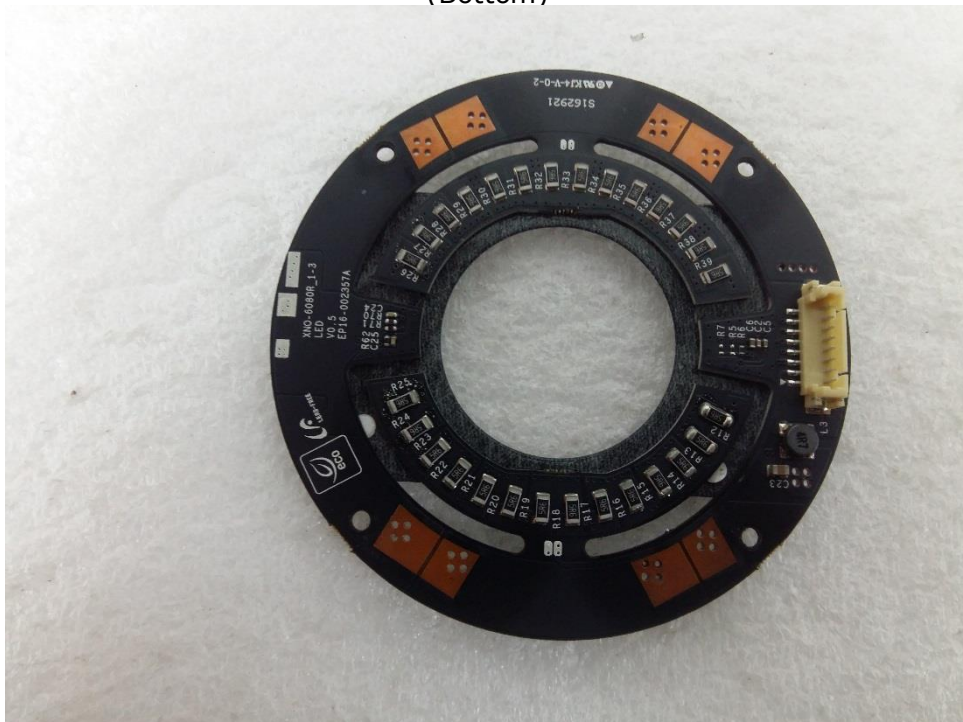

EUT Internal View – Sub Board 2

(Top)

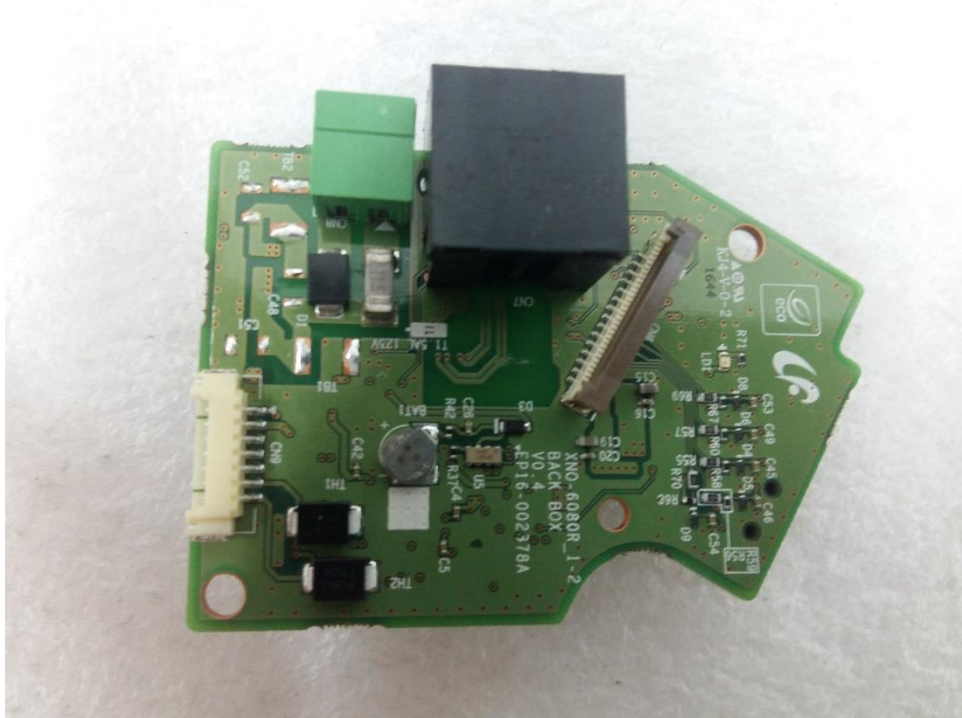

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 3

(Top)




(Bottom)




EUT Internal View – Power Board

(Top)

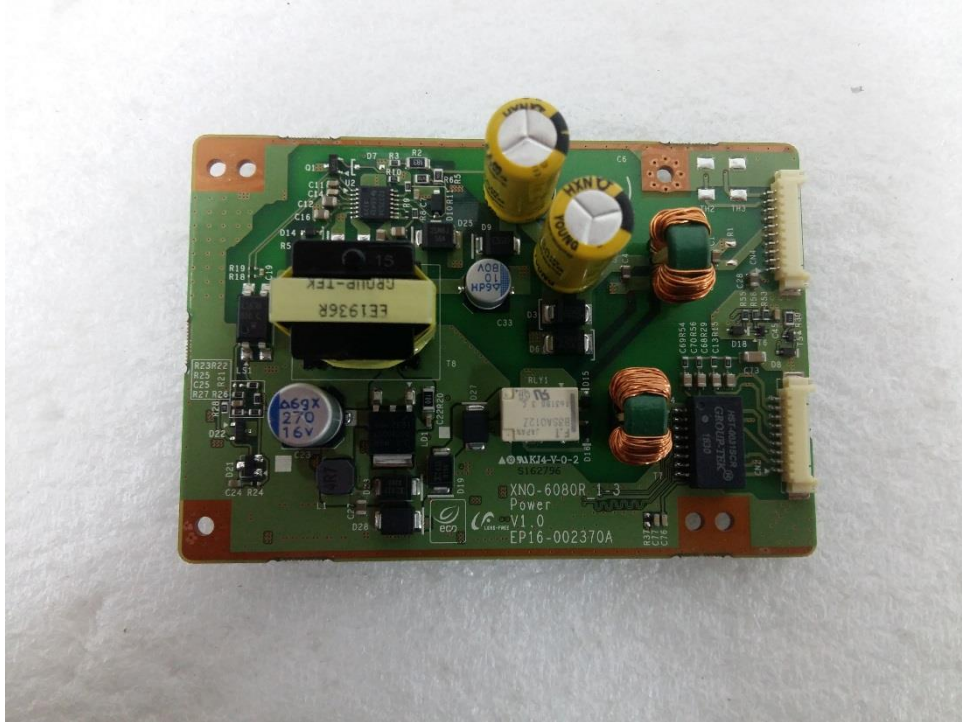

(Bottom)

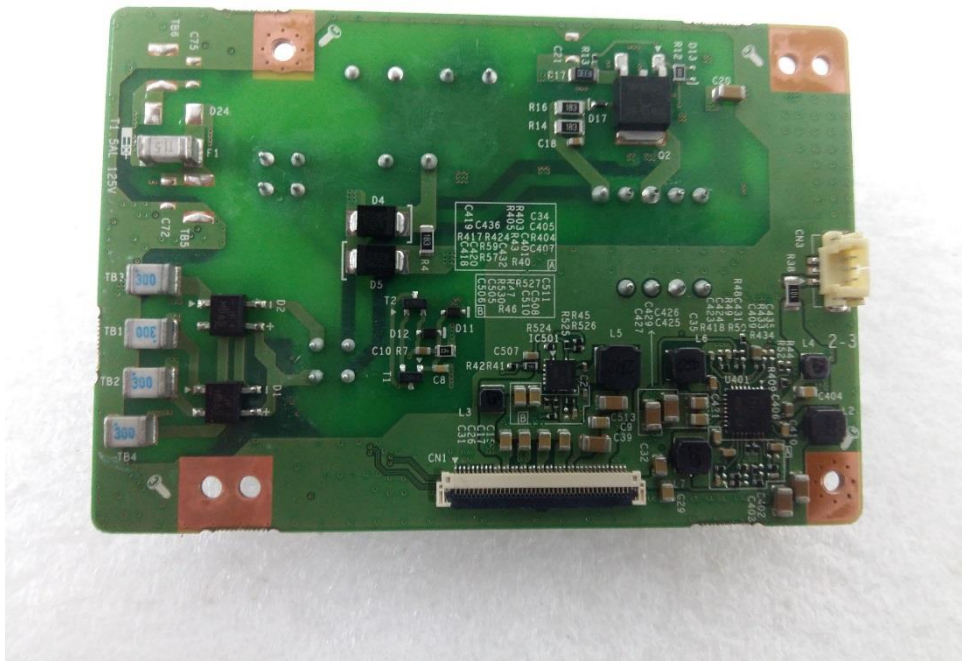

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View - Camera Lens

(Top)



(Bottom)

