



## EMC TEST REPORT For CE

Test Report No. : KES- E1-18T0155-R1  
Date of Issue : Feb. 24, 2023  
Product name : Network Camera  
Model/Type No. : XNO-L6080R  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Feb. 01, 2018  
Test date : Feb. 03, 2018 ~ Feb. 06, 2018  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Min, Choi  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (2) of (60)

### REPORT REVISION HISTORY

| Date          | Test Report No.   | Revision History                                                                                                        |
|---------------|-------------------|-------------------------------------------------------------------------------------------------------------------------|
| Feb. 09, 2018 | KES-E1-18T0155    | Issued                                                                                                                  |
| May. 15, 2019 | KES-E1-18T0155-R1 | Re-issue due to manufacturer change                                                                                     |
| Feb. 24, 2023 | KES-E1-18T0155-R2 | Change the Applicant and manufacturer at the request of the customer<br>Factory deletion at the request of the customer |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |
|               |                   |                                                                                                                         |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## TABLE OF CONTENTS

|                                                                       |                                                             |                        |
|-----------------------------------------------------------------------|-------------------------------------------------------------|------------------------|
| 1.0                                                                   | General Product Description .....                           | 4                      |
| 1.1                                                                   | Test Voltage & Frequency .....                              | 7                      |
| 1.2                                                                   | Variant Model Differences.....                              | 7                      |
| 1.3                                                                   | Device Modifications .....                                  | 7                      |
| 1.4                                                                   | Equipment Under Test.....                                   | 7                      |
| 1.5                                                                   | Support Equipments .....                                    | 7                      |
| 1.6                                                                   | External I/O Cabling .....                                  | 8                      |
| 1.7                                                                   | EUT Operating Mode(s) .....                                 | 8                      |
| 1.8                                                                   | Configuration.....                                          | 9                      |
| 1.9                                                                   | Remarks when standards applied .....                        | 10                     |
| 1.10                                                                  | Calibration Details of Equipment Used for Measurement ..... | 10                     |
| 1.11                                                                  | Test Facility .....                                         | 10                     |
| 1.12                                                                  | Laboratory Accreditations and Listings .....                | 오류! 책갈피가 정의되어 있지 않습니다. |
| 2.0                                                                   | Test Regulations.....                                       | 10                     |
| 2.1                                                                   | Conducted Emissions at Mains Power Ports .....              | 13                     |
| 2.2                                                                   | Conducted Emissions at Telecommunication Ports .....        | 14                     |
| 2.3                                                                   | Radiated Electric Field Emissions(Below 1 GHz) .....        | 15                     |
| 2.4                                                                   | Radiated Electric Field Emissions(Above 1 GHz) .....        | 16                     |
| 2.5                                                                   | Harmonic Current Emissions .....                            | 17                     |
| 2.6                                                                   | Voltage Fluctuations and Flicker .....                      | 18                     |
| 3.0                                                                   | Criteria for compliance .....                               | 19                     |
| 3.1                                                                   | Electrostatic Discharge.....                                | 21                     |
| 3.2                                                                   | Radiated Electric Field Immunity .....                      | 24                     |
| 3.3                                                                   | Electrical Fast Transients/Bursts .....                     | 27                     |
| 3.4                                                                   | Surge Transients .....                                      | 29                     |
| 3.5                                                                   | Conducted Disturbance .....                                 | 32                     |
| 3.6                                                                   | Voltage Dips and Short Interruptions .....                  | 34                     |
| APPENDIX A – TEST DATA.....                                           |                                                             | 36                     |
| Conducted Emissions at Mains Power Ports.....                         |                                                             | 36                     |
| Conducted Emissions at Telecommunication Ports .....                  |                                                             | 38                     |
| Radiated Electric Field Emissions(Below 1 GHz) .....                  |                                                             | 40                     |
| Radiated Electric Field Emissions(Above 1 GHz) .....                  |                                                             | 41                     |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |                                                             | 42                     |
| Test Setup Photos and Configuration .....                             |                                                             | 45                     |
| Conducted Voltage Emissions .....                                     |                                                             | 45                     |
| Conducted Telecommunication Emissions .....                           |                                                             | 46                     |
| Radiated Electric Field Emissions(Below 1 GHz) .....                  |                                                             | 47                     |
| Radiated Electric Field Emissions(Above 1 GHz) .....                  |                                                             | 48                     |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |                                                             | 49                     |
| Electrostatic Discharge .....                                         |                                                             | 50                     |
| Radiated Electric Field Immunity .....                                |                                                             | 50                     |
| Electrical Fast Transients/Bursts .....                               |                                                             | 51                     |
| Surge Transients .....                                                |                                                             | 51                     |
| Conducted Disturbance .....                                           |                                                             | 52                     |
| Voltage Dips and Short Interruptions .....                            |                                                             | 52                     |
| EUT External Photographs .....                                        |                                                             | 53                     |
| EUT Internal Photographs .....                                        |                                                             | 54                     |



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (4) of (60)

## 1.0 General Product Description

### Main Specifications of E.U.T are:

| Video                       |                                                                                                                                                                                                                                                                    |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Imaging Device              | 1/2.8" 2M CMOS                                                                                                                                                                                                                                                     |
| Total Pixels                | 1945(H) x 1109(V) 2.16M                                                                                                                                                                                                                                            |
| Effective Pixels            | 1945(H) x 1097(V) 2.13M                                                                                                                                                                                                                                            |
| Scanning System             | Progressive Scan                                                                                                                                                                                                                                                   |
| Min. Illumination           | Color : 0.1lux<br>B/W : 0 Lux (IR LED On)                                                                                                                                                                                                                          |
| S / N Ratio                 | 50dB                                                                                                                                                                                                                                                               |
| Video Out                   | CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation<br>USB : Micro USB type B, 1280x720, for installation                                                                                                                                    |
| Lens                        |                                                                                                                                                                                                                                                                    |
| Focal Length (Zoom Ratio)   | 3.2~10mm(3.1x) motorized varifocal                                                                                                                                                                                                                                 |
| Max. Aperture Ratio         | 1.6                                                                                                                                                                                                                                                                |
| Angular Field of View       | H : 109.0°(Wide) ~ 33.2°(Tele) / V : 57.4°(Wide) ~ 18.7°(Tele) / D : 132.0°(Wide) ~ 38.0°(Tele)                                                                                                                                                                    |
| Min. Object Distance        | 0.5m (1.64ft)                                                                                                                                                                                                                                                      |
| Focus Control               | Simple focus(Motorized V/F) / Manual, Remote control via network<br>(Manual, Simple focus)                                                                                                                                                                         |
| Lens Type                   | DC Auto Iris                                                                                                                                                                                                                                                       |
| Mount Type                  | Board-in type                                                                                                                                                                                                                                                      |
| Operational                 |                                                                                                                                                                                                                                                                    |
| IR Viewable Length          | 30m                                                                                                                                                                                                                                                                |
| Camera Title                | Off / On (Displayed up to 85 characters)<br>- WW : English/Numeric/Special Characters<br>- China : English/Numeric/Special/Chinese Characters<br>- Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White),<br>Transparency, Auto Scale by Resolution |
| Day & Night                 | Auto (ICR) / Color / B/W / External / Schedule                                                                                                                                                                                                                     |
| Backlight Compensation      | Off / BLC / HLC(Masking/Dimming), WDR                                                                                                                                                                                                                              |
| Wide Dynamic Range          | 120dB                                                                                                                                                                                                                                                              |
| Contrast Enhancement        | SSDR (Off / On)                                                                                                                                                                                                                                                    |
| Digital Noise Reduction     | SSNR5 (2D+3D Noise Filter) (Off / On)                                                                                                                                                                                                                              |
| Digital Image Stabilization | Off / On                                                                                                                                                                                                                                                           |
| Defog                       | Auto(input from fog detection) / Manual / Off                                                                                                                                                                                                                      |
| Motion Detection            | Off/ On(8ea, 8point Polygonal zones), Handover                                                                                                                                                                                                                     |
| Privacy Masking             | Off / On (32ea, polygonal zones)<br>- Color : Grey/Green/Red/Blue/Black/White<br>- Mosaic                                                                                                                                                                          |
| Gain Control                | Off / Low / Middle / High                                                                                                                                                                                                                                          |
| White Balance               | ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)                                                                                                                                                                                                  |
| Contrast                    | level adjustment                                                                                                                                                                                                                                                   |
| LDC                         | On/Off (5 levels with Min/Max)                                                                                                                                                                                                                                     |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)                                                                                                                                                                                                                 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (5) of (60)

|                          |                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Digital PTZ              | 24X, Digital PTZ(Preset, Group)                                                                                                                                                 |
| Flip / Mirror            | Flip : On/Off<br>Mirror : On/Off<br>Hallway view : 90°/270°                                                                                                                     |
| Video & Audio Analytics  | Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, (Dis)Appear, Face Detection, Motion Detection, Digital auto tracking   |
| Alarm I/O                | No                                                                                                                                                                              |
| Alarm Triggers           | Motion Detection, Video Analytics, , Network Disconnect                                                                                                                         |
| Alarm events             | File upload via FTP, E-Mail<br>Notification via E-Mail<br>local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers                                                        |
| Audio In                 | No                                                                                                                                                                              |
| Audio out                | No                                                                                                                                                                              |
| Pixel Counter            | Support                                                                                                                                                                         |
| <b>Network</b>           |                                                                                                                                                                                 |
| Ethernet                 | RJ-45 (10/100BASE-T)                                                                                                                                                            |
| Video Compression Format | H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG                                                                                                             |
| Resolution               | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240                                                               |
| Max. Framerate           | H.265/H.264 : Max. 60fps at all resolutions<br>Motion JPEG : Max. 30fps                                                                                                         |
| Smart Codec              | Manual Mode (area-based : 5EA)                                                                                                                                                  |
| WiseStream II            | Support                                                                                                                                                                         |
| Video Quality Adjustment | H.264/H.265 : Target Bitrate Level Control<br>MJPEG : Target Bitrate Level Control                                                                                              |
| Bitrate Control Method   | H.264/H.265 : CBR or VBR<br>MJPEG : VBR                                                                                                                                         |
| Streaming Capability     | Multiple Streaming (Up to 5 Profiles)                                                                                                                                           |
| Audio Compression Format | No                                                                                                                                                                              |
| Audio Communication      | No                                                                                                                                                                              |
| IP                       | IPv4, IPv6                                                                                                                                                                      |
| Protocol                 | TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour |
| Security                 | HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access Log<br>802.1X Authentication (EAP-TLS, EAP-LEAP)                          |
| Streaming Method         | Unicast / Multicast                                                                                                                                                             |
| Max. User Access         | 20 users at Unicast Mode                                                                                                                                                        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (6) of (60)

|                                   |                                                                                                                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Edge Storage                      | SD/SDHC/SDXC 1slot (up to 256 GB)<br>- Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded.<br>NAS(Network Attached Storage)<br>Local PC for Instant Recording                                     |
| Application Programming Interface | ONVIF Profile S/G<br>SUNAPI(HTTP API)<br>Open Platform                                                                                                                                                                  |
| Webpage Language                  | English, Korean, Chinese, French, Italian, Spanish, German, Japanese,<br>Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek                                                                 |
| Web Viewer                        | Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10. 10.11 10.12<br><b>Non-plugin Webviewer</b><br>Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Window 64bit only) , Apple Safari 9 (Mac OS X only) |
| Central Management Software       | SmartViewer, SSM                                                                                                                                                                                                        |
| <b>Environmental</b>              |                                                                                                                                                                                                                         |
| Operating Temperature / Humidity  | -40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH                                                                                                                                                                       |
| Storage Temperature / Humidity    | -50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH                                                                                                                                                                       |
| Ingress Protection                | IP66                                                                                                                                                                                                                    |
| Vandal Resistance                 | IK10                                                                                                                                                                                                                    |
| <b>Electrical</b>                 |                                                                                                                                                                                                                         |
| Input Voltage / Current           | PoE                                                                                                                                                                                                                     |
| Power Consumption                 | Max 11W                                                                                                                                                                                                                 |
| <b>Mechanical</b>                 |                                                                                                                                                                                                                         |
| Color / Material                  | Dark gray / Aluminum                                                                                                                                                                                                    |
| Dimension (WxHxD)                 | φ91 x L322.9mm                                                                                                                                                                                                          |
| Weight                            | 1,298g                                                                                                                                                                                                                  |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                          | Remarks |
|----------------|--------------|---------------|---------------------------------------|---------|
| Network Camera | XNO-L6080R   | -             | HANWHA VISION VIETNAM COMPANY LIMITED | EUT     |

## 1.5 Support Equipments

| Description    | Model Number | Serial Number | Manufacturer                   | Remarks |
|----------------|--------------|---------------|--------------------------------|---------|
| Laptop         | LG15N54      | 410NZET022292 | LG electronics Inc.            | -       |
| Laptop Adaptor | DA-1900-08   | 9700591703    | Dongguang Lite Power 2nd Plant | -       |
| Micro SD Card  | -            | -             | SanDisk                        | 16 GB   |
| Offsite PoE    | -            | -             | -                              | -       |

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (8) of (60)

## 1.6 External I/O Cabling

| Start                |              | END           |              | Cable Spec. |        |
|----------------------|--------------|---------------|--------------|-------------|--------|
| Description          | I/O Port     | Description   | I/O Port     | Length      | Shield |
| Network Camera (EUT) | RJ-45 (PoE)  | Offsite PoE   | RJ-45 (PoE)  | 3.0         | U      |
|                      | SLOT         | Micro SD Card | SLOT         | -           | -      |
| Offsite PoE          | RJ-45 (Data) | Laptop        | RJ-45 (Data) | 3.0         | U      |

\* Unshielded=U, Shielded=S


## 1.7 EUT Operating Mode(s)

| Test Mode | operating                 |
|-----------|---------------------------|
| PoE       | EUT Monitoring, Ping Test |

| EUT Test operating S/W |         |                        |
|------------------------|---------|------------------------|
| Name                   | Version | Manufacture Company    |
| Webviewer              | -       | Hanwha Vision Co., Ltd |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 1.8 Configuration

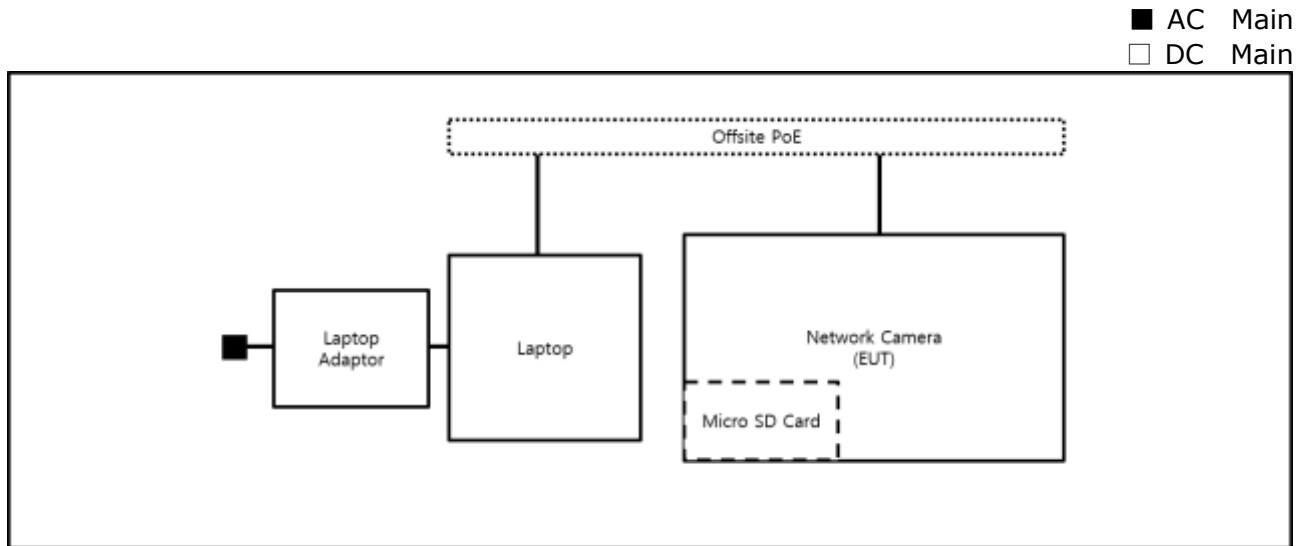

## 1.9 Remarks when standards applied

N/A

## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency  | Scope of Accreditation                                                                                                                  | Logo                                                                                                                           |
|---------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| KOREA         | RRA     | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KR0100                                  |
| International | KOLAS   | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KT489                                 |
| USA           | FCC     | 3 m & 10 m Semi-Anechoic Chamber<br>Conducted test site to perform FCC Part 15/18 measurements.                                         | <br>KR0100                                |
| Canada        | ISED    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site                                                                                | <br>23298                                 |
| JAPAN         | VCCI    | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)                                                                          | <br>C-20136, T-20137,<br>R-20181, G-20176 |
| Europe        | TÜV SÜD | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>CARAT 001633 0004                     |



## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (12) of (60)

- 
- |                                                               |                                  |                                  |
|---------------------------------------------------------------|----------------------------------|----------------------------------|
| <input type="checkbox"/> <b>VCCI V-3 / 2015.04</b>            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR22:2009 +A1:2010</b>  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |                                  |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009                      |                                  |                                  |
| <input type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |                                  |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014                      |                                  |                                  |
| <br><input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>  |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-1 V1.9.2              |                                  |                                  |
| <input type="checkbox"/> Equipment for fixed use              |                                  |                                  |
| <input type="checkbox"/> Equipment for vehicular use          |                                  |                                  |
| <input type="checkbox"/> Equipment for portable use           |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-3 V1.6.1              |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-17 V2.2.1             |                                  |                                  |
| <br><input type="checkbox"/> EN 60945:2002                    |                                  |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (13) of (60)

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

N/A

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

| Used                     | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 27, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 05, 2019 |
| <input type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 27, 2018 |
| <input type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 27, 2018 |
| <input type="checkbox"/> | LISN              | NNBM8124     | SCHWARZBECK  | 8124-1002     | 08, 07, 2018 |
| <input type="checkbox"/> | LISN              | NNBM8124     | SCHWARZBECK  | 8124-1003     | 08, 07, 2018 |

**Test Conditions**

Temperature:

°C

Relative Humidity:

% R.H.

.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

**Remarks**N/A : Because the EUT power is PoE, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (14) of (60)

## 2.2 Conducted Emissions at Telecommunication Ports

**Test Date**

Feb. 05, 2018

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 27, 2018 |
| <input type="checkbox"/>            | LISN              | ENV216       | R & S        | 101787        | 01, 05, 2019 |
| <input type="checkbox"/>            | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | 8-WIRE ISN CAT3,5 | ENY81        | R & S        | 100174        | 01, 07, 2019 |
| <input type="checkbox"/>            | 8-WIRE ISN CAT6   | ENY81-CAT6   | R & S        | 101665        | 01, 07, 2019 |
| <input type="checkbox"/>            | ISN               | ISN S8       | SCHWARZBECK  | ISN-S8-0019   | 05, 12, 2018 |
| <input type="checkbox"/>            | CDN               | CDNS502A     | TESEQ        | 40431         | 01, 05, 2019 |

**Test Conditions**

Temperature: 22,0 °C

Relative Humidity: 41,7 % R.H.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (15) of (60)

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

Feb. 03, 2018

**Test Location**☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 04, 18, 2018 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 716           | 11, 28, 2018 |

**Test Conditions**

Temperature: 21,4 °C

Relative Humidity: 42,0 % R.H.

**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (16) of (60)

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

Feb. 03, 2018

**Test Location**

SEMI ANECHOIC CHAMBER #4(10m)

**Test Equipment**

| Used                                | Description                | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|----------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W               | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER          | ESU26        | R & S            | 100551        | 04, 17, 2018 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER               | 8449B        | AGILENT          | 3008A01742    | 01, 11, 2019 |
| <input type="checkbox"/>            | ATTENUATOR                 | 8491A        | HP               | 32173         | 03, 24, 2018 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA | SAS-571      | A.H.SYSTEM,INC   | 781           | 05, 02, 2019 |

**Test Conditions**

Temperature: 21,4 °C  
Relative Humidity: 42,0 % R.H.

**Frequency Range of Measurement**

1 GHz to 6 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr





## 2.6 Voltage Fluctuations and Flicker

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W           | dpa.control  | EM TEST      | 5.4.11.0      | -            |
| <input type="checkbox"/> | DIGITAL POWER ANALYZER | DPA 500N     | EM TEST      | V1024106759   | 08, 08, 2018 |
| <input type="checkbox"/> | POWER SOURCE           | ACS 500N6    | EM TEST      | V1024106760   | -            |

### Test Conditions

Relative Humidity:                      °C  
                                                            % R.H.

### Test Results

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

### Remarks

N/A : Because the EUT power is PoE, limits are not specified.

### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family  
standard: Immunity requirements for components of fire, intruder and social alarm systems

**The variety and the diversity of the apparatus within the scope of this document makes it**

**difficult to define precise criteria for the evaluation of the immunity test results.**

**If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.**

**A functional description and a definition of performance by the manufacture and noted in the test**

**report, based on the following criteria:**

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.



---

### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .  
For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:  
(a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)  
(b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could  
still be used; and  
(c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the conditioning is permissible, providing that there is no  
residual  
change in the EUT or any change in outputs, which could be interpreted by associated  
equipment  
as a change. The EUT shall meet the acceptance criteria for the functional test, after the  
conditioning.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (21) of (60)

### 3.1 Electrostatic Discharge

**Reference Standard**

EN 61000-4-2:2009

**Test Date**

Feb. 06, 2018

**Test Location**

EMS-ESD: Electro wave Shieldroom #7

**Test Equipment**

| Used                                | Description   | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | ESD SIMULATOR | ESS-2000     | Noise Ken    | ESS01Z0454    | 10, 11, 2018 |
| <input checked="" type="checkbox"/> | HCP           | -            | KES          | -             | -            |
| <input checked="" type="checkbox"/> | VCP           | -            | KES          | -             | -            |

**Test Conditions**

Temperature: 20,9 °C  
Relative Humidity: 42,2 % R.H.  
Atmospheric Pressure: 101,0 kPa

**Test Specifications**Discharge Factor:  $\geq 1$  s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

|                    |                                          |                                          |                                          |                                          |
|--------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
| Discharge Voltage: | Contact                                  | Air                                      | HCP                                      | VCP                                      |
|                    | <input type="checkbox"/> 2 kV            | <input checked="" type="checkbox"/> 2 kV | <input type="checkbox"/> 2 kV            | <input type="checkbox"/> 2 kV            |
|                    | <input type="checkbox"/> 4 kV            | <input checked="" type="checkbox"/> 4 kV | <input type="checkbox"/> 4 kV            | <input type="checkbox"/> 4 kV            |
|                    | <input checked="" type="checkbox"/> 6 kV | <input type="checkbox"/> 6 kV            | <input checked="" type="checkbox"/> 6 kV | <input checked="" type="checkbox"/> 6 kV |
|                    | <input type="checkbox"/> 8 kV            | <input checked="" type="checkbox"/> 8 kV | <input type="checkbox"/> 8 kV            | <input type="checkbox"/> 8 kV            |
|                    | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           |

Notes: HCP: Horizontal coupling plane



VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**Location of Discharge:**

|         |
|---------|
| Air     |
| Contact |

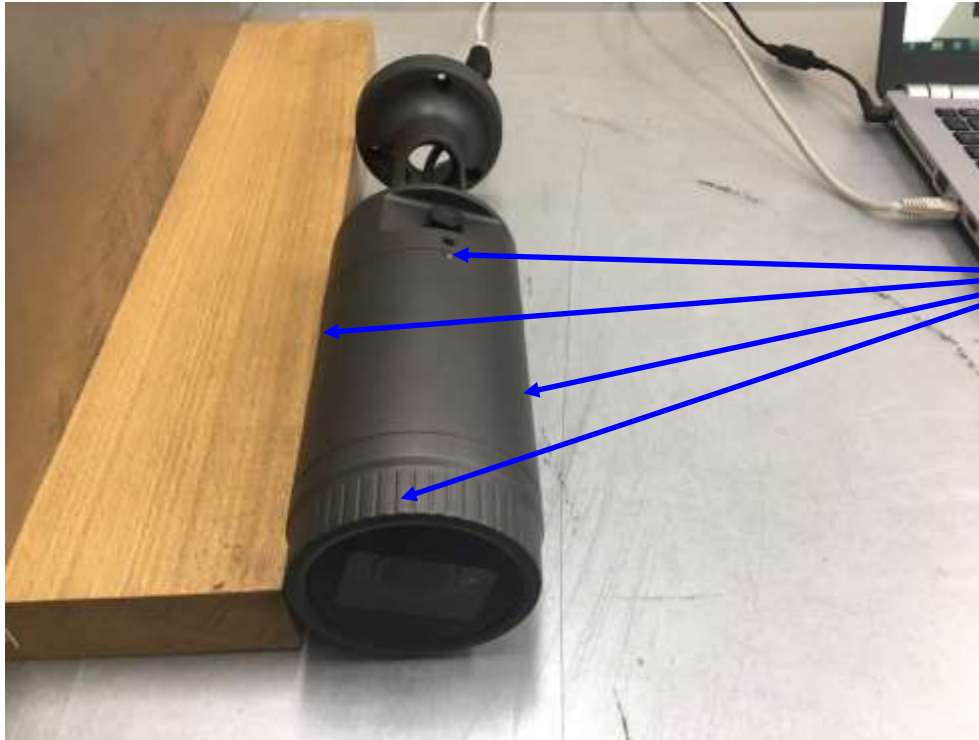

1

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (23) of (60)

**Test Data****Indirect Discharge**

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

**Direct Discharge**

| No. | Test Point          | Discharge Method  | Observations | Remarks |
|-----|---------------------|-------------------|--------------|---------|
| 1   | Enclosure and screw | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (24) of (60)

## 3.2 Radiated Electric Field Immunity

**Reference Standard**

EN 61000-4-3:2006 +A2:2010

**Test Date**

Feb. 05, 2018

**Test Location**EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3**Test Equipment**

| Used                                | Description                     | Model Number    | Manufacturer    | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------------|-----------------|-----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W                    | EMC32           | R & S           | 10.10.02      | -            |
| <input checked="" type="checkbox"/> | SIGNAL GENERATOR                | SMB 100A        | R & S           | 177586        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | BBA100          | R & S           | 101239        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | 100S1G6M1       | AR              | 579931        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | POWER METER                     | NRP2            | R & S           | 103475        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S           | 102526        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S           | 102527        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | STACKED DOUBLE LOG-PER- ANTENNA | STPL9128 E      | Schwarzbeck     | 9128ES-121    | -            |
| <input checked="" type="checkbox"/> | DIRECTIONAL COUPLER             | KYDC-D1070-DX40 | KY TELECOM      | KY150001      | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA      | SAS-571         | A.H.SYSTEM, INC | 781           | 05, 02, 2019 |

**Test Conditions**

Temperature: 21,0 °C  
Relative Humidity: 43,0 % R.H.  
Atmospheric Pressure: 101,5 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (25) of (60)

### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m  
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz  
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (26) of (60)

**Test Data**

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.



### 3.3 Electrical Fast Transients/Bursts

#### Reference Standard

EN 61000-4-4:2012

#### Test Date

Feb. 06, 2018

#### Test Location

EMS-EFT: Electro wave Shieldroom #7

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | iec.control  | EM TEST      | 5.4.7         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR   | UCS 500N7    | EM TEST      | P1608172950   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | MOTOR VARIAC              | MV2616       | EM TEST      | P1552169719   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | CAPACITIVE COUPLING CLAMP | HFK          | EM TEST      | P1633183115   | 11, 27, 2018 |

#### Test Conditions

Temperature: 20,9 °C  
Relative Humidity: 42,2 % R.H.  
Atmospheric Pressure: 101,1 kPa

#### Test Specifications

Pulse Amplitude & Polarity:  
(AC Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV  
☐ ± 4.0 kV

Pulse Amplitude & Polarity:  
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV  
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (28) of (60)

**Test Data**☐ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☐ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45               | Complied       | Complied       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (29) of (60)

### 3.4 Surge Transients

**Reference Standard**

EN 61000-4-5:2014

**Test Date**

N/A

**Test Location**

EMS-Surge: Electro wave Shieldroom #7

**Test Equipment**

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.4.7         | -            |
| <input type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 11, 27, 2018 |
| <input type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | P1552169719   | 11, 27, 2018 |
| <input type="checkbox"/> | CDN                     | CNV 508N1    | EM TEST      | P1610176296   | 11, 28, 2018 |
| <input type="checkbox"/> | CDN                     | CNV 504N7.3  | EM TEST      | P1744207079   | 12, 18, 2018 |

**Test Conditions**

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (30) of (60)

### Test Specifications

#### AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

#### Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 Surges

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (31) of (60)

**Test Data**

☐ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – N               | -              | -              |
| L – PE              | -              | -              |
| N – PE              | -              | -              |

**Signal Lines**

☐ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| -                   | -              | -              |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☐ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

N/A : Because the EUT power is PoE, limits are not specified.



### 3.5 Conducted Disturbance

#### Reference Standard

EN 61000-4-6:2014

#### Test Date

Feb. 06, 2018

#### Test Location

EMS-CS: Electro wave Shieldroom #6

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | icd.control  | EM TEST      | 5.3.11        | -            |
| <input checked="" type="checkbox"/> | CONTINUOUS WAVE SIMULATOR | CWS 500N1.4  | EM TEST      | P1602169880   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | ATTENUATOR                | ATT 6/80     | EM TEST      | P1614178148   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CDN M016     | TESEQ        | 43694         | 11, 27, 2018 |
| <input type="checkbox"/>            | CDN                       | CDN M016     | TESEQ        | 43697         | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CDN T800     | TESEQ        | 42800         | 11, 27, 2018 |
| <input type="checkbox"/>            | EM CLAMP                  | KEMZ 801A    | TESEQ        | 44099         | 11, 28, 2018 |

#### Test Conditions

Temperature: 20,9 °C  
Relative Humidity: 42,2 % R.H.  
Atmospheric Pressure: 101,1 kPa

#### Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz  
Voltage Level: ☐ 1 Vrms ☐ 3 Vrms  
☒ 10 Vrms  
Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)  
Frequency step: ☒ 1 % step  
Dwell Time: ☒ 1 s ☐ 3 s  
Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (33) of (60)

**Test Data**

☐ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☐ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45                                | CDN             | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:  
Complied – No degradation of function

**Test Results**

☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (34) of (60)

### 3.6 Voltage Dips and Short Interruptions

**Reference Standard**

EN 61000-4-11:2004

**Test Date**

N/A

**Test Location**

EMS-Voltage dip: Electro wave Shieldroom #7

**Test Equipment**

| Used                     | Description                | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|----------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMS Test S/W               | iec.control  | EM TEST      | 5.4.7         | -            |
| <input type="checkbox"/> | ULTRA COMPACT<br>SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 11, 27, 2018 |
| <input type="checkbox"/> | MOTOR VARIAC               | MV2616       | EM TEST      | P1552169719   | 11, 27, 2018 |

**Test Conditions**

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (35) of (60)

**Test Specifications & Observations/Remarks**

(Test Voltage : 230 V)

| <u>Test Level</u>                  | <u>Duration [in period/ms (50 Hz)]</u> | <u>Results</u> |
|------------------------------------|----------------------------------------|----------------|
| <input type="checkbox"/> 20 % dip  | <input type="checkbox"/> 250 / 5 000   | <u>N/A</u>     |
| <input type="checkbox"/> 30 % dip  | <input type="checkbox"/> 25 / 500      | <u>N/A</u>     |
| <input type="checkbox"/> 60 % dip  | <input type="checkbox"/> 10 / 200      | <u>N/A</u>     |
| <input type="checkbox"/> 100 % dip | <input type="checkbox"/> 250 / 5 000   | <u>N/A</u>     |

- Voltage variations

|                                      |                                       |            |
|--------------------------------------|---------------------------------------|------------|
| <input type="checkbox"/> Unom + 10 % | <input type="checkbox"/> 253.0 V (ac) | <u>N/A</u> |
| <input type="checkbox"/> Unom - 15 % | <input type="checkbox"/> 195.5 V (ac) | <u>N/A</u> |

Observations:

Complied – No degradation of function

**Test Results**

- ☐ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☒ NOT APPLICABLE

**Remarks**

N/A : Because the EUT power is PoE, limits are not specified.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (36) of (60)

---

## **APPENDIX A – TEST DATA**

### **Conducted Emissions at Mains Power Ports**

**[HOT]**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (37) of (60)

[ NEUTRAL ]

N/A

## ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:  
KES-E1-18T0155-R2  
Page (38) of (60)

## Conducted Emissions at Telecommunication Ports

[10 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: XNO-L6080R  
Mode: PoE 10Mbps  
Operator Name: KES

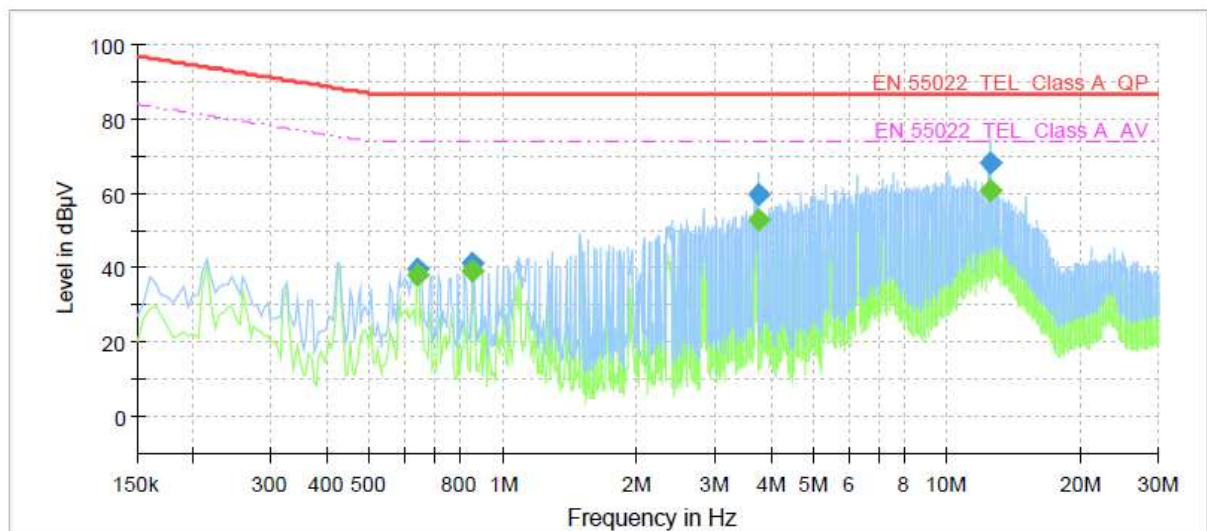

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.640000        | ---              | 37.90           | 74.00        | 36.10       | 1000.0          | 9.000           | Single Line | 19.5       |
| 0.640000        | 39.59            | ---             | 87.00        | 47.41       | 1000.0          | 9.000           | Single Line | 19.5       |
| 0.855000        | ---              | 38.94           | 74.00        | 35.06       | 1000.0          | 9.000           | Single Line | 19.7       |
| 0.855000        | 41.46            | ---             | 87.00        | 45.54       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.750000        | ---              | 52.74           | 74.00        | 21.26       | 1000.0          | 9.000           | Single Line | 19.6       |
| 3.750000        | 59.85            | ---             | 87.00        | 27.15       | 1000.0          | 9.000           | Single Line | 19.6       |
| 12.500000       | ---              | 60.76           | 74.00        | 13.24       | 1000.0          | 9.000           | Single Line | 19.8       |
| 12.500000       | 68.13            | ---             | 87.00        | 18.87       | 1000.0          | 9.000           | Single Line | 19.8       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (39) of (60)

[100 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: XNO-L6080R  
Mode: PoE 100Mbps  
Operator Name: KES

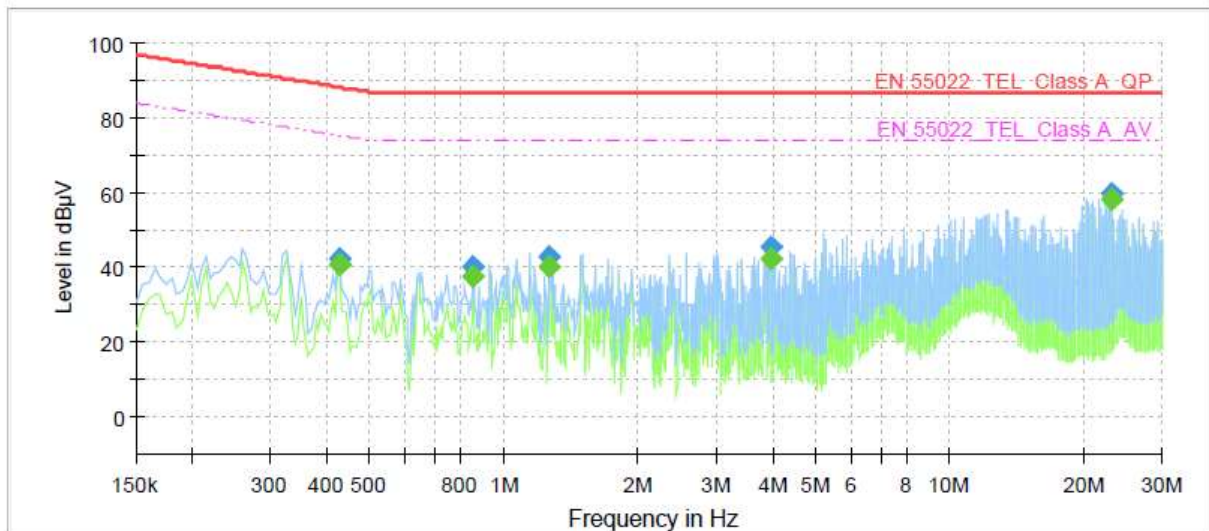

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.430000        | ---              | 40.99           | 75.25        | 34.26       | 1000.0          | 9.000           | Single Line | 19.3       |
| 0.430000        | 42.11            | ---             | 88.25        | 46.14       | 1000.0          | 9.000           | Single Line | 19.3       |
| 0.855000        | ---              | 37.52           | 74.00        | 36.48       | 1000.0          | 9.000           | Single Line | 19.6       |
| 0.855000        | 40.39            | ---             | 87.00        | 46.61       | 1000.0          | 9.000           | Single Line | 19.6       |
| 1.265000        | ---              | 40.24           | 74.00        | 33.76       | 1000.0          | 9.000           | Single Line | 19.7       |
| 1.265000        | 42.75            | ---             | 87.00        | 44.25       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.955000        | ---              | 42.20           | 74.00        | 31.80       | 1000.0          | 9.000           | Single Line | 19.4       |
| 3.955000        | 45.33            | ---             | 87.00        | 41.67       | 1000.0          | 9.000           | Single Line | 19.4       |
| 23.130000       | ---              | 58.01           | 74.00        | 15.99       | 1000.0          | 9.000           | Single Line | 20.1       |
| 23.130000       | 59.70            | ---             | 87.00        | 27.30       | 1000.0          | 9.000           | Single Line | 20.1       |

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-18T0155-R2

Page (40) of (60)

### Radiated Electric Field Emissions(Below 1 GHz)

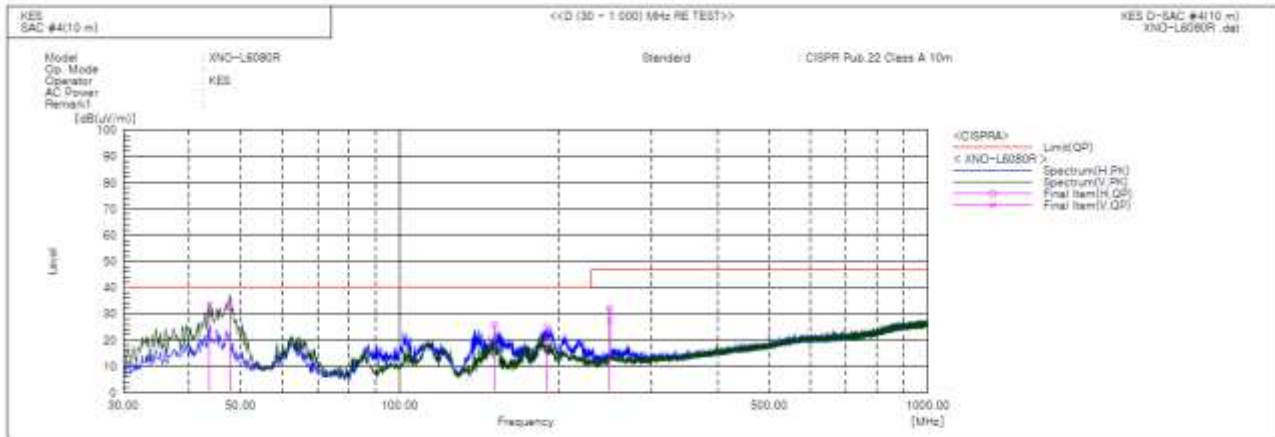

#### Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(μV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(μV/m)] | Limit<br>QP<br>[dB(μV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 43.701             | V   | 62.0                      | -28.5            | 33.5                       | 40.0                      | 6.5                  | 100.0          | 65.0           |        |
| 2   | 47.804             | V   | 62.3                      | -28.3            | 34.0                       | 40.0                      | 6.0                  | 213.0          | 185.0          |        |
| 3   | 151.493            | H   | 57.9                      | -32.0            | 25.9                       | 40.0                      | 14.1                 | 400.0          | 210.0          |        |
| 4   | 189.808            | H   | 53.4                      | -28.6            | 24.8                       | 40.0                      | 15.2                 | 400.0          | 221.0          |        |
| 5   | 249.948            | H   | 58.4                      | -26.2            | 32.2                       | 47.0                      | 14.8                 | 400.0          | 244.0          |        |
| 6   | 249.948            | V   | 53.7                      | -26.2            | 27.5                       | 47.0                      | 19.5                 | 100.0          | 152.0          |        |

#### ◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

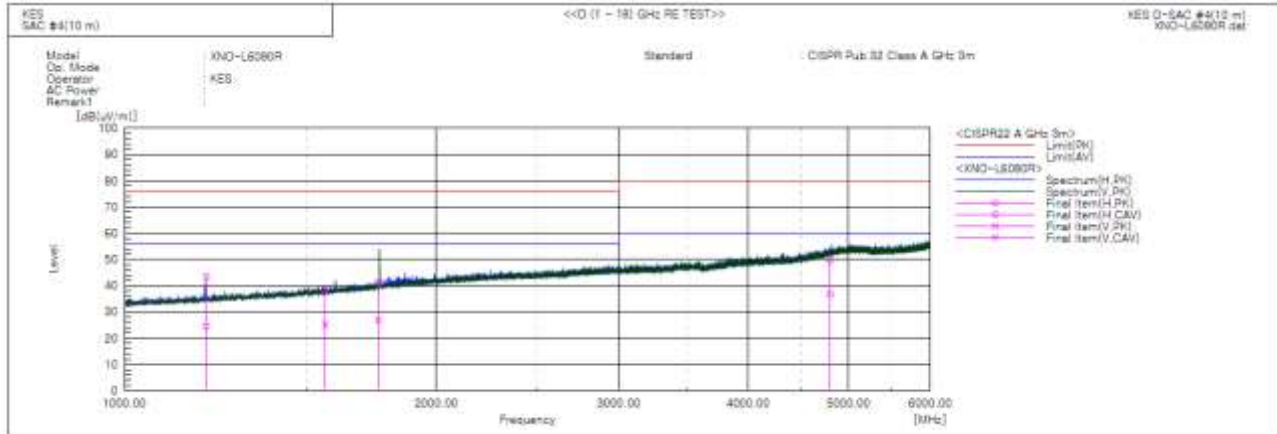

### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading CAV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result CAV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|--------|
| 1   | 1200.025        | H   | 50.4                | 31.5                 | -7.0          | 43.4                 | 24.5                  | 76.0                | 56.0                | 32.6           | 31.5            | 208.0       | 168.0       |        |
| 2   | 1563.213        | V   | 41.7                | 28.5                 | -3.3          | 38.4                 | 25.2                  | 76.0                | 56.0                | 37.6           | 30.8            | 213.0       | 5.0         |        |
| 3   | 1757.763        | V   | 42.5                | 28.0                 | -1.1          | 41.4                 | 26.9                  | 76.0                | 56.0                | 34.6           | 29.1            | 316.0       | 88.0        |        |
| 4   | 4803.063        | H   | 36.0                | 23.0                 | 13.7          | 49.7                 | 36.7                  | 80.0                | 60.0                | 30.3           | 23.3            | 352.0       | 316.0       |        |

### ◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (44) of (60)

**Test Data - Voltage Fluctuations****Maximum Flicker results**

|          | <b>EUT values</b> | <b>Limit</b> | <b>Result</b> |
|----------|-------------------|--------------|---------------|
| Pst      | N/A               |              |               |
| Plt      |                   |              |               |
| dc [%]   |                   |              |               |
| dmax [%] |                   |              |               |
| Tmax [s] |                   |              |               |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (45) of (60)

---

## **Test Setup Photos and Configuration**

### **Conducted Voltage Emissions**

N/A

N/A

---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

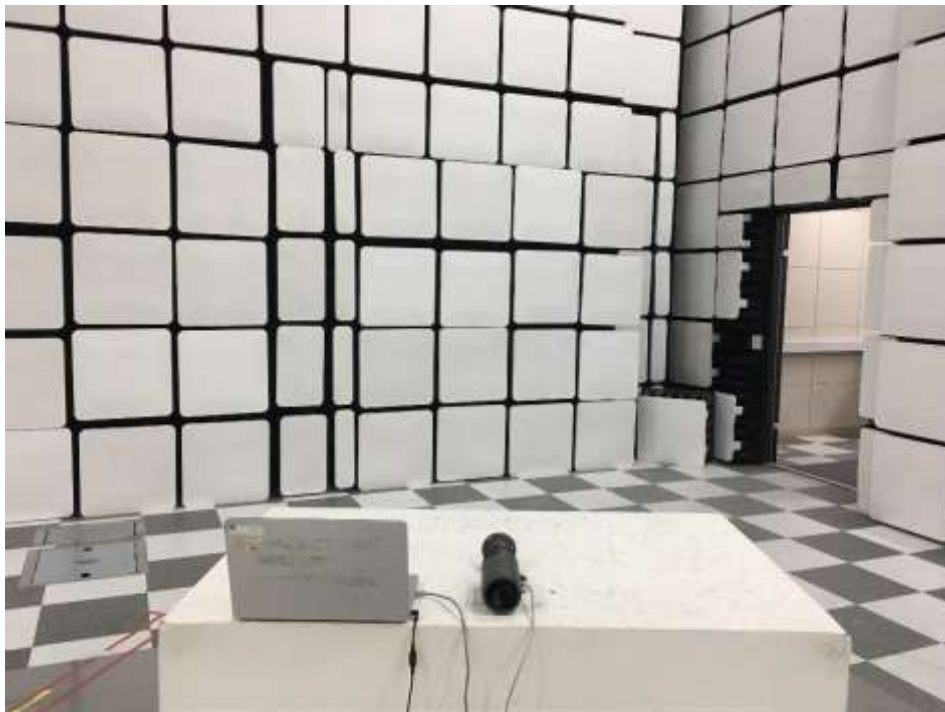

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0155-R2  
Page (49) of (60)

---

## **Harmonic Current Emissions and Voltage Fluctuations and Flicker**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Electrostatic Discharge



## Radiated Electric Field Immunity



## Electrical Fast Transients/Bursts



## Surge Transients

N/A

## Conducted Disturbance



## Voltage Dips and Short Interruptions

N/A

## EUT External Photographs

(Top)



(Bottom)



## EUT Internal Photographs

(Internal View)



## EUT Internal View – board 1

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – board 2

(Top)



(Bottom)

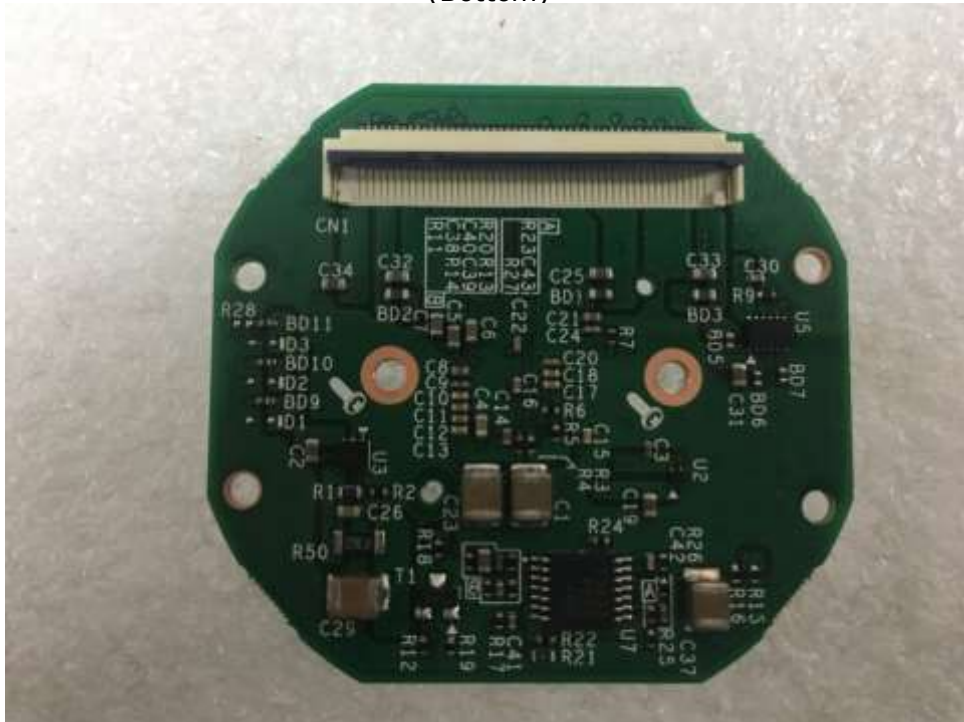

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – board 3

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – board 4

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

## EUT Internal View – board 5

(Top)



(Bottom)

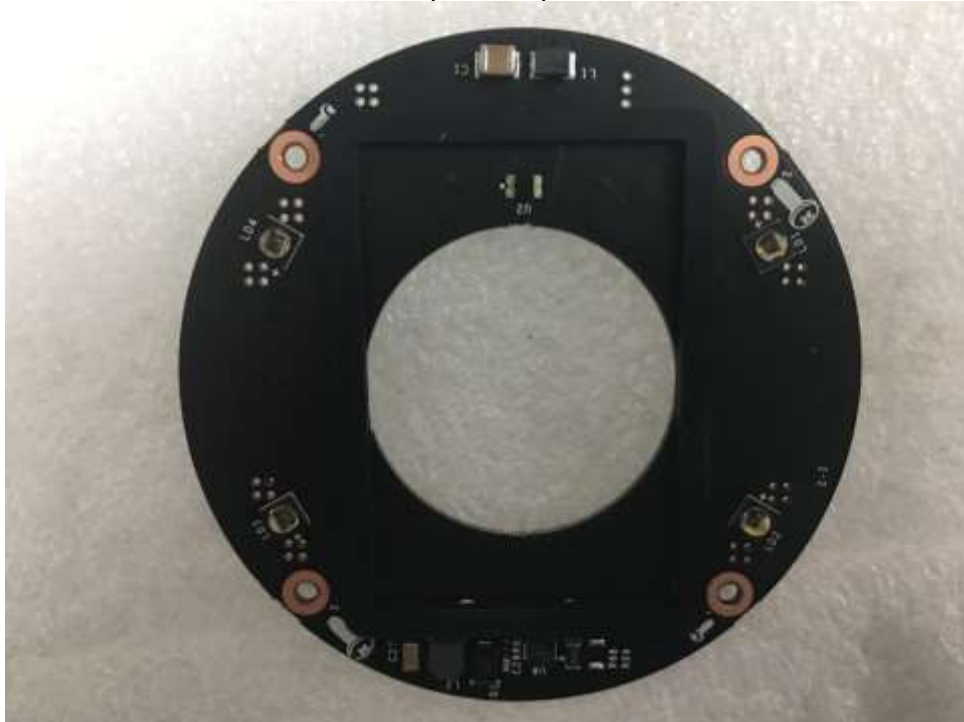

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [kes@kes.co.kr](mailto:kes@kes.co.kr)

## Label and Location

**Network Camera**

Model No : XNO-L6080R

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

