



EMC TEST REPORT

Test Report No. : KES-E1-17T0811-R3
Date of Issue : Feb. 24, 2023
Product name : Network Camera
Model/Type No. : XNP-6320
Variant Mode : XNP-6320G, XNP-6321
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Nov. 22, 2017
Test date : Dec. 04, 2017 ~ Dec. 05, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Ju Won, Yun
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 11, 2017	KES-E1-17T0811	Issued
Dec. 28, 2018	KES-E1-17T0811-R1	Reissuance due to the addition of a derivative
Nov. 15, 2021	KES-E1-17T0811-R2	- Applicant Address/Manufacturer change at customer's request - IC Regulation ICES-003 Issue 7 Update ANSI C63.4-2014 or ANSI C63.4-2014 amended as per ANSI C63.4a-2017
Feb. 24, 2023	KES-E1-17T0811-R3	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (3) of (45)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Radiated Electric Field Emissions(Below 1 GHz)	16
2.3	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		24
Test Setup Photos and Configuration		32
Conducted Voltage Emissions		32
Radiated Electric Field Emissions(Below 1 GHz)		33
Radiated Electric Field Emissions(Above 1 GHz)		34
EUT External Photographs		35
EUT Internal Photographs		36

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.0 General Product Description

Main Specifications of EUT are:

Video	XNP-6320	XNP-6320H
Imaging Device	1/2.8" 2.4M CMOS	
Total Pixels	1981(H) x 1288(V), 2.55M	
Effective Pixels	1944(H) x 1212(V), 2.35M	
Scanning System	Progressive	
Min. Illumination	Color : 0.05Lux (1/30sec, F1.6) B/W : 0.005 Lux (1/30sec, F1.6)	
S / N Ratio	50dB	
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation	
Lens		
Focal Length (Zoom Ratio)	4.44 ~ 142.6mm(Optical 32X)	
Max. Aperture Ratio	F1.6 (Wide) / F4.4 (Tele)	
Angular Field of View	H : 61.8°(Wide) ~ 2.19°(Tele) / V : 36.2°(Wide) ~ 1.24°(Tele)	
Min. Object Distance	Wide 1.5m ,Tele 2m	
Focus Control	Auto / Manual / One shot AF	
Lens Type	DC Auto Iris	
Mount Type	Board-in type	
Pan/Tilt/Rotate		
Pan Range	360° Endless	
Pan Speed	Preset : 700°/sec, Manual : 0.024°/sec ~ 200°/sec	
Tilt Range	210°(-15° ~195°)	
Tilt Speed	Preset : 700°/sec, Manual : 0.024°/sec ~200°/sec	
Sequence	Preset (300 ea), Swing, Group (6 ea), Trace, Tour (1 ea), Auto Run, Schedule	
Preset Accuracy	±0.2°	
Azimuth	Yes (E/W/S/N/NE/NW/SE/SW)	
Auto Tracking	Support	
Operational		
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale, by Resolution	
Day & Night	Auto (ICR) / Color / B/W / Schedule	
Backlight Compensation	Off / BLC / HLC / WDR	
Wide Dynamic Range	150dB	
Contrast Enhancement	SSDR (Off / On)	
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)	
Digital Image Stabilization	Off / On (built-in Gyro)	
Defog	Auto/Manual/Off	
Motion Detection	Off / On(8ea, Polygonal)	
Privacy Masking	Off / On (24 Zones of Rectangle zone) - Color : Grey/Green/Red/Blue/Black/White - Zoom ratio option for mask mode - Mosaic option	

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (5) of (45)

Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1 ~ 1/12,000sec)
Digital Zoom	32x
Image Rotation	Flip/Mirror : On/Off
Video&Audio Analytics	Tampering, Loitering, Directional Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Sound Classification
Serial Interface	RS-485 - Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell
Alarm I/O	Input 4ea / Output 2ea (Relay)
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, TCP and HTTP local storage(SD/SDHC/SDXC) or NAS recording at Alarm Triggers External output Preset
Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm mono jack), Max output level: 1 Vrms
Pixel counter	support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), H.265, Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.264/H.265 : Max 60fps at all resolutions Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual mode (Area-Based : 5ea)
WiseStream-II	support
Video Quality Adjustment	H.264 / H.265 / MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264 / H.265 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law / G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0811-R3
Page (6) of (45)

Audio Communication	Bi-directional (2-Way)	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour	
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)	
Streaming Method	Unicast / Multicast	
Max. User Access	20 users at Unicast Mode	
Edge Storage	Micro SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the Micro SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording	
Application Programming	ONVIF Profile S/G SUNAPI 2.0(HTTP API) Wisenet Open Platform	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	
Web Viewer	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Plug-in Free Webviewer Supported Browser : Google Chrome, MS Edge, Mozilla Firefox(Window 64bit only) , Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)	
Central Management Software	SmartViewer	
Environmental		
Operating Temperature / Humidity	-10°C ~ +55°C(+14°F ~ +131°F) / Less than 90% RH	24V AC: -50°C ~ +55°C (-58°F ~ +131°F) / ~ 90% RH
		PoE+ : -35°C ~ +55°C (-31°F ~ +131°F) / ~ 90% RH * Start up should be done at above -30°C
Storage Temperature /	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH	
Ingress Protection	-	IP66
Vandal Resistance	IK10 (with SHP-3701H)	IK10
Electrical		
Input Voltage / Current	AC24V±10%,PoE+(IEEE802.3at,Class4)	
Power Consumption	20W	24W Max(Heater Off), 65W Max(Heater On, AC24V)
Mechanical		
Color / Material	Ivory / Plastic+Metal	
Dimension (WxH)	Ø152 x H218 mm	Ø220 x H293.6 mm
Weight	1.7Kg	3.3Kg

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☒ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Add a simple derivative model

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNP-6320	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (8) of (45)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	GS728TPP	-	NETGEAR, INC.	-
Notebook	X56K	HN11N5151FJ0045W	Hansung computer co., Ltd.	-
Notebook Adaptor	PA-1900-14	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD.	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Controller	SPC-1010	C50E67WG10100F	SamSung Techwin Co.,Ltd.	-
Controller Adaptor	RS-AB1000	-	Dongguan Jinhuasheng Power Technology Co.,Ltd.	-
Micro SD Card	-	-	SanDisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

■ AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	4.0	U
	RS-485 (3 Pin)	Controller	RS-485 (3 Pin)	3.5	U
	SLOT	Micro SD Card	SLOT	-	-

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	4.0	U
	RS-485 (3 Pin)	Controller	RS-485 (3 Pin)	3.5	U
	SLOT	Micro SD Card	SLOT	-	-
PoE Adaptor	RJ-45 (Data)	Notebook	RJ-45 (Data)	3.0	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (10) of (45)

1.7 EUT Operating Mode(s)

Test mode	operating
AC 24 V	E.U.T Monitoring, Ping Test
PoE	


E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ AC 24 V Mode

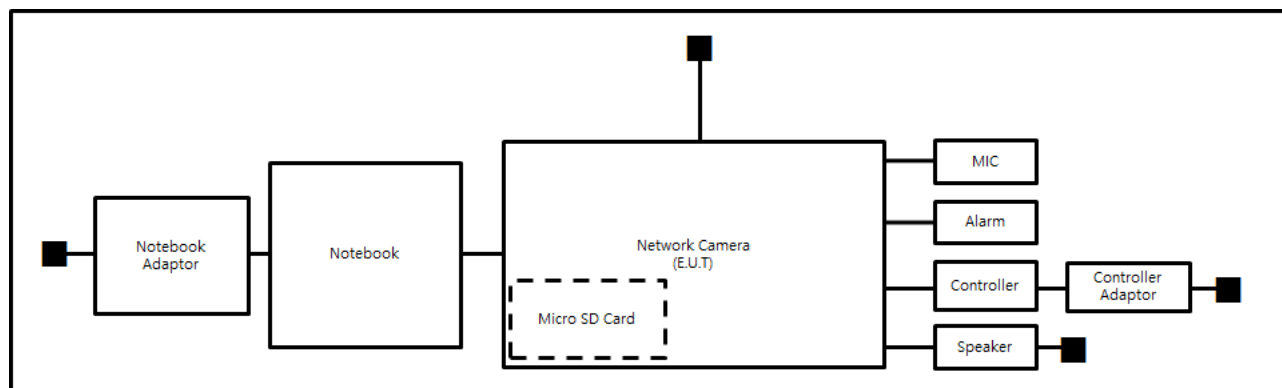

■ PoE Mode

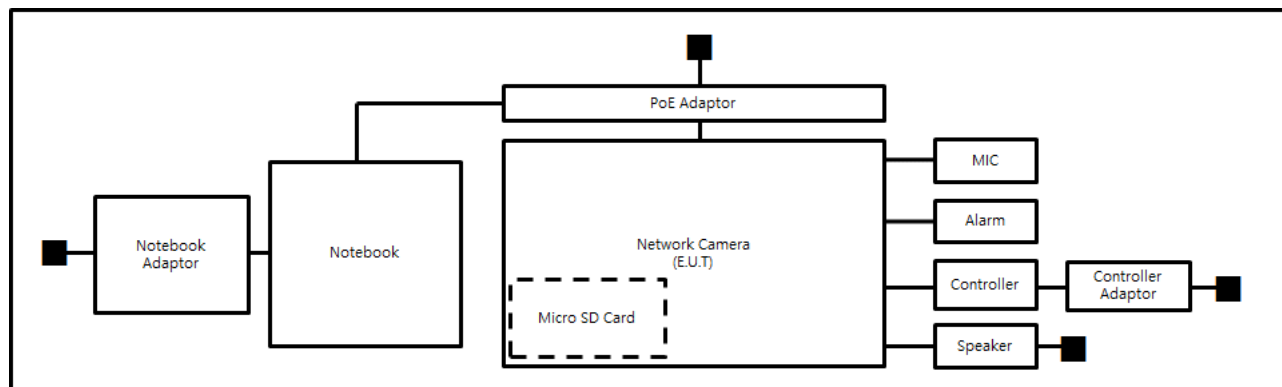

1.9 Remarks when standards applied

- N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (14) of (45)

☐ **VCCI V-3 / 2015.04**☐ Class A☐ Class B☐ **AS/NZS:2013**☐ Class A☐ Class B☒ **47 CFR Part 15, Subpart B**☒ CISPR 22:2009 +A1:2010☒ Class A☐ Class B☐ ANSI C63.4a-2017☐ Class A☐ Class B☒ **IC Regulation ICES-003 Issue 7**☒ CAN/CSA-CISPR 32:17☒ Class A☐ Class B☐ ANSI C63.4a-2017☐ Class A☐ Class B☐ **RE- Directive 2014/53/EU**☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1☐ EN 301 489-17 V2.2.1☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Dec. 04, 2017

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1002	08, 07, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1003	08, 07, 2018

Test Conditions

Temperature: 22,0 °C
Relative Humidity: 43,0 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec. 04, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 22,0 °C
Relative Humidity: 43,0 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec. 05, 2017

Test Location

SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 17, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2018
☐	ATTENUATOR	8491A	HP	32173	03, 24, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test ConditionsTemperature: 21,6 °C
Relative Humidity: 40,9 % R.H.**Frequency Range of Measurement**

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC 24 V Mode

HOT LINE

Common Information

Test Description: Conducted Emission
 Model No.: XNP-6320P
 Mode: AC_H
 Operator Name: KES

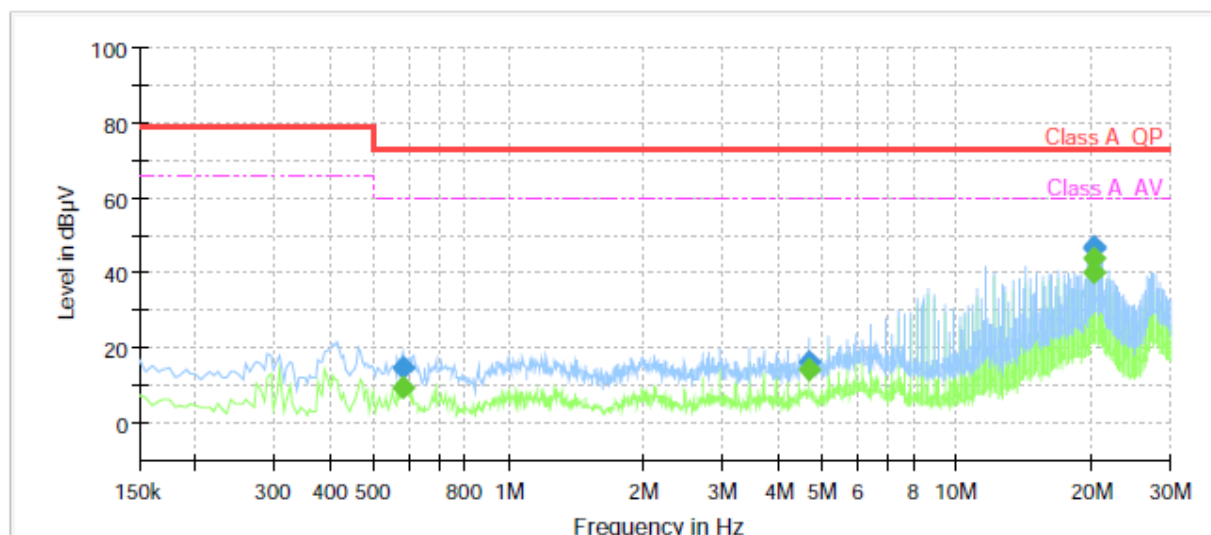

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.580000	---	9.58	60.00	50.42	1000.0	9.000	L1	19.8
0.580000	15.00	---	73.00	58.00	1000.0	9.000	L1	19.8
4.695000	---	14.19	60.00	45.81	1000.0	9.000	L1	19.8
4.695000	16.21	---	73.00	56.79	1000.0	9.000	L1	19.8
20.265000	---	40.24	60.00	19.76	1000.0	9.000	L1	20.4
20.265000	46.64	---	73.00	26.36	1000.0	9.000	L1	20.4
20.270000	---	43.90	60.00	16.10	1000.0	9.000	L1	20.4
20.270000	47.19	---	73.00	25.81	1000.0	9.000	L1	20.4

NEUTRAL LINE

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNP-6320P

AC_N

KES

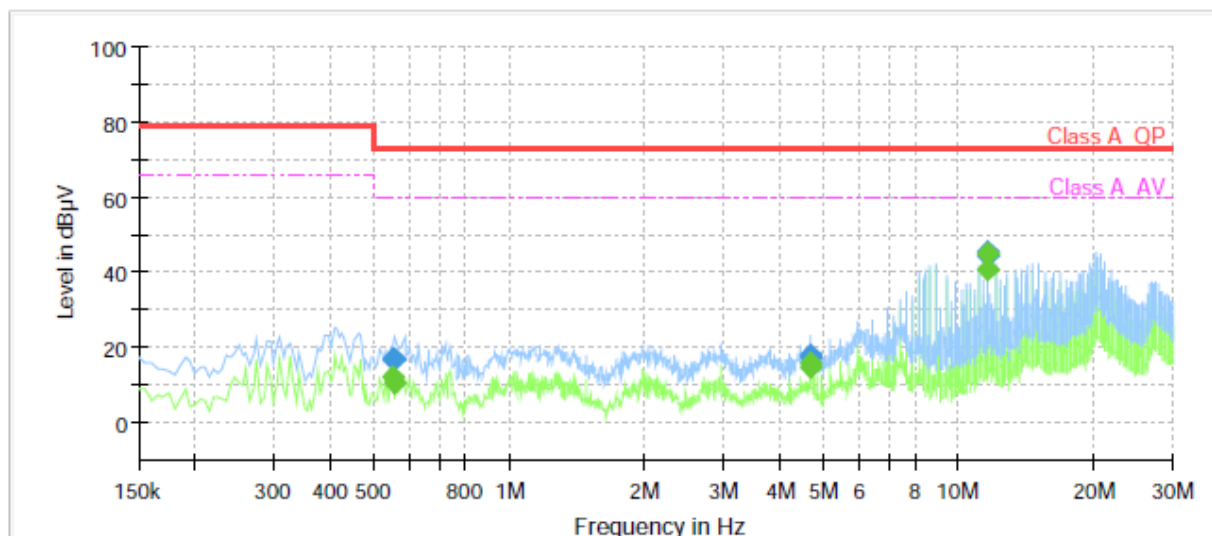

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.550000	---	11.97	60.00	48.03	1000.0	9.000	N	19.8
0.550000	17.05	---	73.00	55.95	1000.0	9.000	N	19.8
0.555000	---	10.65	60.00	49.35	1000.0	9.000	N	19.8
0.555000	17.04	---	73.00	55.96	1000.0	9.000	N	19.8
4.695000	---	15.79	60.00	44.21	1000.0	9.000	N	19.8
4.695000	17.98	---	73.00	55.02	1000.0	9.000	N	19.8
4.700000	---	14.64	60.00	45.36	1000.0	9.000	N	19.8
4.700000	17.28	---	73.00	55.72	1000.0	9.000	N	19.8
11.615000	---	40.97	60.00	19.03	1000.0	9.000	N	20.2
11.615000	44.23	---	73.00	28.77	1000.0	9.000	N	20.2
11.620000	---	44.97	60.00	15.03	1000.0	9.000	N	20.2
11.620000	45.43	---	73.00	27.57	1000.0	9.000	N	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0811-R3

Page (20) of (45)

■ PoE Mode

HOT LINE

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNP-6320

PoE_H

KES

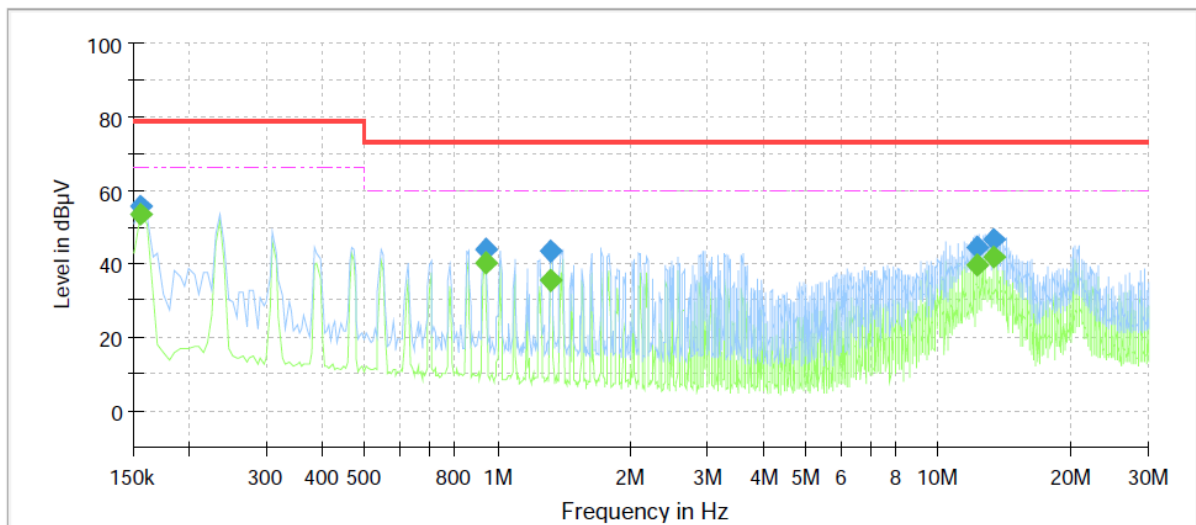

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	53.67	66.00	12.33	1000.0	9.000	L1	21.0
0.155000	55.75	---	79.00	23.25	1000.0	9.000	L1	21.0
0.935000	---	39.98	60.00	20.02	1000.0	9.000	L1	20.1
0.935000	43.71	---	73.00	29.29	1000.0	9.000	L1	20.1
1.320000	---	35.28	60.00	24.72	1000.0	9.000	L1	20.0
1.320000	43.30	---	73.00	29.70	1000.0	9.000	L1	20.0
12.200000	---	39.84	60.00	20.16	1000.0	9.000	L1	19.9
12.200000	44.49	---	73.00	28.51	1000.0	9.000	L1	19.9
13.420000	---	41.71	60.00	18.29	1000.0	9.000	L1	19.9
13.420000	46.80	---	73.00	26.20	1000.0	9.000	L1	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6320
Mode	PoE_N
Operator Name:	KES

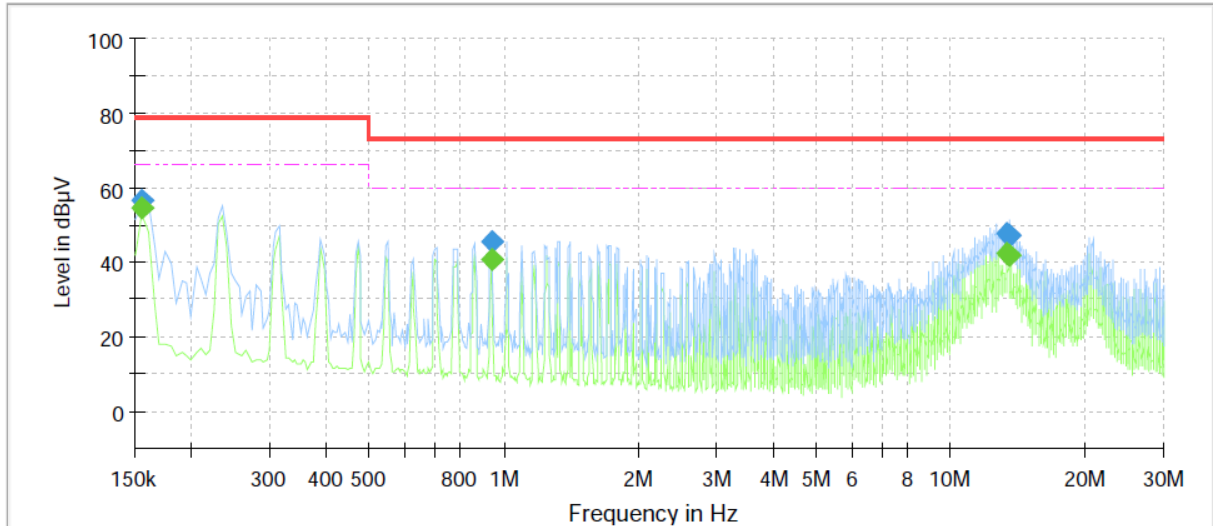

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	54.49	66.00	11.51	1000.0	9.000	N	21.0
0.155000	56.62	---	79.00	22.38	1000.0	9.000	N	21.0
0.940000	---	40.63	60.00	19.37	1000.0	9.000	N	20.2
0.940000	45.30	---	73.00	27.70	1000.0	9.000	N	20.2
13.420000	---	42.26	60.00	17.74	1000.0	9.000	N	19.9
13.420000	47.41	---	73.00	25.59	1000.0	9.000	N	19.9
13.480000	---	41.67	60.00	18.33	1000.0	9.000	N	19.9
13.480000	47.12	---	73.00	25.88	1000.0	9.000	N	19.9

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

■ AC 24 V Mode

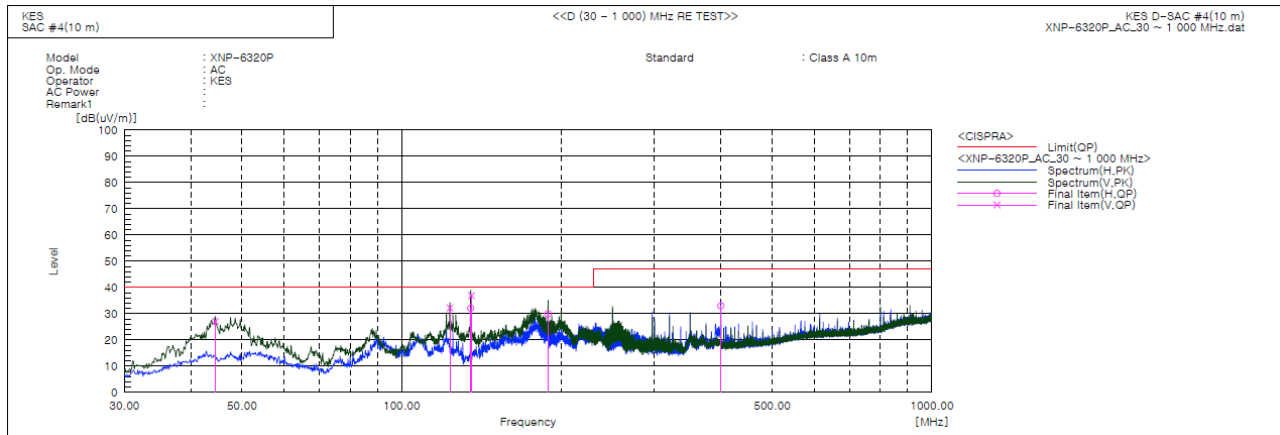


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.550	V	55.1	-28.1	27.0	40.0	13.0	276.0	16.0	
2	123.363	V	63.6	-31.4	32.2	40.0	7.8	121.0	252.0	
3	135.003	H	64.0	-31.9	32.1	40.0	7.9	400.0	84.0	
4	135.436	V	68.8	-31.9	36.9	40.0	3.1	100.0	199.0	
5	188.959	H	58.0	-28.0	30.0	40.0	10.0	396.0	76.0	
6	400.055	H	53.4	-20.4	33.0	47.0	14.0	274.0	268.0	



■ PoE Mode

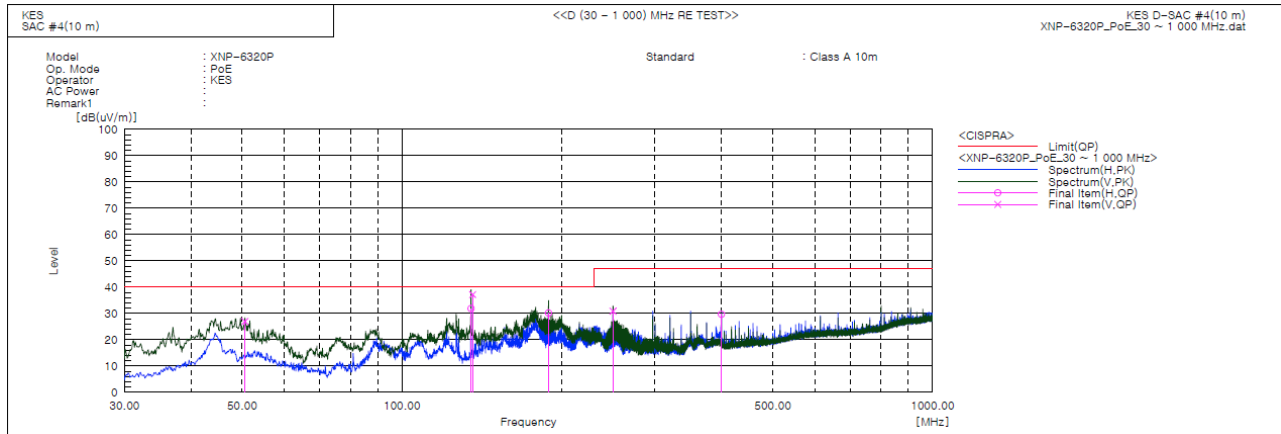

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP		QP	QP	QP			
			[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	50.613	V	54.8	-27.8	27.0	40.0	13.0	119.0	106.0	
2	135.003	H	63.8	-31.9	31.9	40.0	8.1	400.0	85.0	
3	135.923	V	69.1	-31.9	37.2	40.0	2.8	100.0	194.0	
4	188.959	H	58.2	-28.0	30.2	40.0	9.8	379.0	73.0	
5	249.948	V	56.3	-25.4	30.9	47.0	16.1	100.0	218.0	
6	400.055	H	50.1	-20.4	29.7	47.0	17.3	365.0	279.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




Radiated Electric Field Emissions(Above 1 GHz)

■ AC 24 V Mode

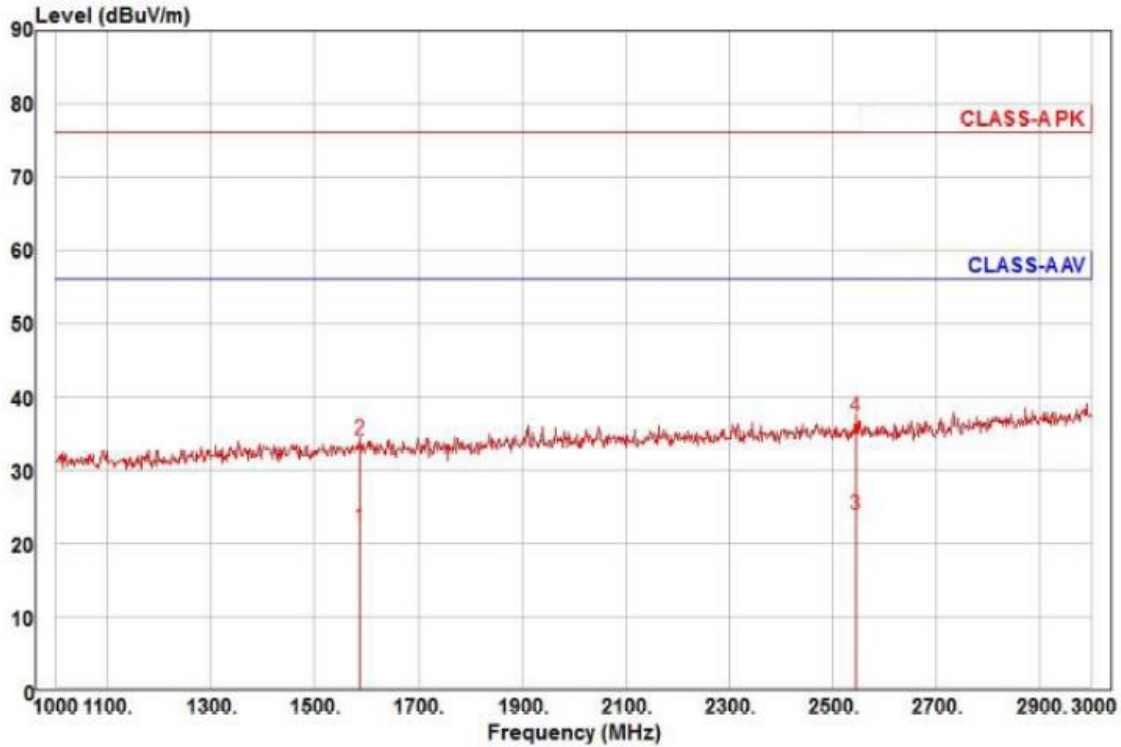


Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : AC
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1588.00	23.58	25.67	8.47	35.54	52	56.00	-33.82	horizontal	Average
2	1588.00	35.56	25.67	8.47	35.54	52	76.00	-41.84	horizontal	Peak
3 pp	2546.00	21.05	27.33	10.94	35.38	201	56.00	-32.06	horizontal	Average
4 pk	2546.00	34.41	27.33	10.94	35.38	201	76.00	-38.70	horizontal	Peak

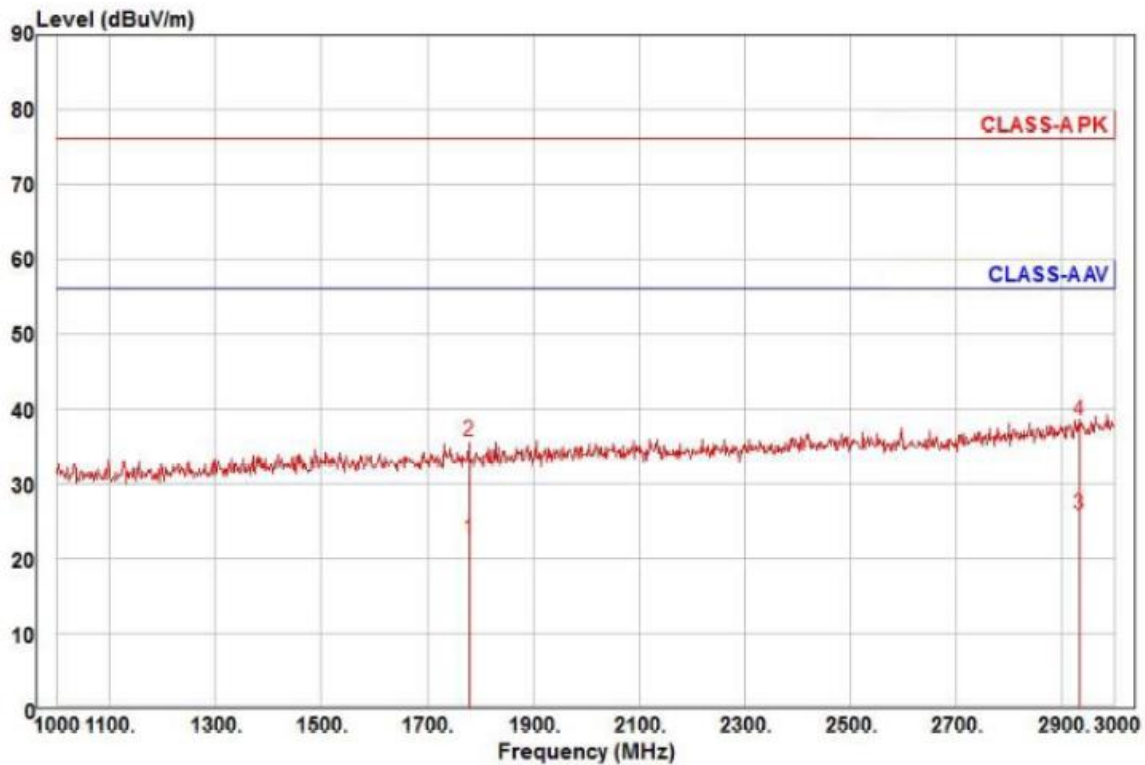

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : AC
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1778.00	23.03	25.90	9.03	341	56.00	-33.41	vertical	Average
2	1778.00	36.20	25.90	9.03	341	76.00	-40.24	vertical	Peak
3 pp	2934.00	21.09	28.34	11.97	4	56.00	-30.13	vertical	Average
4 pk	2934.00	33.68	28.34	11.97	4	76.00	-37.54	vertical	Peak

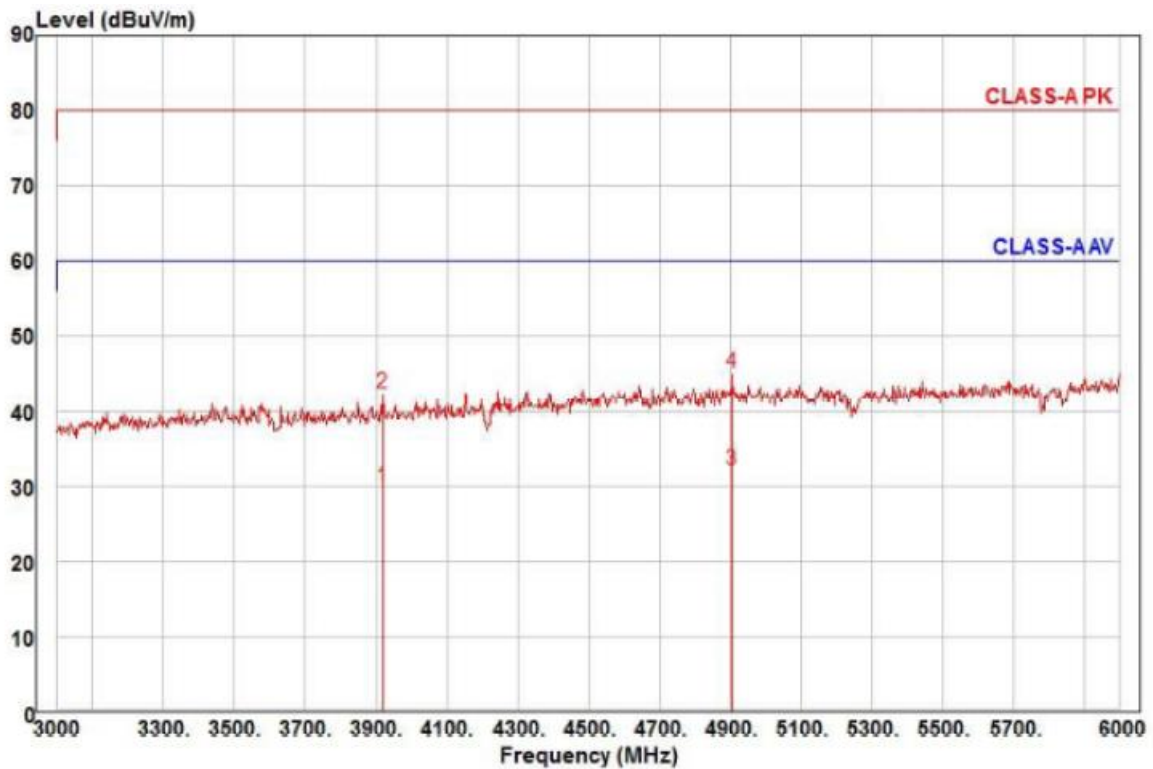

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : AC
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3918.00	21.49	29.67	13.89	35.30	143	60.00	-30.25	horizontal	Average
2	3918.00	34.11	29.67	13.89	35.30	143	80.00	-37.63	horizontal	Peak
3 pp	4908.00	20.76	31.37	15.65	35.60	141	60.00	-27.82	horizontal	Average
4 pk	4908.00	33.62	31.37	15.65	35.60	141	80.00	-34.96	horizontal	Peak



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0811-R3
Page (27) of (45)

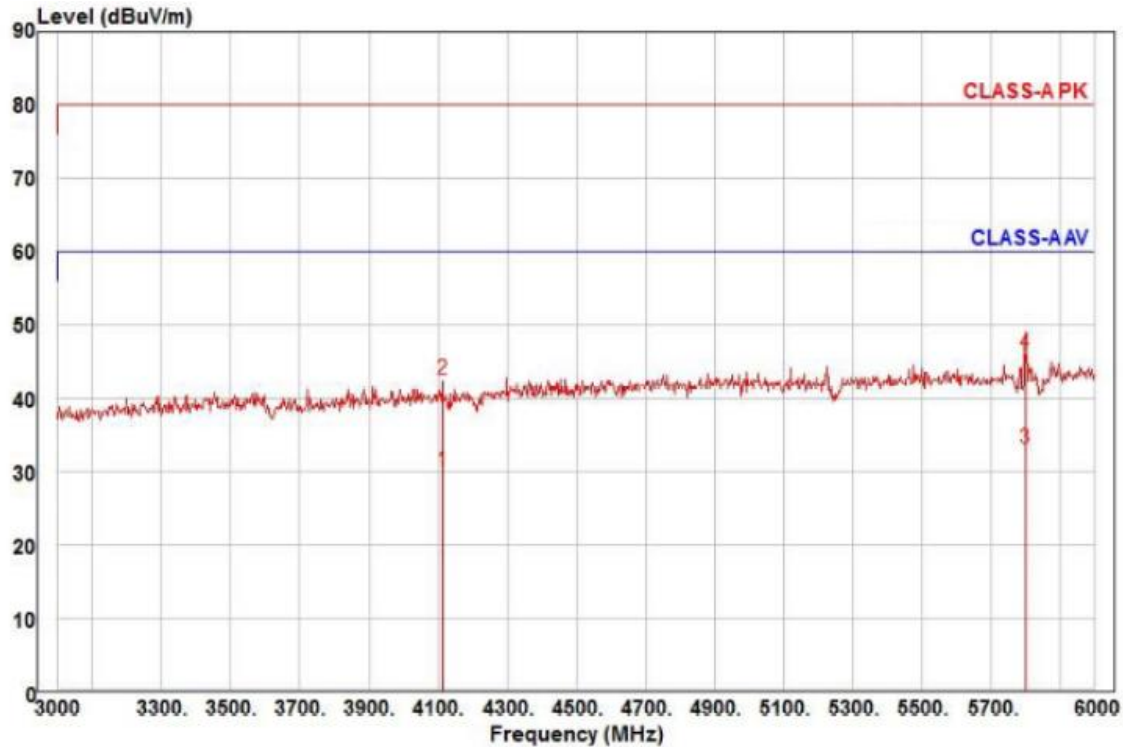


Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : AC
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4113.00	21.10	30.07	14.26	35.32	223	60.00	-29.89	vertical	Average
2	4113.00	33.63	30.07	14.26	35.32	223	80.00	-37.36	vertical	Peak
3 pp	5802.00	19.53	32.27	17.05	35.68	127	60.00	-26.83	vertical	Average
4 pk	5802.00	32.44	32.27	17.05	35.68	127	80.00	-33.92	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

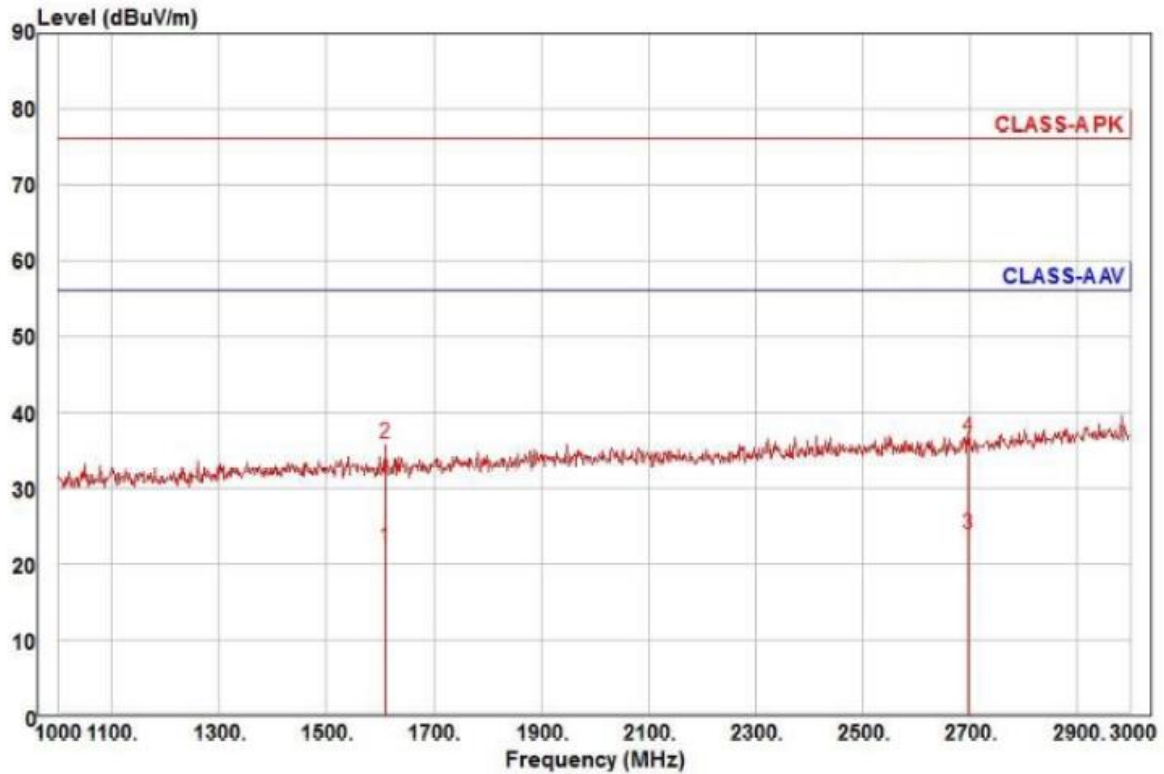

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : PoE
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1610.00	23.54	25.70	8.54	35.52	360	56.00	-33.74	horizontal	Average
2	1610.00	37.08	25.70	8.54	35.52	360	76.00	-40.20	horizontal	Peak
3 pp	2698.00	20.25	27.72	11.33	35.44	121	56.00	-32.14	horizontal	Average
4 pk	2698.00	33.05	27.72	11.33	35.44	121	76.00	-39.34	horizontal	Peak



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0811-R3
Page (29) of (45)

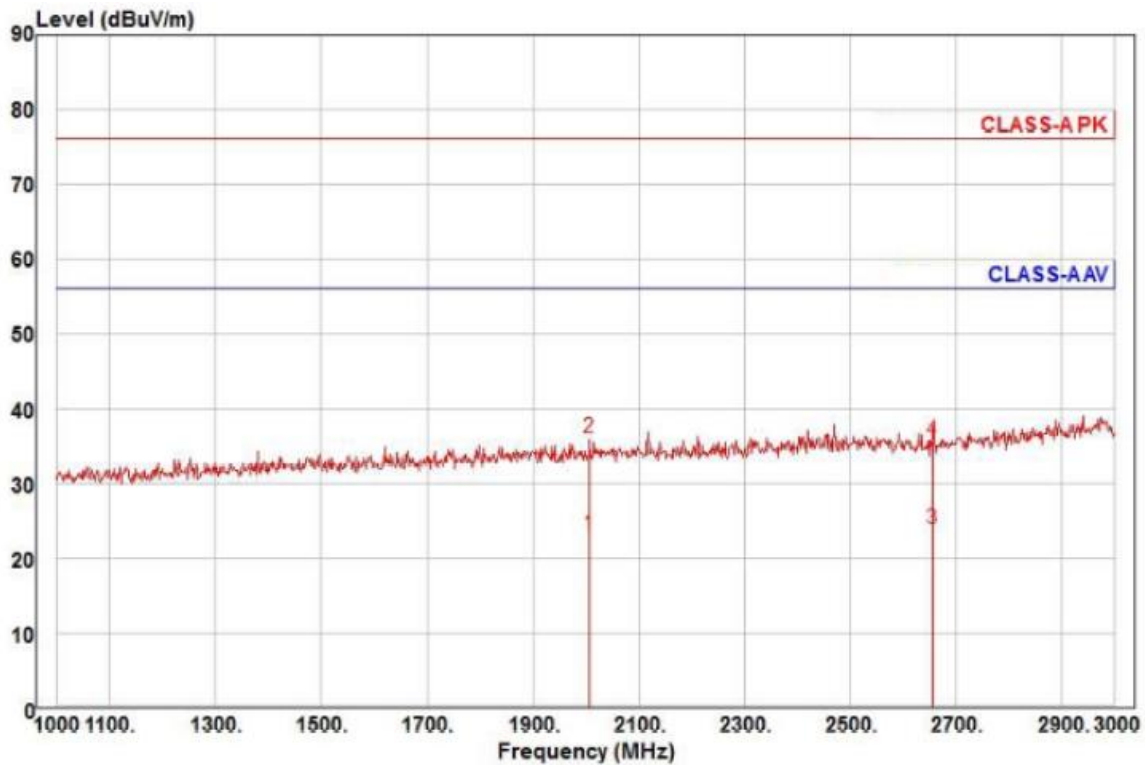

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : PoE
Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	2008.00	22.47	26.18	9.67	35.17	134	56.00	-32.85	vertical	Average
2 pk	2008.00	35.34	26.18	9.67	35.17	134	76.00	-39.98	vertical	Peak
3 pp	2658.00	20.44	27.62	11.22	35.43	195	56.00	-32.15	vertical	Average
4	2658.00	32.20	27.62	11.22	35.43	195	76.00	-40.39	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-E1-17T0811-R3
Page (30) of (45)

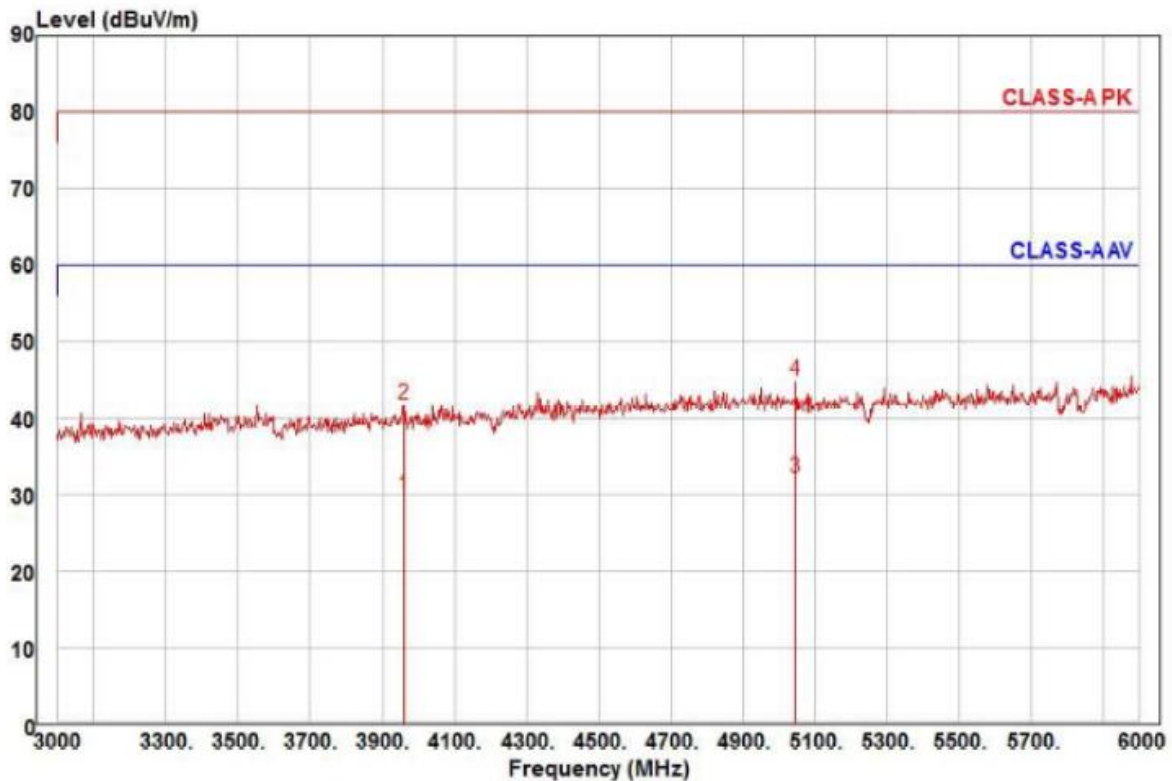

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : PoE
Memo : 3 ~ 6 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3960.00	21.41	29.75	13.98	35.29	189	60.00	-30.15	horizontal	Average
2	3960.00	33.26	29.75	13.98	35.29	189	80.00	-38.30	horizontal	Peak
3 pp	5049.00	20.48	31.51	15.84	35.63	334	60.00	-27.80	horizontal	Average
4 pk	5049.00	33.12	31.51	15.84	35.63	334	80.00	-35.16	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

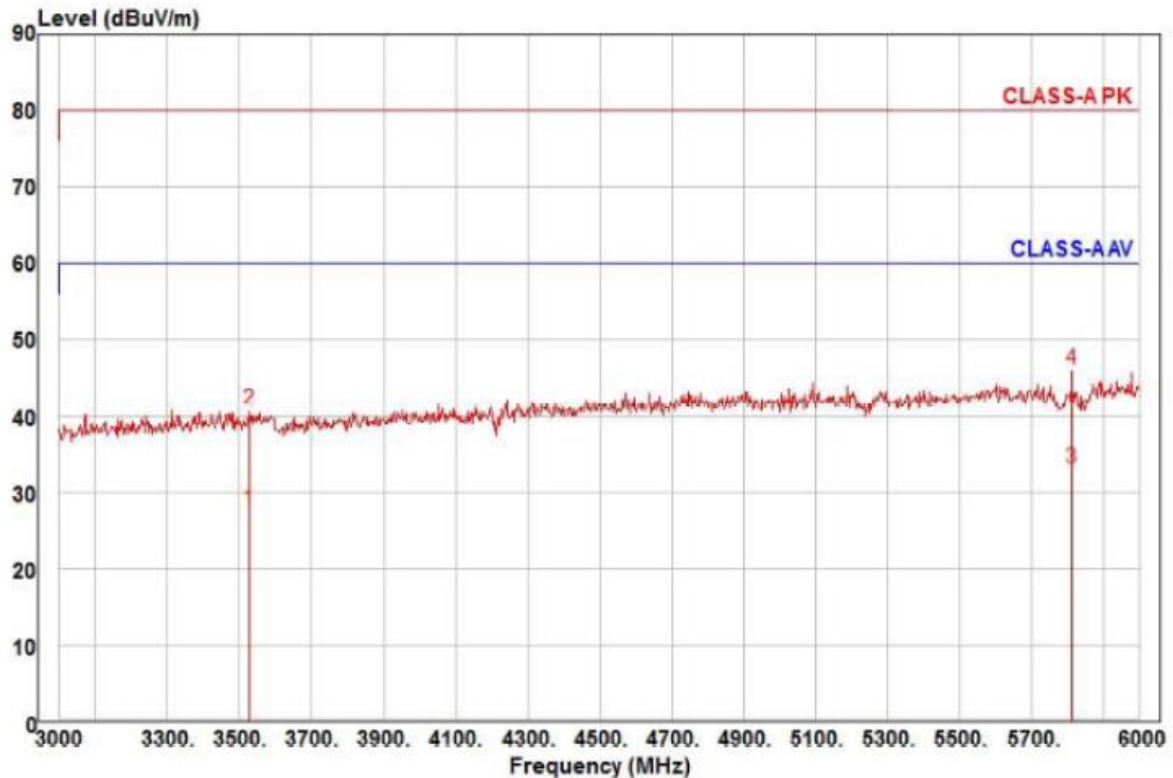

Site : YEOJU_C 3 m SAC
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNP-6320P
Mode : PoE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3528.00	21.04	28.92	13.18	35.41	161	60.00	-32.27	vertical	Average
2	3528.00	34.13	28.92	13.18	35.41	161	80.00	-39.18	vertical	Peak
3 pp	5814.00	19.47	32.29	17.09	35.68	231	60.00	-26.83	vertical	Average
4 pk	5814.00	32.35	32.29	17.09	35.68	231	80.00	-33.95	vertical	Peak

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Test Setup Photos and Configuration

Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

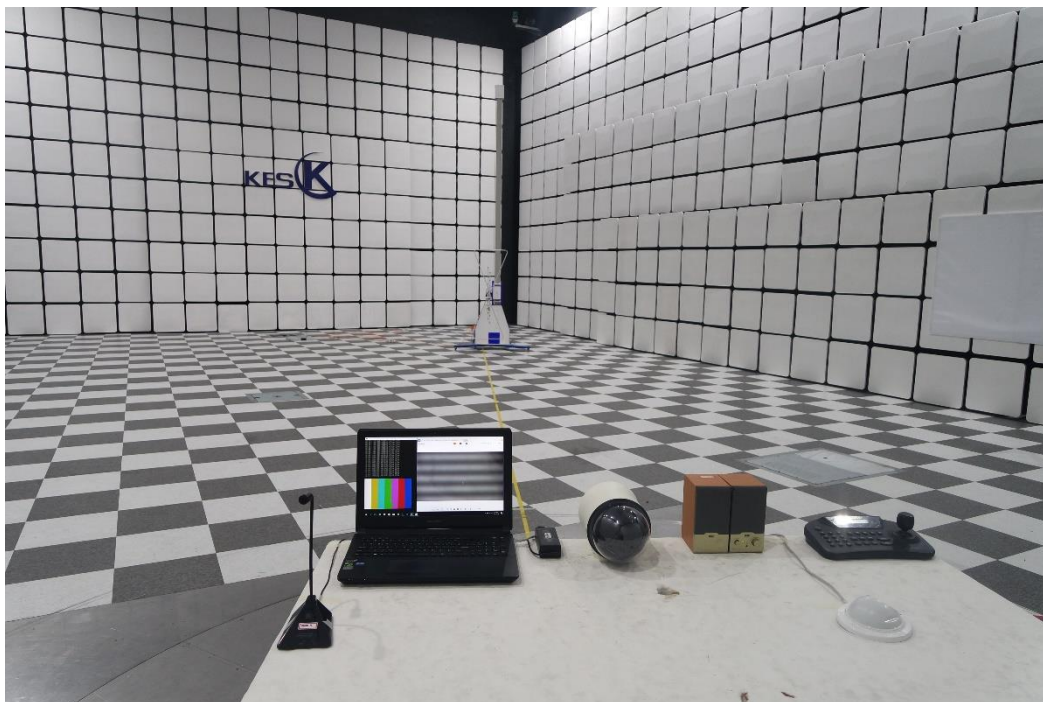

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

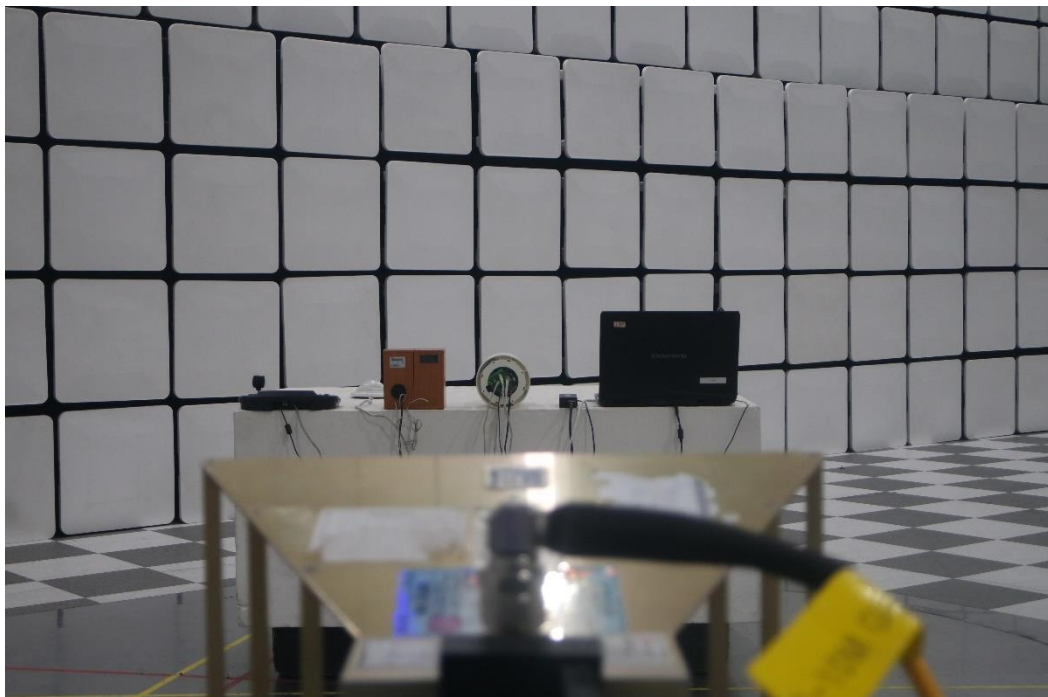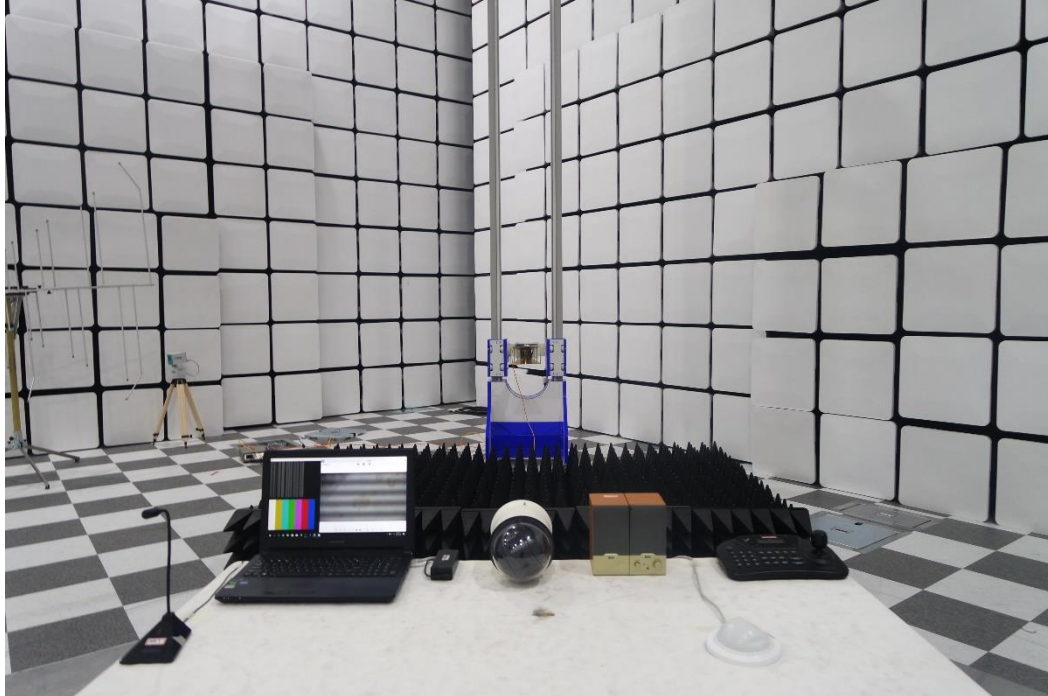

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Main board

(Top)

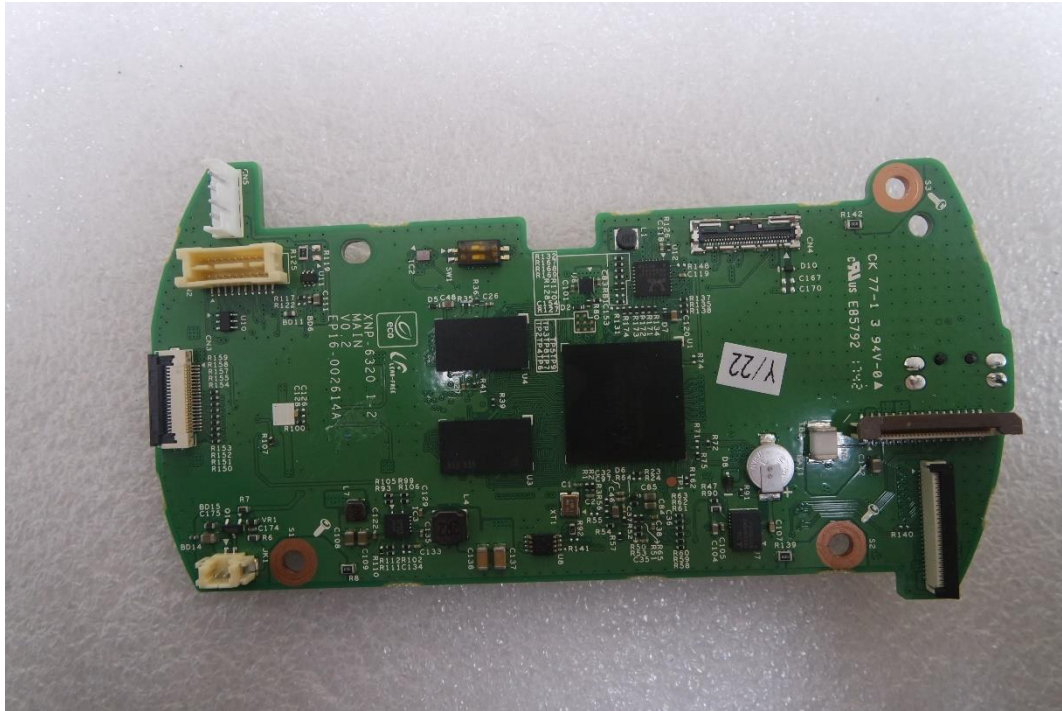


(Bottom)

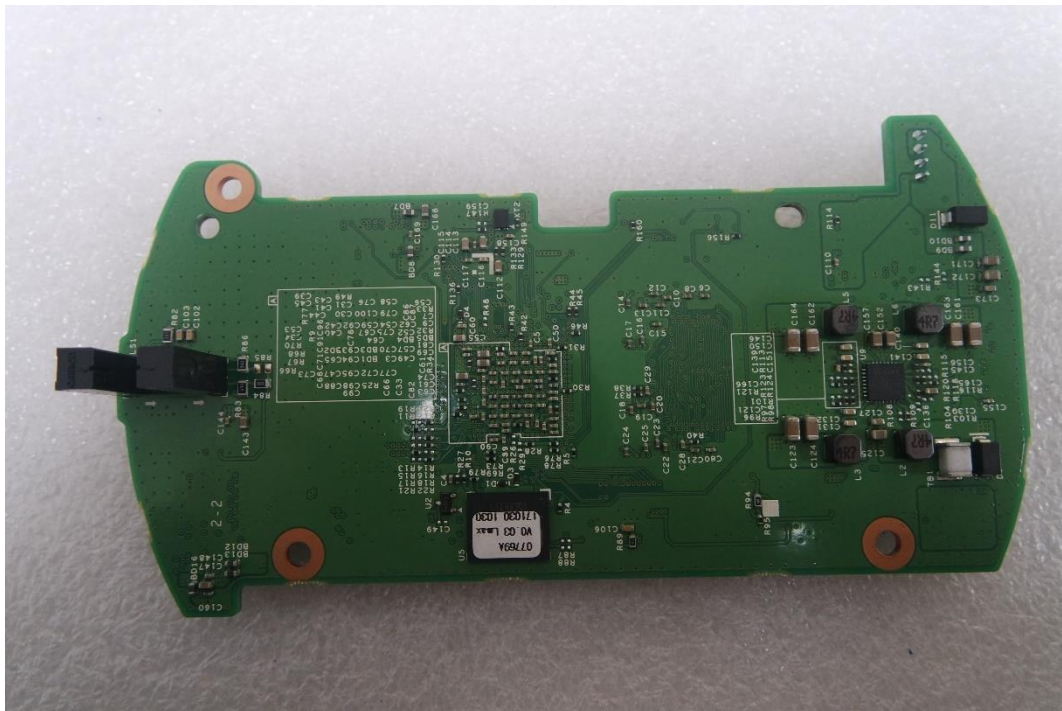


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Interface board

(Top)

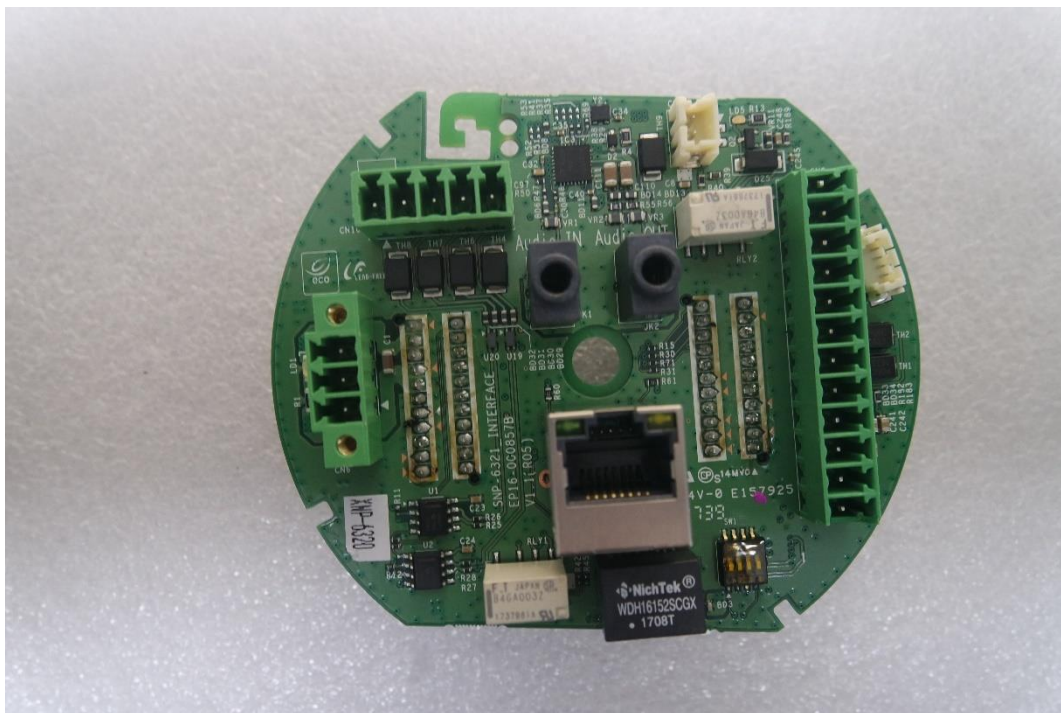


(Bottom)

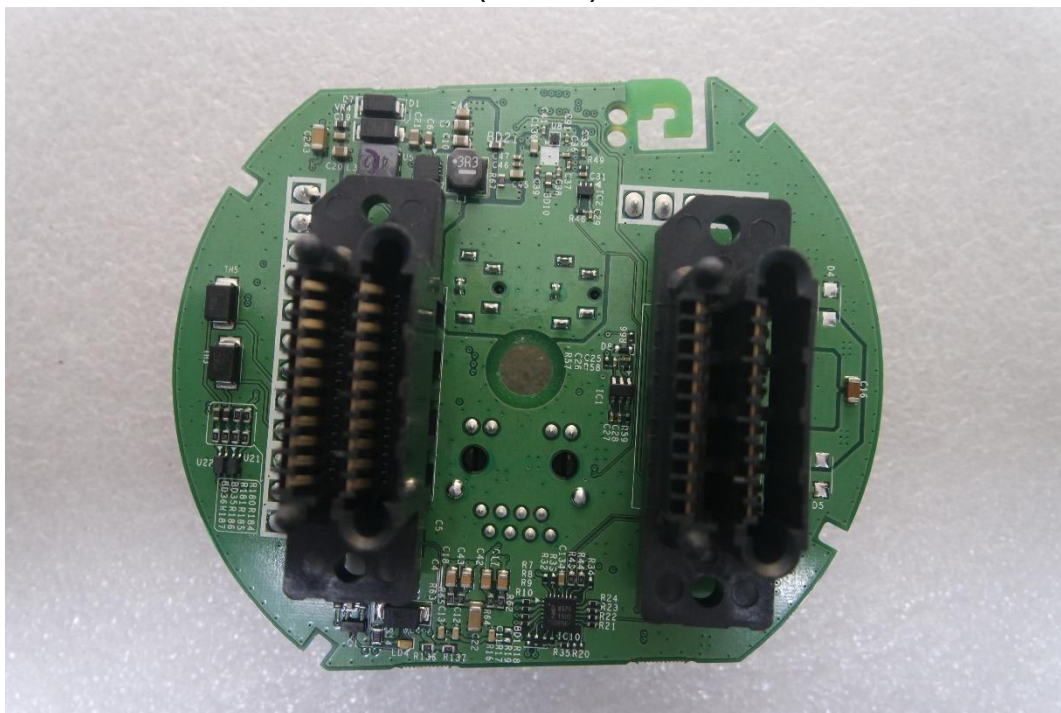


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Drive board

(Top)

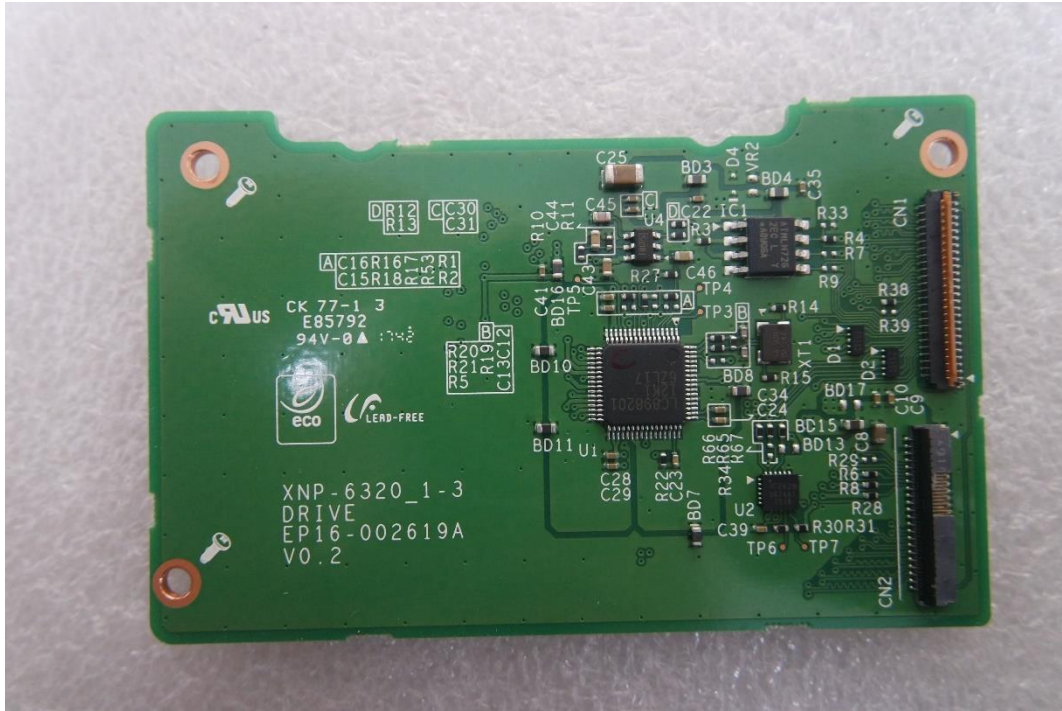


(Bottom)

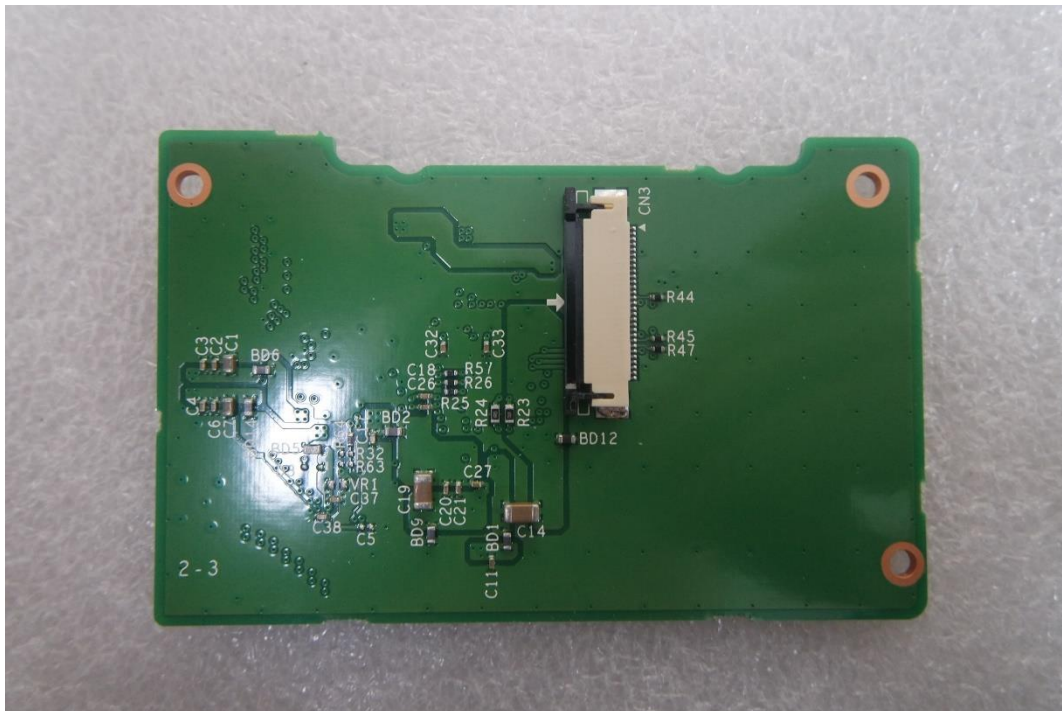


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – CCD board

(Top)

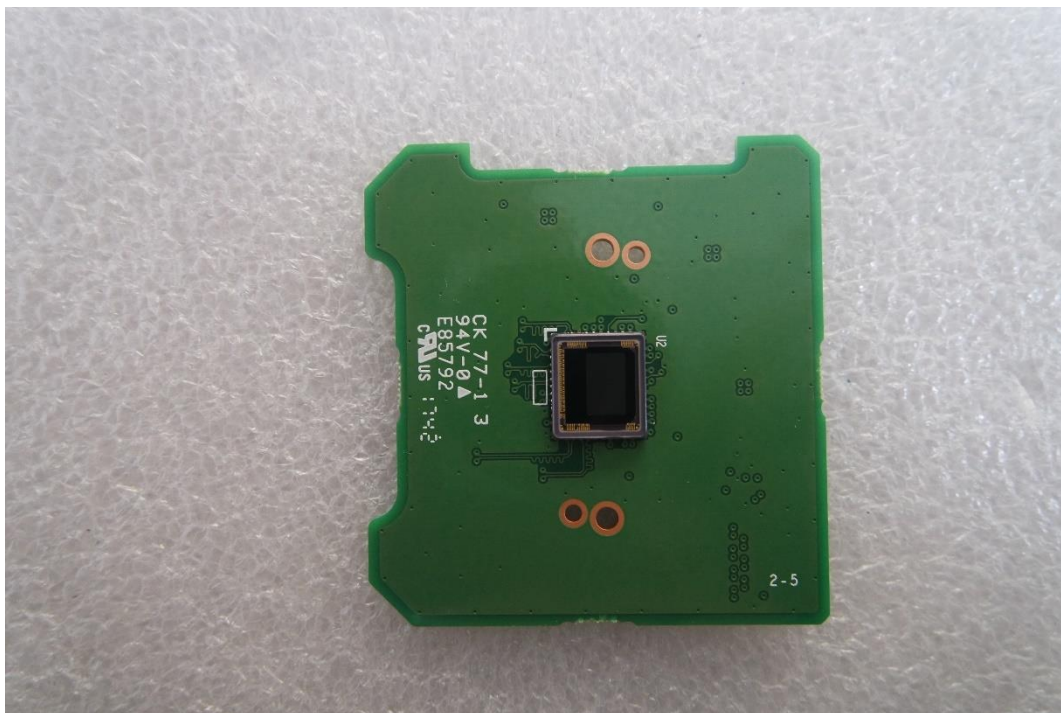


(Bottom)

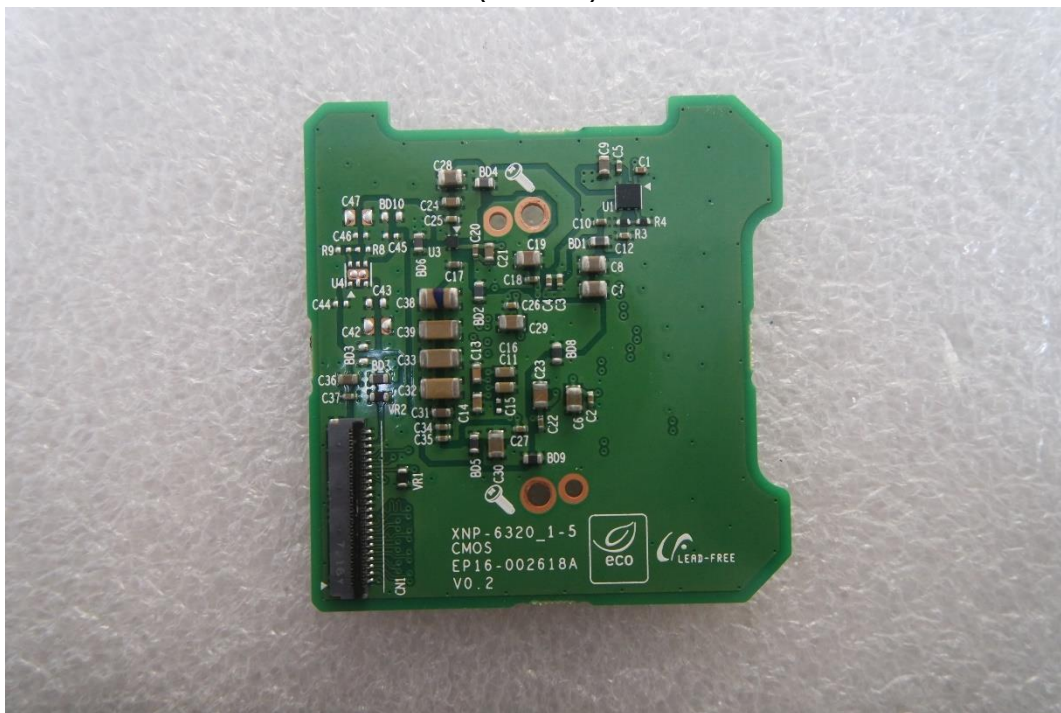


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – SD board

(Top)

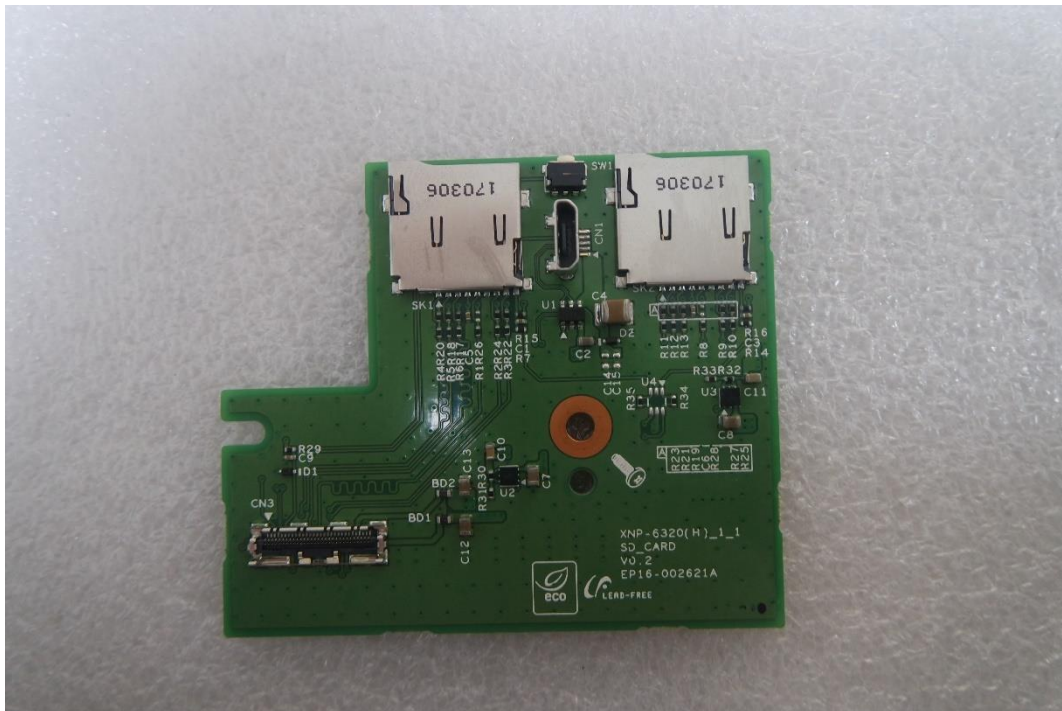


(Bottom)

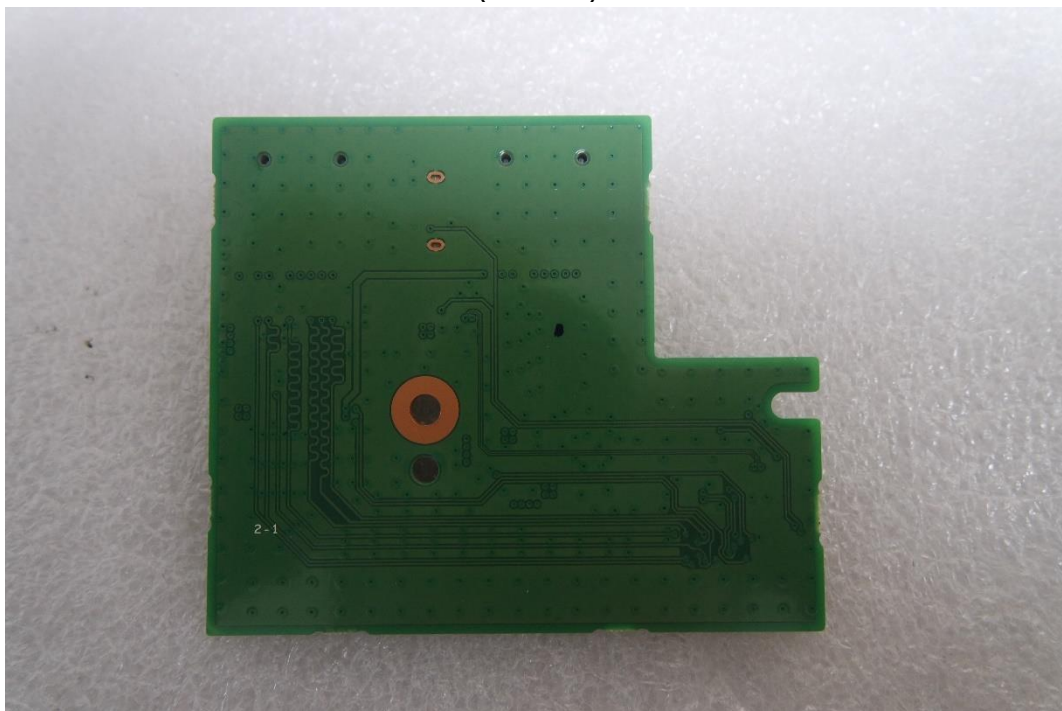


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Power board

(Top)

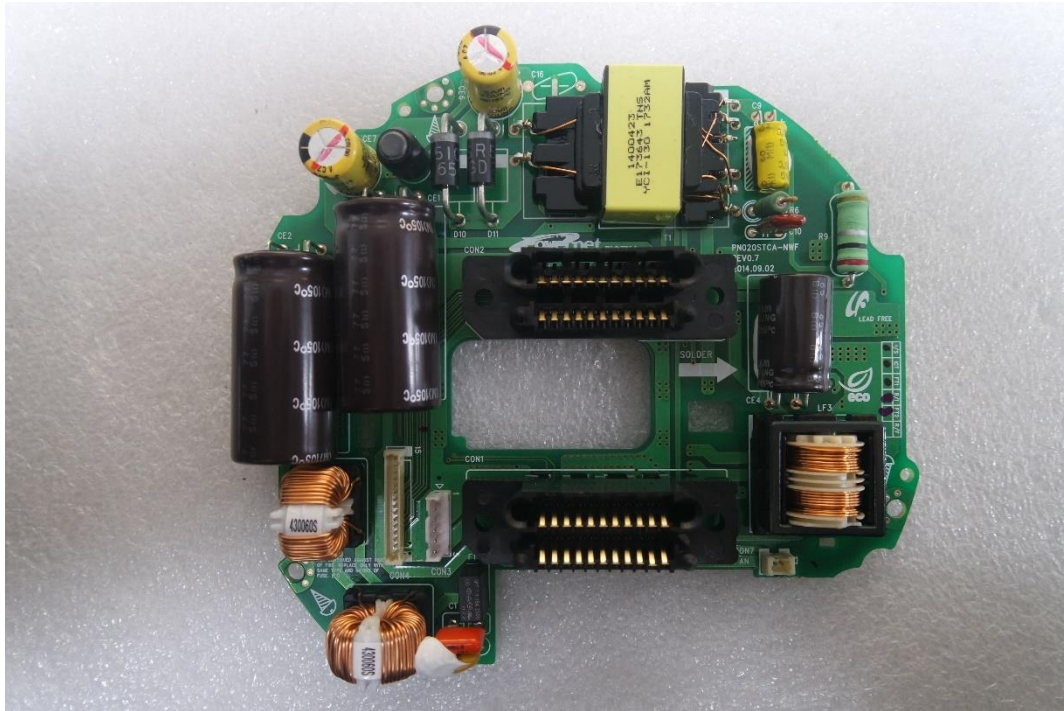


(Bottom)

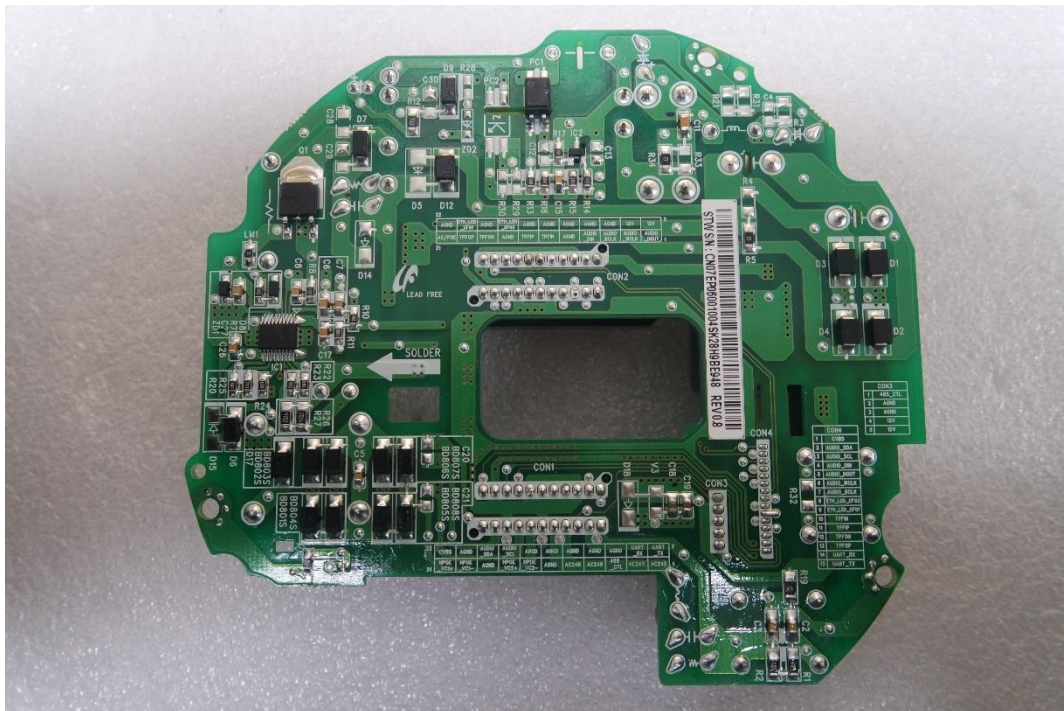


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – TILT board

(Top)

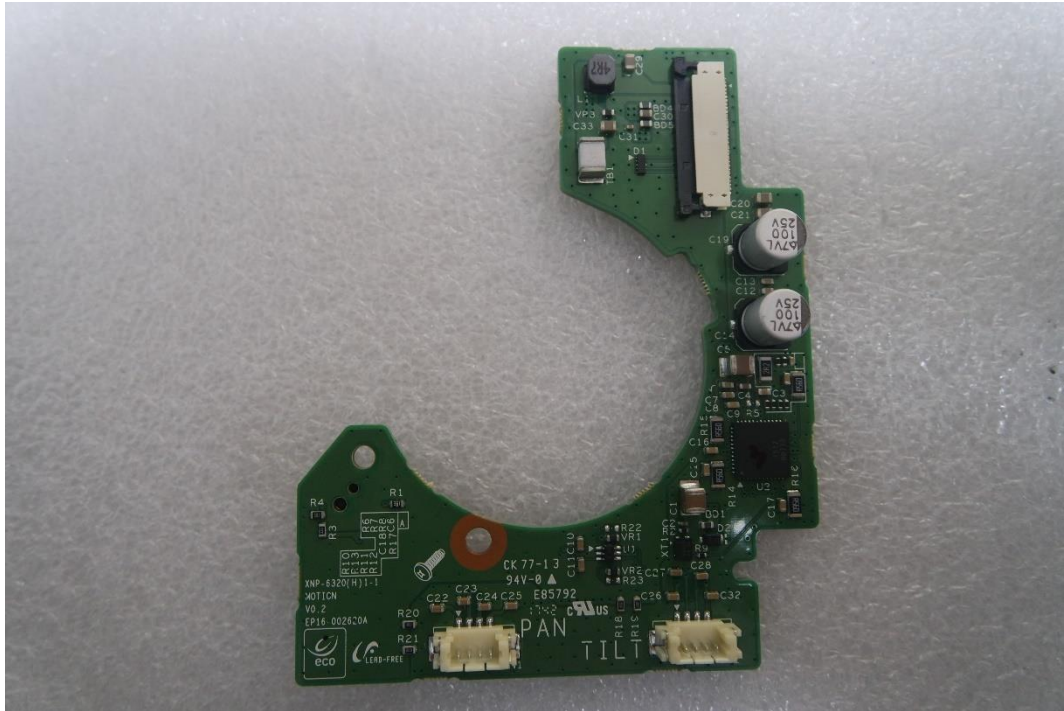


(Bottom)

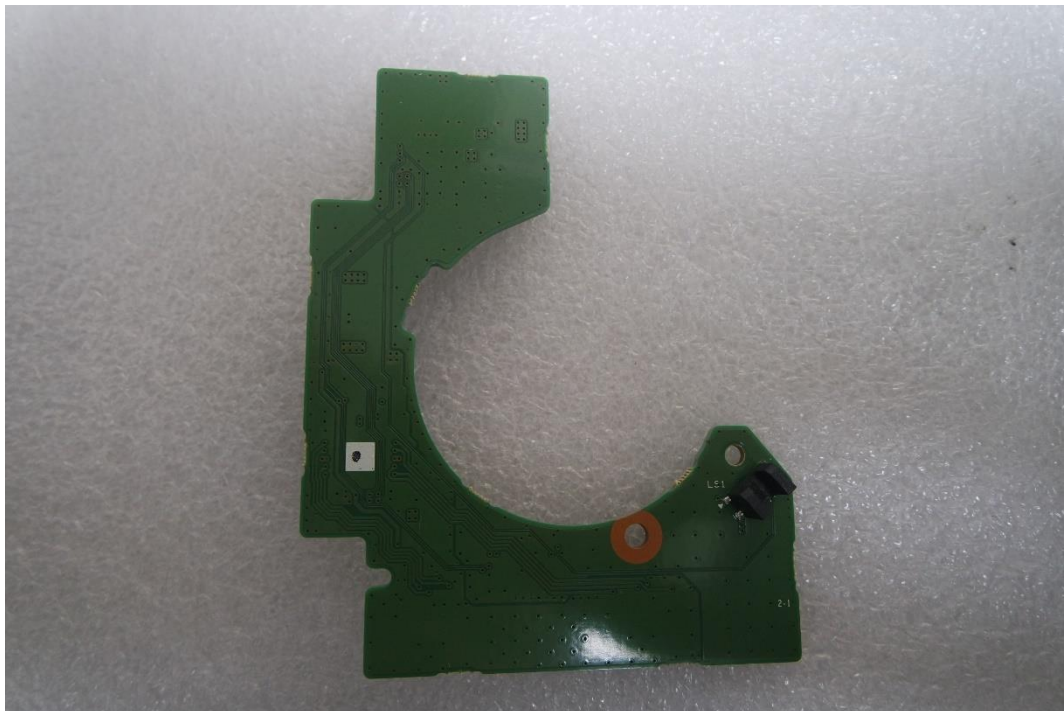


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens Module

(Top)

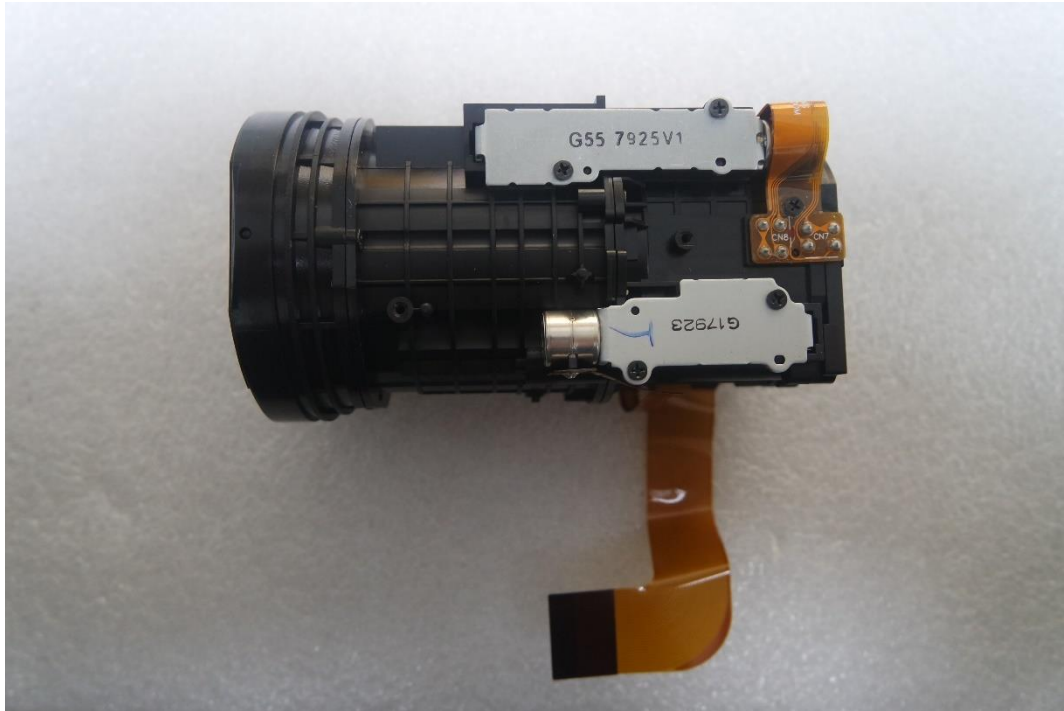

(Bottom)

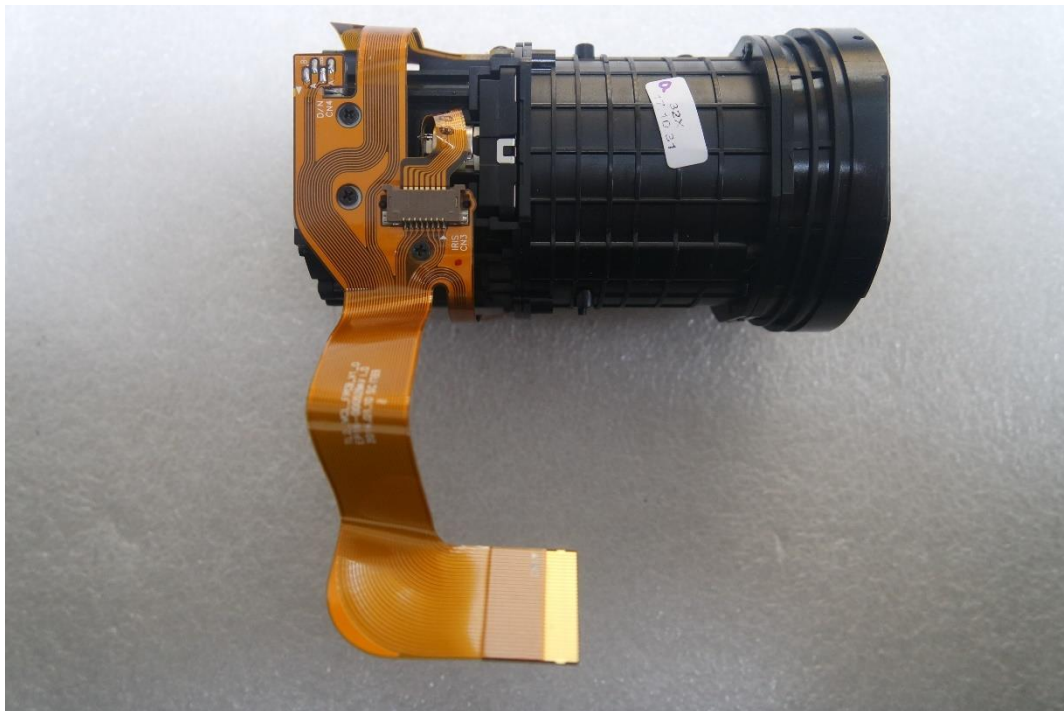

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.