



EMC TEST REPORT For CE

Test Report No. : KES-E1-18T0511-R4
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNP-6550RH
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Aug. 20, 2018
Test date : Sep. 02, 2018 ~ Sep. 03, 2018
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (2) of (71)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Sep. 04, 2018	KES-E1-18T0511	Issued
May. 15, 2019	KES-E1-18T0511-R1	Re-issue due to regulations update
Nov. 11, 2021	KES-E1-18T0511-R2	Factory deletion and test regulation addition on customer request.
May. 27, 2022	KES-E1-18T0511-R3	Re-issue due to regulations update
Feb. 24, 2023	KES-E1-18T0511-R4	Change the Applicant and Manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement.....	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
2.5	Harmonic Current Emissions	18
2.6	Voltage Fluctuations and Flicker	19
3.0	Criteria for compliance.....	20
3.1	Electrostatic Discharge.....	22
3.2	Radiated Electric Field Immunity	25
3.3	Electrical Fast Transients/Bursts	28
3.4	Surge Transients	31
3.5	Conducted Disturbance	35
3.6	Voltage Dips and Short Interruptions	38
APPENDIX A – TEST DATA.....		40
Conducted Emissions at Mains Power Ports.....		40
Conducted Emissions at Telecommunication Ports		42
Radiated Electric Field Emissions(Below 1 GHz)		46
Radiated Electric Field Emissions(Above 1 GHz).....		48
Harmonic Current Emissions and Voltage Fluctuations and Flicker		50
Test Setup Photos and Configuration		53
Conducted Voltage Emissions		53
Conducted Telecommunication Emissions		54
Radiated Electric Field Emissions(Below 1 GHz)		55
Radiated Electric Field Emissions(Above 1 GHz).....		56
Harmonic Current Emissions and Voltage Fluctuations and Flicker		57
Electrostatic Discharge		58
Radiated Electric Field Immunity		58
Electrical Fast Transients/Bursts		59
Surge Transients		59
Conducted Disturbance.....		60
Voltage Dips and Short Interruptions		60
EUT External Photographs		61
EUT Internal Photographs		62



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (4) of (71)

1.0 General Product Description

Main Specifications of EUT are:

	XNP-6550RH
Video	
Imaging Device	1/2.8" 2.16M CMOS
Total Pixels	1945(H) X 1109(V) approx 2.16M pixels
Effective Pixels	1945(H) X 1097(V) approx 2.13M pixels
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux (1/30sec, F1.6) TBD BW : 0.003 lux (1/30sec, F1.6) 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation
Lens	
Focal Length (Zoom Range)	4.75mm ~ 261.4mm (55x)
Max. Aperture Ratio	F1.6 (Wide) ~ F6.5 (Tele)
Angular Field of View	H : 58.6°(Wide) ~ 1.23°(Tele) / V : 34.8°(Wide) ~ 0.71°(Tele)
Min. Object Distance	5m
Focus Control	AF / One-Shot AF / Manual
Lens Type	DC Auto Iris
Mount Type	Board-in type
Zoom Movement Speed	Approx. 5 sec (wide to tele)
Pan / Tilt / Rotate	
Pan Range	360° Endless
Pan Speed	Preset : 400°/sec , Manual : 0.024°/sec ~ 250°/sec
Tilt Range	190°(-5° ~ 185°)
Tilt Speed	Preset : 300°/sec , Manual : 0.024°/sec ~ 250°/sec
Sequence	Preset (300 ea), Swing, Group (6 ea), Trace, Tour , Auto Run, Schedule
Preset Accuracy	±0.2°
Azimuth	Yes (E/W/S/N/NE/SE/NW/SW OSD)
Auto Tracking	Off / On
Operational	
Viewable Length	350m
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Defog (Optical)	Auto/Manual/Off
Digital Image Stabilization	Off / On (built-in Gyro)
Motion Detection	Yes(8ea, Polygonal zones)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (5) of (71)

Privacy Masking	Off / On (24 Zones of Rectangle zone) - Color : Grey/Green/Red/Blue/Black/White - Zoom ratio option for mask mode - Mosaic option
Gain Control	Off / Low / Medium / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital Zoom	32x , area zoom function support digital zoom 2x
Rotate Image	Flip : On/Off Mirror : On/Off
Intelligent Video Analysis	Tampering, Loitering, Directional Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Sound Classification
Alarm I/O	Input 4ea / Output 2ea (Relay type)
Remote Control Interface	RS-485
RS-485 Protocol	Samsung-T, Pelco-D/P, Panasonic, Honeywell, AD, Vicon, GE, BOSCH
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnection
Alarm events	• File upload via FTP, E-Mail • Notification via E-Mail • local storage(SD/SDHC) or NAS recording at Event Triggers • External output • PTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm stereo mini jack), Max output level: 1 Vrms
Pixel Counter	support
Network	
Ethernet	RJ-45 (10/100BASE-T) SFP (*only using SBP-303HF)
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.264/H.265 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265/MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (6) of (71)

Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	Micro SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1st slot to 2nd slot) - Motion Images recorded in the Micro SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programm	ONVIF Profile S/G SUNAPI 2.0(HTTP API) Wisenet Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Plug-in Free Webviewer Supported Browser : Google Chrome, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)
Central Management	SmartViewer
Environmental	
Operating Temperature / Humidity	AC24 : -50°C ~ +55°C (-58°F ~ +131°F) / Less than 90% RH HPoE : -40°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -30°C (HPoE Mode)
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	AC24V / HPoE
Power Consumption	AC24 : 92W HPoE : 60W

Mechanical	
Color / Material	black(head) + ivory(body) / Aluminum, Plastic
Dimension (WxHxD)	Ø236.9 x 407.7
Weight	7.1 Kg(TBD)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230Vac ☐ 100 Vac ☒ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNP-6550RH	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
PoE Adaptor	PT-PSE109GBRO-A	-	I.T.E POWER SUPPLY	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (8) of (71)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Cellular phone	SHV-E210L	R33D713KA3F	SAMSUNG	-
Notebook	NT630Z5J	JK9091EF400142M	SAMSUNG	-
Notebook Adaptor	A13-040N2A	CN60BA4400313AD 0N869C0587	Chicony Power Technology (suzhou)Co., Ltd.	-
Notebook	LG15N54	410NZGK015231	LG	Harmonic Flicker Test
Notebook Adaptor	ADP-90WH B	84ZW19F1663	DELTA ELECTRONICS (JIANGSU) LTD.	
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
Mic	CMK-303	-	CAMAC	-
Controller	SPC-1010	C50E67WD601003	SamSung Techwin Co.,Ltd	-
Controller Adaptor	RS-AB1000	-	Dongguan Jinhuaasheng Power Technology Co.,Ltd	-
Alarm 1	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Alarm 2	-	-	-	-
Micro SD Card	-	-	Transcend	8 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.6 External I/O Cabling

■ AC MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	Mic	3.5 mm	1.7	U
	Alarm In	Alarm 1	Alarm Out	3.0	U
	Alarm Out	Alarm 2	Alarm In	3.0	U
	RS-485	Controller	RS-485	3.2	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Cellular phone	3.5 mm	1.5	U

* Unshielded=U, Shielded=S

■ PoE MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Adaptor	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.7	U
	3.5 mm	Mic	3.5 mm	1.7	U
	Alarm In	Alarm 1	Alarm Out	3.0	U
	Alarm Out	Alarm 2	Alarm In	3.0	U
	RS-485	Controller	RS-485	4.0	U
	SLOT	Micro SD Card	SLOT	-	-
POE Adaptor	RJ-45	Notebook	RJ-45	3.0	S
Notebook	3.5 mm	Cellular phone	3.5 mm	1.5	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (10) of (71)

1.7 EUT Operating Mode(s)

Test Mode	operating
AC 24 V	E.U.T Monitoring, Ping Test
PoE	E.U.T Monitoring, Ping Test


EUT Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ AC MODE

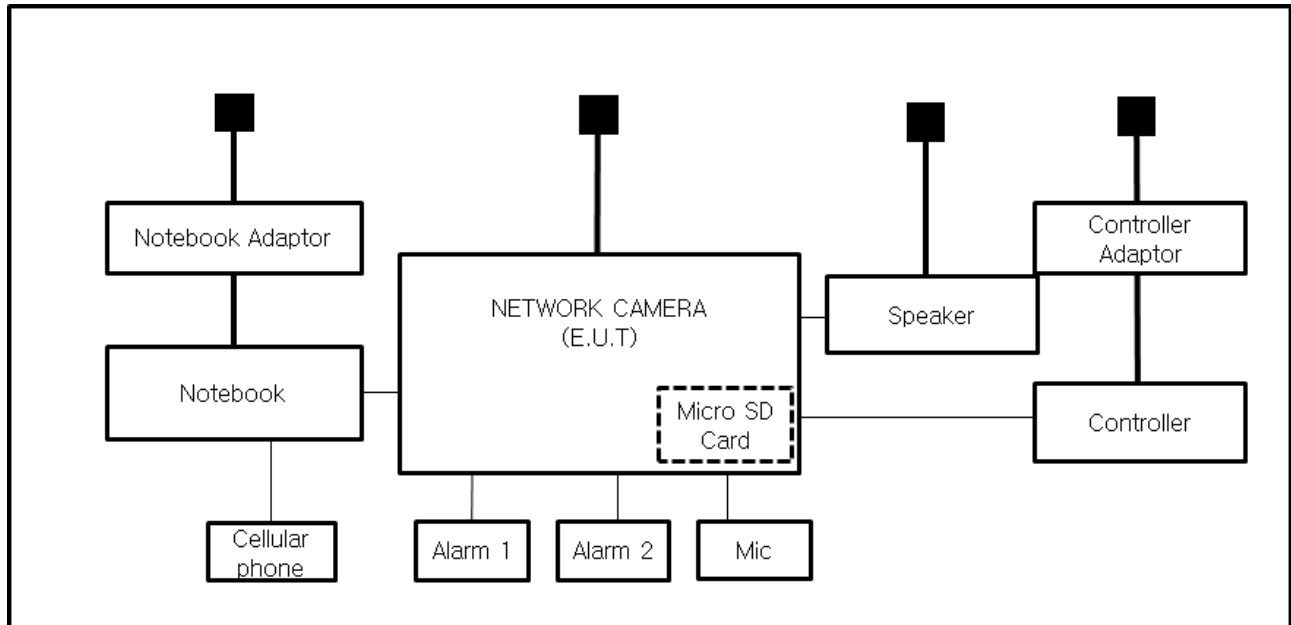

■ PoE MODE

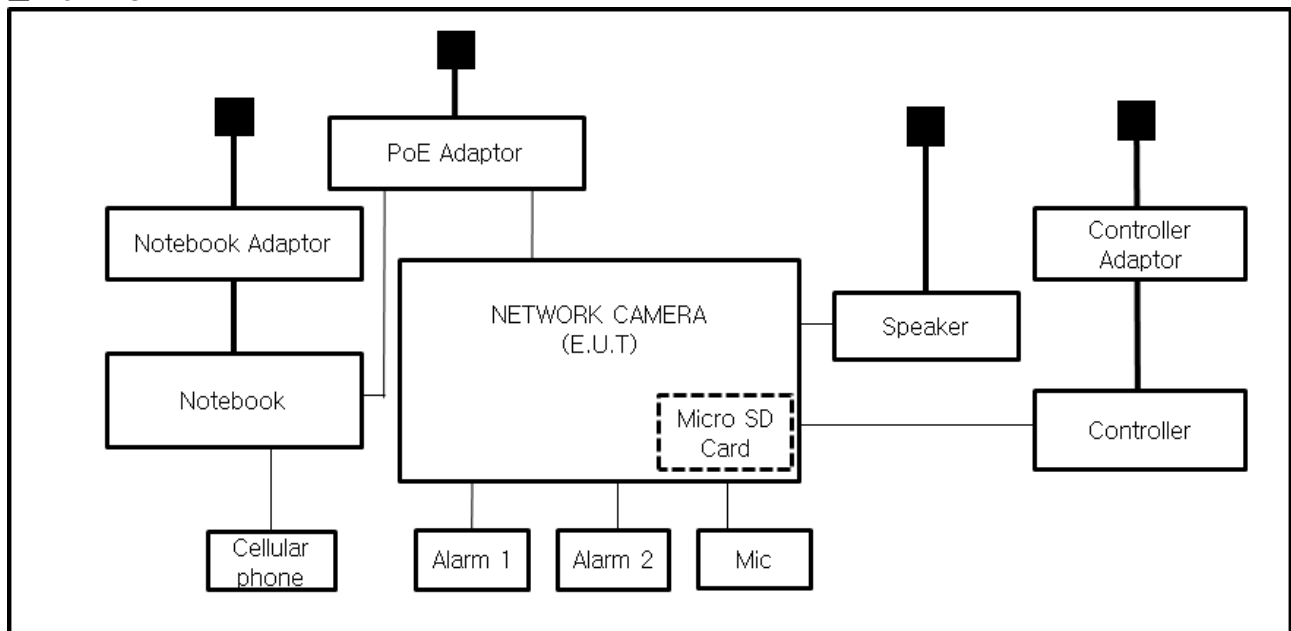

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (14) of (71)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Sep. 02, 2018

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 05, 2019
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018

Test Conditions

Temperature: 24,2 °C
Relative Humidity: 49,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Sep. 02, 2018

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 05, 2019
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2019
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2019

Test Conditions

Temperature: 24,2 °C
Relative Humidity: 49,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (16) of (71)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Sep. 02, 2018

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018

Test Conditions

Temperature: 24,5 °C

Relative Humidity: 53,1 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (17) of (71)

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Sep. 02, 2018

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 54,9 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.5 Harmonic Current Emissions

Test Date

Sep. 02, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 24,4 °C
Relative Humidity: 48,5 % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Sep. 02, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 24,4 °C
Relative Humidity: 48,5 % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it

difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Sep. 02, 2018

Test Location

EMS-ESD: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 21, 2019
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 24,1 °C
Relative Humidity: 48,3 % R.H.
Atmospheric Pressure: 99,8 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Location of Discharge:

Air
Contact



1

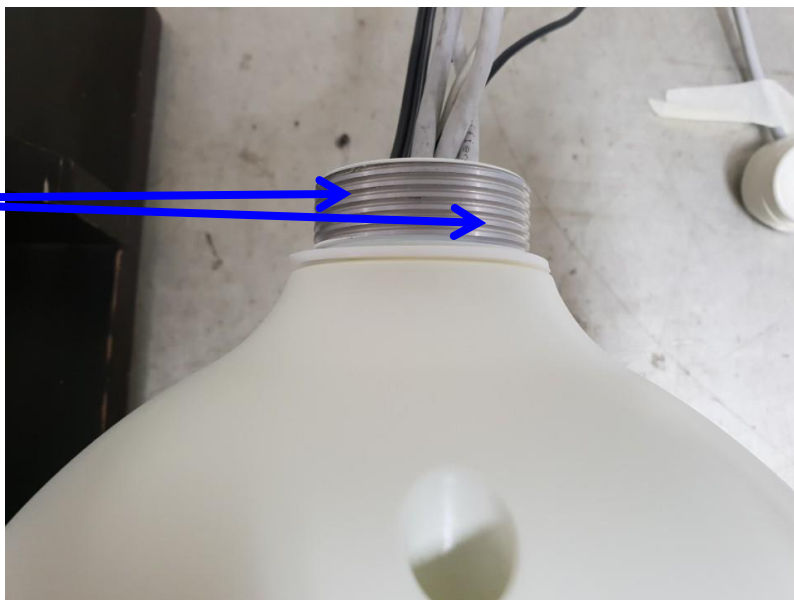

2

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (24) of (71)

Test Data

■ AC MODE

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

■ PoE MODE

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksN/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Sep. 03, 2018

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 06, 2019
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 06, 2019
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 06, 2019
☒	POWER METER	NRP2	R & S	103475	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 06, 2019
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 06, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 23,6 °C
Relative Humidity: 55,1 % R.H.
Atmospheric Pressure: 99,2 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (26) of (71)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Test Data

■ AC MODE

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE MODE

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

N/A

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Sep. 03, 2018

Test Location

EMS-EFT: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2019
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 26, 2019

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 99,9 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (29) of (71)

Test Data

■ AC MODE

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
RS-485	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ POE MODE

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
RS-485	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

N/A

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (31) of (71)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Sep. 03, 2018

Test Location

EMS-Surge: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2019
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 25, 2019
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 25, 2019

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 99,9 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (32) of (71)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (33) of (71)

Test Data

■ AC MODE

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
RS-485	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (34) of (71)

■ PoE MODE☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N – PE	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
RS-485	Complied	Complied
Alarm 1	Complied	Complied
Alarm 2	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksN/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Sep. 03, 2018

Test Location

EMS-CS: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.7	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1	EM TEST	V0936105119	08, 09, 2019
☒	ATTENUATOR	ATT6	EM TEST	1208-34	08, 08, 2019
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 06, 2019
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 06, 2019
☒	EM INJECTION CLAMP	EM 101	Liithi	35943	02, 02, 2019

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 99,9 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (36) of (71)

Test Data**■ AC MODE**☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
RS-485	Clamp	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (37) of (71)

■ PoE MODE☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N -PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
RS-485	Clamp	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**N/A

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0511-R4

Page (38) of (71)

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Sep. 03, 2018

Test Location

EMS-Voltage dip: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2019
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2019

Test Conditions

Temperature: 25,5 °C
Relative Humidity: 48,7 % R.H.
Atmospheric Pressure: 99,9 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (39) of (71)

Test Specifications & Observations/Remarks**■ AC MODE**

(Test Voltage : 230 V)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

■ PoE MODE

(Test Voltage : 230 V)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

The test has been tested using the AC/AC adaptor.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ AC MODE

[HOT]

Common Information

Test Description:

Conducted Emission

Model No.:


XNP-6550RH

Mode

AC_H

Operator Name:

KES

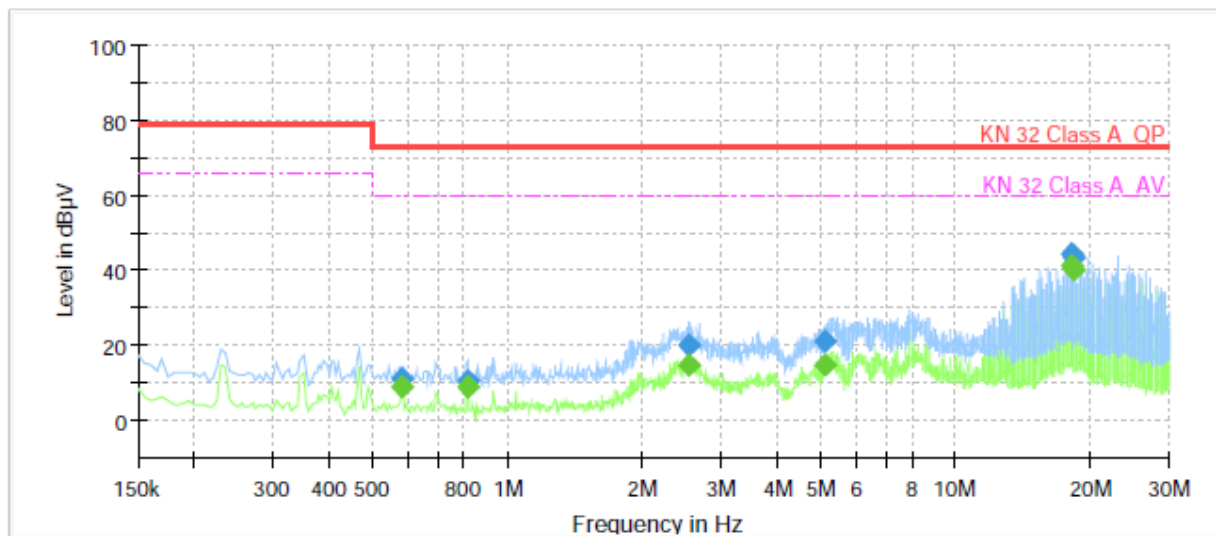

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.580000	---	8.92	60.00	51.08	1000.0	9.000	L1	19.8
0.580000	11.19	---	73.00	61.81	1000.0	9.000	L1	19.8
0.815000	---	9.10	60.00	50.90	1000.0	9.000	L1	20.0
0.815000	10.76	---	73.00	62.24	1000.0	9.000	L1	20.0
2.535000	---	14.81	60.00	45.19	1000.0	9.000	L1	20.2
2.535000	20.07	---	73.00	52.93	1000.0	9.000	L1	20.2
5.115000	---	14.74	60.00	45.26	1000.0	9.000	L1	19.8
5.115000	21.04	---	73.00	51.96	1000.0	9.000	L1	19.8
18.245000	---	41.04	60.00	18.96	1000.0	9.000	L1	20.3
18.245000	44.46	---	73.00	28.54	1000.0	9.000	L1	20.3
18.305000	---	40.30	60.00	19.70	1000.0	9.000	L1	20.3
18.305000	43.66	---	73.00	29.34	1000.0	9.000	L1	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNP-6550RH
Mode: AC_N
Operator Name: KES

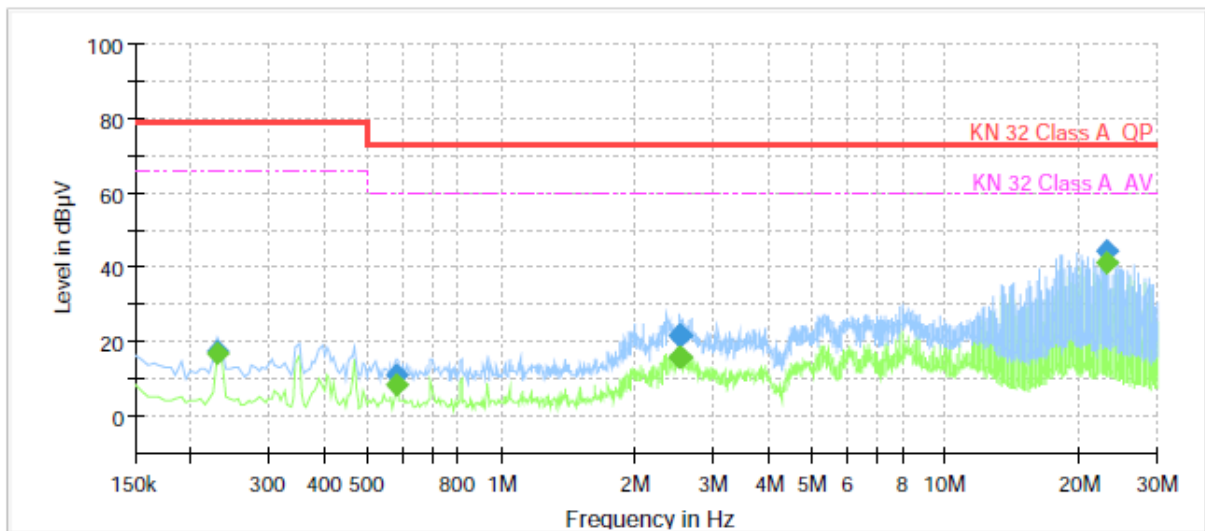

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.230000	---	16.74	66.00	49.26	1000.0	9.000	N	19.5
0.230000	17.40	---	79.00	61.60	1000.0	9.000	N	19.5
0.580000	---	8.28	60.00	51.72	1000.0	9.000	N	19.8
0.580000	11.09	---	73.00	61.91	1000.0	9.000	N	19.8
2.525000	---	15.98	60.00	44.02	1000.0	9.000	N	20.2
2.525000	21.52	---	73.00	51.48	1000.0	9.000	N	20.2
2.540000	---	15.87	60.00	44.13	1000.0	9.000	N	20.2
2.540000	21.50	---	73.00	51.50	1000.0	9.000	N	20.2
23.130000	---	41.46	60.00	18.54	1000.0	9.000	N	20.5
23.130000	44.59	---	73.00	28.41	1000.0	9.000	N	20.5

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Conducted Emissions at Telecommunication Ports

■ AC MODE

[10 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


XNP-6550RH

Mode

AC_10 Mbps

Operator Name:

KES

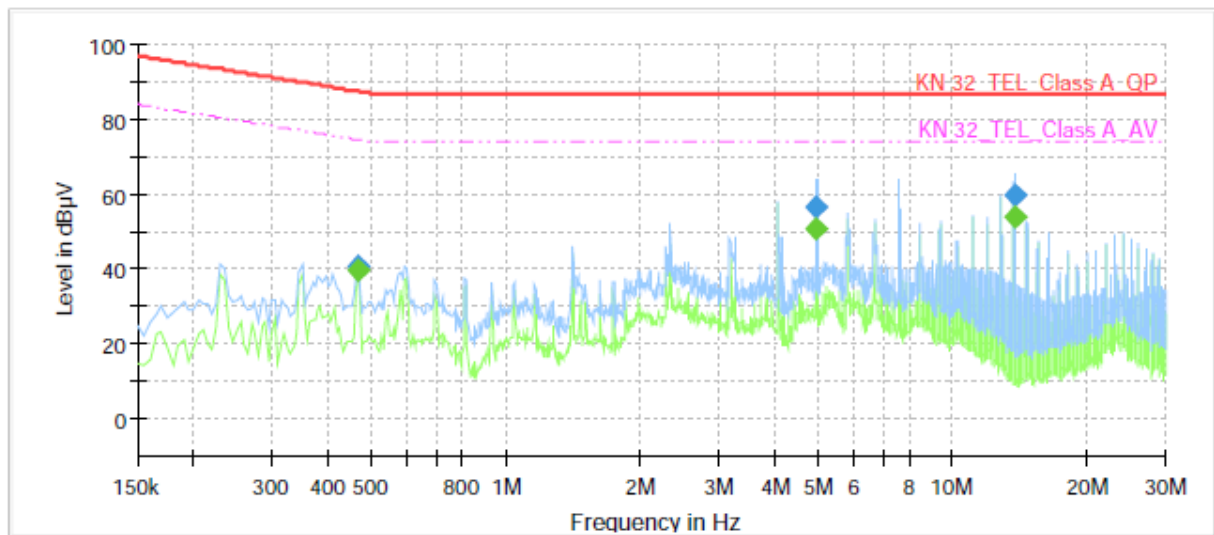

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.465000	---	39.87	74.60	34.73	1000.0	9.000	Single Line	19.6
0.465000	40.61	---	87.60	46.99	1000.0	9.000	Single Line	19.6
4.945000	---	50.91	74.00	23.09	1000.0	9.000	Single Line	19.5
4.945000	56.57	---	87.00	30.43	1000.0	9.000	Single Line	19.5
13.750000	---	53.94	74.00	20.06	1000.0	9.000	Single Line	19.9
13.750000	59.77	---	87.00	27.23	1000.0	9.000	Single Line	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (43) of (71)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNP-6550RH
Mode: AC_100 Mbps
Operator Name: KES

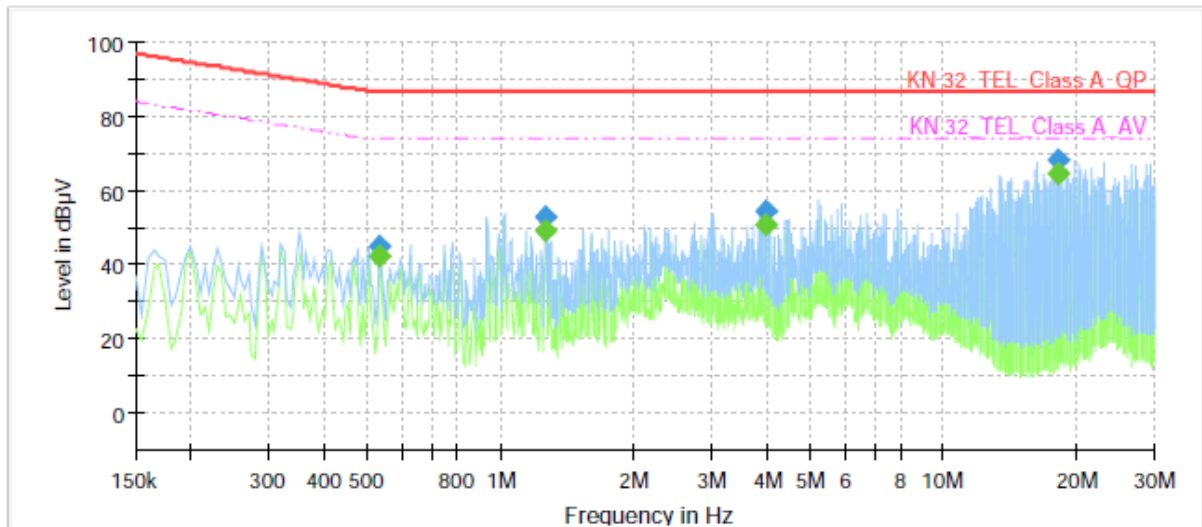

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.535000	---	42.54	74.00	31.46	1000.0	9.000	Single Line	19.6
0.535000	44.94	---	87.00	42.06	1000.0	9.000	Single Line	19.6
1.265000	---	49.43	74.00	24.57	1000.0	9.000	Single Line	19.8
1.265000	52.71	---	87.00	34.29	1000.0	9.000	Single Line	19.8
3.955000	---	51.02	74.00	22.98	1000.0	9.000	Single Line	19.6
3.955000	54.59	---	87.00	32.41	1000.0	9.000	Single Line	19.6
18.245000	---	64.79	74.00	9.21	1000.0	9.000	Single Line	20.0
18.245000	68.40	---	87.00	18.60	1000.0	9.000	Single Line	20.0


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE MODE

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6550RH
Mode	PoE_ 10 Mbps
Operator Name:	KES

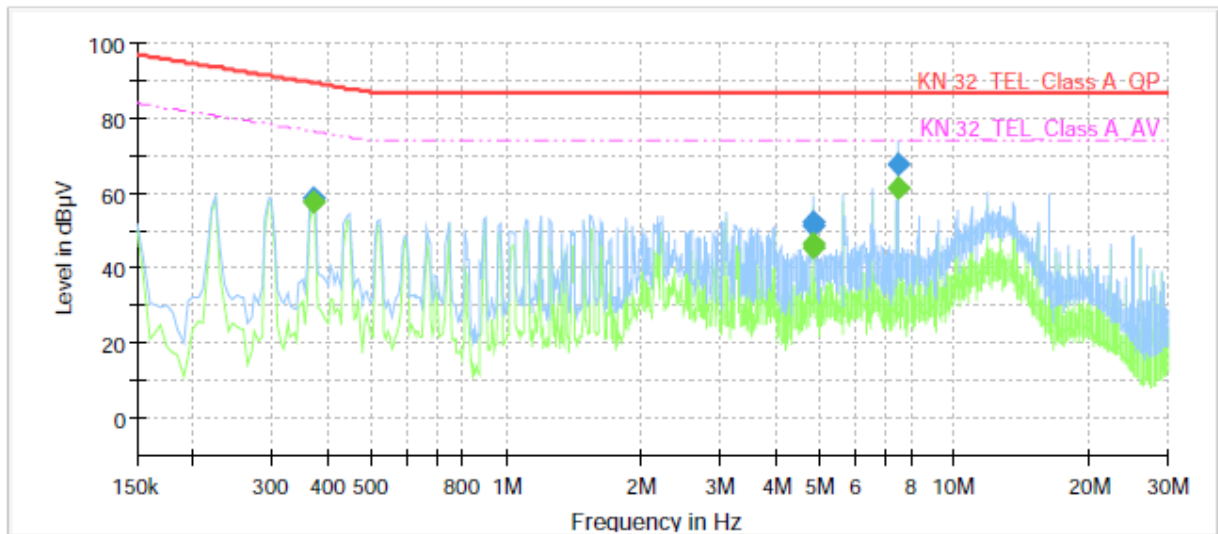


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.370000	---	57.76	76.50	18.74	1000.0	9.000	Single Line	19.6
0.370000	58.70	---	89.50	30.80	1000.0	9.000	Single Line	19.6
4.835000	---	46.72	74.00	27.28	1000.0	9.000	Single Line	19.5
4.835000	52.54	---	87.00	34.46	1000.0	9.000	Single Line	19.5
4.840000	---	45.45	74.00	28.55	1000.0	9.000	Single Line	19.5
4.840000	51.34	---	87.00	35.66	1000.0	9.000	Single Line	19.5
7.500000	---	61.53	74.00	12.47	1000.0	9.000	Single Line	19.4
7.500000	67.94	---	87.00	19.06	1000.0	9.000	Single Line	19.4

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6550RH
Mode	PoE_ 100 Mbps
Operator Name:	KES

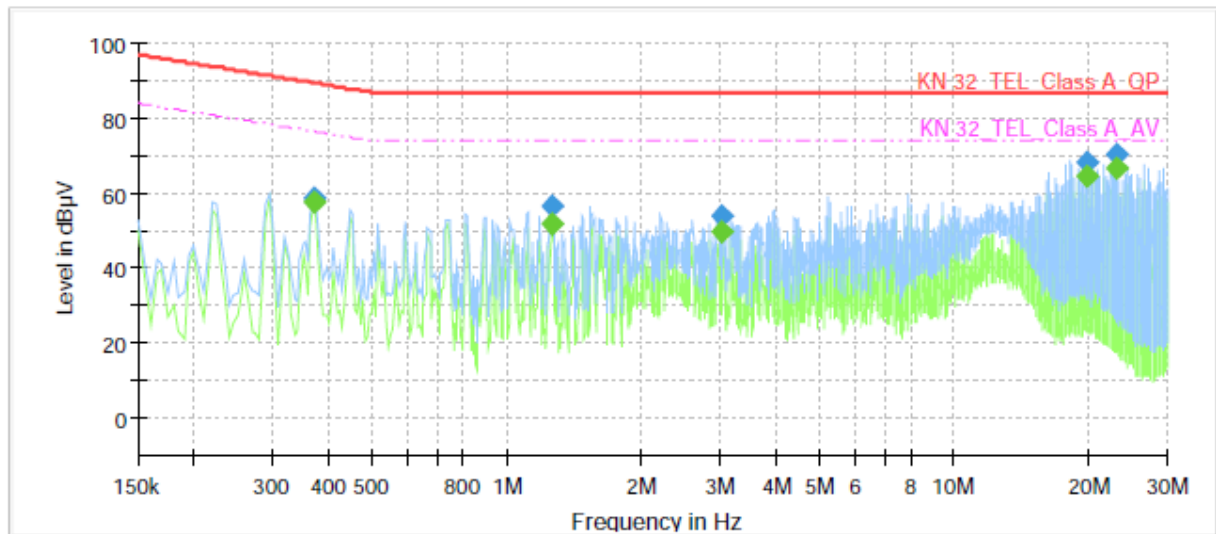

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.370000	---	57.93	76.50	18.57	1000.0	9.000	Single Line	19.5
0.370000	58.82	---	89.50	30.68	1000.0	9.000	Single Line	19.5
1.265000	---	51.94	74.00	22.06	1000.0	9.000	Single Line	19.8
1.265000	56.85	---	87.00	30.15	1000.0	9.000	Single Line	19.8
3.040000	---	49.89	74.00	24.11	1000.0	9.000	Single Line	19.8
3.040000	53.84	---	87.00	33.16	1000.0	9.000	Single Line	19.8
19.710000	---	64.56	74.00	9.44	1000.0	9.000	Single Line	20.1
19.710000	68.29	---	87.00	18.71	1000.0	9.000	Single Line	20.1
23.130000	---	66.84	74.00	7.16	1000.0	9.000	Single Line	20.2
23.130000	70.52	---	87.00	16.48	1000.0	9.000	Single Line	20.2

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-18T0511-R4

Page (46) of (71)

Radiated Electric Field Emissions(Below 1 GHz)

■ AC MODE

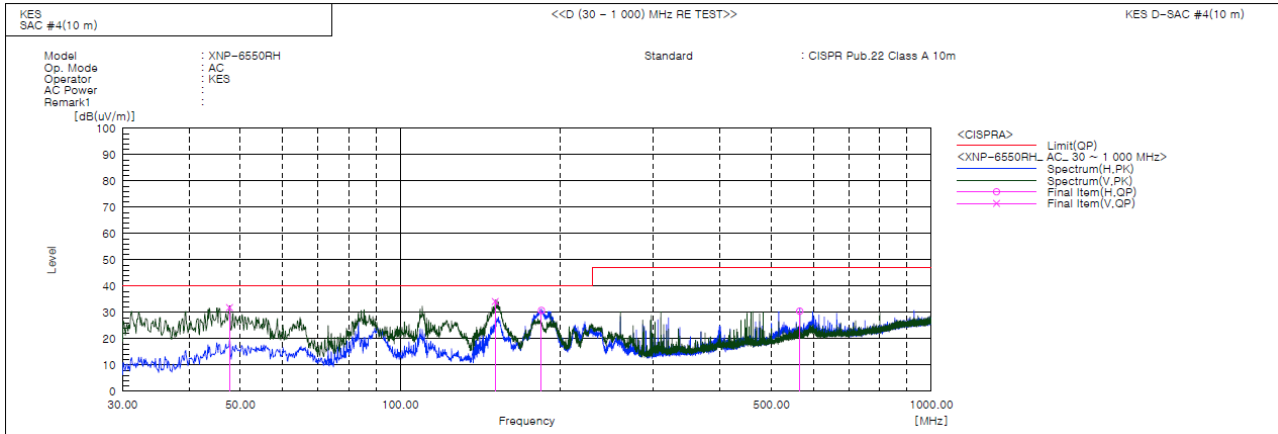

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.703	V	60.4	-28.5	31.9	40.0	8.1	152.0	161.0	
2	151.008	V	66.2	-32.0	34.2	40.0	5.8	166.0	224.0	
3	184.473	H	60.4	-29.6	30.8	40.0	9.2	387.0	251.0	
4	565.198	H	47.3	-16.8	30.5	47.0	16.5	221.0	240.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (47) of (71)

■ PoE MODE

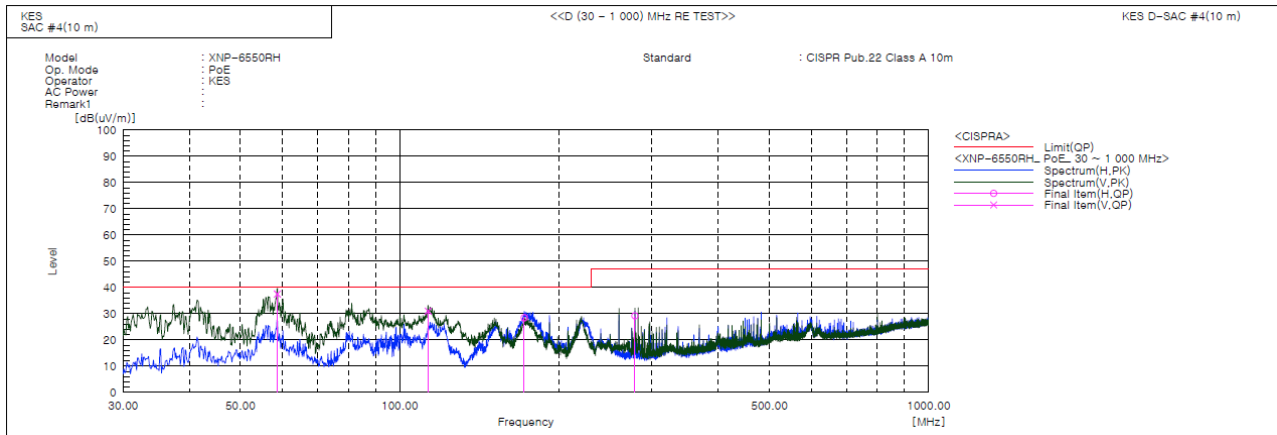

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	58.716	V	66.8	-29.3	37.5	40.0	2.5	137.0	251.0	
2	113.178	V	61.4	-30.4	31.0	40.0	9.0	103.0	290.0	
3	171.984	H	59.6	-31.1	28.5	40.0	11.5	368.0	248.0	
4	278.441	H	54.6	-25.4	29.2	47.0	17.8	224.0	315.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (48) of (71)

Radiated Electric Field Emissions(Above 1 GHz)

■ AC MODE

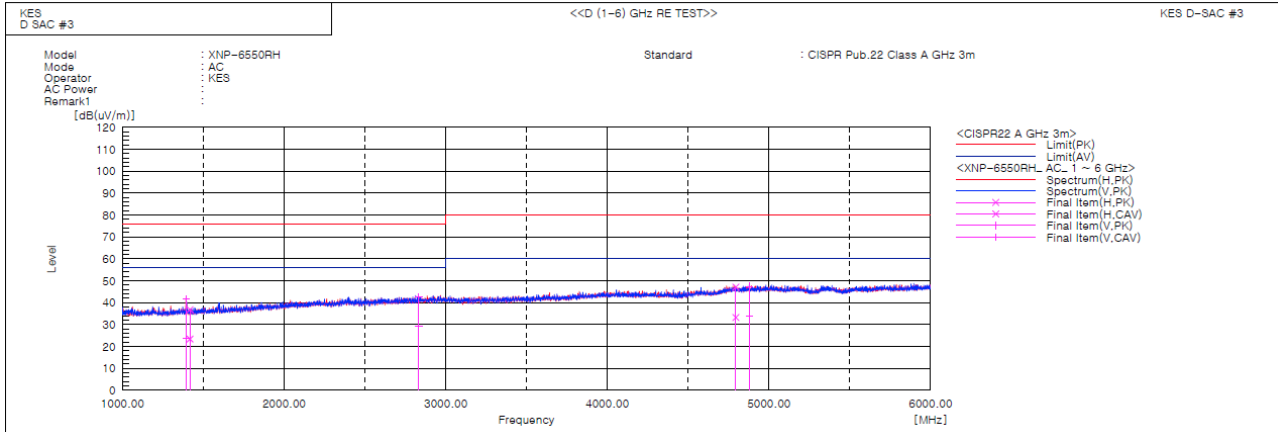

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1418.045	H	42.9	29.5	-6.1	36.8	23.4	76.0	56.0	39.2	32.6	100.0	115.7	
2	1394.471	V	48.1	30.0	-6.3	41.8	23.7	76.0	56.0	34.2	32.3	100.0	259.6	
3	2832.926	V	41.4	27.8	1.2	42.6	29.0	76.0	56.0	33.4	27.0	100.0	114.0	
4	4795.518	H	39.5	25.7	7.6	47.1	33.3	80.0	60.0	32.9	26.7	100.0	235.7	
5	4878.370	V	39.4	25.8	8.1	47.5	33.9	80.0	60.0	32.5	26.1	100.0	35.6	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (49) of (71)

■ PoE MODE

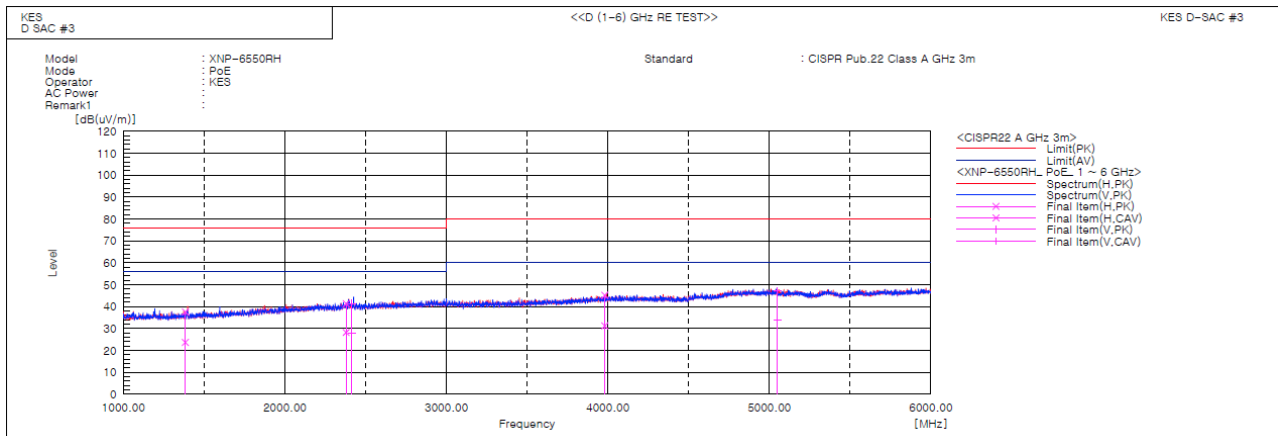

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1383.833	H	43.9	30.0	-6.3	37.6	23.7	76.0	56.0	38.4	32.3	100.0	156.2	
2	2379.563	H	41.7	28.6	-0.4	41.3	28.2	76.0	56.0	34.7	27.8	100.0	129.1	
3	2414.252	V	41.8	28.3	-0.3	41.5	28.0	76.0	56.0	34.5	28.0	100.0	219.5	
4	3980.882	H	40.5	26.6	4.7	45.2	31.3	80.0	60.0	34.8	28.7	100.0	2.7	
5	5050.338	V	39.0	25.5	8.4	47.4	33.9	80.0	60.0	32.6	26.1	100.0	145.2	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ PoE MODE

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	199.257E-3			
2	2.636E-3			PASS
3	47.296E-3	2.056	2.30	PASS
4	1.338E-3			PASS
5	53.572E-3	4.699	1.14	PASS
6	596.111E-6			PASS
7	21.855E-3	2.838	770.00E-3	PASS
8	675.792E-6			PASS
9	13.551E-3	3.388	400.00E-3	PASS
10	791.929E-6			PASS
11	4.847E-3			PASS
12	670.227E-6			PASS
13	4.499E-3			PASS
14	601.981E-6			PASS
15	4.581E-3			PASS
16	624.986E-6			PASS
17	3.015E-3			PASS
18	626.579E-6			PASS
19	2.131E-3			PASS
20	663.808E-6			PASS
21	2.300E-3			PASS
22	995.554E-6			PASS
23	1.941E-3			PASS
24	643.646E-6			PASS
25	1.707E-3			PASS
26	646.321E-6			PASS
27	1.143E-3			PASS
28	744.768E-6			PASS
29	2.029E-3			PASS
30	623.632E-6			PASS
31	1.182E-3			PASS
32	618.905E-6			PASS
33	976.664E-6			PASS
34	744.413E-6			PASS
35	770.519E-6			PASS
36	671.012E-6			PASS
37	1.012E-3			PASS
38	599.562E-6			PASS
39	724.489E-6			PASS
40	578.176E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	199.548E-3			
2	2.787E-3			PASS
3	47.381E-3	1.373	3.45	PASS
4	1.444E-3			PASS
5	53.671E-3	3.139	1.71	PASS
6	696.476E-6			PASS
7	21.973E-3	1.902	1.15	PASS
8	787.226E-6			PASS
9	13.693E-3	2.282	600.00E-3	PASS
10	878.112E-6			PASS
11	4.928E-3			PASS
12	786.765E-6			PASS
13	4.754E-3			PASS
14	747.083E-6			PASS
15	4.677E-3			PASS
16	751.987E-6			PASS
17	3.194E-3			PASS
18	689.812E-6			PASS
19	2.230E-3			PASS
20	916.966E-6			PASS
21	2.487E-3			PASS
22	1.089E-3			PASS
23	2.066E-3			PASS
24	715.291E-6			PASS
25	1.774E-3			PASS
26	727.118E-6			PASS
27	1.380E-3			PASS
28	852.109E-6			PASS
29	2.180E-3			PASS
30	742.155E-6			PASS
31	1.314E-3			PASS
32	679.542E-6			PASS
33	1.120E-3			PASS
34	822.831E-6			PASS
35	899.960E-6			PASS
36	736.069E-6			PASS
37	1.146E-3			PASS
38	675.826E-6			PASS
39	803.906E-6			PASS
40	638.425E-6			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0511-R4
Page (52) of (71)

Test Data - Voltage Fluctuations**Maximum Flicker results**

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.045	4.00	PASS
Tmax [s]	0.000	0.50	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

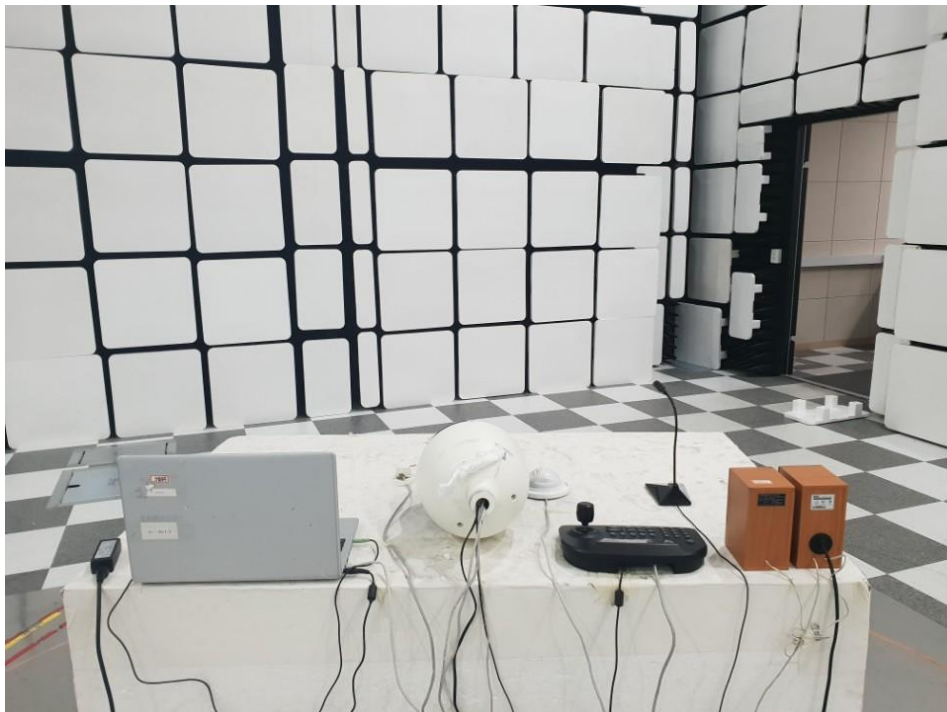

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

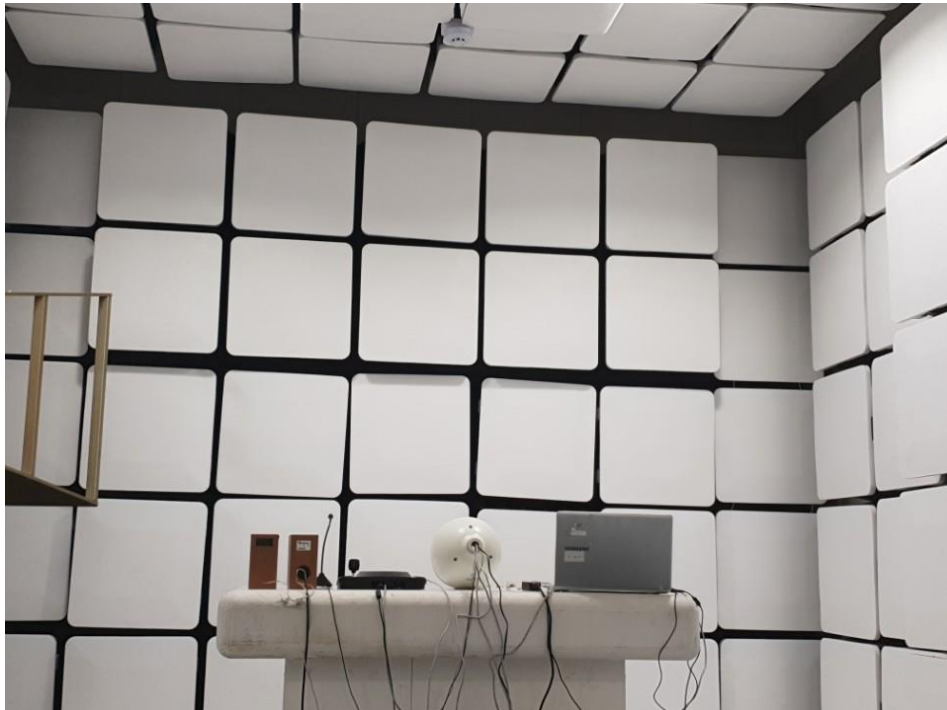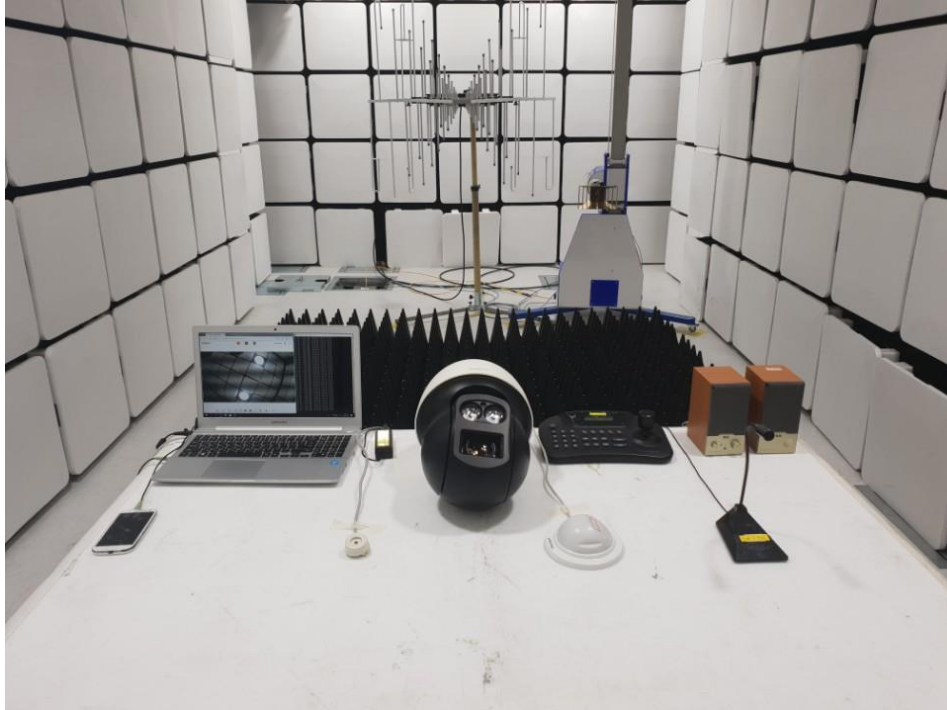

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Electric Field Immunity

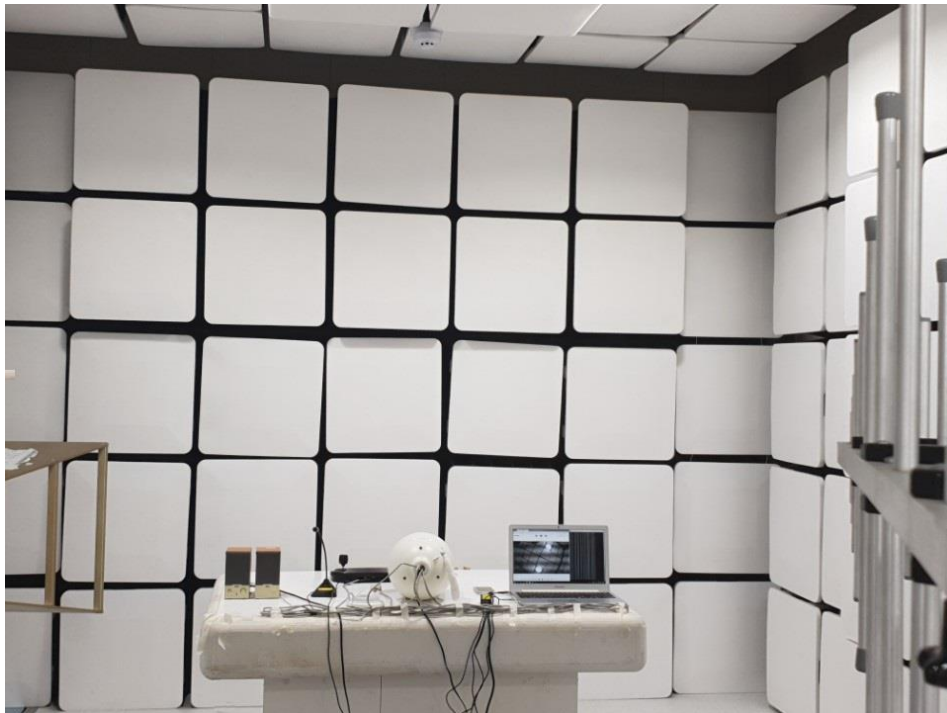

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Board 1

(Top)

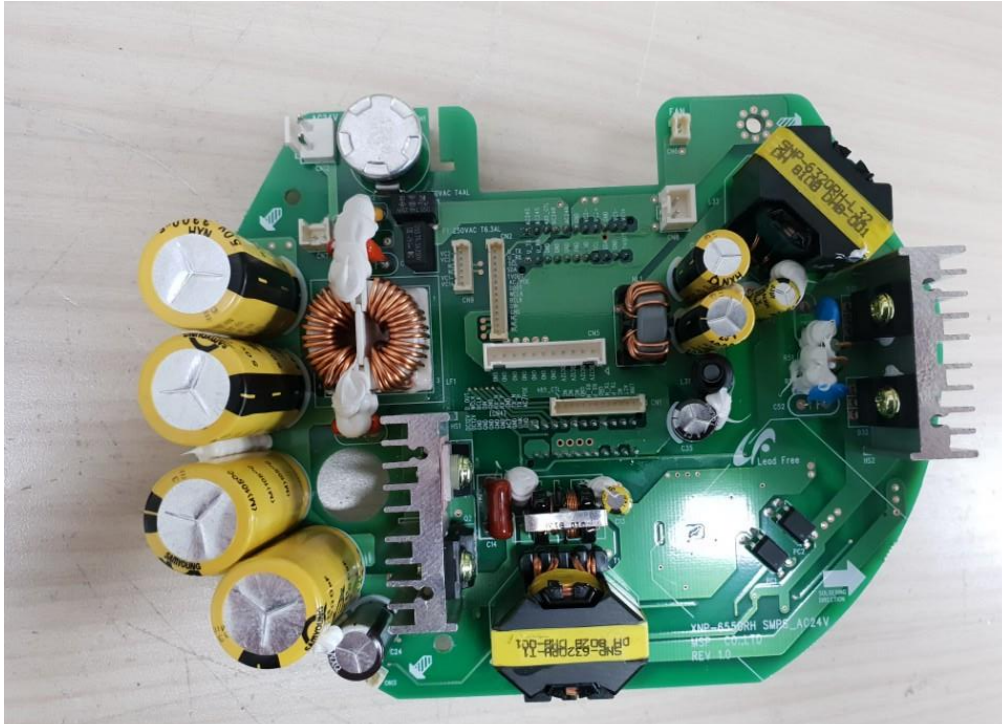


(Bottom)

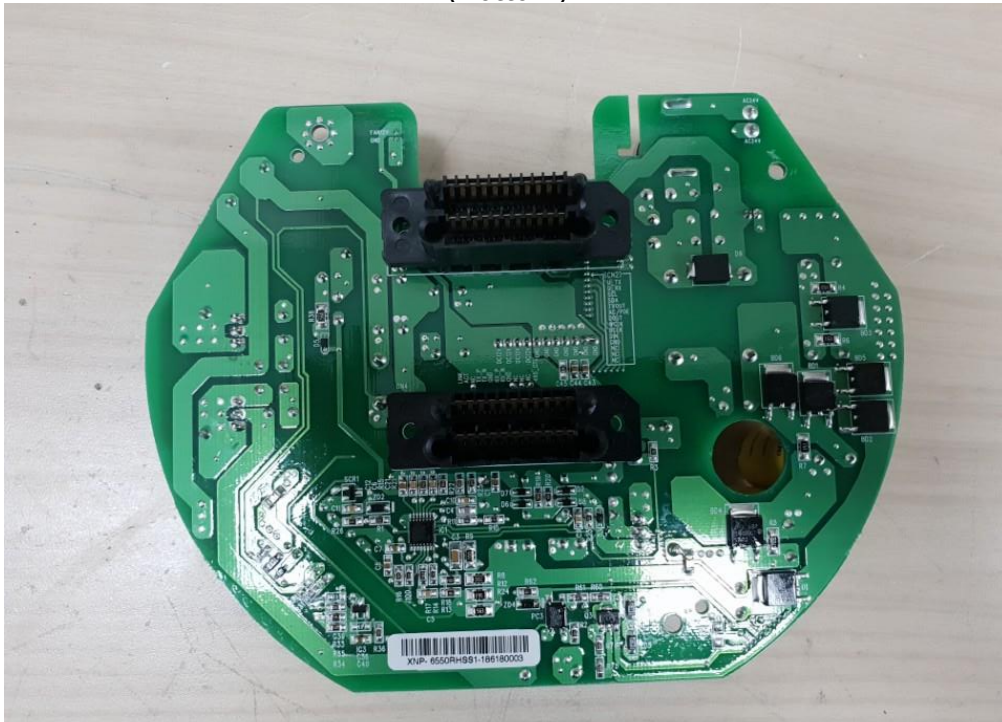

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

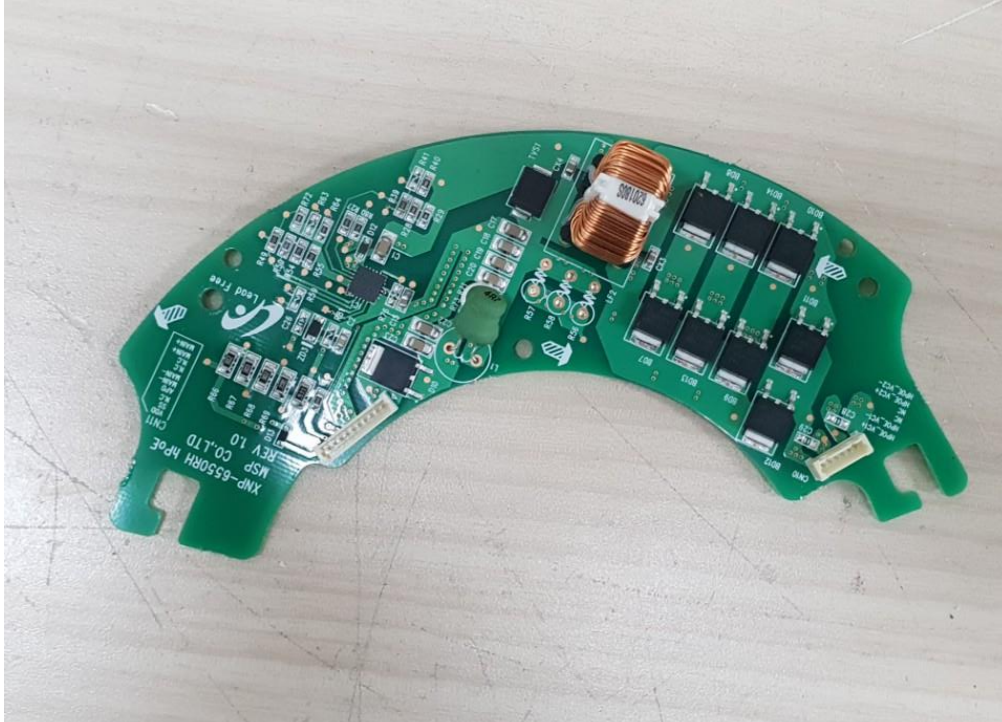

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)

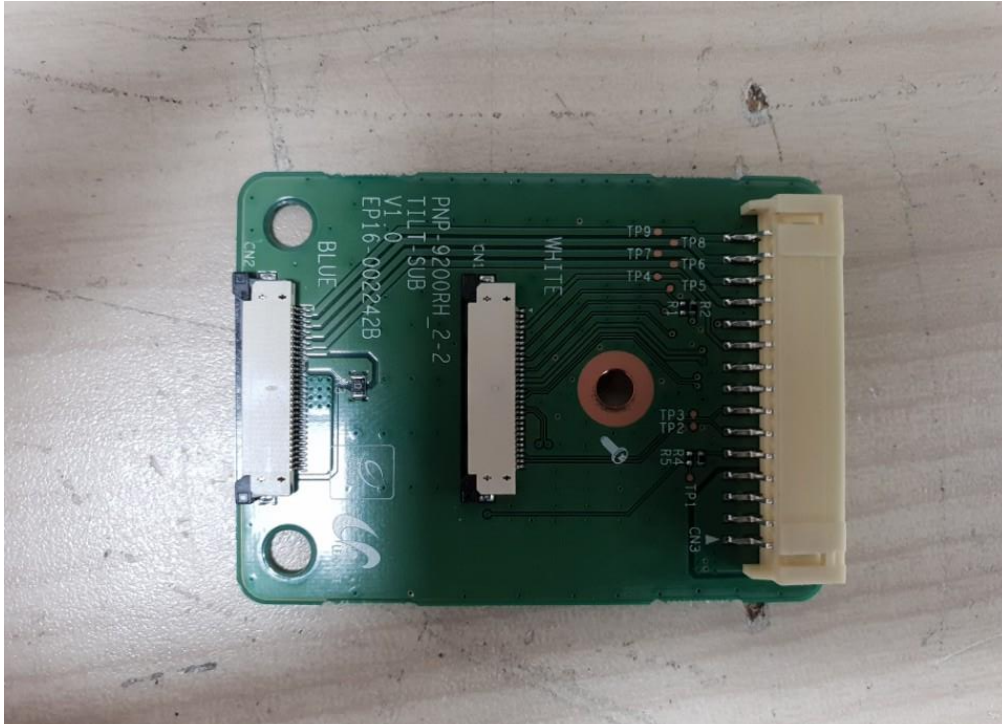


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 5

(Top)

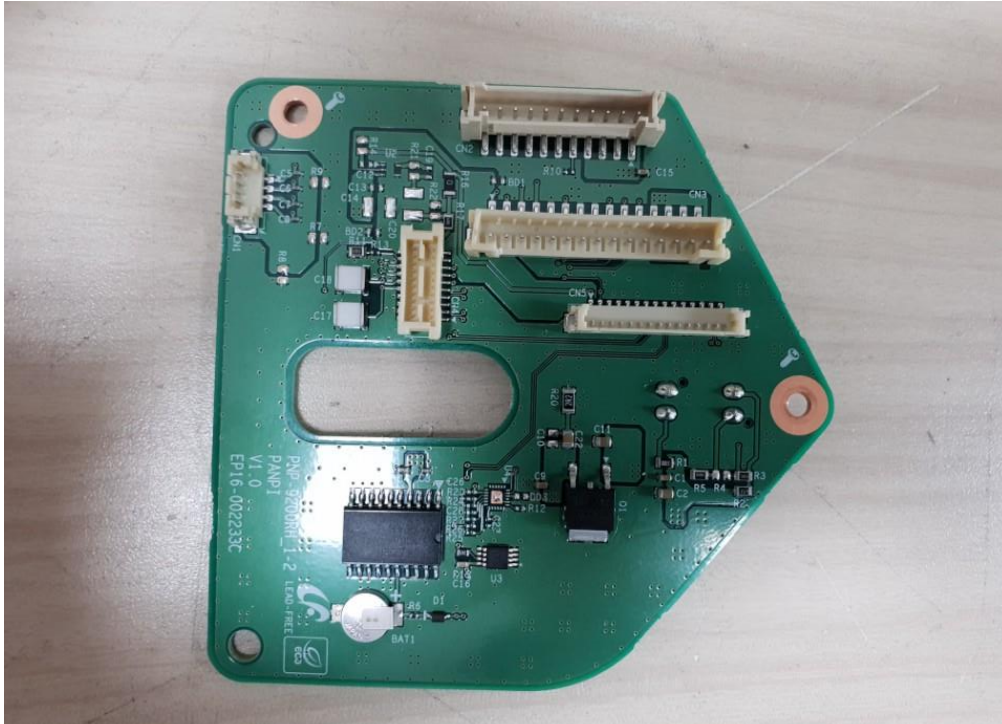

(Bottom)

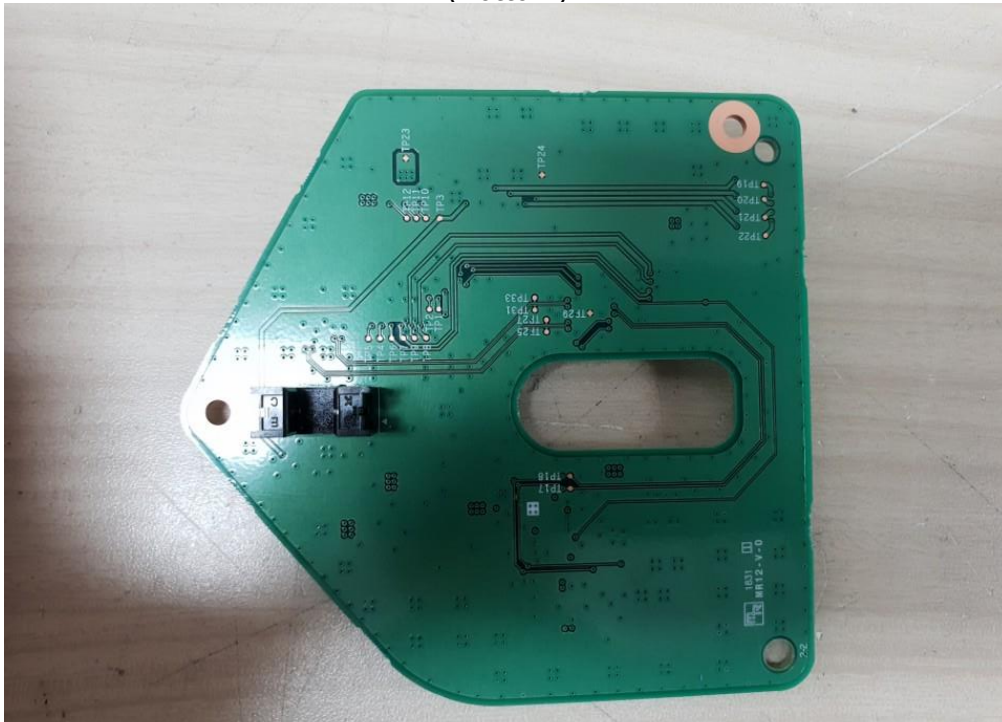


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 6

(Top)




(Bottom)

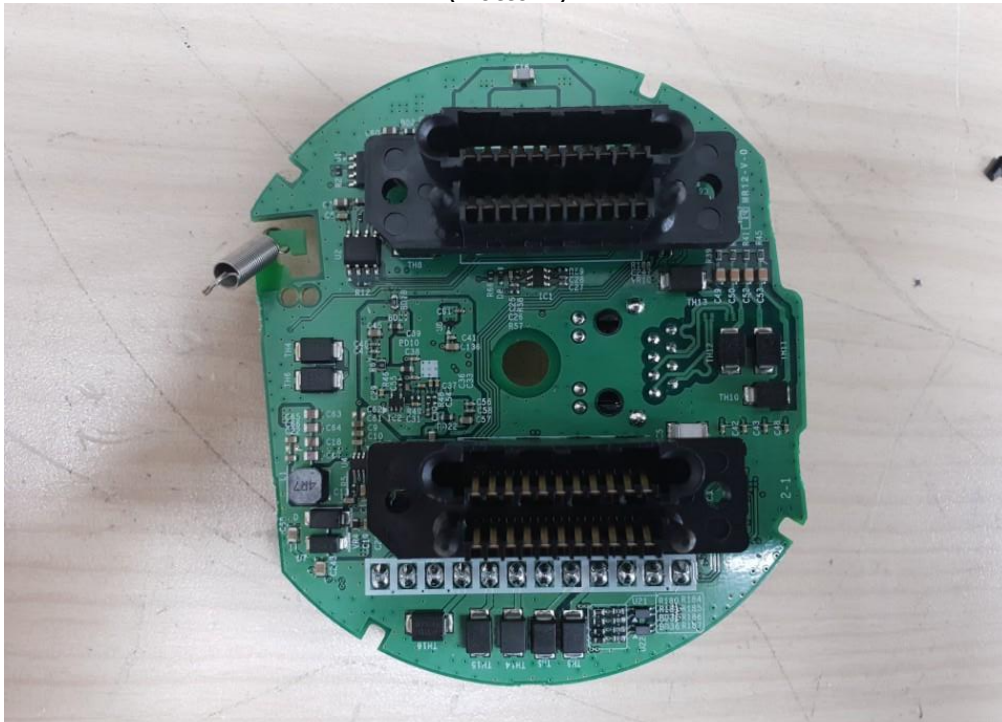


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 7

(Top)

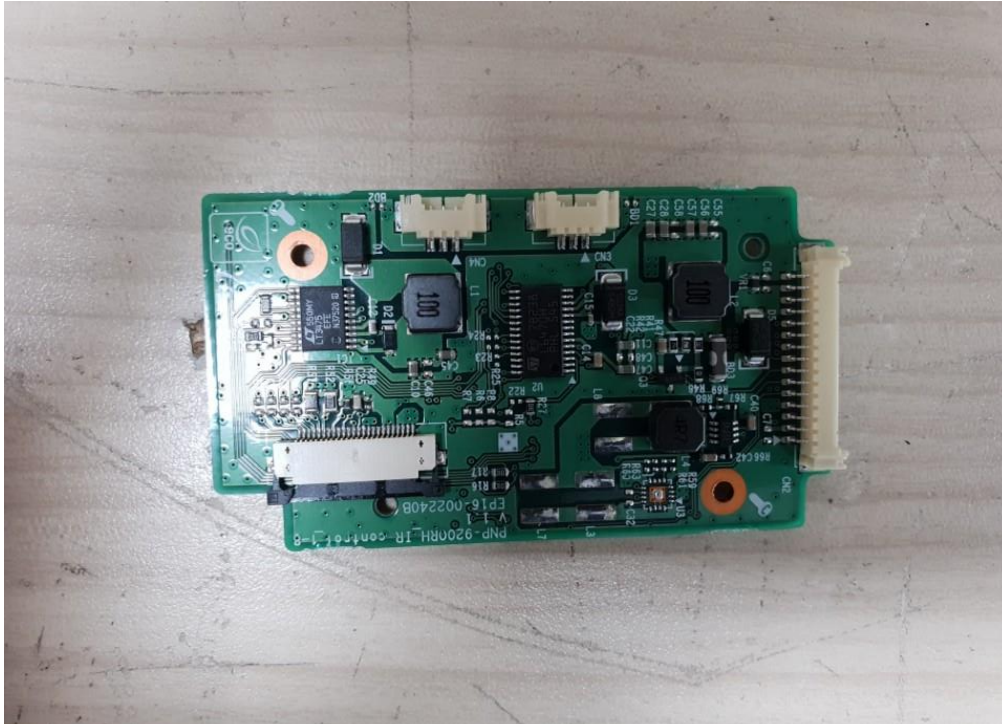


(Bottom)

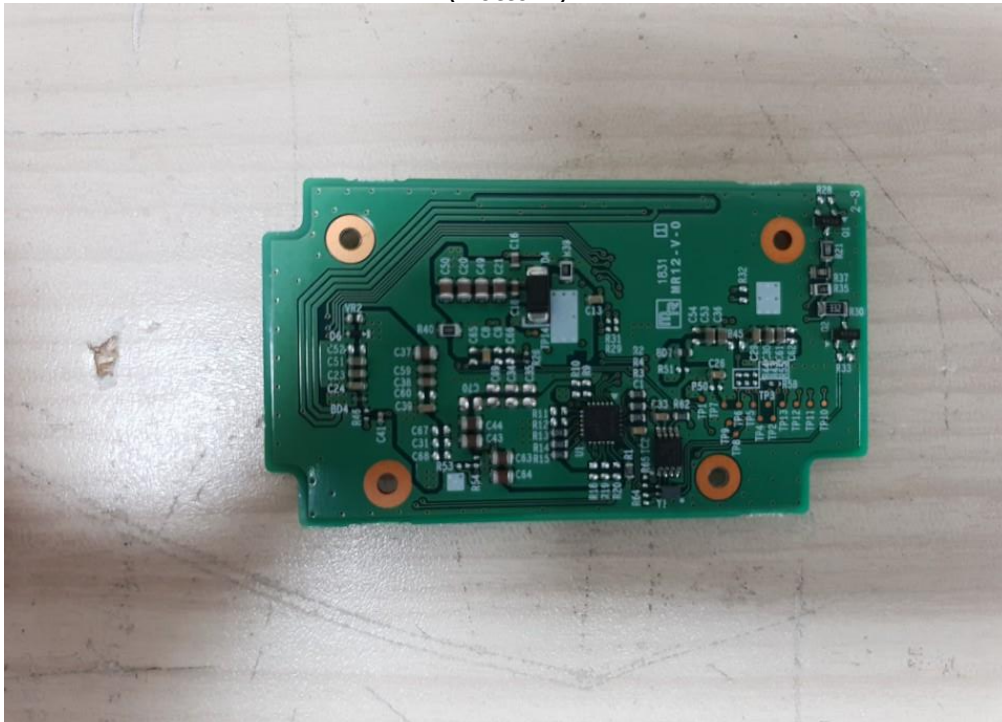


EUT Internal View – Lens

(Top)

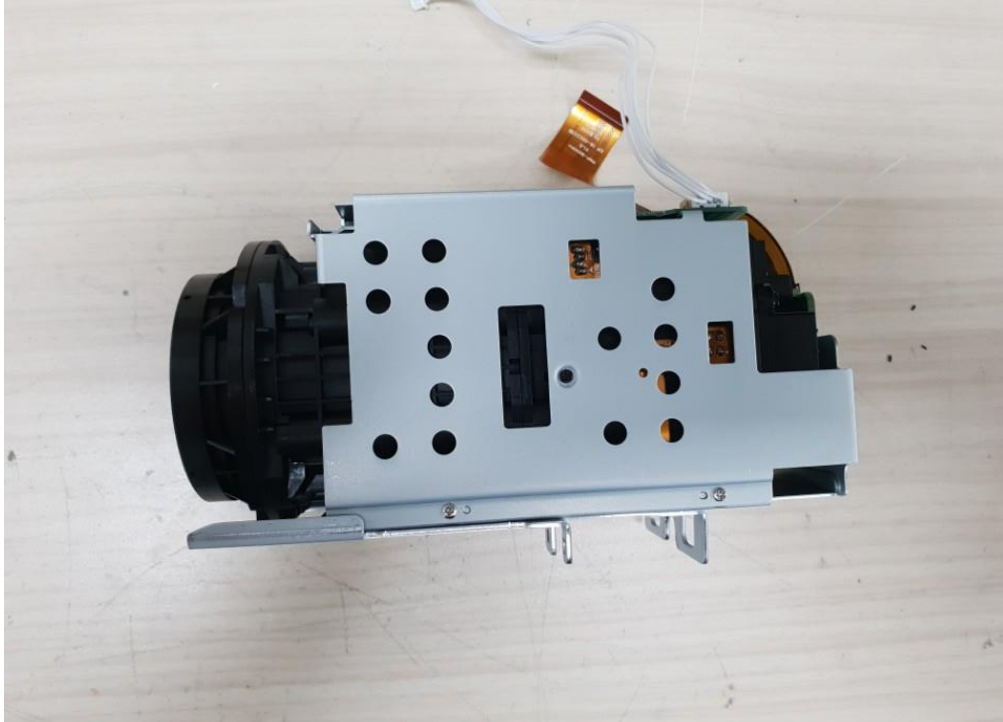

(Bottom)

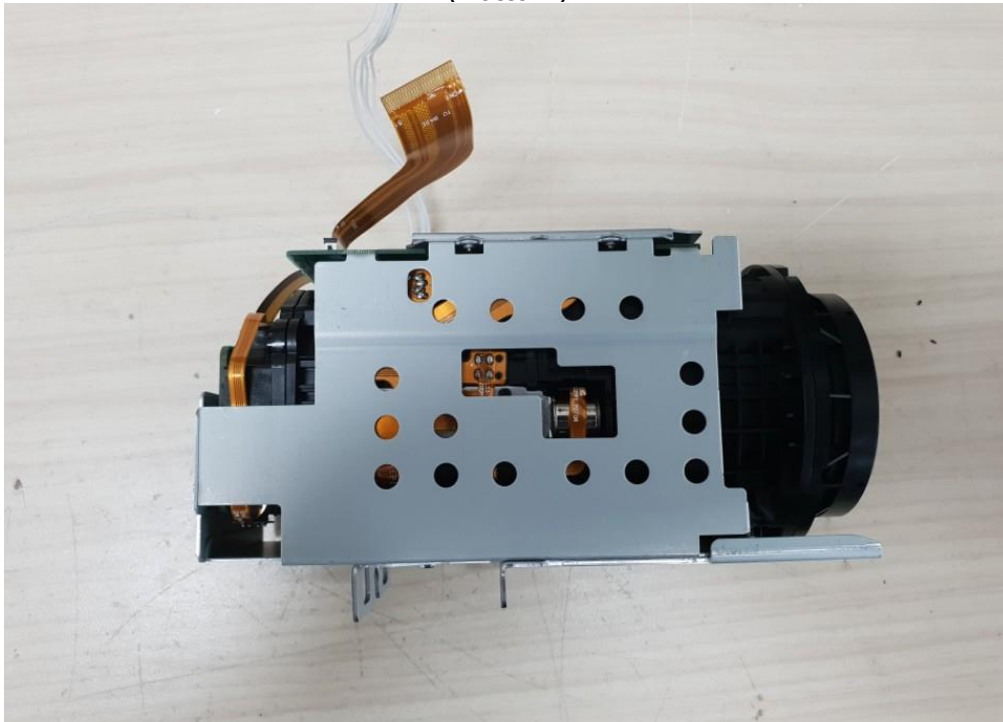

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location

**NETWORK CAMERA**

Model No : XNP-6550RH

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

