VERIFICATION OF FCC PART 15 COMPLIANCE

KES hereby verify *that the subject product complies with all the electromagnetic emission specified in the FCC Rule Part 15*

Product Description:	NETWORK CAMERA
Model/Brand Name:	XNV-6020RN
Variant Model:	-
FCC Rule Part(s):	FCC 47CFR Part 15 Subpart B Class A Part 15.107(b) & Part 15.109(b)
FCC Procedure:	Verification
Applicant Name:	Hanwha Techwin Co., Ltd.
Applicant Address:	Changwon-dareri, Seongsan-gu Changwon-si, Gyeongsangn am-do
Manufacturer Name:	Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address:	No.11 Weiliu Rd,Micro-Electronic Industrial Park,TEDA,Tianjin,300385,People's Republic of China
Test Report Reference No.:	KES-E1-17T0113

NETWORK CAMERA, Model **XNV-6020RN** has been tested in accordance with the measurement procedures specified in FCC 47CFR Part 15 Subpart B class A and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part 15 Subpart B class A. A testing of the sample product has been valid for the sample tested based on the reference test report, KES-E1-17T0113

Date of Issue: 02. 13, 2017

Dong Hun, Jang
Technical Manager
Signature:



KES.Co., Ltd.
C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do,431-716, Korea
Tel: +82-31-425-6200 //Fax: +82-31-424-0450

EMC TEST REPORT For FCC

Test Report No.	:	KES-E1-17T0113
Date of Issue	:	Feb. 13, 2017
Product name	:	NETWORK CAMERA
Model/Type No.	:	XNV-6020RN
Variant Model	:	-
Applicant	:	Hanwha Techwin Co., Ltd.
Applicant Address	:	1204, Changwon-daero, Seongsan-gu Changwon-si, Gyeongsangnam-do
Manufacturer	:	Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address	:	No.11 Weiliu Rd,Micro-Electronic Industrial Park,TEDA,Tianjin,300385,People's Republic of China
Equipment authorization	:	☐ **Declaration of Conformity** ☒ **Verification** ☐ **Certification**
Date of Receipt	:	Jan, 10, 2017
Test date	:	Feb. 06, 2017 ~ Feb. 07, 2017
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jin Bae, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 13, 2017	KES-E1-17T0113	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Sep be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 7
1.2 Variant Model Differences 7
1.3 Device Modifications 7
1.4 Equipment Under Test 7
1.5 Support Equipments 7
1.6 External I/O Cabling 8
1.7 EUT Operating Mode(s) 9
1.8 Configuration 10
1.9 Calibration Details of Equipment Used for Measurement 11
1.10 Test Facility 11
1.11 Laboratory Accreditations and Listings 11
2.0 Test Regulations 12
2.1 Conducted Emissions at Mains Power Ports 14
2.2 Radiated Electric Field Emissions(Below 1 ㎓) 15
2.3 Radiated Electric Field Emissions(Above 1 ㎓) 16
APPENDIX A – TEST DATA 17
Conducted Emissions at Mains Power Ports 17
Radiated Electric Field Emissions(Below 1 ㎓) 19
Radiated Electric Field Emissions(Above 1 ㎓) 20
Test Setup Photos and Configuration 24
Conducted Voltage Emissions 24
Radiated Electric Field Emissions(Below 1 ㎓) 25
Radiated Electric Field Emissions(Above 1 ㎓) 27
EUT External Photographs 29
EUT Internal Photographs 30

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.015 lux(F1.4, 1/30sec) B/W : 0Lux(IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio	4mm Fixed
Max. Aperture Ratio	F1.4
Angular Field of View	H: 88.6°, V:47.5°, D: 104.8°
Min. Object Distance	0.4m
Focus Control	Manual
Lens Type	Fixed
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 67° / 0° ~ 355°
Operational	
IR Viewable Length	30m(98.43ft)
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, *Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification, People counting, Heat map, Queue management
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Forma	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Forma	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-dierctional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10. 10.11 10.12 **Non-plugin Webviewer** Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Window 64bit only) , Apple Safari 9 (Mac OS X only) **Plug-in Webviewer** Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH *Start up should be done at above -20°C
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Vandal Resistance	IK10
Electrical	
Input Voltage / Current	DC12V,PoE(IEEE802.3af,Class3)
Power Consumption	Max. 8W(12VDC), Max. 9W(PoE)
Mechanical	
Color / Material	Ivory / Metal
Dimension (WxHxD)	Ø120xH97.5mm(Ø4.72" x 3.84")
Weight	625g (1.37lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 120 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-6020RN	-	Hanwha Techwin(Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Alarm	-	-	-	-
SD card	-	-	SanDisk	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 ㎜	1.7	U
		Speaker	3.5 ㎜	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 ㎜	1.7	U
		Speaker	3.5 ㎜	1.6	U
		Alarm	2 pin	3.0	U
	Slot	SD card	Slot	-	-
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded = U, Shielded = S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.7 EUT Operating Mode(s)

Test mode	operating
DC 12 V, POE	E.U.T Monitoring, 1 ㎑, Ping Test


E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


1.8 Configuration

■ AC Main
□ DC Main

- DC 12 V Mode

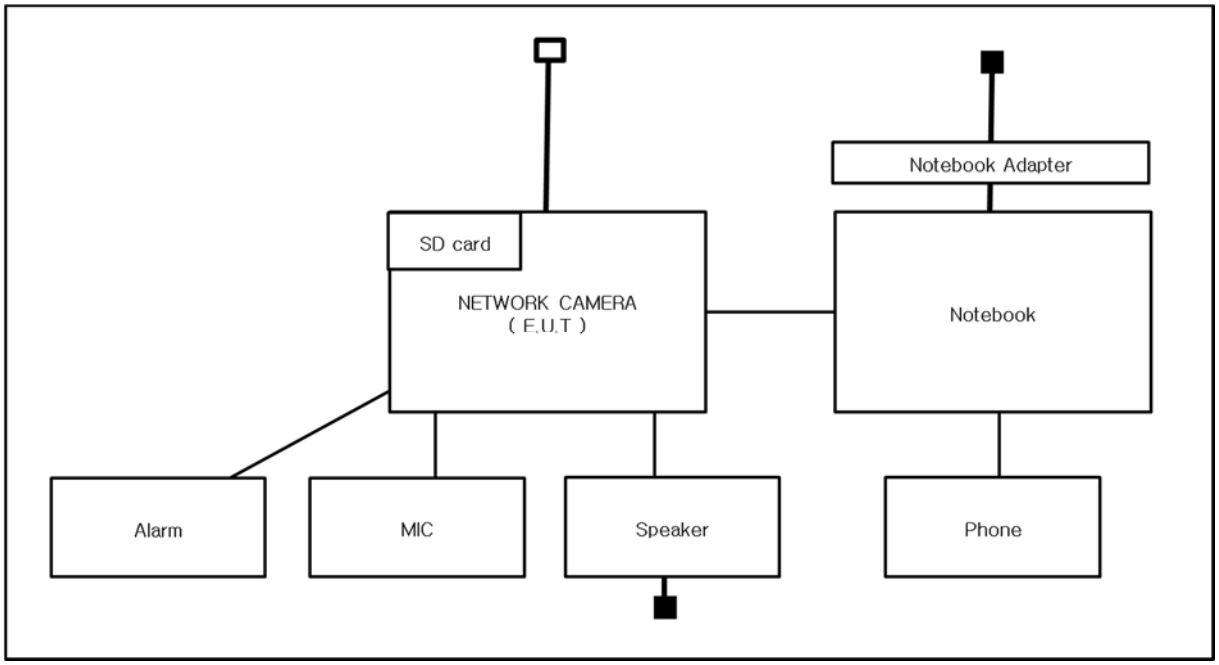

- PoE Mode

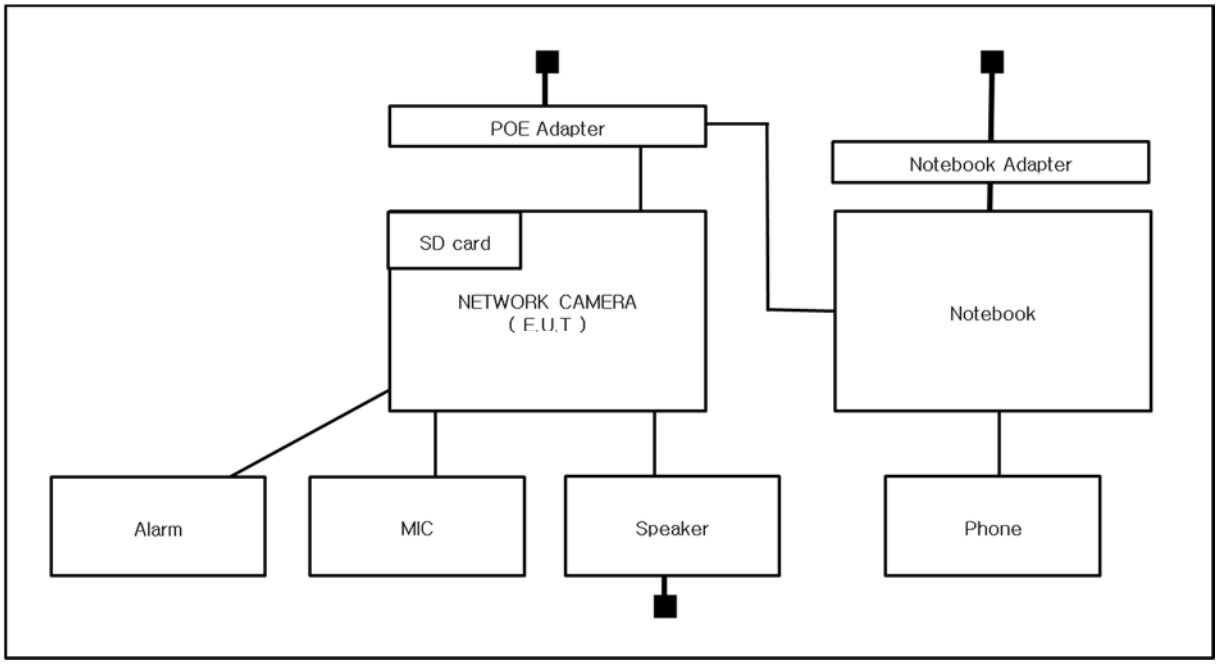

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	**FCC**	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	**VCCI**	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	R-4308, C-4798, T-2311, G-914
KOREA	**MSIP**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
Canada	**IC**	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1
Europe	**CE**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	**KOLAS**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010 ☐ Group 1 ☐ Class A ☐ Group 2 ☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010 ☐ Class A ☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

☐ **VCCI V-3 / 2015.04** ☐ Class A ☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010** ☐ Class A ☐ Class B

☒ **47 CFR Part 15, Subpart B**

- ☐ CISPR 22:2009 +A1:2010 ☐ Class A ☐ Class B
- ☒ ANSI C63.4-2014 ☒ Class A ☐ Class B

☐ **IC Regulation ICES-003 : 2016**

- ☐ CAN/CSA CISPR 22-10 ☐ Class A ☐ Class B
- ☐ ANSI C63.4-2014

☐ **MEDICAL – Directive 93/42/EEC**

- ☐ EN 60601-1-2 :2007

☐ **RE– Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.1 Conducted Emissions at Mains Power Ports

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 03, 2018
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions
Temperature: ℃
Relative Humidity: %

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
N/A Because the E.U.T power is 12 v (dc) power and PoE, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.2 Radiated Electric Field Emissions(Below 1 ㎓)

Test Date
Feb, 06, 2017

Test Location
☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R & S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB9163	Schwarzbeck	714	11, 28, 2018
☒	OATS	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions
Temperature: 2,3 ℃
Relative Humidity: 64,0 %

Frequency Range of Measurement
30 ㎒ to 1 ㎓

Instrument Settings
IF Band Width: 120 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.3 Radiated Electric Field Emissions(Above 1 ㎓)

Test Date
Feb, 07, 2017

Test Location
Semi Anechoic Chamber #1

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Log-Periodic Antenna	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
☒	EMI TEST Receiver	ESU26	R & S	100551	04, 18, 2017
☒	Preamplifier	SCU 18	R & S	102232	06, 29, 2017
☒	Semi Anechoic Chamber #1	-	KES	-	-
☒	Tilt Antenna Mast	TAM 4.0-E	maturo	18100116	-
☒	Turn Table	DT 2000-1,5T	INN-CO	-	-
☒	EMI Test S/W	N/A	N/A	N/A	N/A

Test Conditions
Temperature: 25,1 ℃
Relative Humidity: 34,9 %

Frequency Range of Measurement
1 ㎓ to 6 ㎓

Instrument Settings
IF Band Width: 1 ㎒

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[NEUTRAL]

N/A

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 ㎓)

- DC 12 V Mode

Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[㎒]	[dBμV]		[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	
49.45	17.52	V	1.00	13.18	2.08	32.78	39.00	6.22
176.08	11.70	V	1.00	9.02	3.86	24.58	43.50	18.92
260.88	17.62	H	3.78	12.69	4.81	35.12	46.40	11.28
375.42	16.89	H	3.74	15.07	5.91	37.87	46.40	8.53
400.18	10.01	V	1.42	15.61	6.18	31.80	46.40	14.60
480.02	11.76	H	3.59	17.00	6.92	35.68	46.40	10.72

* H : Horizontal, V : Vertical

♦ Calculation
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

- PoE Mode

Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[㎒]	[dBμV]		[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	
251.81	12.63	H	3.82	12.52	4.73	29.88	46.40	16.52
260.88	11.23	V	1.00	12.69	4.81	28.73	46.40	17.67
274.94	9.80	V	2.14	12.95	4.93	27.68	46.40	18.72
350.16	9.22	H	4.00	14.52	5.64	29.38	46.40	17.02
450.01	13.55	H	3.83	16.48	6.80	36.83	46.40	9.57
475.26	10.81	V	1.28	16.92	6.90	34.63	46.40	11.77

* H : Horizontal, V : Vertical

♦ Calculation
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)

- DC 12 V Mode

- PK

Frequency		Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin [dB]
[㎒]		[dBμV]		[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	
1	233.000	75.350	H	3.740	21.680	3.420	43.640	56.810	80.000	23.190
1	281.000	78.320	V	1.790	21.930	3.490	43.630	60.110	80.000	19.890
1	824.000	64.740	H	2.850	24.700	4.310	43.730	50.020	80.000	29.980
1	999.000	74.910	V	1.570	25.590	4.400	43.780	61.120	80.000	18.880
2	381.000	58.640	V	1.620	27.200	4.890	43.960	46.770	80.000	33.230
2	385.000	57.980	H	3.840	27.210	4.890	43.960	46.120	80.000	33.880
3	572.000	49.500	V	2.810	30.710	6.160	44.240	42.130	80.000	37.870
4	001.000	46.490	H	3.690	31.390	6.620	44.210	40.290	80.000	39.710
4	277.000	47.410	H	2.120	31.900	6.790	44.240	41.860	80.000	38.140
4	307.000	44.720	V	3.880	31.950	6.770	44.240	39.200	80.000	40.800
4	881.000	47.100	V	1.680	33.010	7.000	44.310	42.800	80.000	37.200
5	200.000	46.210	H	1.660	33.890	7.180	44.410	42.870	80.000	37.130

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- AV

	Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin [dB]
	[㎒]	[dBμV]		[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	
1	258.000	55.520	H	3.740	21.810	3.460	43.630	37.160	60.000	22.840
1	280.000	53.070	V	1.640	21.920	3.490	43.630	34.850	60.000	25.150
1	897.000	44.440	H	3.780	25.070	4.350	43.750	30.110	60.000	29.890
1	993.000	44.120	V	2.890	25.560	4.400	43.780	30.300	60.000	29.700
2	414.000	49.500	H	1.880	27.330	4.920	43.970	37.780	60.000	22.220
2	422.000	51.010	V	2.390	27.370	4.930	43.970	39.340	60.000	20.660
3	566.000	31.440	V	2.920	30.700	6.150	44.240	24.050	60.000	35.950
3	599.000	35.160	H	3.750	30.750	6.210	44.240	27.880	60.000	32.120
4	236.000	32.430	H	2.030	31.820	6.820	44.230	26.840	60.000	33.160
4	296.000	31.660	V	2.710	31.930	6.780	44.240	26.130	60.000	33.870
4	873.000	30.700	V	1.580	33.000	7.000	44.310	26.390	60.000	33.610
5	189.000	30.480	H	3.910	33.860	7.170	44.400	27.110	60.000	32.890

♦ Calculation
Correction Factor [dB] = Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]
Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]
Corrected Amplitude : The Final Value, Amplitude : Reading Value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

- PK

	Frequency [㎒]	Amplitude [dB㎶]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor			Corrected Amplitude [dB㎶/m]	Applicable Limit [dB㎶/m]	Margin [dB]
					ANT. [dB /m]	Cable [dB]	AMP [dB]			
1	142.000	81.900	V	1.890	21.220	3.300	43.640	62.780	80.000	17.220
1	162.000	80.380	H	3.120	21.320	3.330	43.640	61.390	80.000	18.610
1	241.000	76.610	V	2.100	21.720	3.440	43.640	58.130	80.000	21.870
1	271.000	72.310	H	3.870	21.870	3.480	43.630	54.030	80.000	25.970
1	730.000	57.590	H	3.860	24.220	4.150	43.700	42.260	80.000	37.740
1	994.000	73.840	V	2.250	25.570	4.400	43.780	60.030	80.000	19.970
2	707.000	63.490	V	1.740	28.560	5.240	44.090	53.200	80.000	26.800
2	736.000	65.850	H	3.920	28.680	5.250	44.100	55.680	80.000	24.320
3	576.000	48.580	V	1.280	30.710	6.170	44.240	41.220	80.000	38.780
3	992.000	45.680	H	3.380	31.380	6.610	44.210	39.460	80.000	40.540
4	766.000	44.630	H	3.850	32.800	6.970	44.300	40.100	80.000	39.900
4	998.000	44.780	V	1.140	33.230	6.990	44.330	40.670	80.000	39.330

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- AV

Frequency		Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor			Corrected Amplitude	Applicable Limit	Margin [dB]
[㎒]		[dBμV]		[m]	ANT. [dB /m]	Cable [dB]	AMP [dB]	[dBμV/m]	[dBμV/m]	
1	144.000	53.550	V	1.120	21.230	3.300	43.640	34.440	60.000	25.560
1	169.000	53.770	H	3.790	21.350	3.340	43.640	34.820	60.000	25.180
1	252.000	55.600	V	2.130	21.780	3.450	43.630	37.200	60.000	22.800
1	289.000	51.780	H	3.700	21.970	3.500	43.630	33.620	60.000	26.380
1	727.000	44.470	H	3.680	24.200	4.140	43.700	29.110	60.000	30.890
1	999.000	47.160	V	1.220	25.590	4.400	43.780	33.370	60.000	26.630
2	741.000	39.510	H	3.640	28.700	5.250	44.100	29.360	60.000	30.640
2	813.000	40.130	V	1.280	29.010	5.280	44.130	30.290	60.000	29.710
3	580.000	37.100	V	2.660	30.720	6.180	44.240	29.760	60.000	30.240
3	989.000	34.930	H	3.750	31.370	6.610	44.210	28.700	60.000	31.300
4	764.000	32.360	H	3.240	32.800	6.970	44.300	27.830	60.000	32.170
4	995.000	34.820	V	2.230	33.220	6.990	44.330	30.700	60.000	29.300

♦ Calculation
Correction Factor [㏈] = Ant Factor[㏈/m] + Cable Loss [㏈] – Preamp Factor [㏈]
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 ㎓)

- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode






This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)


- DC 12 V Mode

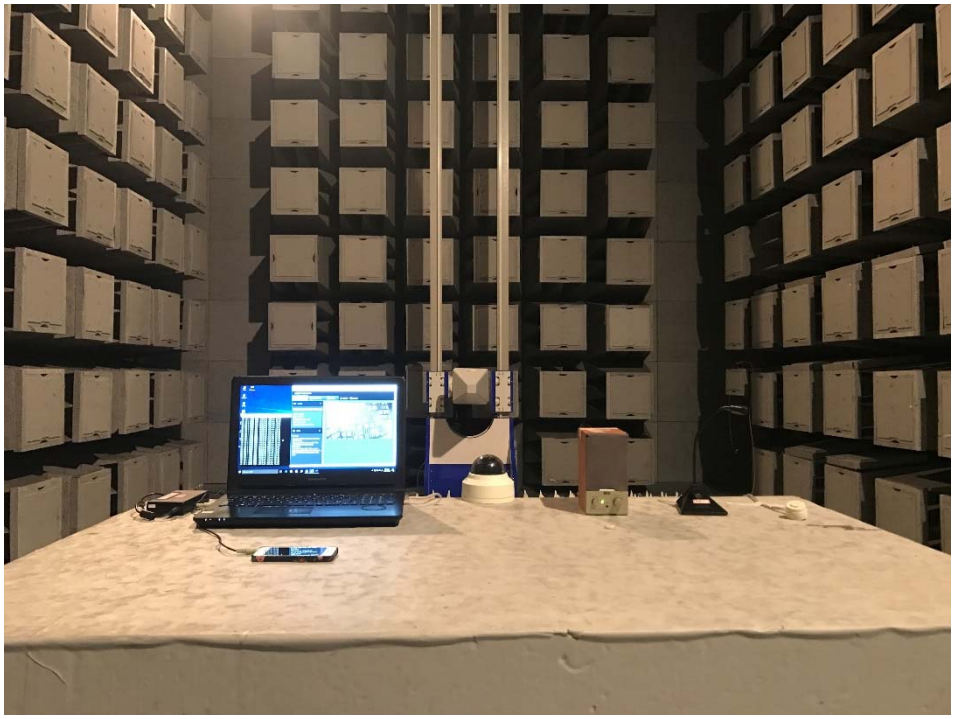




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

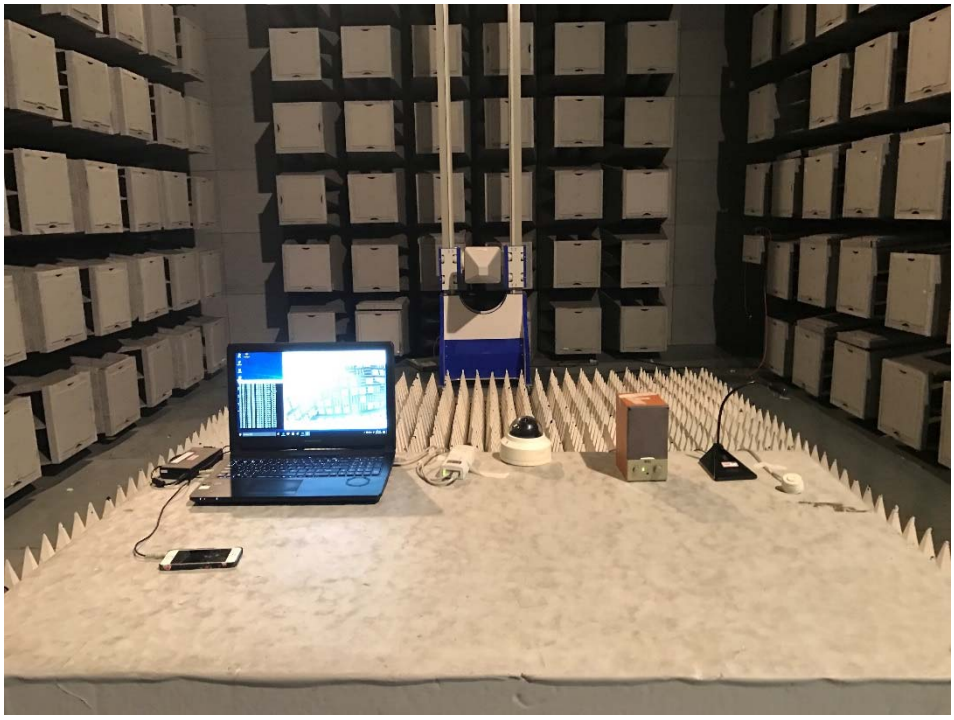

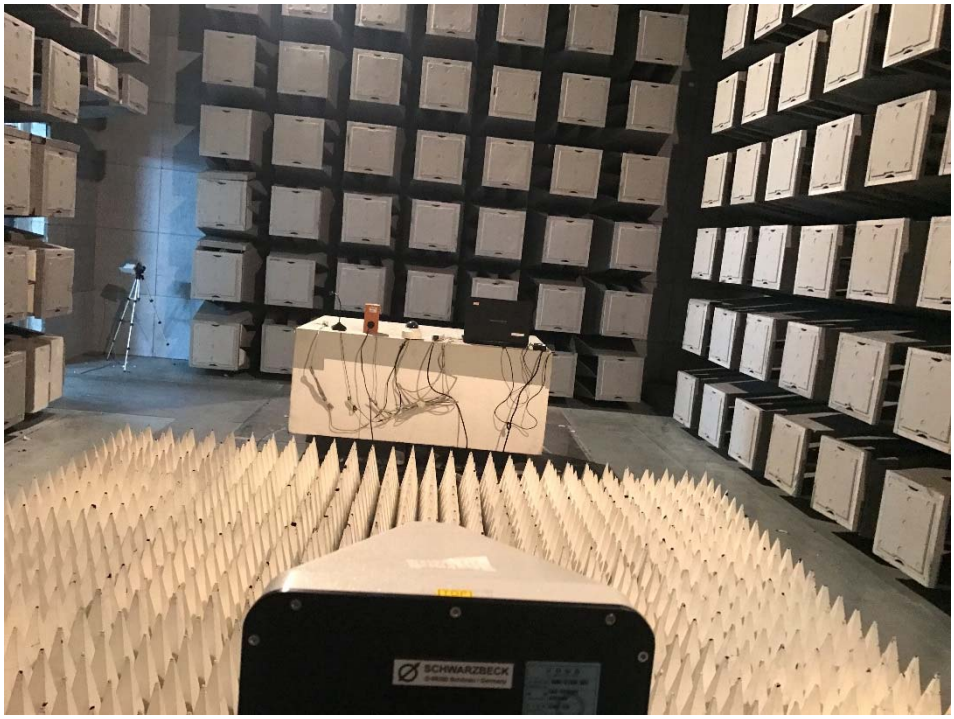

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 1

(Top)




(Bottom)

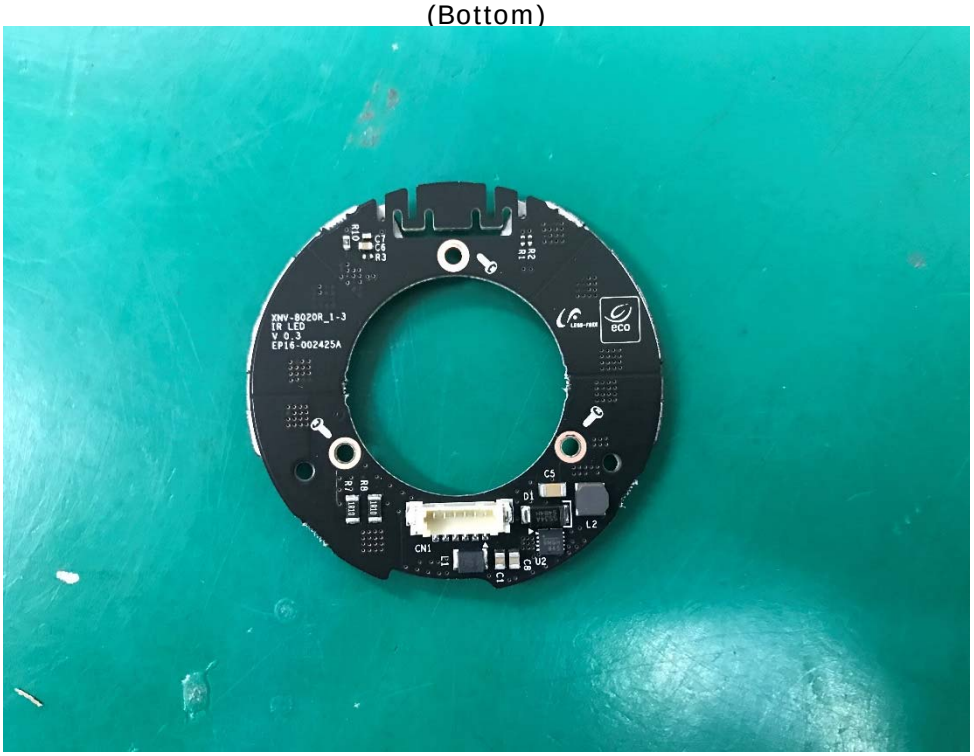


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 2

(Top)

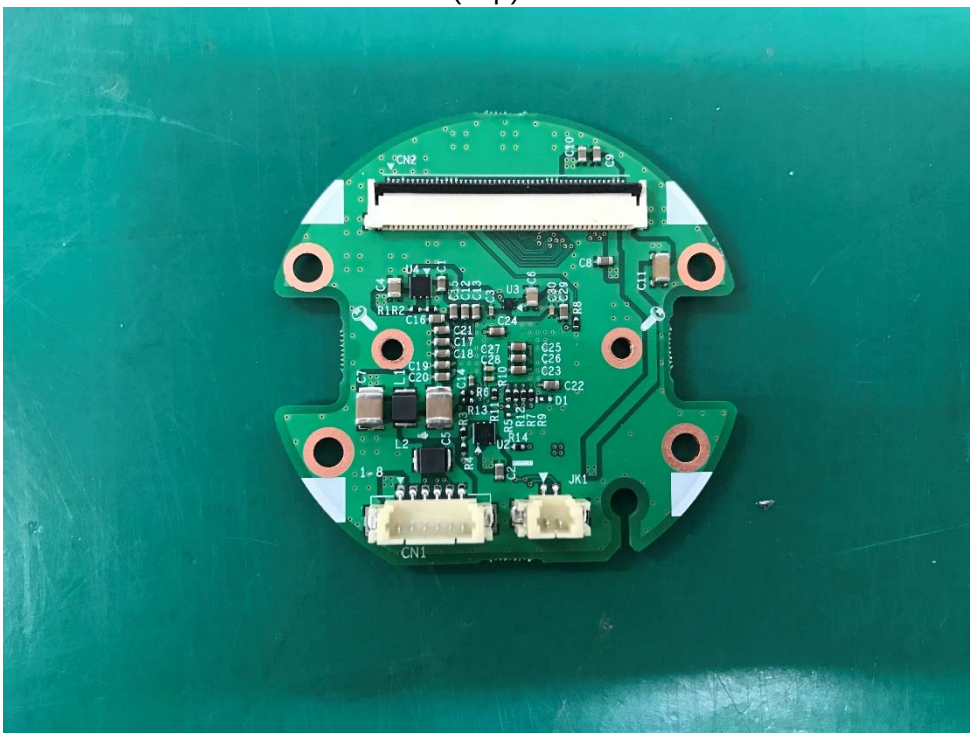

(Bottom)

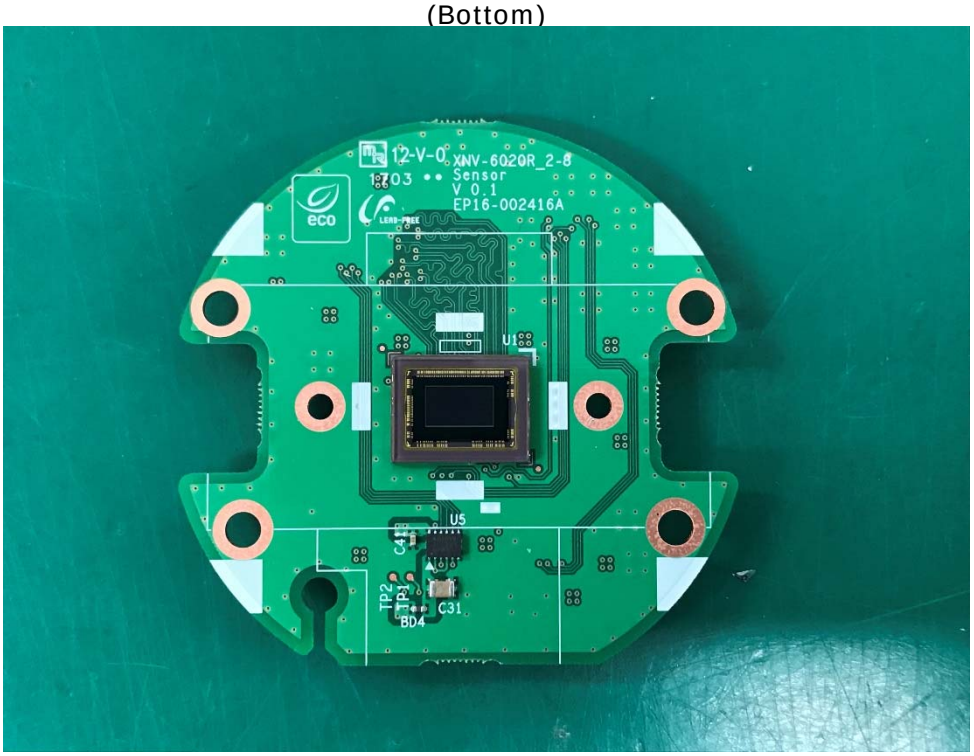


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 3

(Top)




(Bottom)

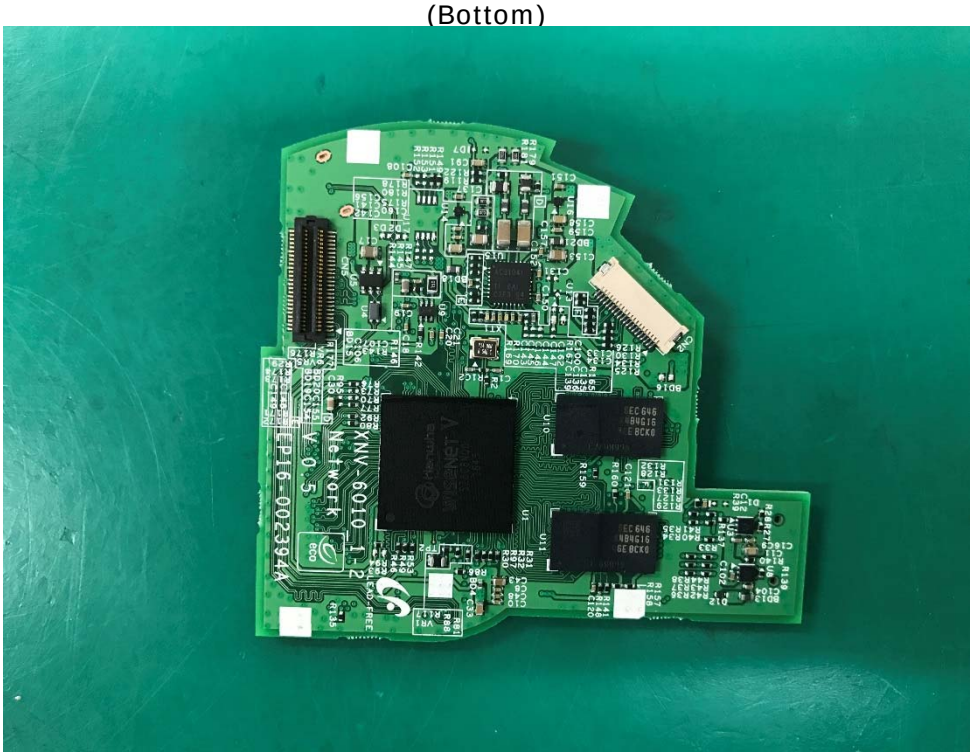


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 4

(Top)

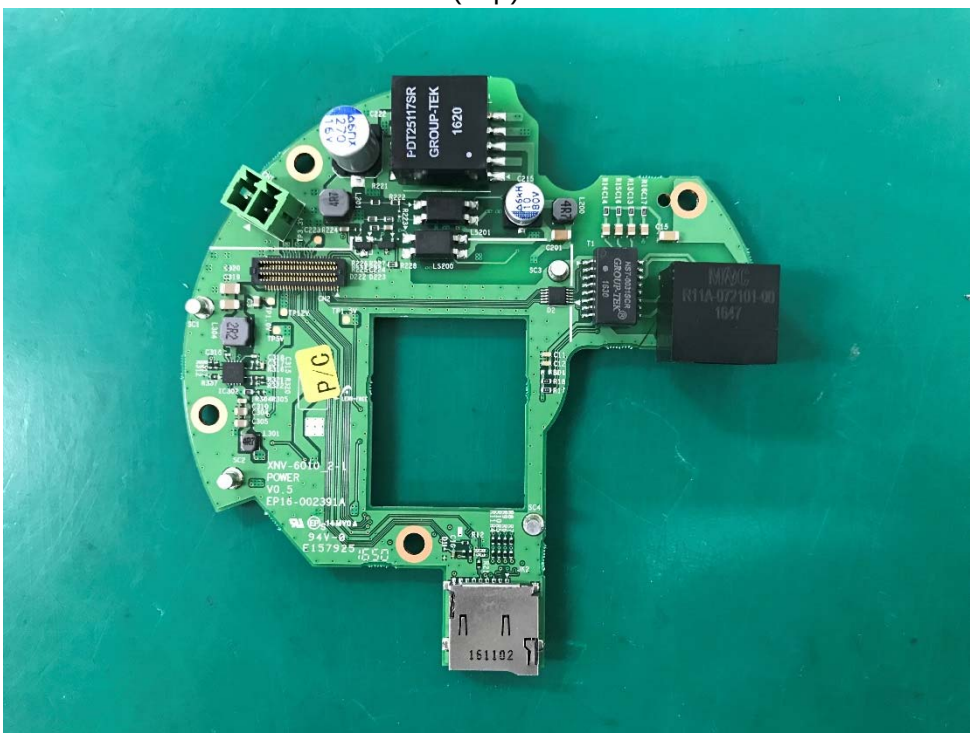

(Bottom)

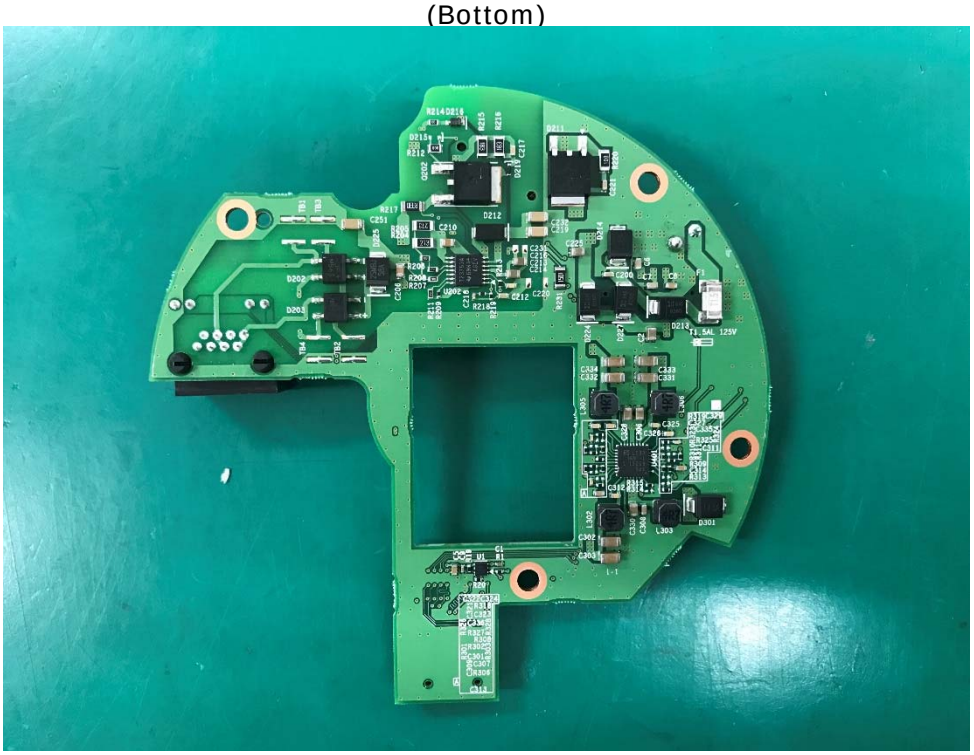

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.