



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (1) of (39)

EMC TEST REPORT For VCCI

Test Report No. : KES-E1-18T0097-R2

Date of Issue : Feb. 24, 2023

Product name : Network Camera

Model/Type No. : XNV-6080RS

Variant Model : XNV-6080RSA

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)

Equipment authorization : ☐ Declaration of Conformity
☒ Verification
☐ Certification

Date of Receipt : Jan. 03, 2018

Test date : Jan. 03, 2018 ~ Jan. 05, 2018

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Dong Il, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0097-R2
Page (2) of (39)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 16, 2018	KES-E1-18T0097	Issued
Jan. 27, 2020	KES-E1-18T0097-R1	Reissue due to the addition of a derived model
Feb. 24, 2023	KES-E1-18T0097-R2	Change the Applicant, Applicant Address, manufacturer and Manufacturer Address at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0097-R2
Page (3) of (39)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions Mains Power Ports.....	14
2.2	Conducted Emissions at Telecommunication Ports.....	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz).....		28
Test Setup Photos and Configuration		30
Conducted Voltage Emissions		30
Conducted Telecommunication Emissions		31
Radiated Electric Field Emissions(Below 1 GHz)		32
Radiated Electric Field Emissions(Above 1 GHz).....		33
EUT External Photographs		34
EUT Internal Photographs		35

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (4) of (39)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.015 lux(F1.4, 1./30sec) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal
Max. Aperture Ratio	1.4(Wide) ~ 3.6(Tele)
Angular Field of View	H: 119.5°, V: 62.8°, D: 142.1° H: 27.9°, V: 15.7°, D: 32.0°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network(Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 67° / 0° ~ 355°
Operational	
IR Viewable Length	50m(164.04ft)
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Pixel Counter	Support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (5) of (39)

Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Form	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Audio Compression Form	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10. 10.11 10.12 Non-plugin Webviewer Supported Browser: Google Chrome, MS Edge, Mozilla Firefox(Window 64bit only) , Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari(Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10+
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	Max. 11.5W(12VDC), Max. 12.95W(PoE), Max. 14W(24VAC)
Mechanical	
Color / Material	Silver / SUS316L
Dimension (WxHxD)	Ø 162 X H120.5mm (Ø6.38" x 4.74")
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 100 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Added a simple variant model for the purpose of the vendor management and a country of origin for the dualization.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNV-6080RS	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Notebook	X56K	HN11N5151FJ0045W	HanSung Corporation	-
Notebook AC/DC Adaptor	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Micro SD Card1	-	-	SanDisk	-
Micro SD Card2	-	-	SanDisk	-
MIC	CMK-303	-	CAMAC	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
Alarm1	-	-	-	-
Alarm2	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-

1.6 External I/O Cabling

■ AC 24 V Mode, DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
Network Camera (E.U.T)	Micro SD Slot	Micro SD Card1	Micro SD Slot	-	-
Network Camera (E.U.T)	Micro SD Slot	Micro SD Card2	Micro SD Slot	-	-
Network Camera (E.U.T)	3.5 mm	MIC	3.5 mm	1.7	U
Network Camera (E.U.T)	3.5 mm	Speaker	3.5 mm	1.6	U
Network Camera (E.U.T)	2 PIN	Alarm1	2 PIN	3.0	U
Network Camera (E.U.T)	2 PIN	Alarm2	2 PIN	3.0	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	PoE Adaptor	RJ-45	3.0	U
PoE Adaptor	RJ-45	Notebook	RJ-45	3.0	U
Network Camera (E.U.T)	Micro SD Slot	Micro SD Card1	Micro SD Slot	-	-
Network Camera (E.U.T)	Micro SD Slot	Micro SD Card2	Micro SD Slot	-	-
Network Camera (E.U.T)	3.5 mm	MIC	3.5 mm	1.7	U
Network Camera (E.U.T)	3.5 mm	Speaker	3.5 mm	1.6	U
Network Camera (E.U.T)	2 PIN	Alarm1	2 PIN	3.0	U
Network Camera (E.U.T)	2 PIN	Alarm2	2 PIN	3.0	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0097-R2
Page (8) of (39)

1.7 EUT Operating Mode(s)

Test mode	operating
AC, DC, PoE	E.U.T Monitoring, Ping Test


E.U.T Test operating S/W		
Name	Version	Manufacture Company
Webviewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main


■ AC 24 V Mode

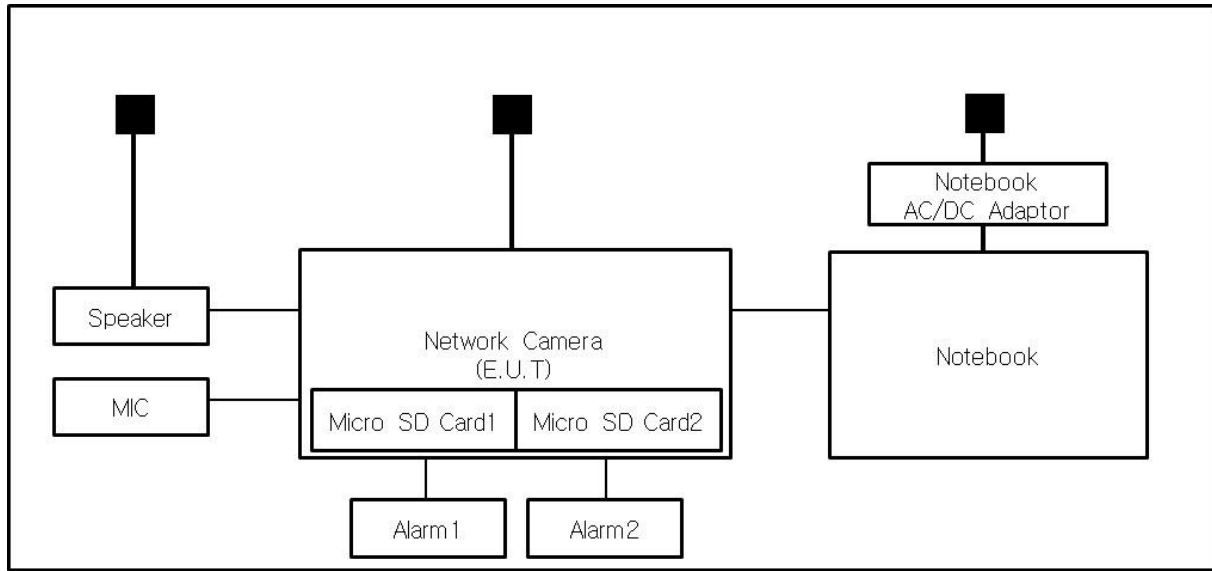

■ DC 12 V Mode

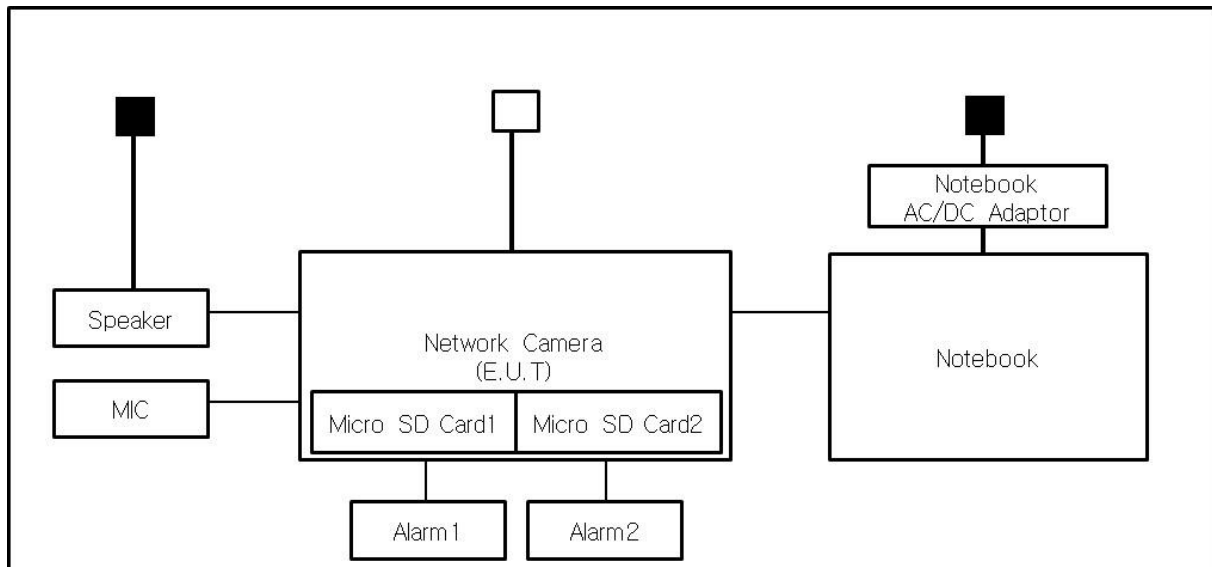

■ PoE Mode

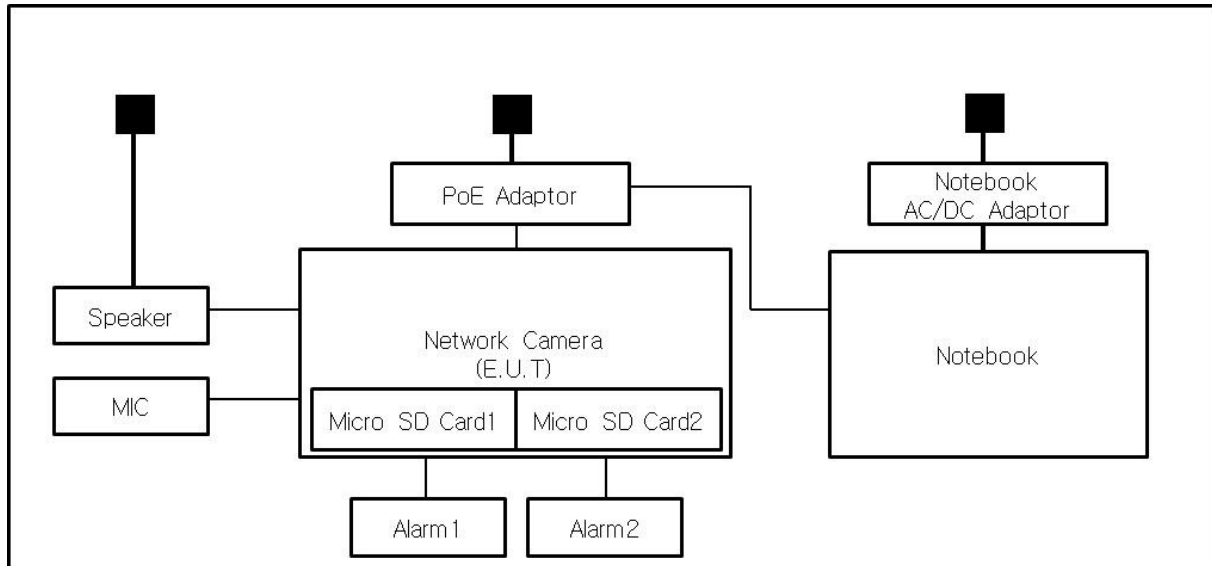

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0097-R2
Page (13) of (39)

-
- | | | |
|---|---|----------------------------------|
| ☒ VCCI V-3 / 2015.04 | ☒ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (14) of (39)

2.1 Conducted Emissions Mains Power Ports

Test Date

Jan. 05, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	11, 27, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1002	08, 07, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1003	08, 07, 2018

Test Conditions

Temperature: 24,1 °C
Relative Humidity: 42,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jan. 05, 2017

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	11, 27, 2018
☒	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 29, 2018
☒	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 29, 2018
☐	8-WIRE ISN CAT6	NTFM 8158	SCHWARZBECK	8158-0029	08, 10, 2018
☐	CDN	CDNS502A	TESEQ	40431	01, 11, 2018

Test Conditions

Temperature: 24,1 °C
Relative Humidity: 42,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (16) of (39)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 03, 2017

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2019

Test Conditions

Temperature: 24,1 °C
Relative Humidity: 42,0 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 04, 2017

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 07, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2018
☐	ATTENUATOR	8491A	HP	32173	03, 24, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 22,8 °C
Relative Humidity: 41,5 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC 24 V Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6080RS
Mode	AC
Operator Name:	KES

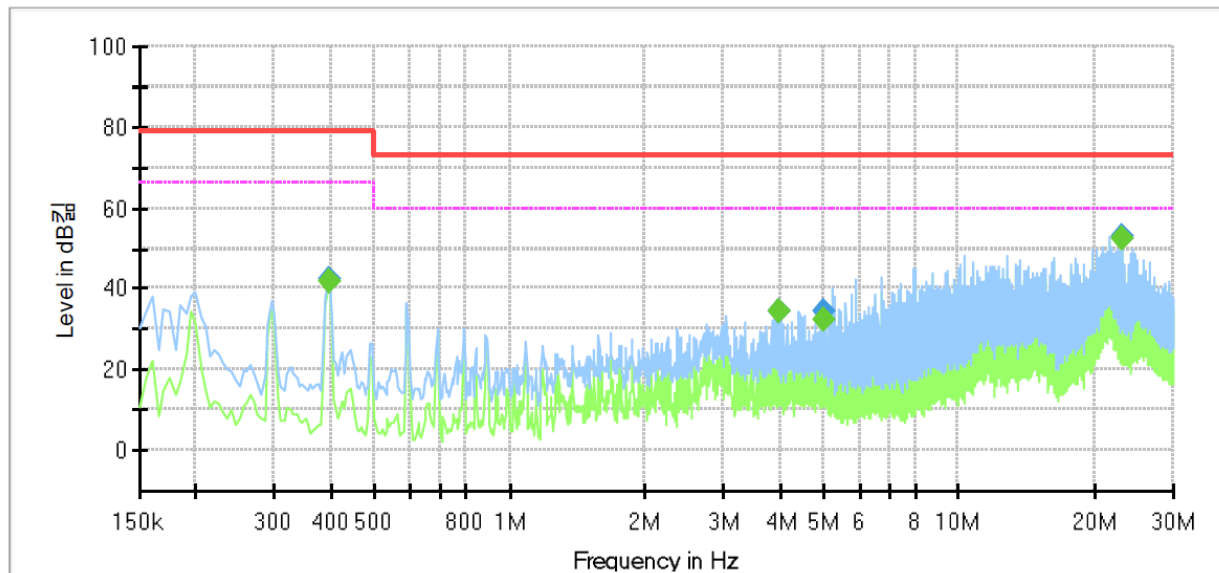

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.395000	---	41.59	66.00	24.41	1000.0	9.000	L1	19.5
0.395000	42.47	---	79.00	36.53	1000.0	9.000	L1	19.5
3.955000	---	34.17	60.00	25.83	1000.0	9.000	L1	19.9
3.955000	34.38	---	73.00	38.62	1000.0	9.000	L1	19.9
5.025000	---	32.10	60.00	27.90	1000.0	9.000	L1	19.9
5.025000	34.49	---	73.00	38.51	1000.0	9.000	L1	19.9
23.130000	---	52.35	60.00	7.65	1000.0	9.000	L1	20.2
23.130000	52.78	---	73.00	20.22	1000.0	9.000	L1	20.2



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-E1-18T0097-R2

Page (19) of (39)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNV-6080RS
Mode: AC
Operator Name: KES

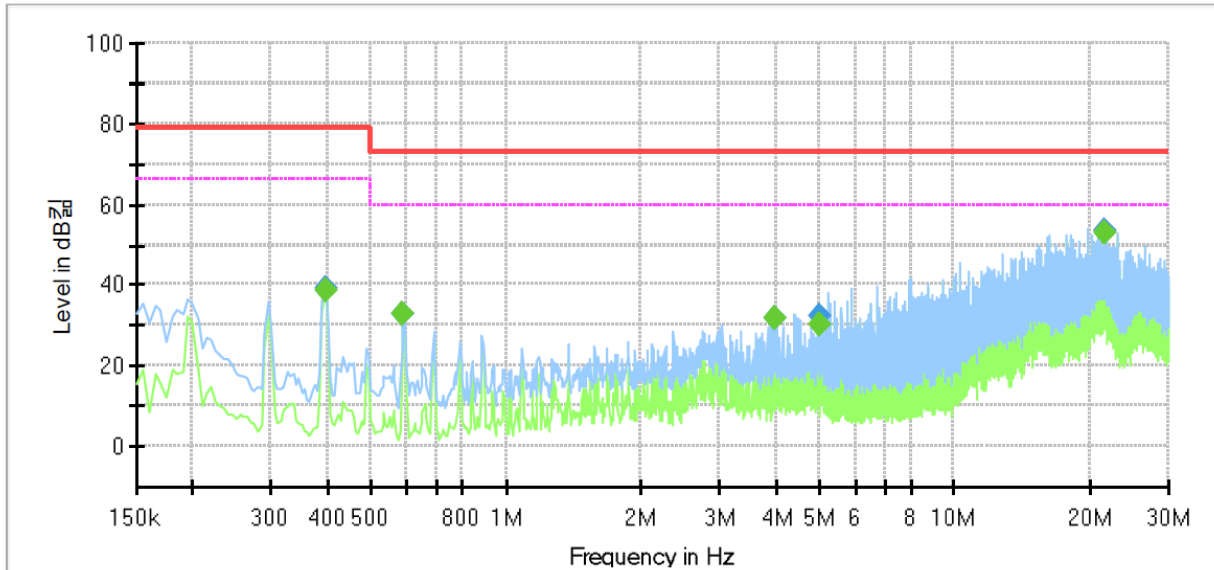

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.395000	---	38.47	66.00	27.53	1000.0	9.000	N	19.5
0.395000	39.39	---	79.00	39.61	1000.0	9.000	N	19.5
0.590000	---	32.93	60.00	27.07	1000.0	9.000	N	19.6
0.590000	33.02	---	73.00	39.98	1000.0	9.000	N	19.6
3.955000	---	31.53	60.00	28.47	1000.0	9.000	N	19.9
3.955000	31.70	---	73.00	41.30	1000.0	9.000	N	19.9
5.025000	---	29.98	60.00	30.02	1000.0	9.000	N	19.9
5.025000	32.23	---	73.00	40.77	1000.0	9.000	N	19.9
21.665000	---	52.69	60.00	7.31	1000.0	9.000	N	20.1
21.665000	53.35	---	73.00	19.65	1000.0	9.000	N	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ AC 24 V Mode

[10 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


XNV-6080RS

Mode

AC , 10 Mbps

Operator Name:

KES

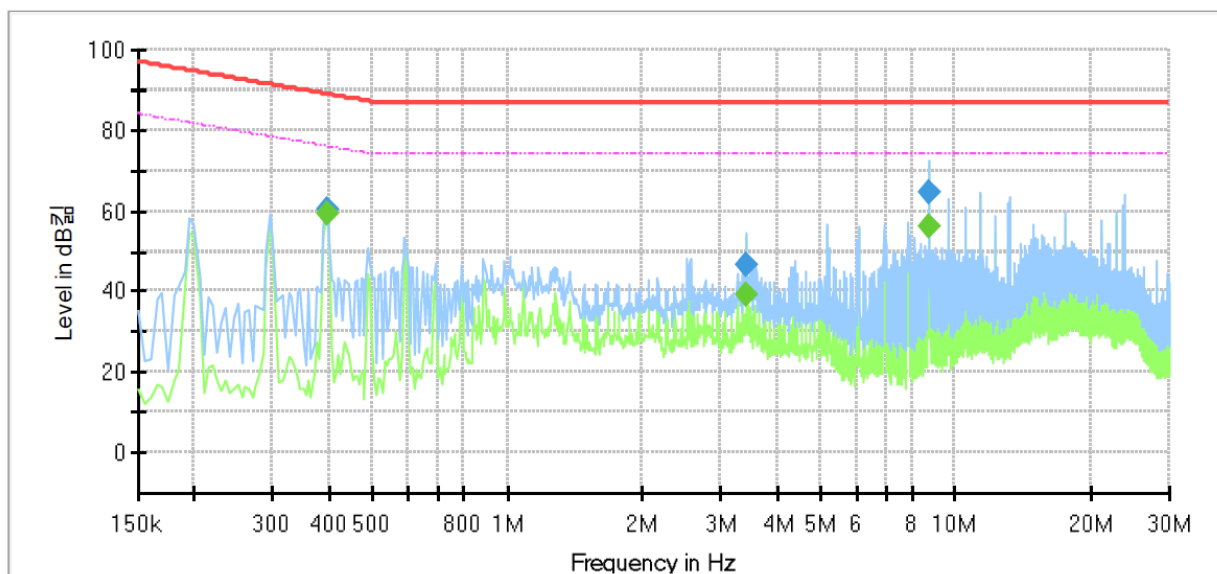

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.395000	---	59.16	75.96	16.80	1000.0	9.000	Single Line	19.9
0.395000	60.22	---	88.96	28.74	1000.0	9.000	Single Line	19.9
3.425000	---	39.42	74.00	34.58	1000.0	9.000	Single Line	20.0
3.425000	46.46	---	87.00	40.54	1000.0	9.000	Single Line	20.0
8.750000	---	56.14	74.00	17.86	1000.0	9.000	Single Line	19.8
8.750000	64.67	---	87.00	22.33	1000.0	9.000	Single Line	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6080RS
Mode	AC , 100 Mbps
Operator Name:	KES

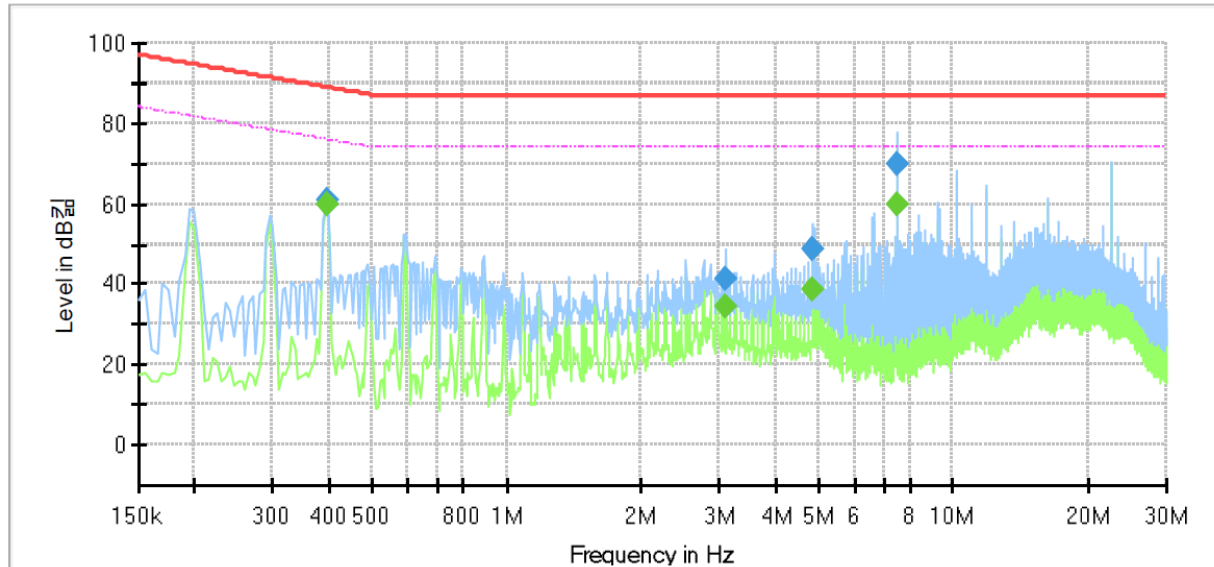

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.395000	---	59.88	75.96	16.08	1000.0	9.000	Single Line	19.4
0.395000	60.61	---	88.96	28.35	1000.0	9.000	Single Line	19.4
3.100000	---	34.36	74.00	39.64	1000.0	9.000	Single Line	19.5
3.100000	41.15	---	87.00	45.85	1000.0	9.000	Single Line	19.5
4.840000	---	38.87	74.00	35.13	1000.0	9.000	Single Line	19.5
4.840000	48.53	---	87.00	38.47	1000.0	9.000	Single Line	19.5
7.500000	---	59.95	74.00	14.05	1000.0	9.000	Single Line	19.3
7.500000	70.07	---	87.00	16.93	1000.0	9.000	Single Line	19.3

■ DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6080RS
Mode	DC , 10 Mbps
Operator Name:	KES

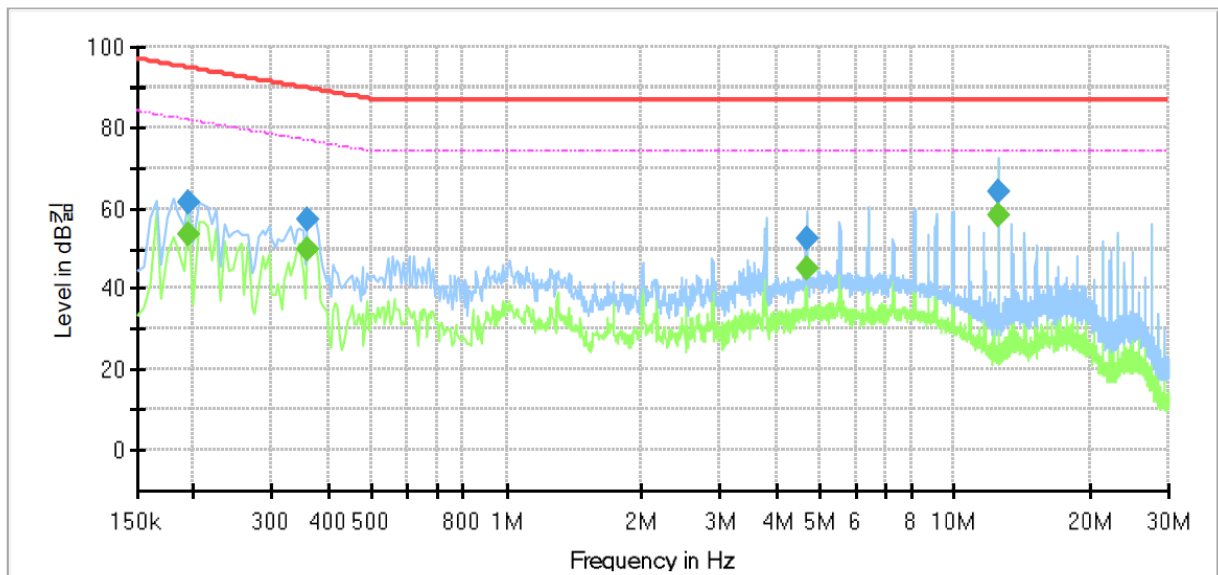

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	53.32	81.82	28.50	1000.0	9.000	Single Line	19.9
0.195000	61.52	---	94.82	33.30	1000.0	9.000	Single Line	19.9
0.360000	---	49.72	76.73	27.01	1000.0	9.000	Single Line	19.9
0.360000	57.23	---	89.73	32.50	1000.0	9.000	Single Line	19.9
4.675000	---	44.80	74.00	29.20	1000.0	9.000	Single Line	20.0
4.675000	52.40	---	87.00	34.60	1000.0	9.000	Single Line	20.0
12.500000	---	57.99	74.00	16.01	1000.0	9.000	Single Line	19.8
12.500000	64.18	---	87.00	22.82	1000.0	9.000	Single Line	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-E1-18T0097-R2

Page (23) of (39)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-6080RS
Mode: DC , 100 Mbps
Operator Name: KES

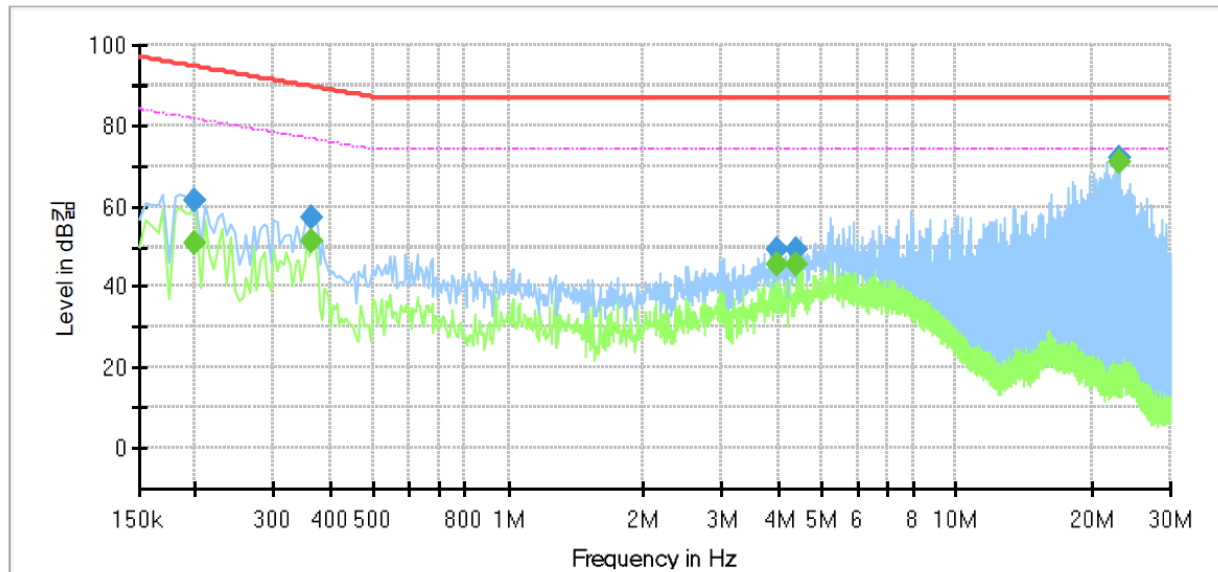

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.200000	---	51.04	81.61	30.57	1000.0	9.000	Single Line	19.4
0.200000	61.17	---	94.61	33.44	1000.0	9.000	Single Line	19.4
0.365000	---	51.26	76.61	25.35	1000.0	9.000	Single Line	19.4
0.365000	57.13	---	89.61	32.48	1000.0	9.000	Single Line	19.4
3.955000	---	45.74	74.00	28.26	1000.0	9.000	Single Line	19.5
3.955000	49.49	---	87.00	37.51	1000.0	9.000	Single Line	19.5
4.410000	---	45.40	74.00	28.60	1000.0	9.000	Single Line	19.5
4.410000	49.13	---	87.00	37.87	1000.0	9.000	Single Line	19.5
23.130000	---	70.94	74.00	3.06	1000.0	9.000	Single Line	19.4
23.130000	72.04	---	87.00	14.96	1000.0	9.000	Single Line	19.4


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6080RS
Mode	POE , 10 Mbps
Operator Name:	KES

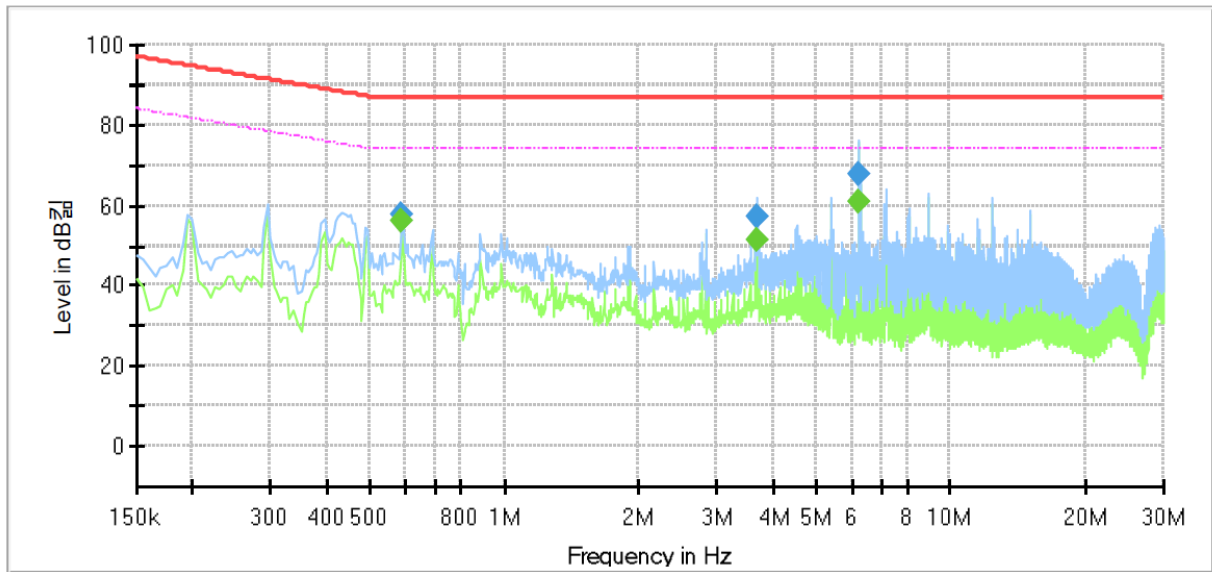

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.590000	---	56.00	74.00	18.00	1000.0	9.000	Single Line	19.9
0.590000	57.69	---	87.00	29.31	1000.0	9.000	Single Line	19.9
3.695000	---	51.41	74.00	22.59	1000.0	9.000	Single Line	20.0
3.695000	57.16	---	87.00	29.84	1000.0	9.000	Single Line	20.0
6.250000	---	60.86	74.00	13.14	1000.0	9.000	Single Line	19.9
6.250000	67.76	---	87.00	19.24	1000.0	9.000	Single Line	19.9



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0097-R2
Page (25) of (39)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-6080RS
Mode: POE , 100 Mbps
Operator Name: KES

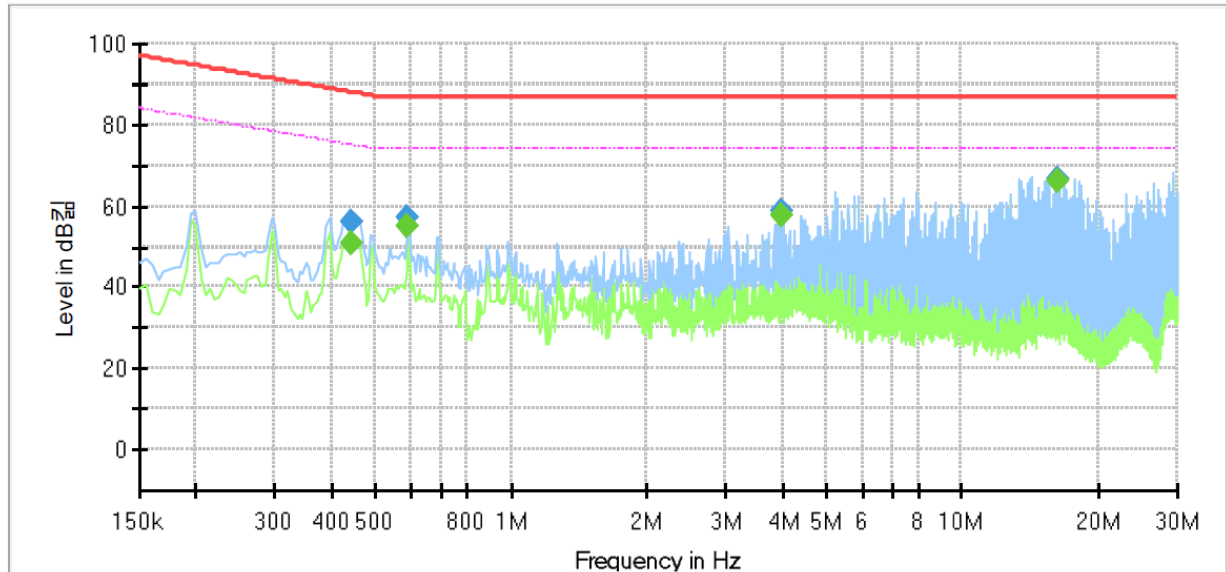

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.440000	---	50.67	75.06	24.39	1000.0	9.000	Single Line	19.4
0.440000	55.93	---	88.06	32.13	1000.0	9.000	Single Line	19.4
0.590000	---	55.02	74.00	18.98	1000.0	9.000	Single Line	19.4
0.590000	56.93	---	87.00	30.07	1000.0	9.000	Single Line	19.4
3.955000	---	57.89	74.00	16.11	1000.0	9.000	Single Line	19.5
3.955000	58.63	---	87.00	28.37	1000.0	9.000	Single Line	19.5
16.230000	---	66.39	74.00	7.61	1000.0	9.000	Single Line	19.5
16.230000	66.50	---	87.00	20.50	1000.0	9.000	Single Line	19.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)


■ AC 24 V Mode

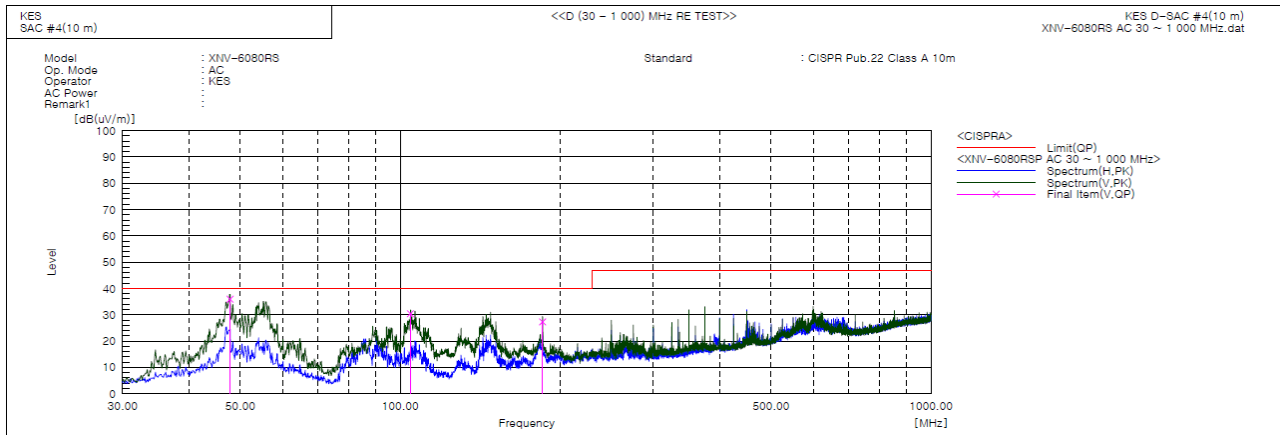

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.824	V	63.8	-27.9	35.9	40.0	4.1	100.0	201.0	
2	104.525	V	58.9	-28.5	30.4	40.0	9.6	100.0	211.0	
3	185.419	V	56.0	-28.7	27.3	40.0	12.7	100.0	32.0	

■ DC 12 V Mode

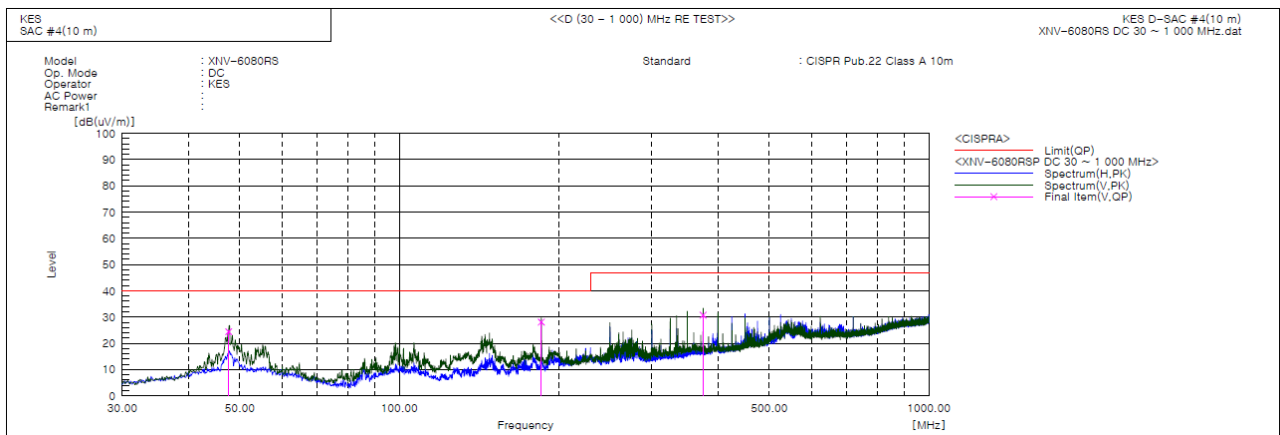

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.634	V	52.3	-27.9	24.4	40.0	15.6	100.0	221.0	
2	185.437	V	56.8	-28.7	28.1	40.0	11.9	100.0	284.0	
3	374.830	V	52.0	-21.3	30.7	47.0	16.3	100.0	162.0	



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (27) of (39)

■ PoE Mode

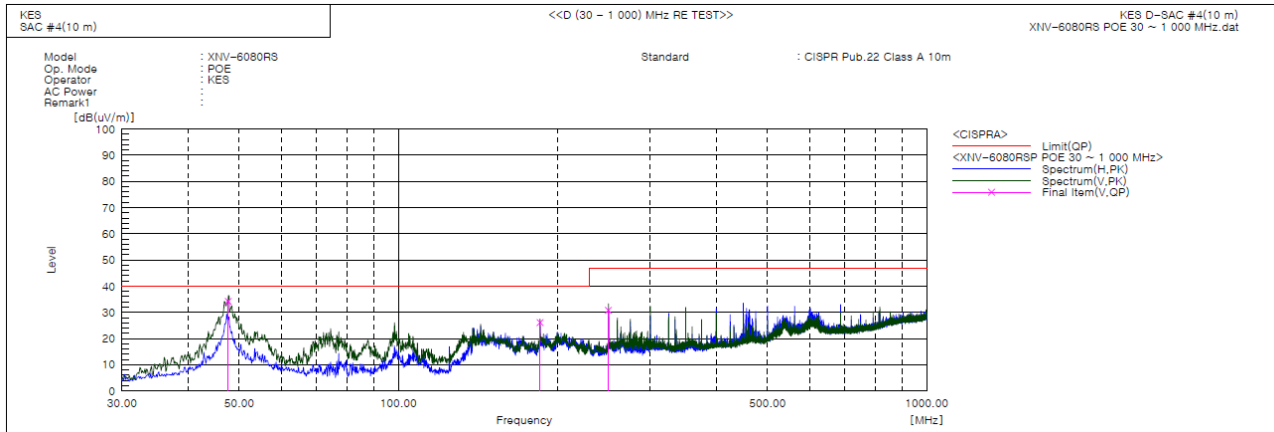

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.664	V	62.1	-27.9	34.2	40.0	5.8	10.0	28.0	
2	185.494	V	54.8	-28.7	26.1	40.0	13.9	100.0	38.0	
3	249.835	V	56.2	-25.4	30.8	47.0	16.2	100.0	152.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-18T0097-R2

Page (28) of (39)

Radiated Electric Field Emissions(Above 1 GHz)


■ AC 24 V Mode

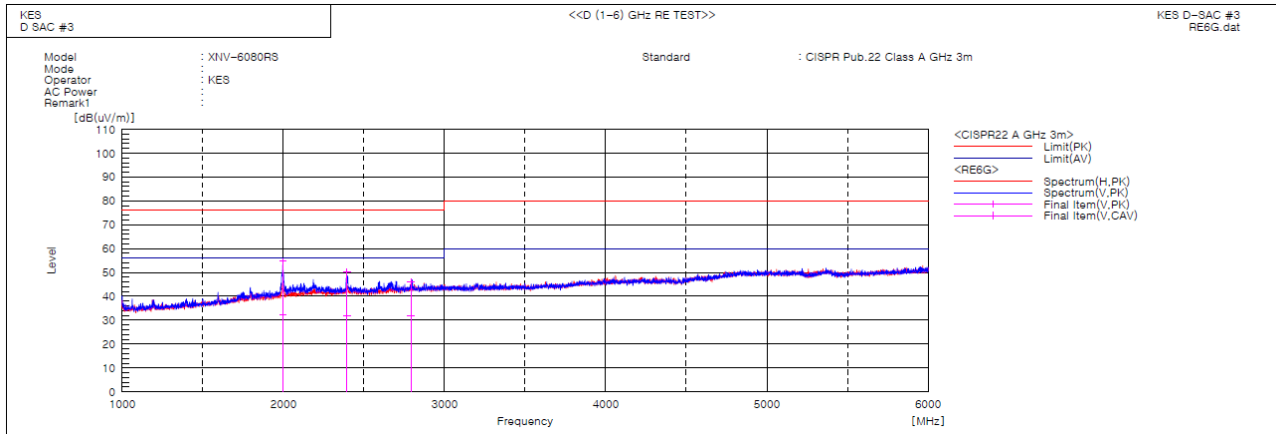

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1996.670	V	56.6	34.1	-1.7	54.9	32.4	76.0	56.0	21.1	23.6	100.0	11.3	
2	2394.551	V	50.1	31.8	0.2	50.3	32.0	76.0	56.0	25.7	24.0	100.0	6.5	
3	2790.942	V	44.1	29.8	1.9	46.0	31.7	76.0	56.0	30.0	24.3	100.0	59.0	

■ DC 12 V Mode

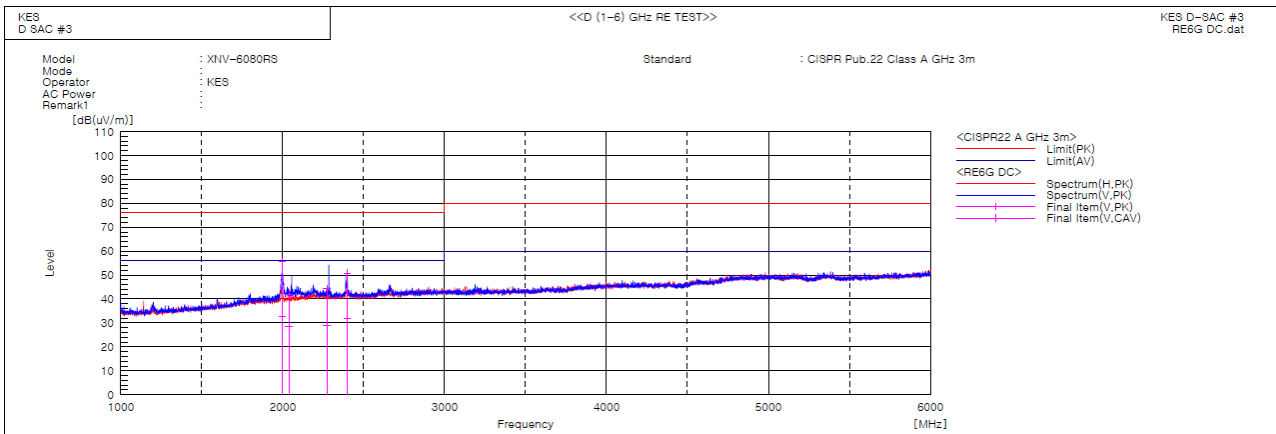

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1996.270	V	57.2	34.6	-1.7	55.5	32.9	76.0	56.0	20.5	23.1	100.0	341.1	
2	2037.814	V	43.5	29.8	-1.4	42.1	28.4	76.0	56.0	33.9	27.6	100.0	106.8	
3	2272.583	V	44.7	29.3	-0.3	44.4	29.0	76.0	56.0	31.6	27.0	100.0	357.3	
4	2399.278	V	50.6	31.7	0.2	50.8	31.9	76.0	56.0	25.2	24.1	100.0	12.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0097-R2

Page (29) of (39)

■ PoE Mode

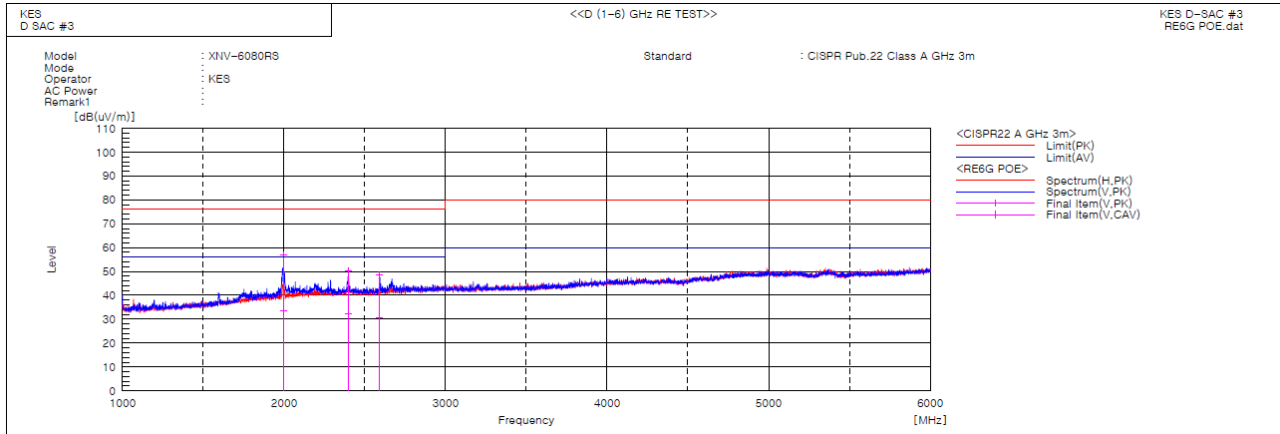

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1998.309	V	58.7	35.1	-1.7	57.0	33.4	76.0	56.0	19.0	22.6	100.0	343.5	
2	2396.570	V	49.9	31.9	0.2	50.1	32.1	76.0	56.0	25.9	23.9	100.0	357.4	
3	2589.391	V	47.6	29.6	0.9	48.5	30.5	76.0	56.0	27.5	25.5	100.0	2.7	

◆ Calculation

Over Limit [dB] = (Read Level[dB μ V] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dB μ V]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

adiated Electric Field Emissions(Below 1 GHz)

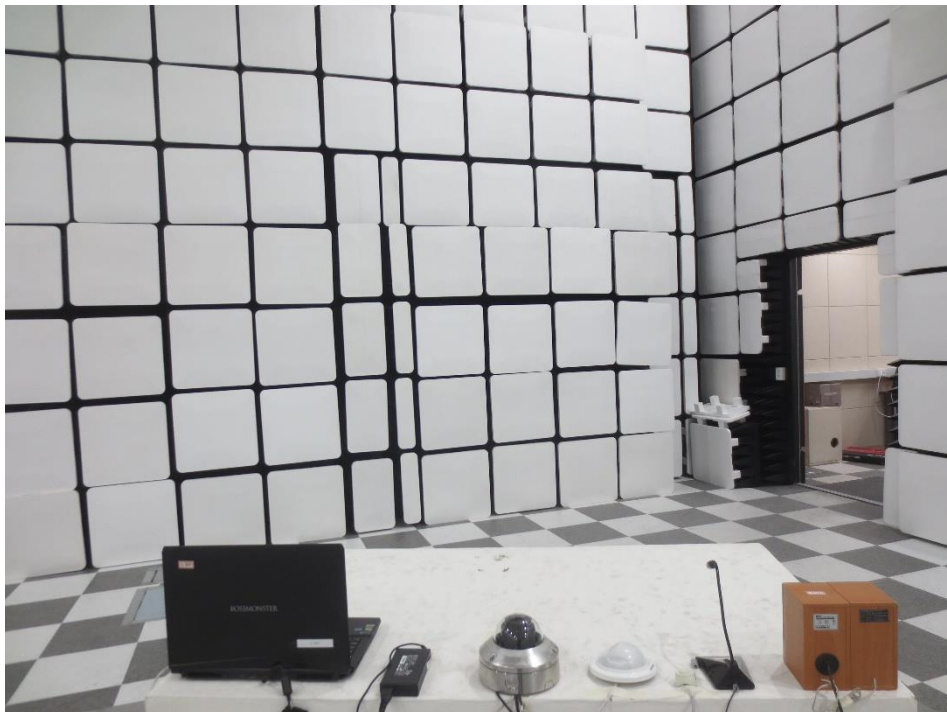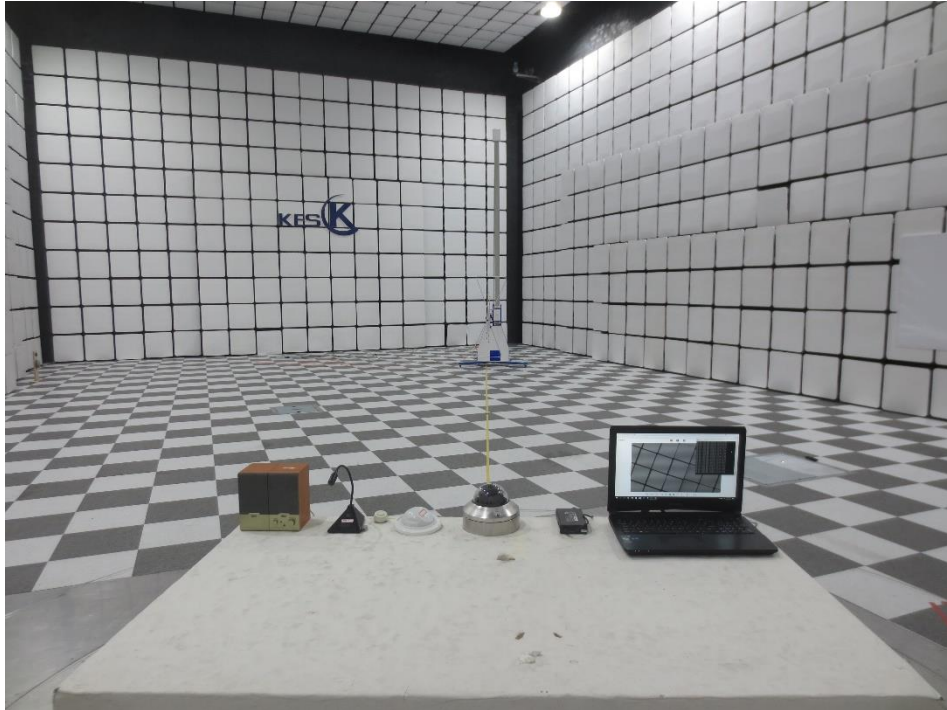

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)



EUT Internal View – Main board

(Top)

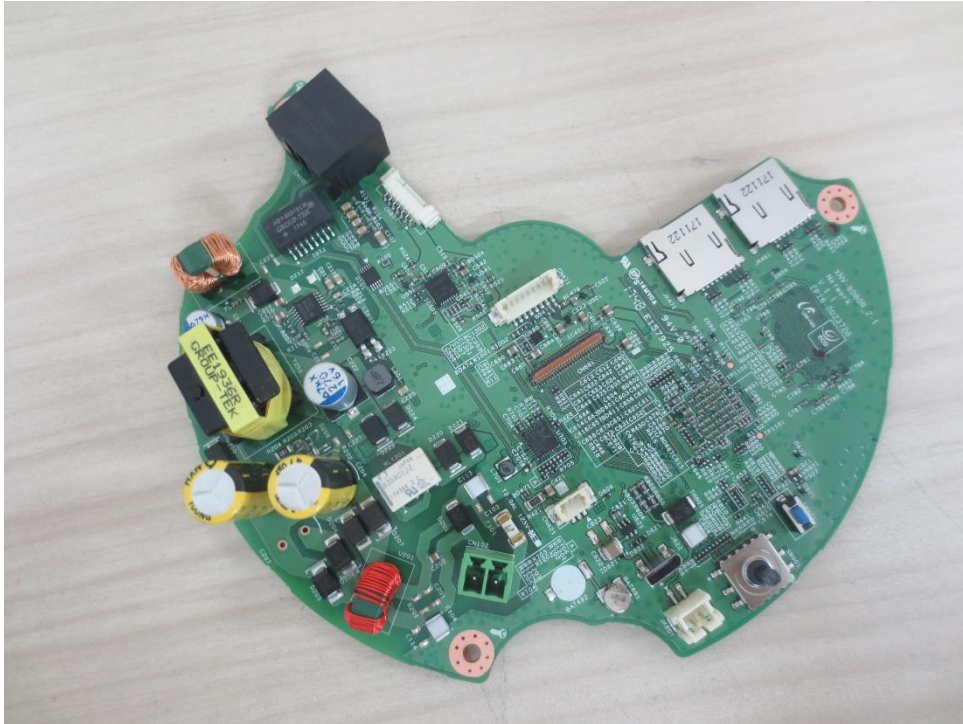

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub board 1

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub board 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr