



EMC TEST REPORT For RCM

Test Report No. : KES-E1-18T0625-R1
Date of Issue : Feb. 24, 2023
Product name : Network Camera
Model/Type No. : XNV-6081Z
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Nov. 02, 2018
Test date : Nov. 06, 2018 ~ Nov. 07, 2018
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (2) of (45)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 14, 2018	KES-E1-18T0625	Issued
Feb. 24, 2023	KES-E1-18T0625-R1	-Change the Applicant and manufacturer at the request of the customer - Factory deletion at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports.....	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		26
Radiated Electric Field Emissions(Above 1 GHz).....		28
Test Setup Photos and Configuration		30
Conducted Voltage Emissions		30
Conducted Telecommunication Emissions		31
Radiated Electric Field Emissions(Below 1 GHz)		32
Radiated Electric Field Emissions(Above 1 GHz).....		33
EUT External Photographs		34
EUT Internal Photographs		35



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (4) of (45)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1945(H) x 1109(V) 2.16M
Effective Pixels	1945(H) x 1097(V) 2.13M
Scanning System	Progressive Scan
Min. Illumination	Color : 0.015 lux(F1.4, 1/30sec) B/W : 0.0015 Lux (F1.4, 1/30sec)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal
Max. Aperture Ratio	1.4(Wide) ~ 3.6(Tele)
Angular Field of View	H: 119.5°, V: 62.8°, D: 142.1° H: 27.9°, V: 15.7°, D: 32.0°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network (Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	±175° / 0~85° / ±175°
PTR control	Remote adjustment (Max. 200 cycles)
Operational	
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC, WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On (built-in Gyro Sensor)
Defog	Auto / Manual / Off
Motion Detection	Off / On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification, Audio Playback on event , Shock detection , Heatmap , People counting , Queue management
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Pixel Counter	Support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (5) of (45)

Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Form	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 60fps at all resolutions MJPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStreamII	Support
Video Quality Adjustmen	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Form	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	Micro SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. - NAS(Network Attached Storage), Local PC for Instant Recording
Application Programmin	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS : Windows 7, 8, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer - Supported Browser : Google Chrome 56, MS Edge 39, Mozilla Firefox 56 (Window 64bit only), Apple Safari 10 (Mac OS X only) Plug-in Webviewer - Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)
Central Management So	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH * Start up should be done at above -35°C
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10+
Electrical	
Input Voltage / Current	Power redundancy 12VDC ± 10%, PoE(IEEE802.3af, Class3) 24VAC ± 10%(optional)
Power Consumption	DC : Max 9.5W, PoE : Max 11W AC : Max 11W(optional)
Mechanical	
Color / Material	White / Aluminum
Dimension (ØxH)	Ø 180
Weight	TBD

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 240 Vac ☐ 100 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNV-6081Z	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
AC module	SPC-100AC	-	-	AC 24 V

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-9501GR/AC	-	CHANGZHOU WUJIN HONGGUANG RADIO CO., LTD.	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Mike	MP1000	-	-	-
Gpad	LG-V480	-	LG	-
Alarm button	-	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Micro SD Card	-	-	Transcend	16 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.6 External I/O Cabling

■ AC 24 V, DC 12 V MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	Notebook	RJ-45	4.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	Mike	3.5 mm	1.7	U
	2Pin	Alarm IN	2Pin	3.0	U
	2Pin	Alarm Out	2Pin	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	3.5 mm	Gpad	3.5 mm	1.4	U

■ PoE MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	POE Adapter	RJ-45	4.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	Mike	3.5 mm	1.7	U
	2Pin	Alarm IN	2Pin	3.0	U
	2Pin	Alarm Out	2Pin	3.0	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	3.5 mm	Gpad	3.5 mm	1.4	U
	RJ-45	POE Adapter	RJ-45	4.0	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (8) of (45)

1.7 EUT Operating Mode(s)

Test mode	operating
AC 24 V, DC 12 V, POE	EUT Monitoring, Ping Test


EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main


■ AC 24 V MODE

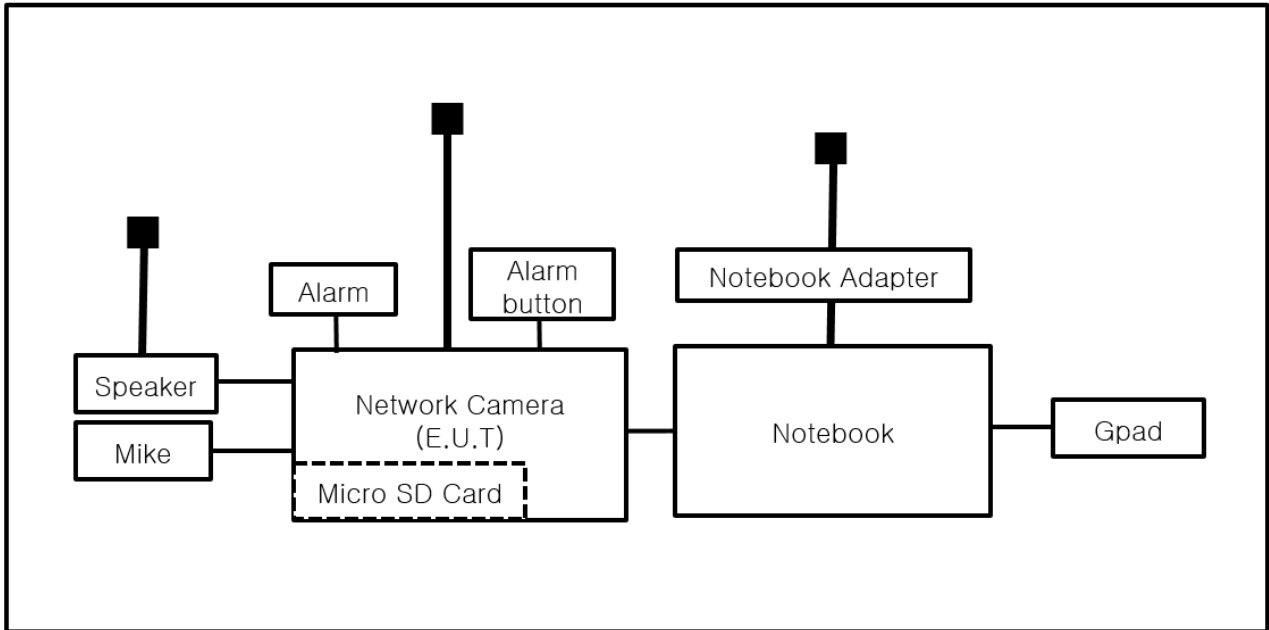

■ DC 12 V MODE

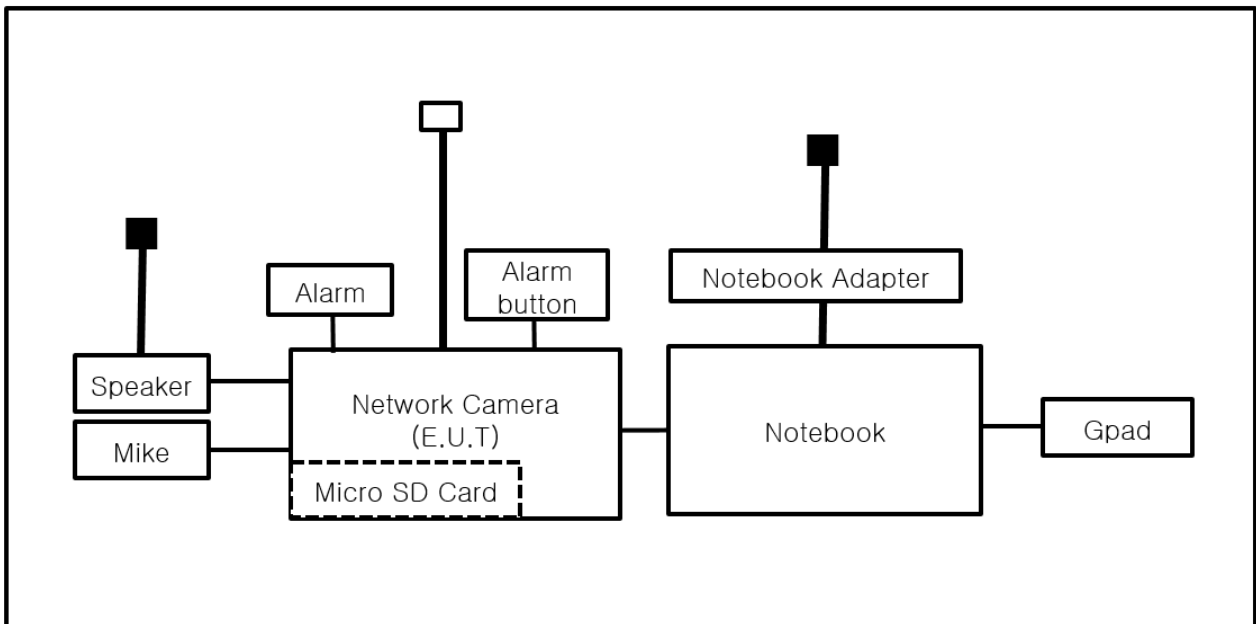

■ PoE MODE

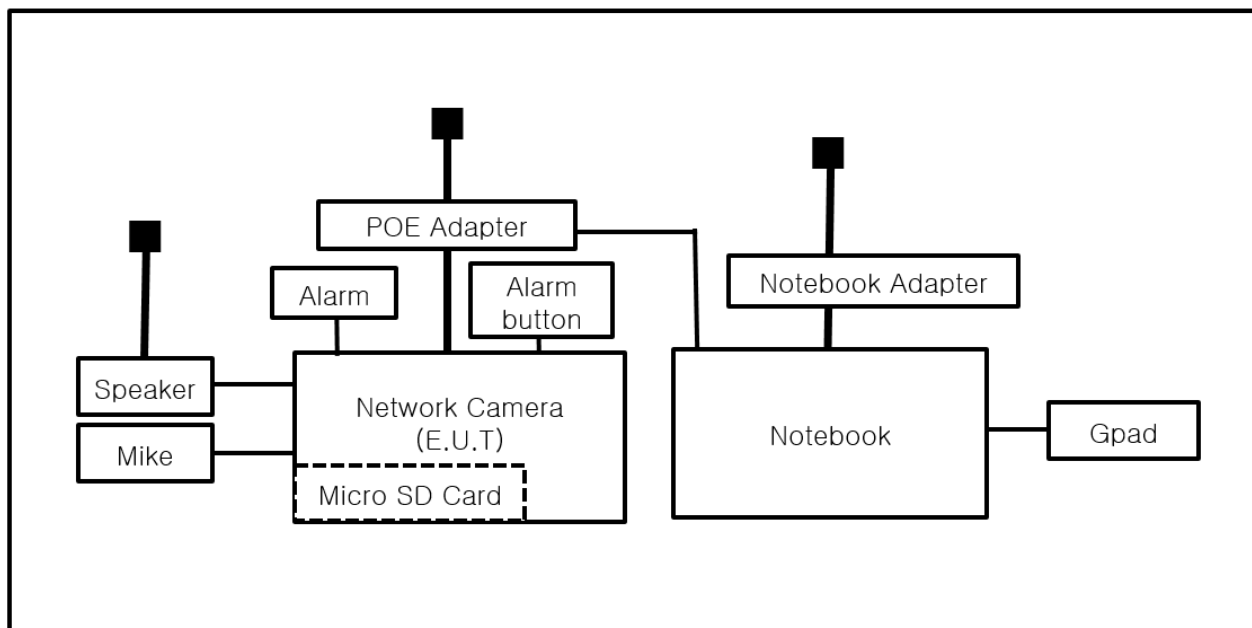

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1

☐ Group 2

☐ Class A

☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0625-R1
Page (13) of (45)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR32:2015 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
|
 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
|
 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports

Test Date

Nov. 06, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 25, 2019
☒	LISN	ENV216	R & S	101137	01, 31, 2019
☒	LISN	ENV216	R & S	101786	04, 25, 2019

Test ConditionsTemperature: 22,9 °C
Relative Humidity: 52,6 % R.H.**Frequency Range of Measurement**

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov. 06, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 25, 2019
☒	LISN	ENV216	R & S	101137	01, 31, 2019
☒	LISN	ENV216	R & S	101786	04, 25, 2019
☒	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 22, 2019
☒	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 22, 2019

Test ConditionsTemperature: 22,9 °C
Relative Humidity: 52,6 % R.H.**Frequency Range of Measurement**

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 06, 2018

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018

Test Conditions

Temperature: 20,7 °C
Relative Humidity: 52,1 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 07, 2018

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 22,2 °C
Relative Humidity: 53,1 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC 24 V MODE

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6081Z
Mode	AC 24 V_H
Operator Name:	KES

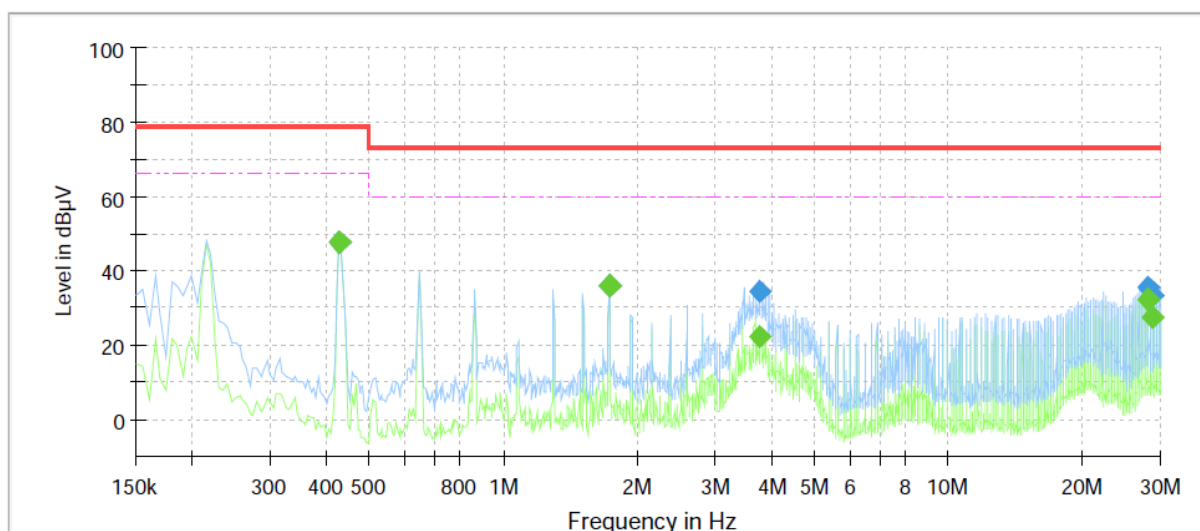


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	---	47.38	66.00	18.62	1000.0	9.000	L1	9.7
0.430000	47.43	---	79.00	31.57	1000.0	9.000	L1	9.7
1.725000	---	35.92	60.00	24.08	1000.0	9.000	L1	10.1
1.725000	36.16	---	73.00	36.84	1000.0	9.000	L1	10.1
3.750000	---	22.35	60.00	37.65	1000.0	9.000	L1	10.1
3.750000	34.19	---	73.00	38.81	1000.0	9.000	L1	10.1
28.050000	---	32.16	60.00	27.84	1000.0	9.000	L1	10.3
28.050000	35.71	---	73.00	37.29	1000.0	9.000	L1	10.3
28.695000	---	27.79	60.00	32.21	1000.0	9.000	L1	10.3
28.695000	33.35	---	73.00	39.65	1000.0	9.000	L1	10.3

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6081Z
Mode	AC 24 V_N
Operator Name:	KES

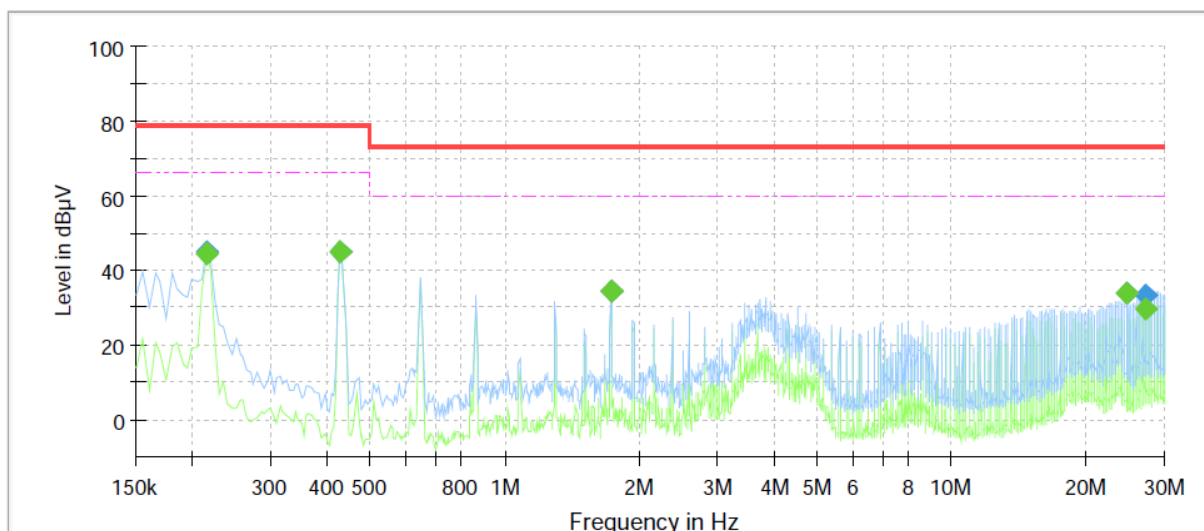

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.215000	---	44.54	66.00	21.46	1000.0	9.000	N	9.7
0.215000	44.94	---	79.00	34.06	1000.0	9.000	N	9.7
0.430000	---	45.13	66.00	20.87	1000.0	9.000	N	9.8
0.430000	45.19	---	79.00	33.81	1000.0	9.000	N	9.8
1.725000	---	34.25	60.00	25.75	1000.0	9.000	N	10.1
1.725000	34.49	---	73.00	38.51	1000.0	9.000	N	10.1
24.575000	---	33.78	60.00	26.22	1000.0	9.000	N	10.2
24.575000	34.07	---	73.00	38.93	1000.0	9.000	N	10.2
27.190000	---	29.87	60.00	30.13	1000.0	9.000	N	10.3
27.190000	33.49	---	73.00	39.51	1000.0	9.000	N	10.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ AC 24 V MODE

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6081Z
Mode	AC 24 V_10 Mbps
Operator Name:	KES

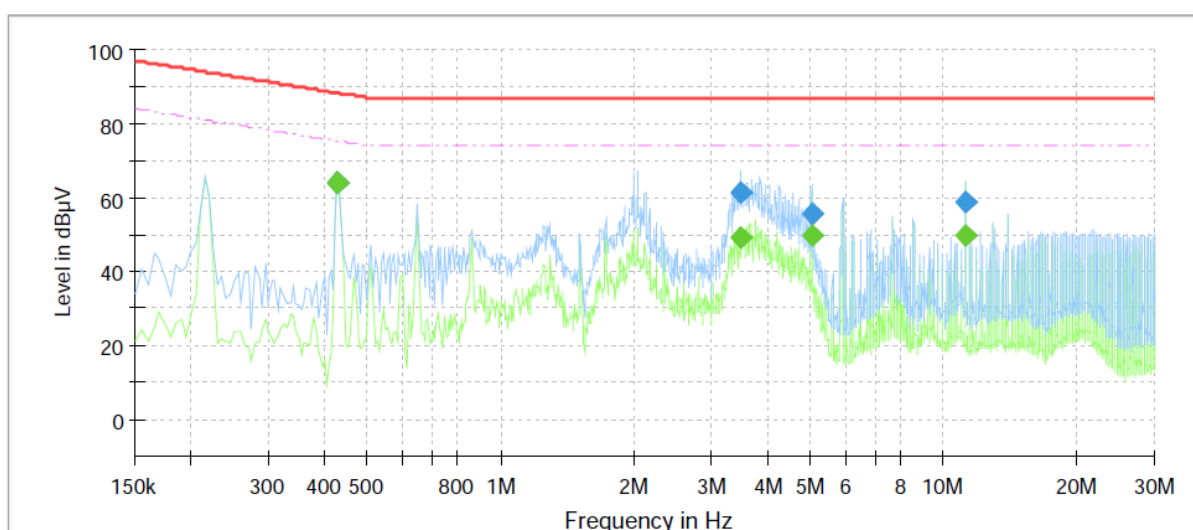

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	---	63.97	75.25	11.28	1000.0	9.000	Single Line	10.1
0.430000	64.05	---	88.25	24.20	1000.0	9.000	Single Line	10.1
3.485000	---	49.04	74.00	24.96	1000.0	9.000	Single Line	10.3
3.485000	61.55	---	87.00	25.45	1000.0	9.000	Single Line	10.3
5.055000	---	49.63	74.00	24.37	1000.0	9.000	Single Line	10.2
5.055000	55.73	---	87.00	31.27	1000.0	9.000	Single Line	10.2
11.250000	---	49.71	74.00	24.29	1000.0	9.000	Single Line	10.0
11.250000	58.85	---	87.00	28.15	1000.0	9.000	Single Line	10.0



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-E1-18T0625-R1

Page (21) of (45)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-6081Z
Mode: AC 24 V_100 Mbps
Operator Name: KES

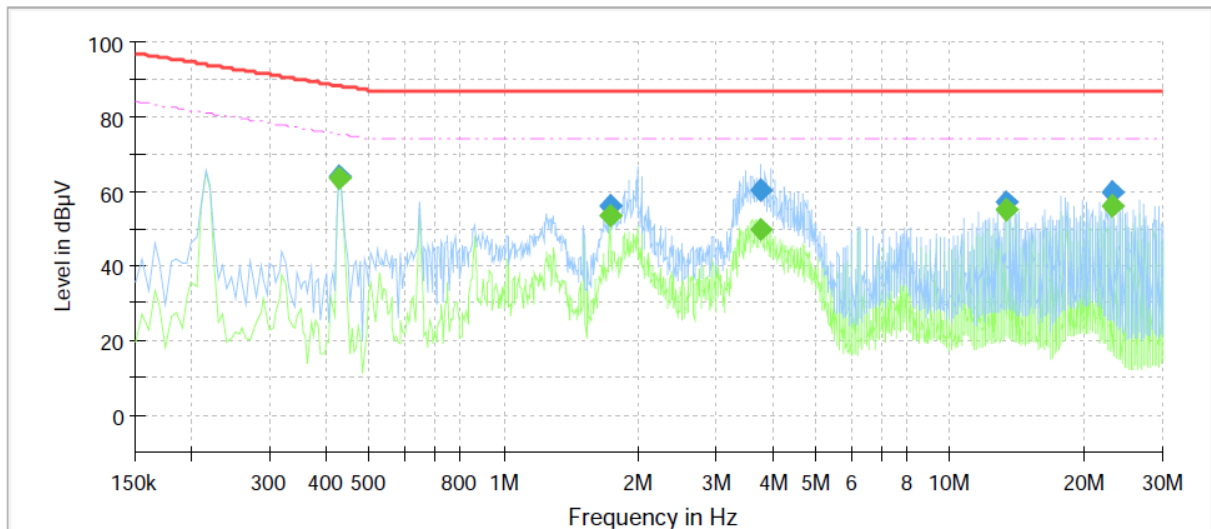

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	---	63.77	75.25	11.48	1000.0	9.000	Single Line	9.6
0.430000	63.89	---	88.25	24.36	1000.0	9.000	Single Line	9.6
1.725000	---	53.32	74.00	20.68	1000.0	9.000	Single Line	9.8
1.725000	56.24	---	87.00	30.76	1000.0	9.000	Single Line	9.8
3.755000	---	49.58	74.00	24.42	1000.0	9.000	Single Line	9.7
3.755000	60.57	---	87.00	26.43	1000.0	9.000	Single Line	9.7
13.420000	---	54.94	74.00	19.06	1000.0	9.000	Single Line	9.6
13.420000	57.01	---	87.00	29.99	1000.0	9.000	Single Line	9.6
23.130000	---	56.19	74.00	17.81	1000.0	9.000	Single Line	9.6
23.130000	59.73	---	87.00	27.27	1000.0	9.000	Single Line	9.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


■ DC 12 V MODE

[10 Mbps]

Common Information

Test Description:
 Model No.:
 Mode
 Operator Name:

Telecommunication Emission
 XNV-6081Z
 DC 12 V_10 Mbps
 KES

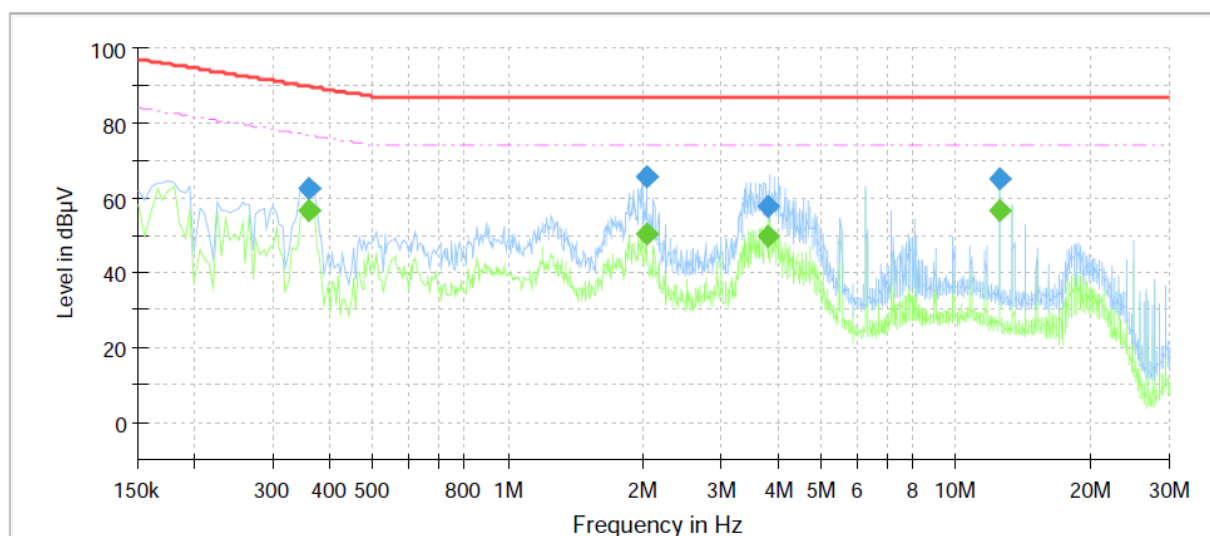

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.360000	---	56.66	76.73	20.07	1000.0	9.000	Single Line	10.1
0.360000	62.62	---	89.73	27.11	1000.0	9.000	Single Line	10.1
2.040000	---	50.20	74.00	23.80	1000.0	9.000	Single Line	10.3
2.040000	65.74	---	87.00	21.26	1000.0	9.000	Single Line	10.3
3.805000	---	49.70	74.00	24.30	1000.0	9.000	Single Line	10.2
3.805000	57.58	---	87.00	29.42	1000.0	9.000	Single Line	10.2
12.500000	---	56.84	74.00	17.16	1000.0	9.000	Single Line	10.0
12.500000	65.11	---	87.00	21.89	1000.0	9.000	Single Line	10.0



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-E1-18T0625-R1

Page (23) of (45)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-6081Z
Mode: DC 12 V_100 Mbps
Operator Name: KES

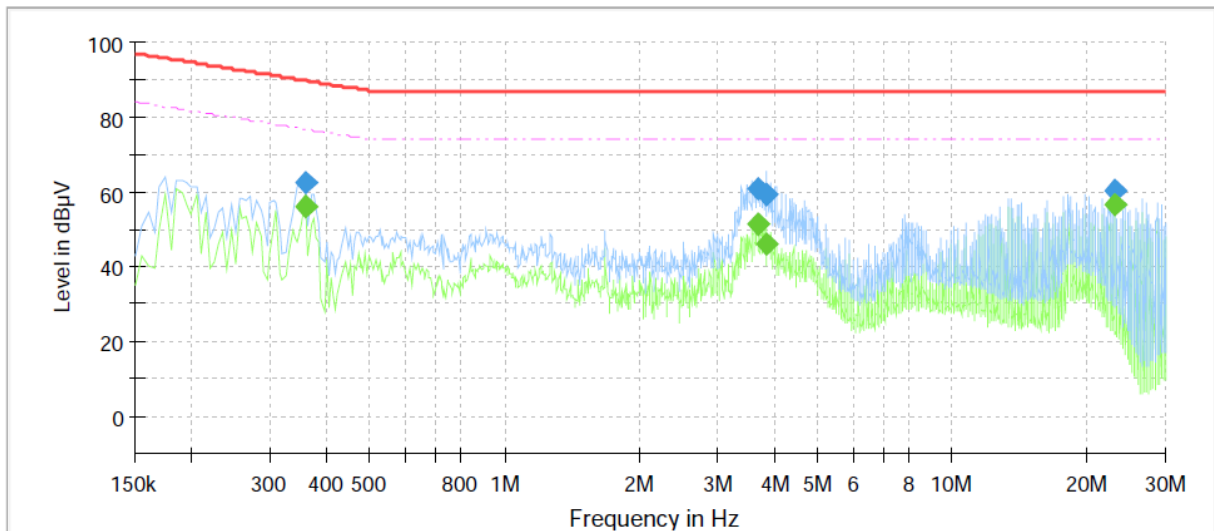

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.360000	---	56.37	76.73	20.36	1000.0	9.000	Single Line	9.6
0.360000	62.46	---	89.73	27.27	1000.0	9.000	Single Line	9.6
3.665000	---	51.26	74.00	22.74	1000.0	9.000	Single Line	9.7
3.665000	60.70	---	87.00	26.30	1000.0	9.000	Single Line	9.7
3.840000	---	45.86	74.00	28.14	1000.0	9.000	Single Line	9.7
3.840000	59.34	---	87.00	27.66	1000.0	9.000	Single Line	9.7
23.130000	---	56.45	74.00	17.55	1000.0	9.000	Single Line	9.6
23.130000	60.18	---	87.00	26.82	1000.0	9.000	Single Line	9.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (24) of (45)

■ PoE MODE

[10 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


XNV-6081Z

Mode

POE_10 Mbps

Operator Name:

KES

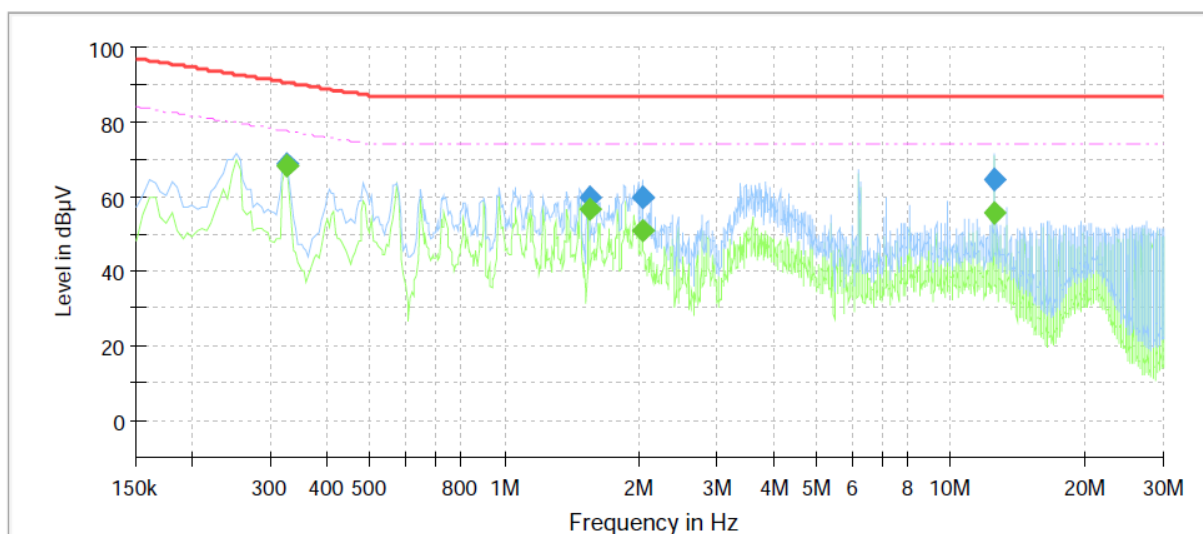

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.325000	---	68.52	77.58	9.06	1000.0	9.000	Single Line	10.1
0.325000	68.83	---	90.58	21.75	1000.0	9.000	Single Line	10.1
1.550000	---	56.46	74.00	17.54	1000.0	9.000	Single Line	10.3
1.550000	59.64	---	87.00	27.36	1000.0	9.000	Single Line	10.3
2.035000	---	50.75	74.00	23.25	1000.0	9.000	Single Line	10.3
2.035000	59.93	---	87.00	27.07	1000.0	9.000	Single Line	10.3
12.500000	---	55.66	74.00	18.34	1000.0	9.000	Single Line	10.0
12.500000	64.32	---	87.00	22.68	1000.0	9.000	Single Line	10.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-6081Z
Mode	POE_100 Mbps
Operator Name:	KES

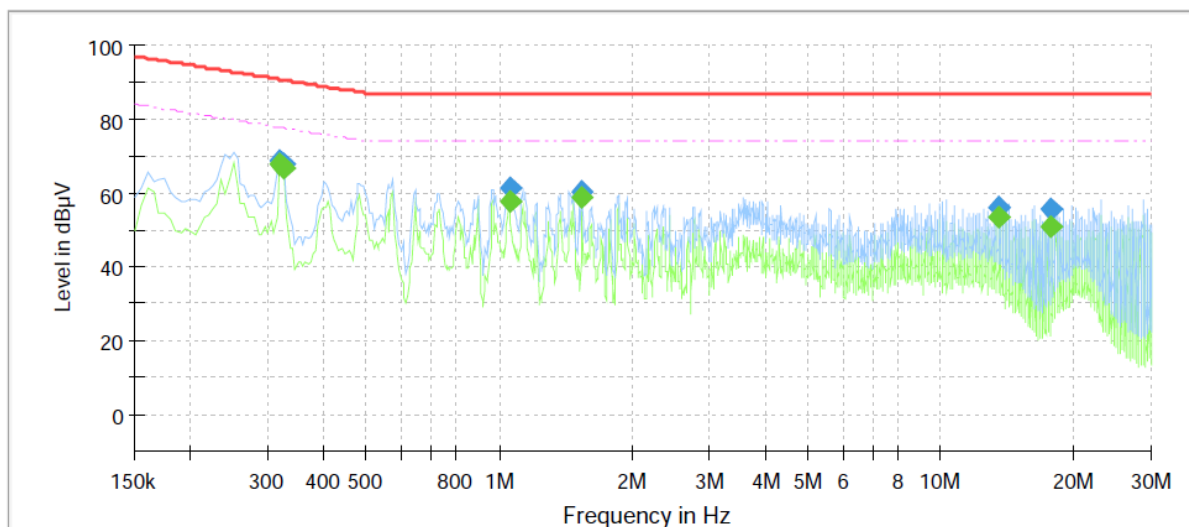

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.320000	---	67.90	77.71	9.81	1000.0	9.000	Single Line	9.6
0.320000	68.68	---	90.71	22.03	1000.0	9.000	Single Line	9.6
0.325000	---	66.73	77.58	10.85	1000.0	9.000	Single Line	9.6
0.325000	67.68	---	90.58	22.90	1000.0	9.000	Single Line	9.6
1.055000	---	57.75	74.00	16.25	1000.0	9.000	Single Line	9.8
1.055000	61.65	---	87.00	25.35	1000.0	9.000	Single Line	9.8
1.540000	---	58.93	74.00	15.07	1000.0	9.000	Single Line	9.8
1.540000	60.49	---	87.00	26.51	1000.0	9.000	Single Line	9.8
13.480000	---	53.60	74.00	20.40	1000.0	9.000	Single Line	9.6
13.480000	56.21	---	87.00	30.79	1000.0	9.000	Single Line	9.6
17.690000	---	50.95	74.00	23.05	1000.0	9.000	Single Line	9.7
17.690000	55.59	---	87.00	31.41	1000.0	9.000	Single Line	9.7

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)


■ AC 24 V MODE

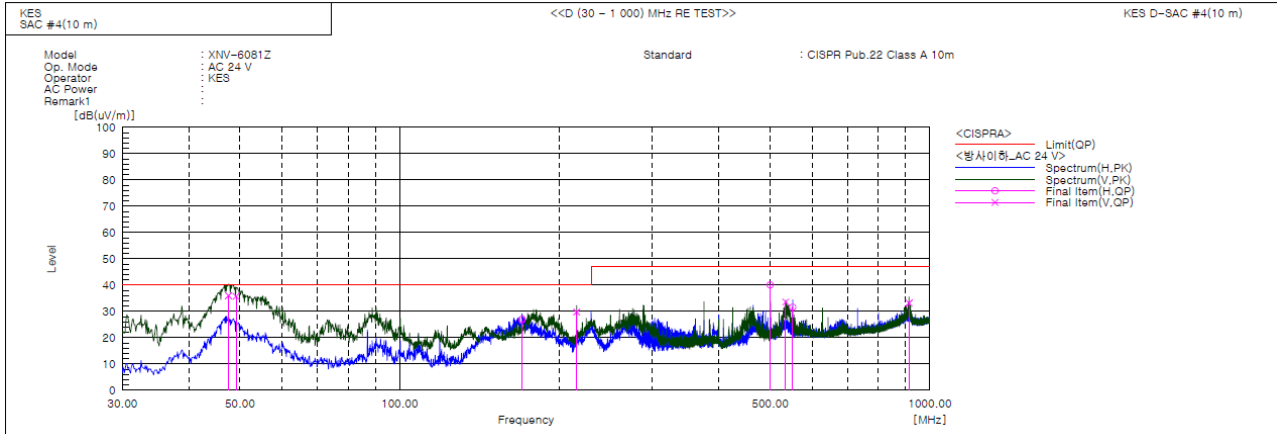

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.581	V	64.5	-28.5	36.0	40.0	4.0	104.0	260.0	
2	49.158	V	64.2	-28.5	35.7	40.0	4.3	109.0	260.0	
3	170.165	H	58.2	-31.2	27.0	40.0	13.0	395.0	115.0	
4	215.755	V	57.0	-27.2	29.8	40.0	10.2	391.0	48.0	
5	499.965	H	58.9	-18.8	40.1	47.0	6.9	199.0	205.0	
6	534.764	V	51.3	-17.7	33.6	47.0	13.4	106.0	51.0	
7	551.254	H	48.8	-17.2	31.6	47.0	15.4	117.0	175.0	
8	913.549	V	44.6	-11.4	33.2	47.0	13.8	101.0	276.0	

■ DC 12 V MODE

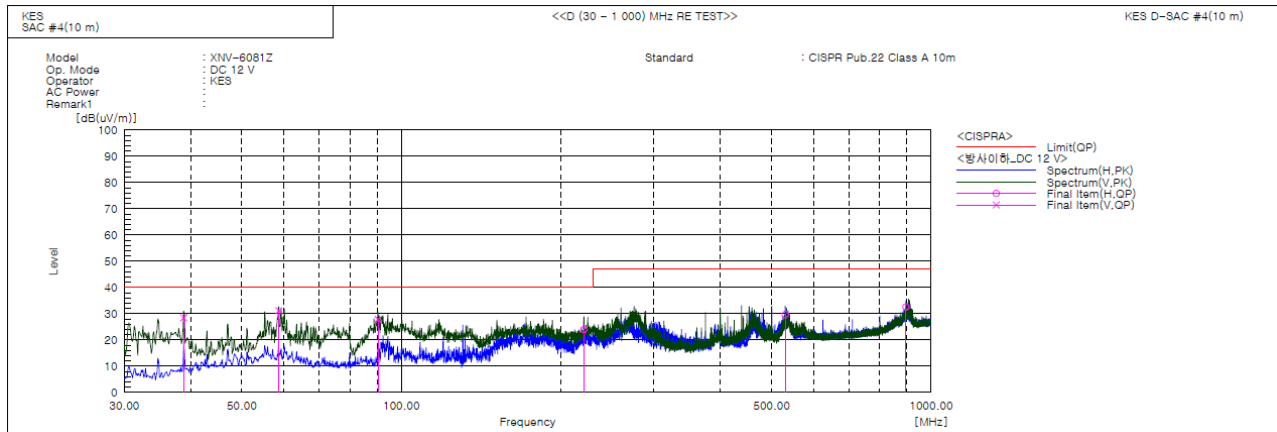


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	59.0	-30.5	28.5	40.0	11.5	149.0	273.0	
2	58.736	V	60.5	-29.3	31.2	40.0	8.8	103.0	257.0	
3	90.383	V	58.7	-30.9	27.8	40.0	12.2	168.0	253.0	
4	221.090	H	51.1	-27.1	24.0	40.0	16.0	393.0	337.0	
5	530.520	H	47.6	-17.9	29.7	47.0	17.3	202.0	226.0	
6	895.846	H	44.1	-11.5	32.6	47.0	14.4	386.0	325.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



■ PoE MODE

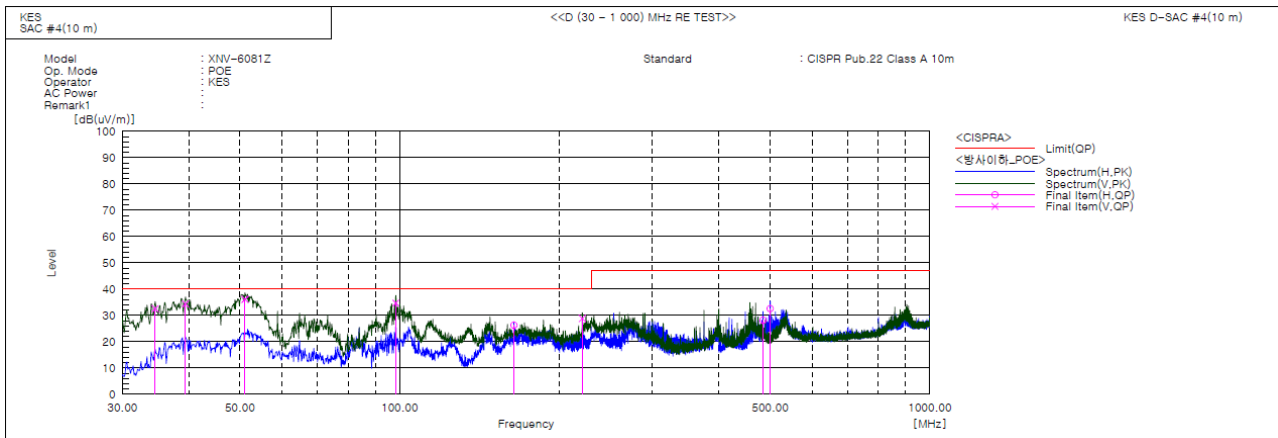

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	34.608	V	64.9	-32.3	32.6	40.0	7.4	105.0	237.0	
2	39.458	V	64.6	-30.2	34.4	40.0	5.6	117.0	197.0	
3	51.098	V	64.5	-28.4	36.1	40.0	3.9	156.0	238.0	
4	98.385	V	63.8	-29.1	34.7	40.0	5.3	134.0	87.0	
5	164.345	H	57.7	-31.4	26.3	40.0	13.7	395.0	87.0	
6	221.090	V	55.9	-27.1	28.8	40.0	11.2	101.0	332.0	
7	484.566	H	47.5	-19.3	28.2	47.0	18.8	186.0	241.0	
8	499.965	H	51.4	-18.8	32.6	47.0	14.4	209.0	58.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Radiated Electric Field Emissions(Above 1 GHz)


■ AC 24 V MODE

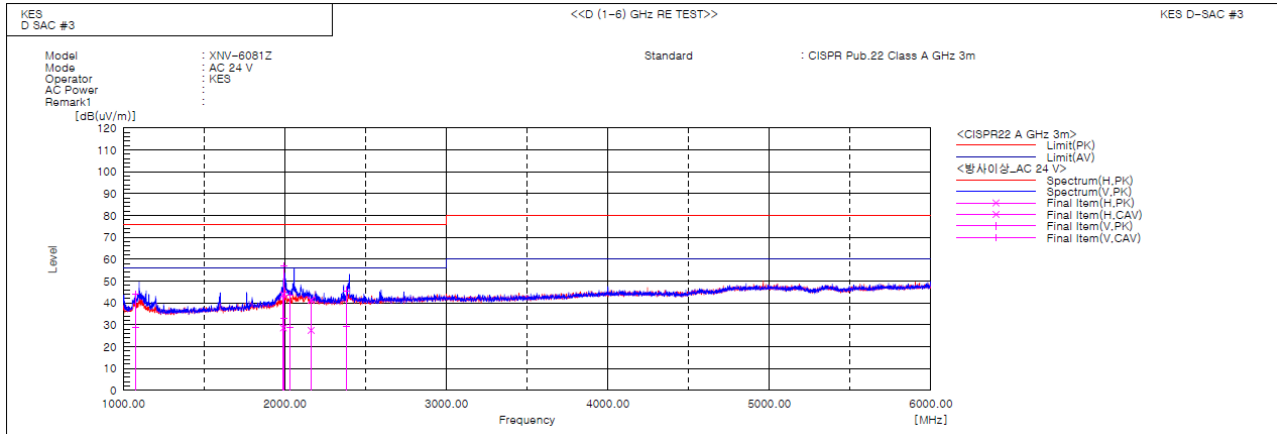

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1077.304	V	51.7	36.3	-7.6	44.1	28.7	76.0	56.0	31.9	27.3	100.0	131.2	
2	1991.202	H	46.0	30.8	-2.2	43.8	28.6	76.0	56.0	32.2	27.4	100.0	296.3	
3	1991.841	V	59.0	34.9	-2.1	56.9	32.8	76.0	56.0	19.1	23.2	100.0	26.7	
4	2033.155	V	45.3	30.9	-1.9	43.4	29.0	76.0	56.0	32.6	27.0	100.0	71.7	
5	2162.655	H	42.6	28.8	-1.3	41.3	27.5	76.0	56.0	34.7	28.5	100.0	271.8	
6	2381.944	V	46.0	29.6	-0.4	45.6	29.2	76.0	56.0	30.4	26.8	100.0	55.7	

■ DC 12 V MODE

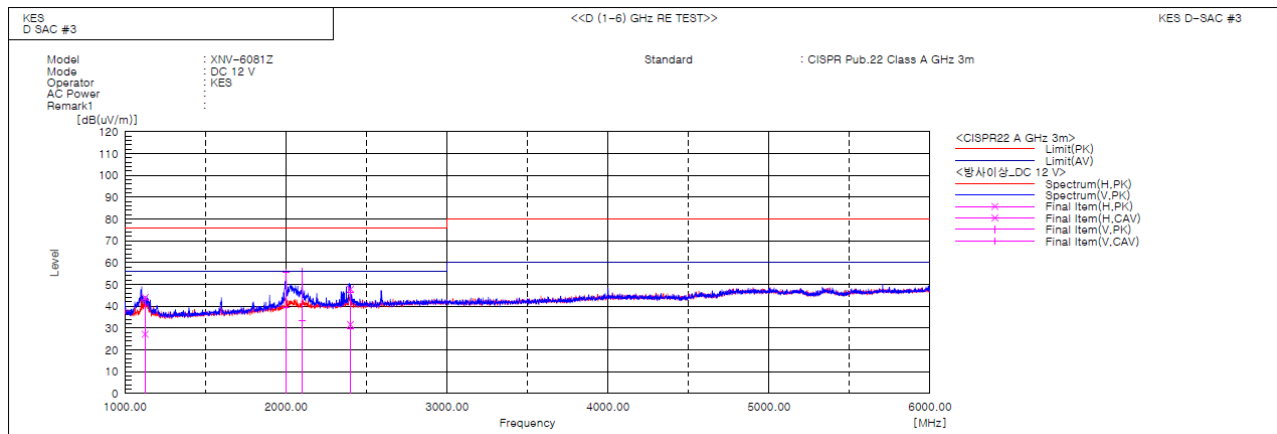

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1125.485	H	51.6	34.7	-7.5	44.1	27.2	76.0	56.0	31.9	28.8	100.0	223.9	
2	1999.850	V	57.8	41.3	-2.1	55.7	39.2	76.0	56.0	20.3	16.8	100.0	352.2	
3	2099.710	V	57.7	35.0	-1.6	56.1	33.4	76.0	56.0	19.9	22.6	100.0	349.3	
4	2400.188	H	48.3	32.0	-0.4	47.9	31.6	76.0	56.0	28.1	24.4	100.0	60.0	
5	2400.730	V	46.8	30.2	-0.4	46.4	29.8	76.0	56.0	29.6	26.2	100.0	100.6	



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0625-R1

Page (29) of (45)

■ PoE MODE

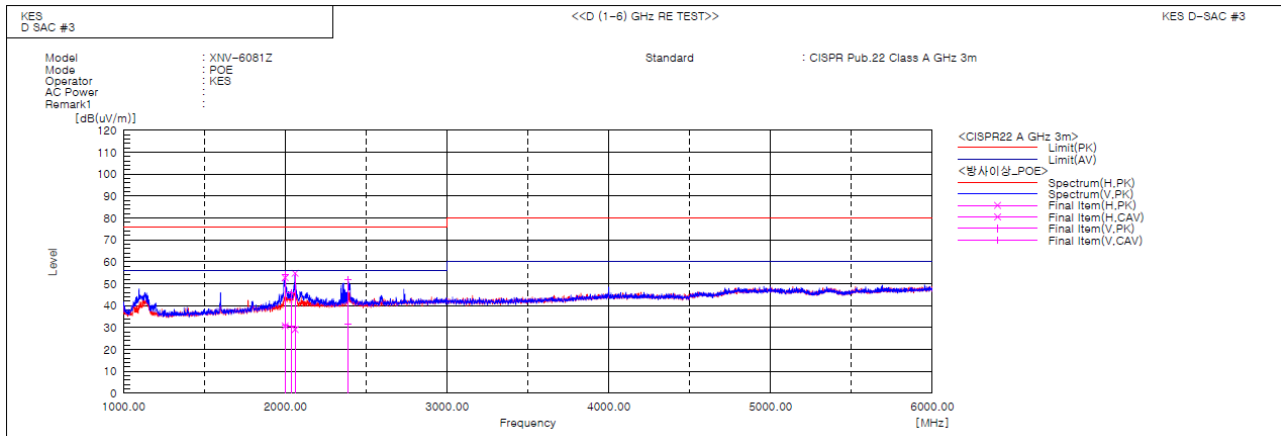

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1999.090	V	56.3	33.2	-2.1	54.2	31.1	76.0	56.0	21.8	24.9	100.0	36.9	
2	1999.170	H	54.8	32.9	-2.1	52.7	30.8	76.0	56.0	23.3	25.2	100.0	338.9	
3	2035.175	V	47.7	32.7	-1.9	45.8	30.8	76.0	56.0	30.2	25.2	100.0	23.5	
4	2060.631	H	56.6	30.9	-1.8	54.8	29.1	76.0	56.0	21.2	26.9	100.0	309.3	
5	2389.091	V	52.2	32.2	-0.4	51.8	31.8	76.0	56.0	24.2	24.2	100.0	27.0	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Test Setup Photos and Configuration

Conducted Voltage Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Telecommunication Emissions

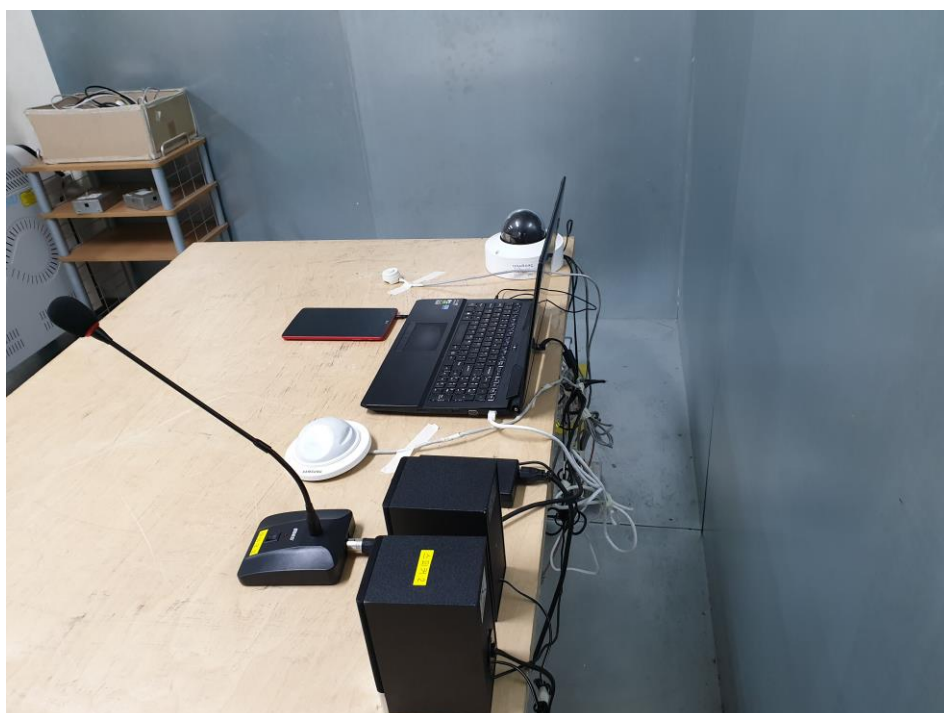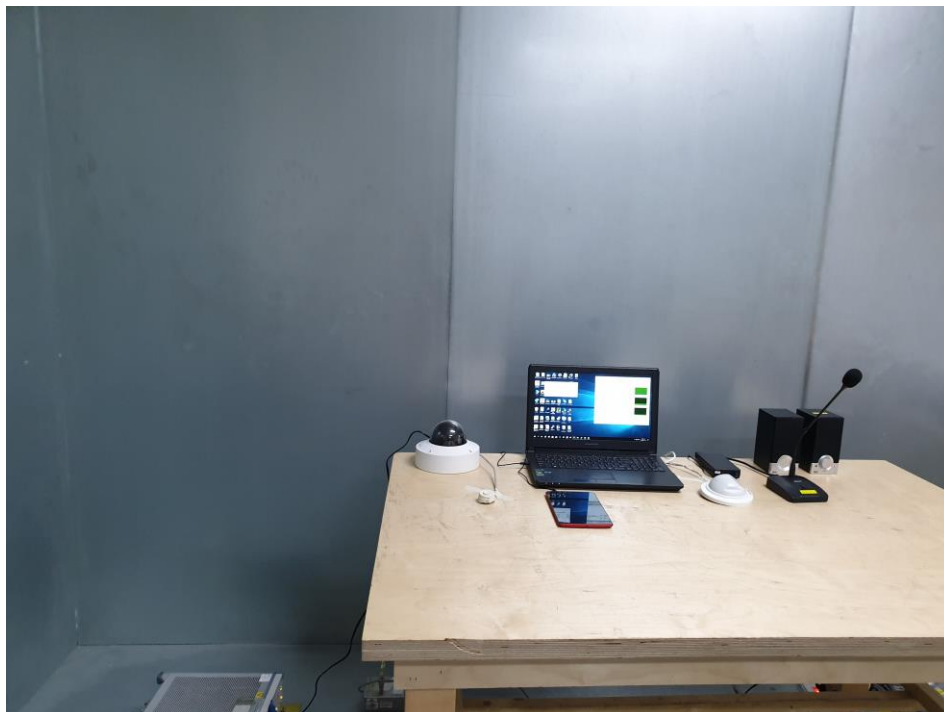



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

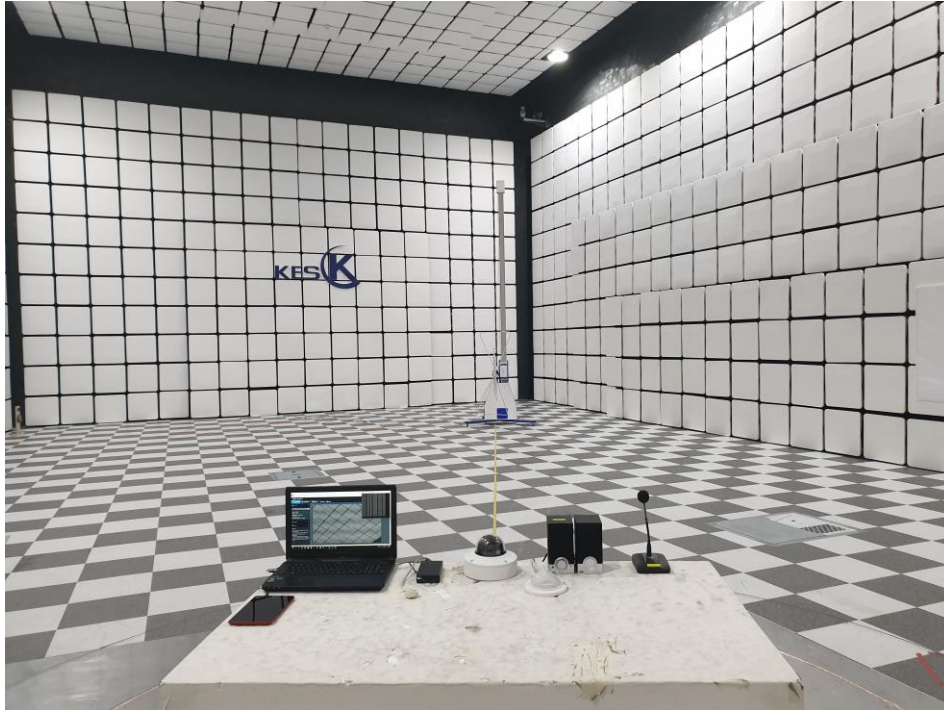

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

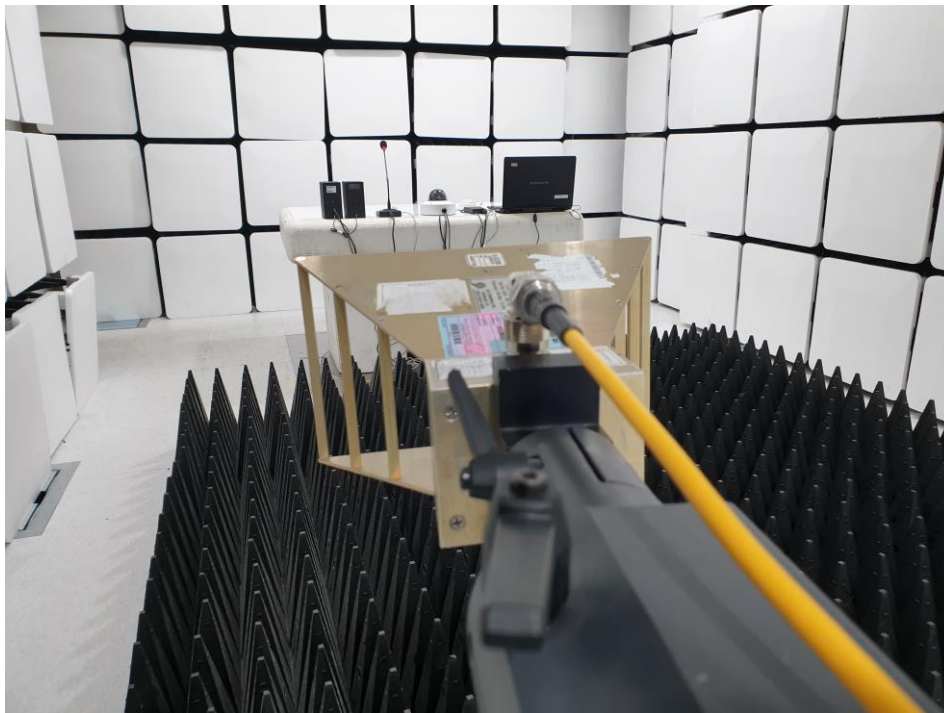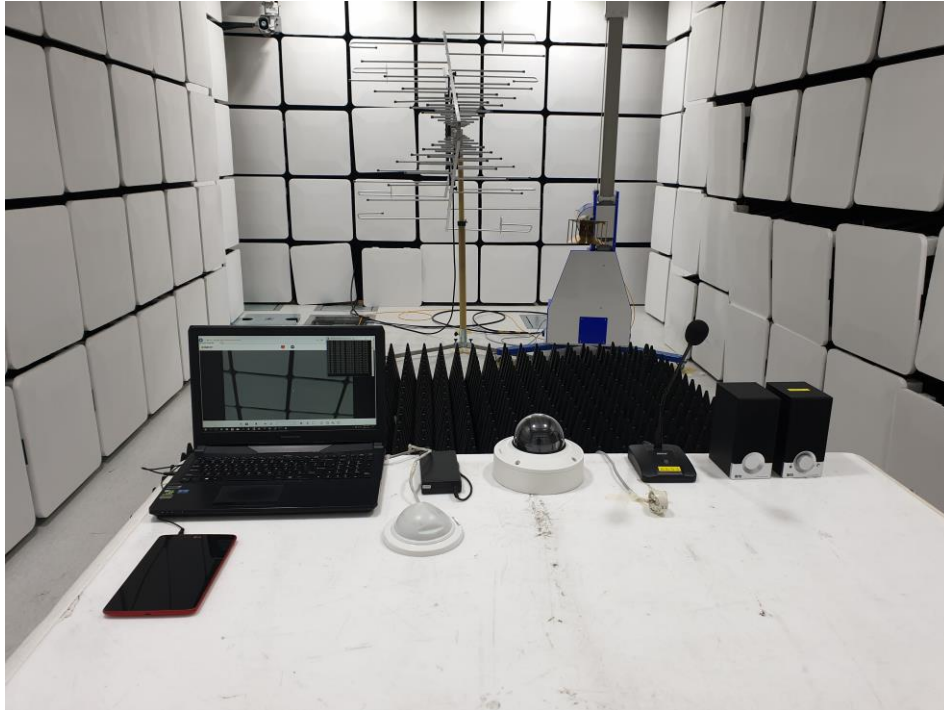

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs


(Internal View)



EUT Internal View – Main Board (Top)

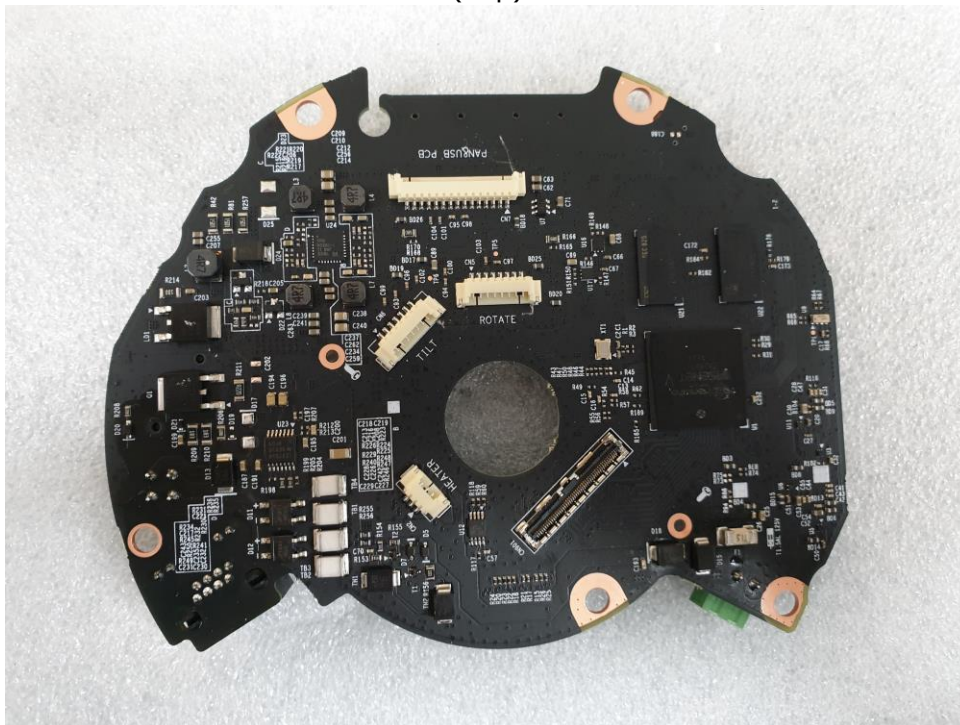

(Bottom)

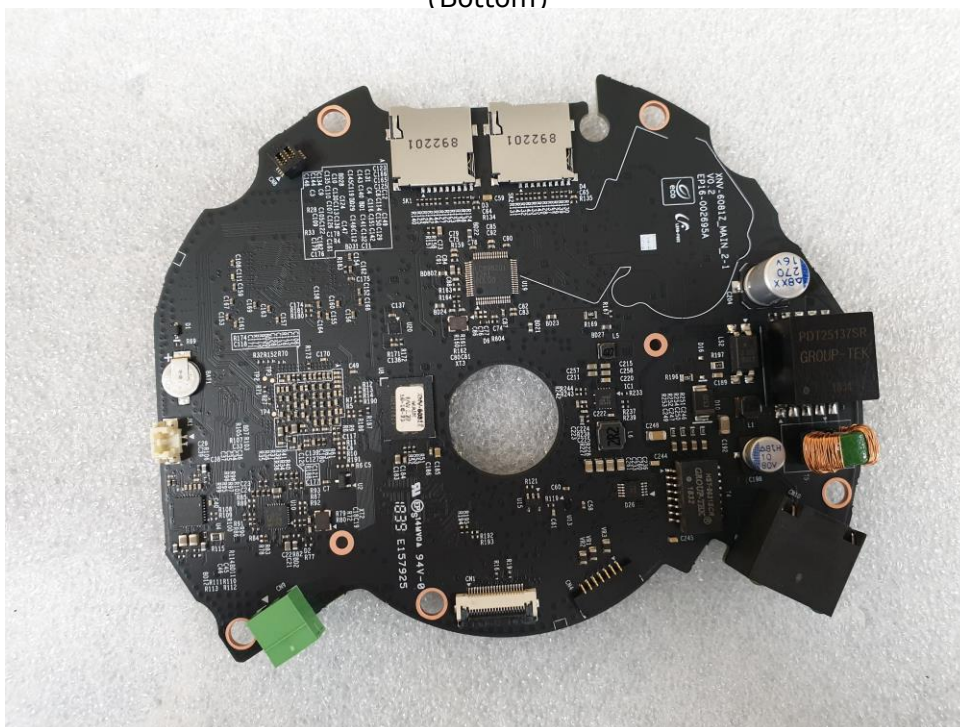

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – AC Module Board (Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – AC Module
(Top)



(Bottom)



EUT Internal View – Board 1 (Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2 (Top)

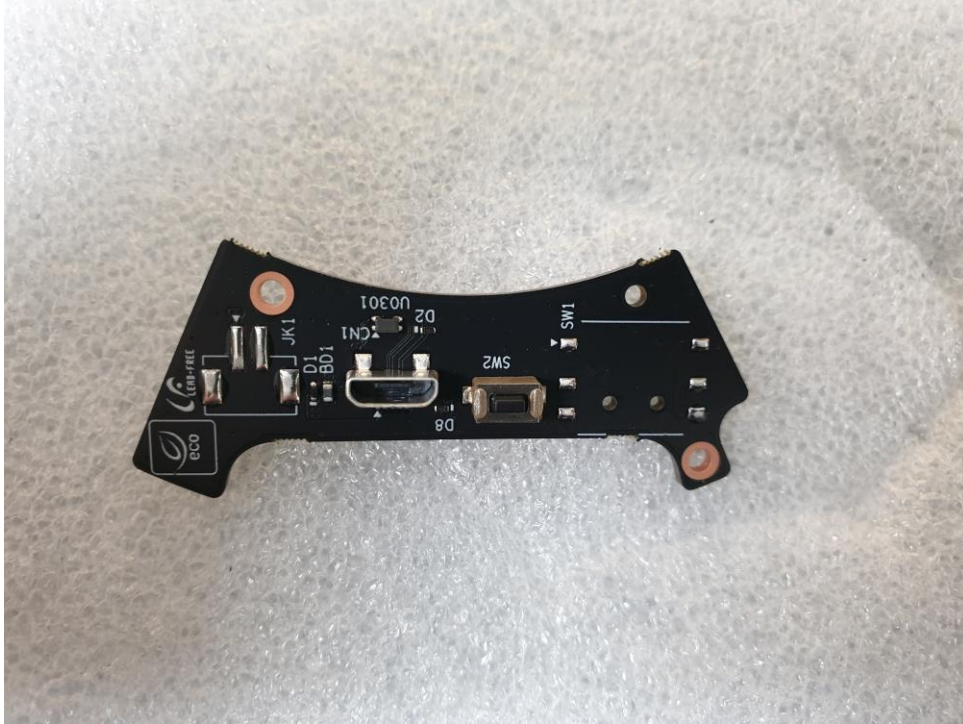


(Bottom)

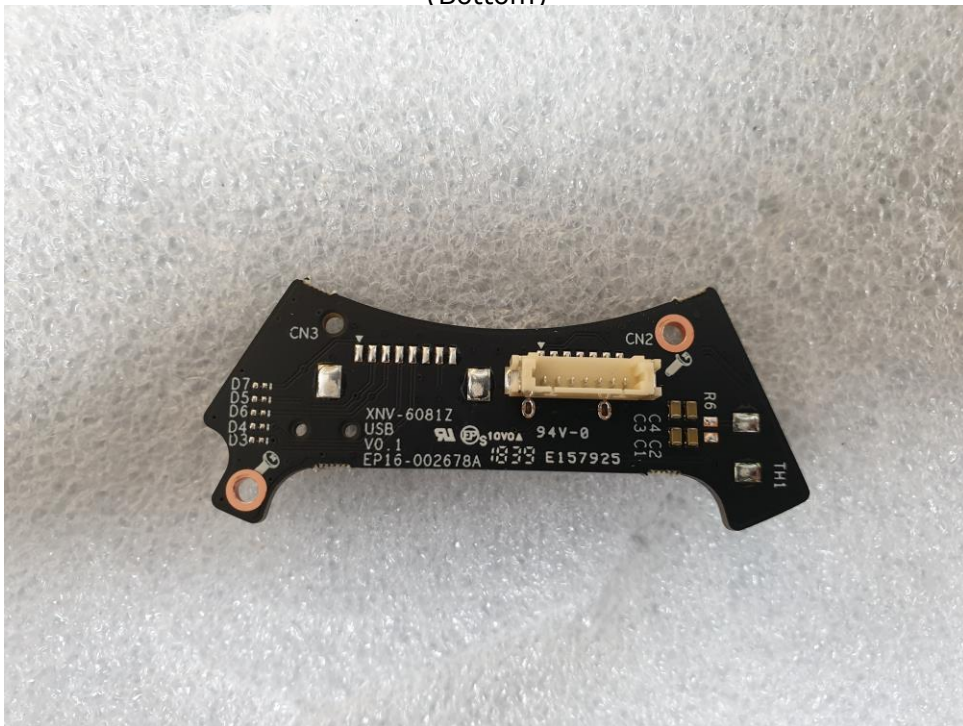


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3 (Top)

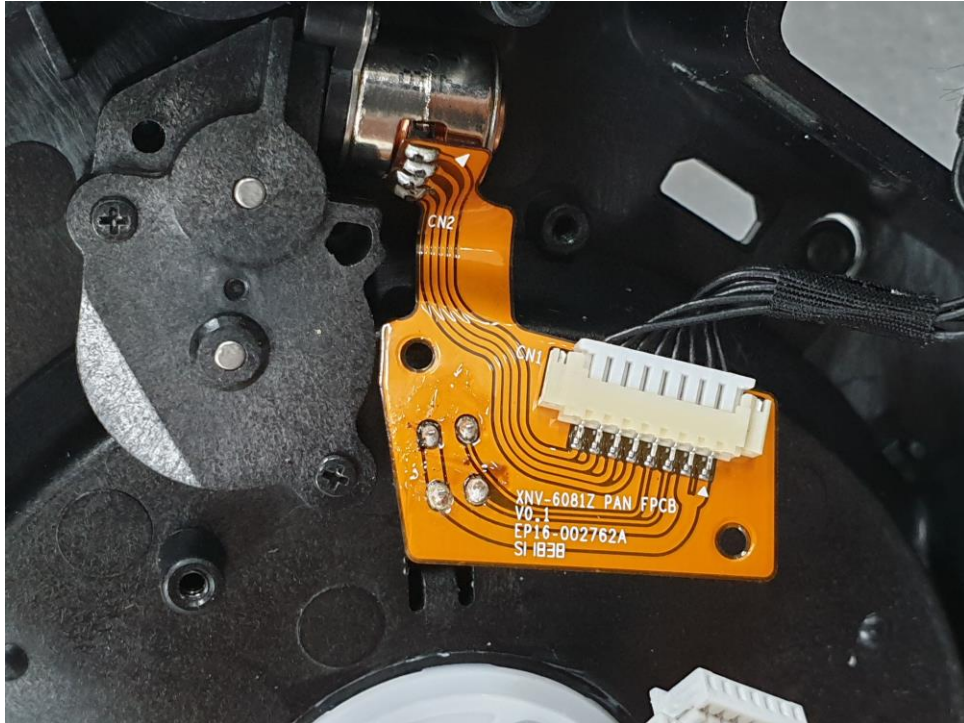


(Bottom)

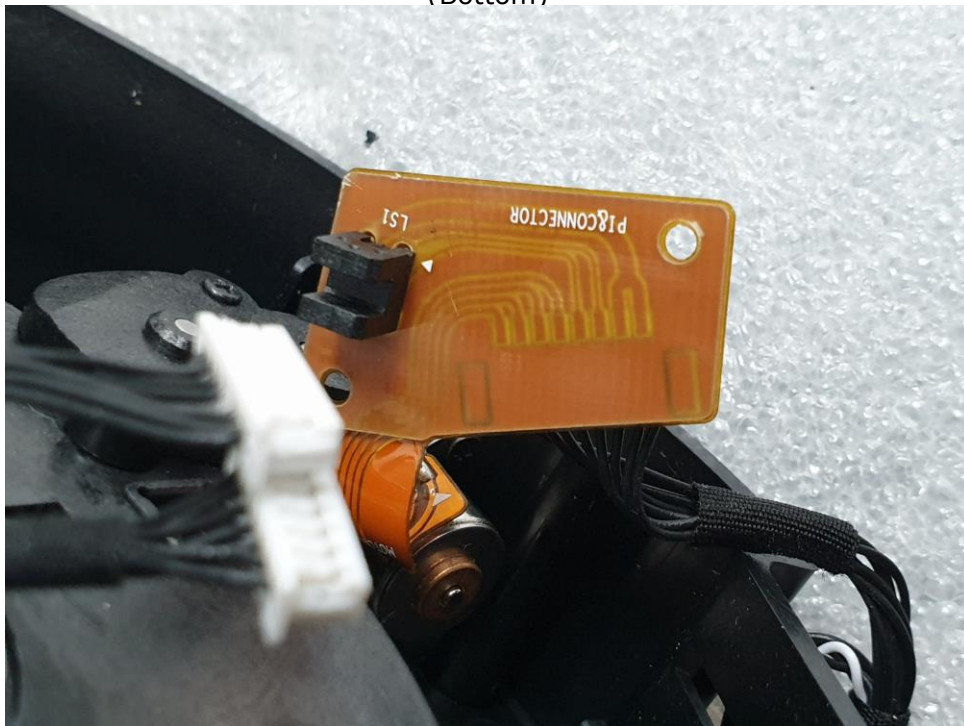

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4 (Top)

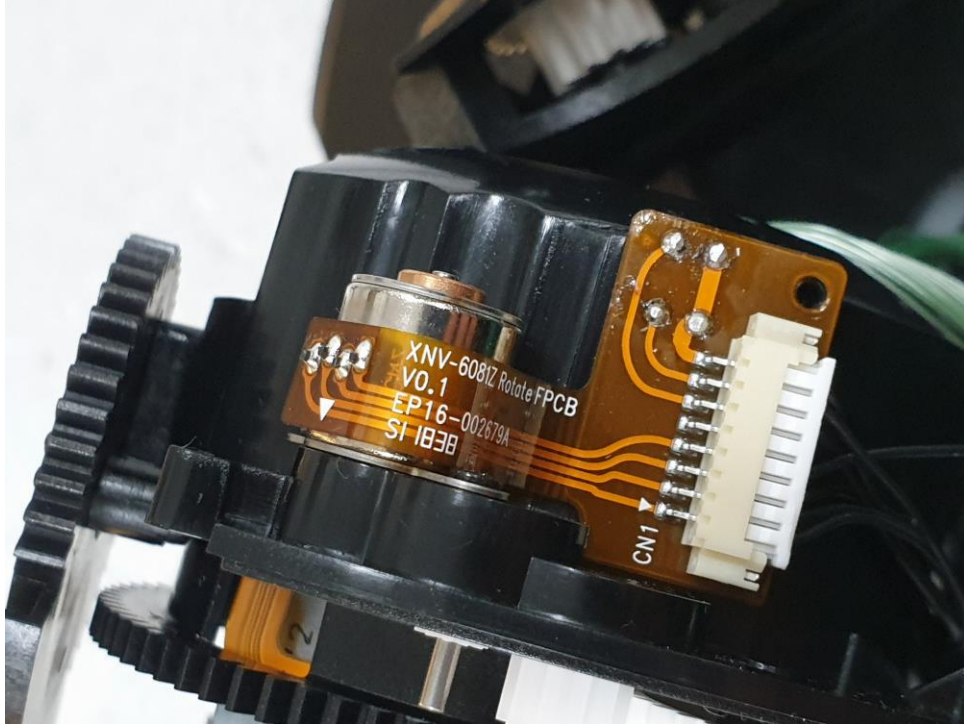


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Camera Board (Top)

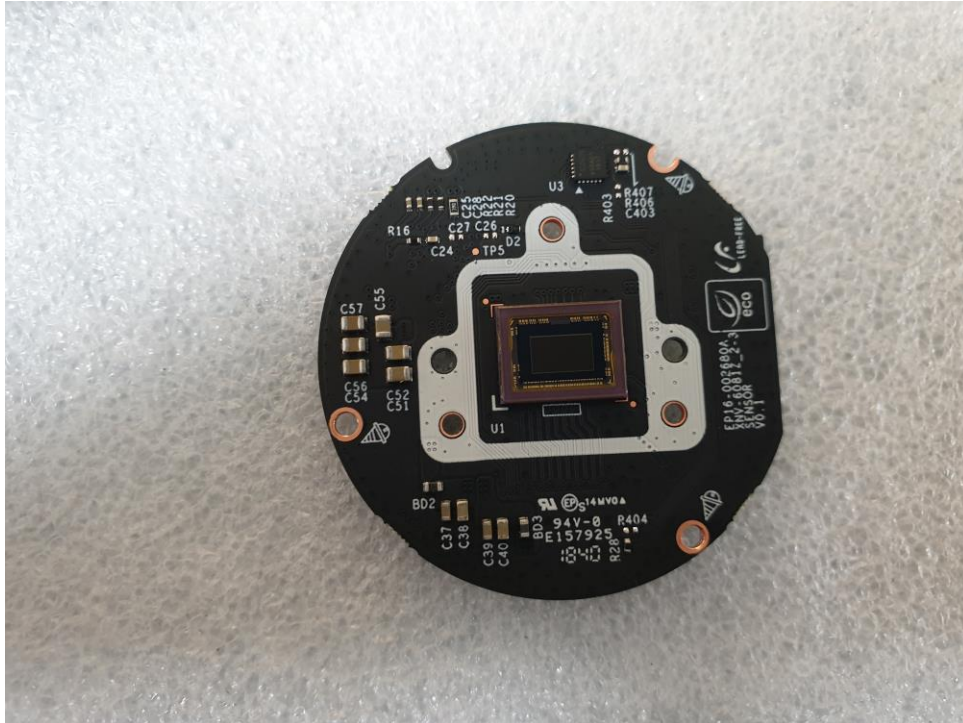

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Camera (Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – LENS (Top)



(Bottom)

